

DTIC FILE COPY

xR
AAMRL-88-052



AD-A206 825

**THE USE OF PSYCHOPHYSIOLOGICAL MEASURES
IN THE SABER LABORATORIES: PHASE I (U)**

**KATHY McCLOSKEY
MELODIE MORROW
WILLIAM PEREZ**

**SYSTEMS RESEARCH LABORATORIES, INC.
DAYTON, OHIO**

OCTOBER 1988

INTERIM REPORT FOR NOVEMBER 1987 TO AUGUST 1988

Approved for public release; distribution is unlimited

DTIC
ELECTE
APR 19 1989
S H D
Cb

**HARRY G. ARMSTRONG AEROSPACE MEDICAL RESEARCH LABORATORY
HUMAN SYSTEMS DIVISION
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433-6573**

89 4 10 046

NOTICES

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Please do not request copies of this report from the Armstrong Aerospace Medical Research Laboratory. Additional copies may be purchased from:

National Technical Information Service
5285 Port Royal Road
Springfield, Virginia 22161

Federal Government agencies and their contractors registered with the Defense Technical Information Center should direct requests for copies of this report to:

Defense Technical Information Center
Cameron Station
Alexandria, Virginia 22314

TECHNICAL REVIEW AND APPROVAL

AAMRL-TR-88-052

This report has been reviewed by the Office of Public Affairs (PA) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

The voluntary informed consent of the subjects used in this research was obtained as required by Air Force Regulation 169-3.

This technical report has been reviewed and is approved for publication.

FOR THE COMMANDER



CHARLES BATES, JR.
Director, Human Engineering Division
Armstrong Aerospace Medical Research Laboratory

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS N/A		
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution is unlimited.		
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			4. PERFORMING ORGANIZATION REPORT NUMBER(S)		
4. PERFORMING ORGANIZATION REPORT NUMBER(S)			5. MONITORING ORGANIZATION REPORT NUMBER(S) AAMRL-TR-88-052		
6a. NAME OF PERFORMING ORGANIZATION Systems Research Laboratories Dayton, Ohio 45424		6b. OFFICE SYMBOL (If applicable)	7a. NAME OF MONITORING ORGANIZATION AAMRL/HED		
6c. ADDRESS (City, State, and ZIP Code) 2800 Indian Ripple Road Dayton, Ohio 45440			7b. ADDRESS (City, State, and ZIP Code) Wright-Patterson AFB OH 45433-6573		
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER F33615-85-C-0541		
8c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS		
PROGRAM ELEMENT NO. 62202F		PROJECT NO. 7184	TASK NO. 10	WORK UNIT ACCESSION NO. 33	
11. TITLE (Include Security Classification) THE USE OF PSYCHOPHYSIOLOGICAL MEASURES IN THE SABER LABORATORIES: PHASE I (U)					
12. PERSONAL AUTHOR(S) McCloskey, Kathy; Morrow, Melodie; and Perez, William					
13a. TYPE OF REPORT Interim		13b. TIME COVERED FROM NOV 87 TO AUG 88		14. DATE OF REPORT (Year, Month, Day) 1988 October 03	15. PAGE COUNT 69
16. SUPPLEMENTARY NOTATION					
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Human Performance		
05	08		Heart Rate, Eyeblink Measures		
23	01		Flight Simulation		
			Brain Evoked Response		
			Physiological Test Battery, Bioinstrumentation Interface		
19. ABSTRACT (Continue on reverse if necessary and identify by block number)					
<p>Behavioral and psychophysiological measures were obtained during a low-fidelity F-15 flight simulation where subjects were required to fly the wing position in relation to a canned lead flight. One of the major emphases of this preliminary research effort was to identify, solve and document the hardware/software problems that emerged when a physiological data collection device (the Neuropsychological Workload Test Battery) was interfaced with a computer controlling the simulation (Silicon Graphics device).</p> <p>Another emphasis was determining the cost-effectiveness of psychophysiological measurement in terms of value of the data. This study demonstrated that heart rate and eyeblink data not only confirmed and further clarified information obtained by the behavioral measures, but also provided information about the flight task not otherwise available. It was concluded that, in future SABER simulations, the extra costs of collecting physiological data are offset by the increased dimensionality and extra information added to the flight</p>					
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a. NAME OF RESPONSIBLE INDIVIDUAL William P. Marshak, Lt Col			22b. TELEPHONE (Include Area Code) (513) 255-7555		22c. OFFICE SYMBOL AAMRL/HED

BLOCK 19. ABSTRACT (CONTINUED)

profile data base. *Keywords:*
as
flow

PREFACE

This research was completed under contract number F33615-85-C-0541, work unit number 7184-10-33, at the Harry G. Armstrong Aerospace Medical Research Laboratories (AAMRL), located at Wright-Patterson Air Force Base, Ohio. The authors wish to thank Gilbert Kuperman, Denise Wilson and Major William Marshak, contract monitors for this project, for helpful suggestions and comments. The help of Dr Glenn Wilson on questions about the Neuropsychological Workload Test Battery (NWTB) is also gratefully acknowledged.

The authors also thank the key people from SRL that helped smooth the way. Walt Rosenthal and Barbara Richey were excellent in troubleshooting the software problems with the NWTB. Brian Porter, Curt Mayrand and Cliff Brust helped us tremendously in setting up the Silicon Graphics software. Dave Brown, Don Jones, Ken Bange and Mike Gifford were always on hand to solve hardware problems. Penny Fullenkamp and Iris Davis supported our efforts and answered questions concerning the NWTB analyses. Robyn Crawford spent many long hours with data reduction and analysis.

Without the help of these AAMRL and SRL people this research would not have been possible. To everyone, our sincere appreciation.



Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification _____	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

TABLE OF CONTENTS

	<u>Page</u>
PREFACE	iii
LIST OF FIGURES	vii
LIST OF TABLES	viii

Section

1	RATIONALE	1
	Psychophysiology in Relation to Flight Parameters	
	Heart Rate (or ECG)	
	Eyeblink (or EOG)	
	Electroencephalography (or EEG)	
2	PHASE I SIMULATION	9
3	PROBLEM SOLVING	10
	Physiological Measurement	
	Neuropsychological Workload Test Battery (NWTB)	
	Simulation	
	IRIS Silicon Graphics Computer System	
	NWTB and IRIS Interface	
4	EXPERIMENTAL METHODS	18
	Subjects	
	Design	
	Procedures	
	Training	
	Testing	
	Audio Rare Event (Oddball)	
	Electrode Placement and Procedure	
5	DATA REDUCTION	23
	Reducing the IRIS Behavioral Data	
	Reducing the NWTB Physiological Data	
	ECG Analysis	
	EOG Analysis	
	Evoked Potential Analysis	
6	RESULTS	28
	Behavioral Data	
	X Axis (Lateral Offset)	
	RMSX	
	Y Axis (Altitude)	
	RMSY	
	Z Axis (Trailing Distance)	
	RMSZ	
	Physiological Data	
	Heart Rate (ECG)	

TABLE OF CONTENTS (cont.)

Page

BPM
Heart Rate Variability (HRV)
Eyeblink (EOG)
Number of Blinks
Blink Interval
Half-amplitude Closing Duration
Closing Duration
Evoked Potentials (EPs)
Rare Tone Evoked Potentials
Frequent Tone Evoked Potentials

7 DISCUSSION 53

8 RECOMMENDATIONS 56

REFERENCES

LIST OF FIGURES

	<u>Page</u>
Figure 1. Flight Path Top and Side Views	13
Figure 2. Representation of the Lead and Subject flights in the Three Dimensions	15
Figure 3. Formula used for RMS Error	24
Figure 4. RMSX Lateral Offset Segment Effects	29
Figure 5. RMSX Lateral Offset Segment by Visibility Effects	30
Figure 6. RMSX Lateral Offset Segment by Session Block Effects	31
Figure 7. RMSY Altitude Session Block Effects	33
Figure 8. RMSZ Trail Distance Segment Effects	34
Figure 9. RMSZ Trail Distance Segment by Visibility Effects	35
Figure 10. RMSZ Trail Distance Segment by Session Block Effects	36
Figure 11. Beats-per-minute Segment Effects	37
Figure 12. Beats-per-minute Segment Effects in First and Second 30 Second Blocks	39
Figure 13. Beats-per-minute Regressed with Session Block	40
Figure 14. Heart Rate Variability Segment Effects	41
Figure 15. Blink Rate Segment Effects	42
Figure 16. Blink Rate Segment Effects in First and Second 30 Second Blocks	44
Figure 17. Blink Duration Visibility Effects	45
Figure 18. Blink Duration Session Block Effects	46
Figure 19. Blink Duration Segment Effects	47
Figure 20. Representative Evoked Potentials from Subjects 03 and 05	49
Figure 21. Rare Tone P200 Amplitude Segment Effects	51
Figure 22. Frequent Tone P200 Amplitude Segment Effects	52

LIST OF TABLES

	<u>Page</u>
Table 1. Training Schedule Sheet	19
Table 2. Parameters for the Auditory Oddball	22
Table 3. Significance Table for all EP Components (p values)	50

Section 1

RATIONALE

In 1987, an AGARDograph (edited by Stan Roscoe) was devoted entirely to outlining the state-of-the-art techniques used to identify and quantify the characteristics of any given flight system (AGARD No. 282, 1987). In eleven of the sixteen chapters dealing with workload and human-machine interactions, psychophysiological techniques were utilized.

The multidimensional qualities of workload have recently been recognized, as evident in the continuing interest of using a three-pronged approach to investigate human-machine interactions. This approach consists of using objective, subjective and physiological techniques.

Most investigations of new or existing crew stations, cockpits and assembly lines, use the objective category of techniques. This category includes detailed time-line analyses of task demands, time and motion studies, and performance measures (including secondary task techniques). Furthermore, the use of subjective techniques, such as rating scales obtained from operators during performance, have proven reliable as indicators of the level of perceived workload.

Psychophysiological techniques are relatively new in the applications field and so do not benefit from repeated use as do the more routinely used methods of objective and subjective techniques. However, there exists a wide body of laboratory data that supports the idea that much can be gained from these physiological techniques, as well as the few reports that deal with data obtained from simulations and actual in-flight operational missions. Psychophysiological techniques can fill in the informational gaps left by objective and subjective techniques. Time-line analyses yield information only about the task, and performance measures give information only about human-

machine status at that given time. It does not answer questions about predictive performance under stress, such as emergencies and bottlenecks in human capacity (O'Donnell and Eggemeier, 1986). Subjective techniques may answer some of these questions, yet it has been pointed out before that these techniques have their own unique shortcomings, including individual biases, poor individual replication under similar circumstances, and delayed ratings under high workload conditions (Hart, 1982). Psychophysiological techniques have been used precisely to fill in these informational gaps. It is recommended that this three-pronged approach (objective, subjective and physiological) be used to obtain a more complete picture of human-machine interactions.

PSYCHOPHYSIOLOGY IN RELATION TO FLIGHT PARAMETERS

Heart Rate (or ECG)

As early as 1967, researchers were examining changes in the cardio-vascular system of pilots during different flight segments. Smith (1967) reported elevations of heart rate during take-off and landing phases of commercial airline routes. Roman, Older and Jones (1967) reported that navy pilots flying combat missions had higher heart rates during carrier landing than during actual target acquisition and weapons delivery. This finding opposed the belief that acquisition and delivery was the most taxing and dangerous flight segment.

Increased heart rate during take-off and landing segments of any given commercial flight is not surprising since flight time between these two segments does not usually entail a large amount of pilot activity. However, in the above military scenario, the segments between take-off and landing required at least the same amount, if not greater, pilot activity and attention to flight parameters as during take-off and landing. This psychophysiological technique revealed information not obtainable with the more traditional measures.

The usefulness of psychophysiological measures was also demonstrated in a

recent application of heart rate measures during the performance of an A-7D mission scenario. Skelly, Purvis and Wilson (1987) and Wilson, Purvis, Skelly, Fullenkamp and Davis (1987) reported data taken from pilots during the training performance of a tactical mission in both actual and simulated flight. Heart rate was sensitive to changes in mission segments as well as in-flight versus simulator differences. Specifically, mission events affected heart rate in the lead and wing but not in the simulator. For the lead flights, pilots' heart rate was higher during pre-takeoff, takeoff, guns jink, 90-degree slice maneuver, weapons delivery and landing than during briefing, fly-over update and cruise. For the wing, pilots' heart rate was higher during these same segments than for briefing and cruise. Pilots' heart rates during simulator flight did not show these differences. Furthermore, heart rate was higher overall during the lead flight than during the wing flight, and higher during wing than during simulator flight. Wilson et al (1987) suggested that the added workload of piloting an actual aircraft over that of a simulator, and the increased duties/responsibilities of the lead pilot, led to these increases in heart rate.

These results lend support to the assumption that simulations of flight missions will not elicit the same physiological responses from pilots that are found during actual flight. This has direct bearing on heart rate taken during simulator flight. As discussed in Skelly, et al (1987), there is a need to measure physiological reactivity in simulators to examine how and where simulator fidelity affects crew performance. It may be that the mere physical similarity between simulators and aircraft is not sufficient to have true applicability in training, licensing and certification, and general engineering research. In the SABER laboratories, however, heart rate responses obtained from simulation can be used as baselines in relation to actual aircraft flight. Furthermore, heart rate can be applied as a measure of "relational" fidelity.

As an example, two separate weapons delivery simulations may elicit different increases in heart rate.

Related results obtained in the laboratory suggest further uses of heart rate in examining training effects. In 1973, Zwaga asserted that heart rate reactivity was directly related to the amount of time any given subject had practiced on a task. The main hypothesis was that the initial introduction to a task precipitated increased heart rate, and that further performance of that task would see gradually decreasing heart rate. These effects occur even when behavioral performance is stable from the beginning to the end of the task (McCloskey, 1987). This has importance when training and task load effects occur in a situation at the same time. In other words, task load effects may be superimposed over a gradually decreasing trend in heart rate, and this trend may even obscure the task load effects.

Eyeblink (or EOG)

Eyeblink behavior during demanding tasks has been characterized as follows:

- As attentional demands increase, the number of blinks decrease.
- As attentional demands increase, the length of time the eye is closed decreases.
- As fatigue increases, number of blinks and duration of blinks increase.

These phenomena have been heavily documented in the literature (Bauer, Strock, Goldstein, Stern and Walrath, 1984; Stern and Skelly, 1984; Stern, Walrath and Goldstein, 1984). Stern, Walrath and Goldstein (1984) reviewed the evidence concerning eyeblink behavior during task performance. It is postulated that blinking is best understood in terms of a cognitively-based mechanism which suppresses blink behavior until such times as decisions about external stimuli have been made.

Stern and Skelly (1984) reported data that were obtained during high-fidelity simulator missions. Blink rate discriminated between the pilot in control of the aircraft and the person acting as co-pilot. Furthermore, mission segments affected blink rate. During the weapons delivery and "coping with threat" segments, blink rate decreased. These mission segment effects on blink rate are evidence that blink rate can be a measure of task demands in an aircraft setting. Also, blink duration increased from pilot to co-pilot, and was shown to increase in latency as time-on-task increased.

Another interesting aspect of blink behavior is evidence that high rates of long-duration blinks during the "taking-in" and processing of relevant stimuli may be an indication of erroneous performance (missed signals, incorrect responses, etc.). Morris (1985) used a basic instrument flight trainer with cockpit motion and engine sound simulation to examine eyeblink effects in relation to piloting errors. Eyeblink results showed that the longer the closure duration, the higher the error in airspeed, heading and altitude during the pre-specified flight course. Furthermore, as the frequency of long-duration blinks increased (those longer than 500 msec in duration), error also increased. Morris (1985) further suggested that these eyeblink measures can be used to predict mistakes in flight performance. Errors in airspeed, heading and altitude were preceded by increases in blink duration far enough in advance to become candidates for the valid prediction of "catastrophic failure". Eyeblink changes occurred before performance decrements were found.

The above results document the use of eyeblink measures in simulation and actual flight. These measures proved useful in obtaining information about pilot versus co-pilot attentional demands, task loads, and investigations of EOG as predictors of flying performance decrements.

Electroencephalography (or EEG)

Perhaps the most intuitively appealing physiological measure is that of brain activity. If the cognitive demands on an operator are of interest, surely the on-going activity of the brain must offer insight into mental workload. In practice, however, it has been found that the EEG does not offer this insight easily. Difficulties arise with detecting the extremely small EEG signal (on the order of 5-20 microvolts) from the human scalp. In some cases amplification of the EEG must be as large as 100,000 times the original signal. When this problem is overcome, EEG techniques can be useful (O'Donnell, 1979).

On-going EEG obtained during actual aircraft and simulator flights has been submitted to spectral analysis and correlated with mission event as well as flight formation position (Skelly, et al, 1987; Wilson, et al, 1987). The 4-7.5 Hz band, the 8-13 Hz band, the 14-19.5 Hz band and the 20-30 Hz band of the EEG spectra showed increased activity during the lead and wing aircraft flights over that found during the simulator flight. Furthermore, during high-G stress in the aircraft flights, the 8-13 Hz band of the EEG showed heightened activation.

While these results are promising, Wilson, et al (1987) cautioned against too strong of an interpretation. Problems with obtaining the EEG signal stemmed from the electrically noisy environment of the aircraft (coupled with movement artifact) not found in simulation. This increased noise could easily have caused the increased activity of the EEG signal, unrelated to any cognitive functions of the pilots. Wilson, et al (1987) recommended changes in EEG collection techniques, specifically larger amplification of the EEG signal closer to the point of the electrical source. Presently, stronger pre-amplifiers located within inches of the scalp contacts are being tested on pilots flying F-4 aircraft.

When these problems of signal noise have been controlled, spectral analyses of on-going EEG signals have proven to be generalized measures of arousal. Serman, Schummer, Dushenko and Smith (1987) found that 8-11 Hz amplitude discriminated between pilots during resting and when flying an airplane. Furthermore, sensorimotor cortex scalp sites showed higher amplitude responses in the 8-11 Hz band during controlled flight tasks than the visual cortex scalp sites. These results point out the usefulness of on-going EEG measures, especially when used to investigate differences between aircraft and simulation flights, and task/no-task situations.

On-going EEG does not lend itself well to answering more specific questions about flight tasks. A technique known as the averaged evoked potential (EP) has been used extensively in the laboratory to answer very specific questions about task loads. The technique consists of taking one second "snap-shots" of the on-going EEG potentials that occur in response to discrete stimuli, and then superimposing these snapshots one upon the other to obtain an average EP. The technique is limited by the requirement of multiple occurrences of the discrete "evoking" stimuli to obtain multiple snap-shots for the average EP. The recommended number of snap-shots required to obtain a reliable average EP has ranged from 10 to 100 (Wickens, Kramer, Vanasse and Donchin, 1983). In some situations, the evoking stimuli do not occur often enough to obtain a "reliable" average. For example, Albery (1988) obtained EPs elicited from both a primary and secondary task while pilots were under centripetal force in a high-G simulator. The number of snap-shots available for the EP averages ranged from one to twenty-two (mean=11, std=3). Albery (1988) identified two major problems that caused many of these single trial snap-shots to be lost: 1) excessive eyeblink contamination during high-G stress, and 2) electrical noise generated

by the motion-based centrifuge apparatus. However, it is interesting to note that results obtained from these EP averages still matched the a priori hypotheses of the author. The components of the EPs to the primary tracking task increased in amplitude and latency as the difficulty of the task increased. Furthermore, the components of the EPs to the secondary target acquisition task increased in latency as the number of targets increased. This is evidence that, even though EP signals may be noisy and contaminated by artifacts in motion-based simulators and actual flight, this measure can still be useful.

In a more ideal situation, Kramer, Sirevaag and Braun (1987) obtained EPs elicited by a secondary "oddball" task during the performance of a simulated flight mission. The simulation apparatus was fixed-based and did not cause large EP signal contamination, and any eyeblink artifacts could be mathematically corrected by a technique reported by Gratton, Coles and Donchin (1983). When the difficulty of the primary flight task was increased by introducing turbulence, subsystem failures, and increasing wind speed, the components of the EPs elicited by the secondary task (oddball tones) decreased in amplitude.

Since the SABER laboratories contain a fixed-based simulation capability, the electrical noise inherent in actual airplane cockpits and motion-based simulators should not be a problem. Evoked potentials should be relatively artifact free and easy to obtain. The secondary task discussed above (the oddball) seems to be a good candidate for indexing the difficulty of flight tasks. Also, eliciting EPs with discrete occurrences of task-relevant stimuli, such as low-level emergency tones, could prove useful in evaluating flight tasks. Finally, on-going EEG spectral analyses have been used to determine overall arousal levels of the operator.

PHASE I SIMULATION

A small-scale flight task simulation, with a Neuropsychological Workload Test Battery (NWTB, Wilson and O'Donnell, 1988), was obtained for the Strategic Avionics Battle-Management Evaluation Research (SABER) laboratories. The Phase I investigation had as its main objectives:

- 1) Test the interface between the simulation and the NWTB (identify problem areas and correct them)
- 2) Determine the feasibility of collecting physiological data during simulation (cost-effectiveness, value of the data, etc.)
- 3) Formulate recommendations for a larger simulator effort through the experience of the small-scale simulation.

These three objectives were all met to some degree in the Phase I effort reported below. A description of the NWTB used to obtain physiological measures is followed by a description of the Silicon Graphics IRIS simulation (and pertinent segments of the "DOG" flight). The problems found during the interface of these two hardware and software systems (the NWTB and the flight simulation) are summarized. The experimental methods used to obtain behavioral and physiological measures during the simulation are then presented. The results of these measures (behavioral and physiological) are discussed in terms of their relation to flight parameters.

Finally, the results of the Phase I effort are used to generate recommendations for a more realistic, full-scale simulator investigation that will use physiological measures as part of a larger evaluative data base.

Section 3

PROBLEM SOLVING

PHYSIOLOGICAL MEASUREMENT

The Modified Neuropsychological Workload Test Battery (NWTB).

The NWTB was modified to accommodate studies in the SABER laboratories, in which lengthy data collection could last up to 6 hours for two subjects at a time. A two step approach was employed. First, the problem of data collection was addressed.

Because a large quantity of data could potentially be collected, 8 more disc surfaces were added to the NWTB to increase storage capability to 120 Megabytes. Ten A/D channels were available for collecting and storing data. Two of the ten channels were dedicated to heartrate collection and sampled at a 1 KHz rate (4 Kbytes/sec, 240 Kbytes/min, 14.4 Mbytes/hr, and 86.4 Mbytes/total test capability). Two channels were dedicated to eyeblink collection and sampled at a 100 Hz rate (8.64 Mbytes/total test capability). Six channels were dedicated to EEG collection and sampled at a 200 Hz rate for intermittent three minute periods (432 Kbytes/period and 17.28 Mbytes/40 periods). Total data collection capability for all ten channels was 112.32 Mbytes (NOTE: the actual memory space required for the present study was negligible and did not approach the maximum capacity of the modified NWTB; for each subject, one channel of heartrate, eyeblink and EEG data were collected for very short periods of time, ie., under one hour continuous for one subject).

The next step was to arrange the data into a format that could be presented to the standard NWTB hardware and software for analyses. Extra analog to digital (A/D) converters were added to the NWTB to accommodate the two channels of heartrate data. A software module (also called SABER) was written to collect heartrate and eyeblink data. This module also provided an "Audio Rare Event" (Oddball) task, described later, identical to the standard test on the original

NWTB. The module transferred all collected digitized data to the hard discs for archival storage. This feature allowed previously collected test data to be restored in the modified NWTB, ready for the next processing step. An IEEE interface between the NWTB and SABER simulation was provided for a direct link concerning control and data transfer communications but was not used in the present study. A second software module (SABSRT) was created to allow the operator to select position and time frames of physiological data that corresponded to flight segment. These "data windows" were identical to standard NWTB "*.DAT" files, which allowed the information to be processed in the NWTB data reduction/analysis program as usual. A third software module controlled the gain and filter settings of an SRL programmable amplifier/filter. The amplifier/filter settings used in this study were as follows:

	<u>EEG</u>	<u>EOG</u>	<u>ECG</u>
High Pass:	0.10	0.10	9.65
Low Pass:	29.80	100.44	100.44
Filter Range:	32-64K	4-8K	1-2K
Gain:	50,000	5000	2000
Notch Filter:	60Hz	60Hz	60Hz

In summary, hardware additions included 8 disc surfaces, A/D converters and a ten channel SRL amplifier/filter. The sequence of events was as follows: data were collected on the NWTB as usual, however, the digitized data went directly to the 8 disc surfaces that had been added to the NWTB. After data collection was completed, SABSRT pulled windows of data from the discs. Once chosen, these windows went directly onto the standard NWTB removable 5 Mbyte disc as "*.DAT" files where they could be examined with the standard NWTB reduction/analysis program modules. Before the next test could be run, the


digitized data on the 8 disc surfaces had to be removed and cleared through initialization of the disc memory.

SIMULATION

IRIS Silicon Graphics Computer System.

A dynamic flight mission using a modified version of the "DOG" program provided the task. The hardware and software of the IRIS 3030 Silicon Graphics workstation remained standard. A flight pattern similar to a simple oval circuit was created with a simulated F-15 aircraft and saved (pre-recorded) on the IRIS' hard disc. This pre-recorded flight path was sequenced in the following manner: take-off (TO), straight and level (SL1), left bank (B1), straight and level (SL2), left bank (B2), straight and level (SL3) and landing (L). An illustration of the flight path is presented in Figure 1. Each segment of the pattern used at least one minute's worth of time to enable EEG data collection. Next, the pattern was broken down into actual time windows that reflected each flight segment. Once the criterion flight pattern was pre-recorded and timed, subjects piloted a second F-15 aircraft along with the pre-recorded criterion aircraft. The objective was to fly the second (wing) aircraft 1500 feet or less behind the first (lead) aircraft, maintaining similar altitude and roll angle. Unfortunately, the IRIS slowed down when the wing plane was added to the screen with the pre-recorded lead plane, and sampling rate decreased. Sampling rate also became more variable within each segment, and within and between each subject. When a sampling rate was specified, the display made jerky, discrete movements instead of the smooth, continuous movements required for simulation. Because this "jerky" simulation was too difficult to fly, sampling rate was allowed to vary randomly, resulting in about 13 performance samples per second.

TOP VIEW OF MISSION WITH SOFTWARE TIME (REAL TIME)

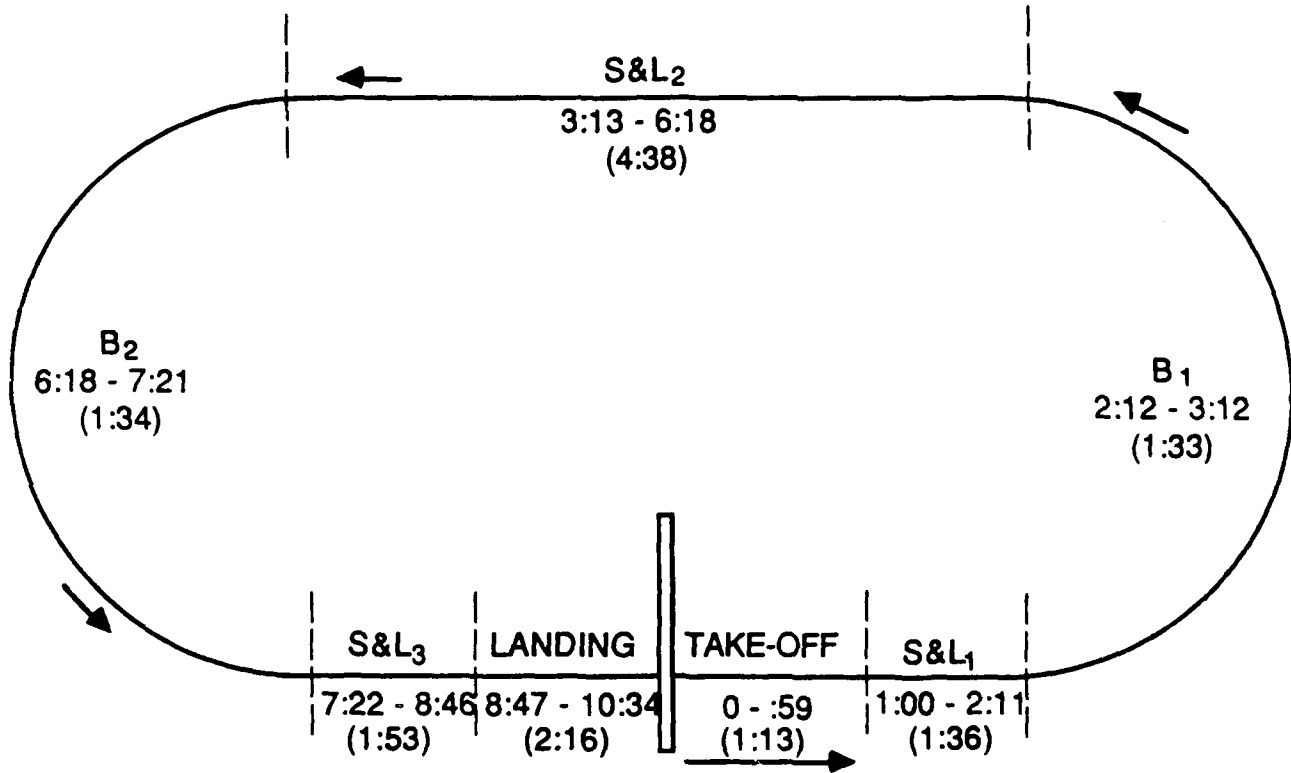

S&L - STRAIGHT AND LEVEL
 B - BANK

SIDE VIEW OF MISSION

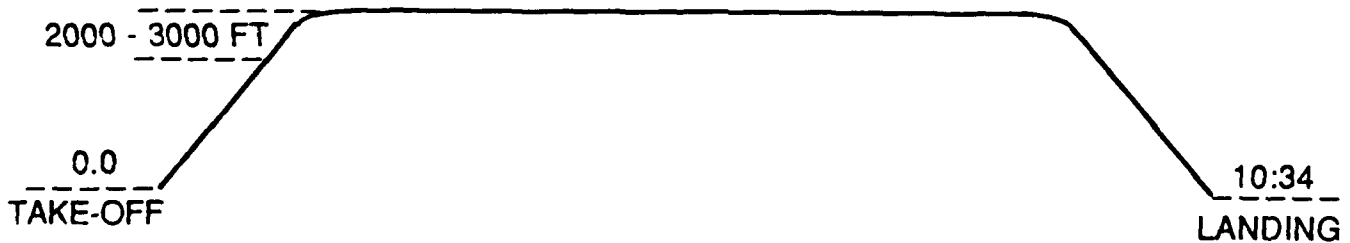


FIGURE 1. Flight path top and side views.

Specifying the lead and wing options of the IRIS allowed the subjects' wing flight and the pre-recorded lead flight to be recorded in a file simultaneously, resulting in comparable data at the end of a run. The data showed both aircraft's positions in the Z (longitudinal trailing distance), Y (altitude) and X (lateral off-set or roll) axes for each sample taken (See Figure 2).

Two programs, FLIGHT.C and COMM.C, which encompass the DOG program, underwent modifications to allow a distance and heading display to be placed on the screen. Also, an additional modification of COMM.C allowed position data that would normally be sent to the SG network to be sent to "OUTFILE" for viewing.

NWTB AND IRIS INTERFACE

The new problem of the random IRIS sampling rate during simulated lead/wing flight had implications for the use of the NWTB in the study. The IRIS ran on variable software time instead of real time. The NWTB ran on a real time clock, and problems appeared during correlation of NWTB and IRIS data. To solve these problems, an RS-232 was employed to link both systems together to run on the IRIS' software time. Since the software time was considerably slower, the segments lasted longer than we had originally anticipated. The segment start and stop times, as well as the amount of real time, are listed below.

	Pre-Recorded Time		Real Time
	start	stop	
Take-off	00:00	00:59	01:13
SL1	01:00	02:11	01:36
B1	02:12	03:12	01:33
SL2	03:13	06:18	04:38
B2	06:19	07:21	01:34
SL3	07:22	08:46	01:53
Landing	08:47	10:34	02:16

Although the real start and stop time for each of the flight segments was known, the pre-recorded time was variable in both interval between seconds and length of each second. Because the NWTB used the IRIS' variable software time,

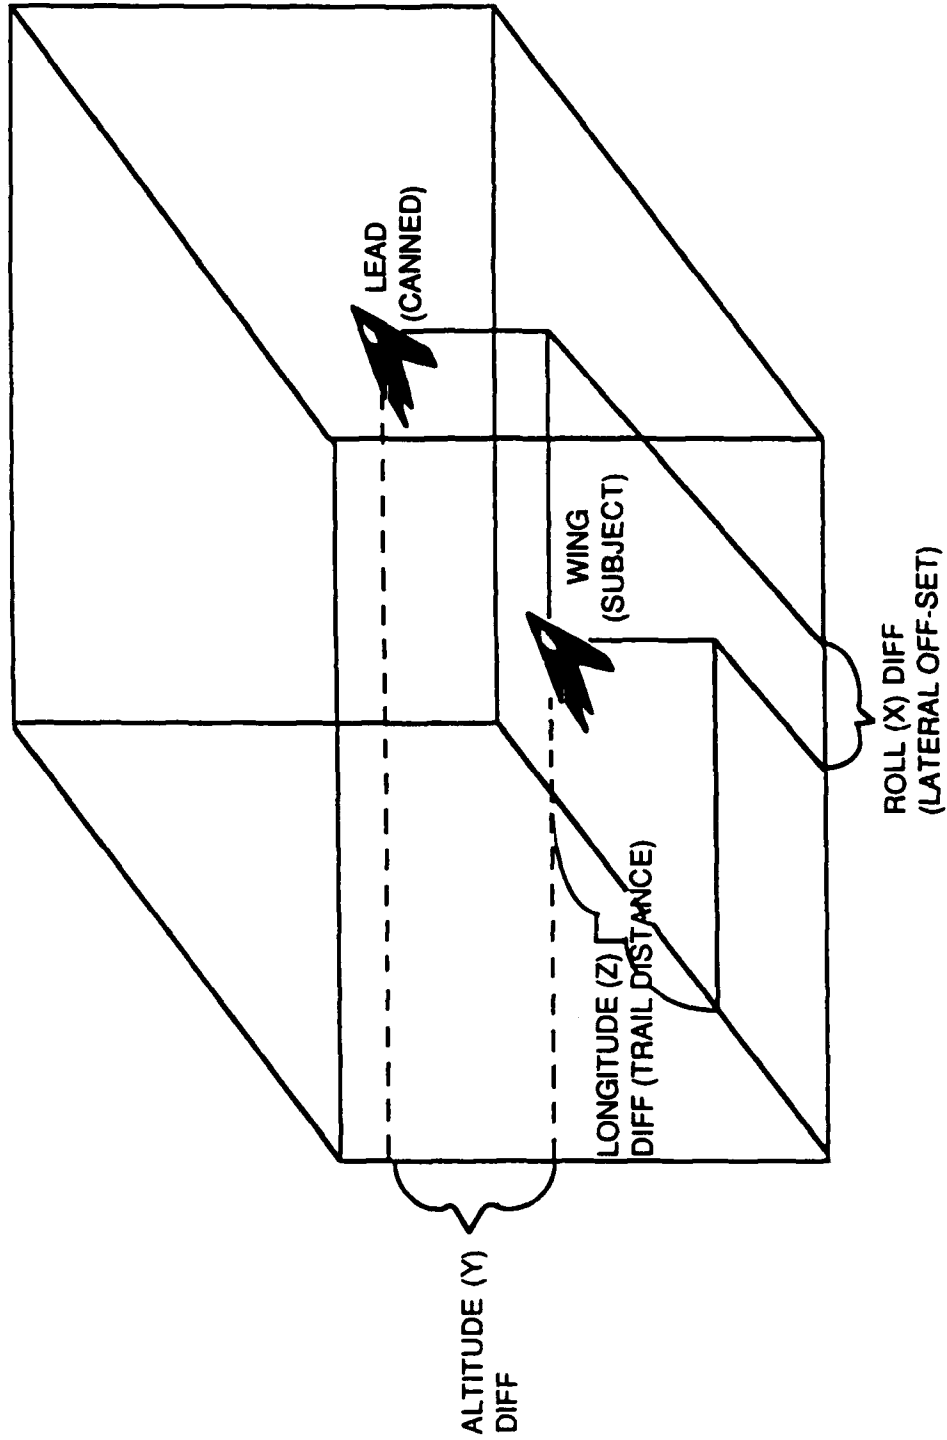


FIGURE 2. Representation of the lead and wing flights in the three dimensions.

the NWTB could be programmed to begin data collection at 00:00:00 when the IRIS clock began counting at the start of the flight trial. For the EOG and ECG, this was not a problem since the data was recorded continuously and setting the program parameters to collect this type of data was a one step operation. However, for the EEG data a real logistics problem emerged. During EEG collection, a secondary task (described later) was presented and evoked potentials recorded to the onset of the task items. A window of time during each segment was chosen to present this secondary task, rather than attempting to collect continuous data. This meant that each time window block had to be typed in separately. Unfortunately, the operator could only input one window at a time while collection was underway. This was an extremely inconvenient and error prone situation. If the time window block was entered incorrectly, and couldn't be corrected by the time the test was due to begin, the entire run had to be re-set and re-started. To alleviate this problem, the NWTB was programmed to start counting from 10:00:00 to allow the operator to type in all the time window blocks before the run started. When the task started, the NWTB time was re-set to 10:00:00 and the EEG data was collected at time points specified by the operator (NOTE: all the data windows were under 00:10:34, so it would have taken the NWTB almost ten hours to count down to the first time window). The starting times for each data window were input as follows:

	<u>EOG and ECG</u>	<u>EEG</u>
Take-off	10:00:03	10:00:03
SL1	10:01:00	10:01:07
B1	10:02:11	10:02:11
SL2	10:05:15	10:05:15
B2	10:06:19	10:06:19
SL3	10:07:22	10:07:22
Landing	10:08:47	10:09:25

EEG windows were slightly different from EOG and ECG because the data in each window were collected as discrete data. The window choices were made to optimize the effects of each segment. Each one minute EEG sample needed to

reflect the effects of each segment. For example, "landing" effects would most likely be seen in the latter part of the landing segment where the subjects' plane was actually touching down on the runway. Once the run was completed (when the lead plane stopped on the runway) the NWTB program was halted and SABSRT was used to sift through the data for the specified windows listed above.

Section 4

EXPERIMENTAL METHODS

SUBJECTS

Six healthy male non-pilots, aged 20-45 years, participated in this study. Each subject was right-handed and had approximately 20/20 uncorrected vision.

DESIGN

Data were collected in a mixed factorial design. Independent measures included training session (Early, Middle or Late training, Test session 1 or 2), visibility (Day or Night), and flight segment (REST, TO, SL1, B1, SL2, B2, SL3 and L). The visibility factor was counterbalanced within and between subjects. Night was the same flight scenario as day, but the display became dimmer and "night lights" from the city, runway, and aircraft became apparent. Dependent measures included root mean square error, which represented distance between the lead/wing planes in the three axes (XRMS, YRMS and ZRMS), heart rate and heart rate variability (HR and HRV), eyeblink rate, duration, half amplitude duration and variability (BR, DUR, HDUR and BV), and N200/P300 amplitude and latency of the evoked potentials obtained from the EEG.

PROCEDURES

Training.

The primary task required the subjects to follow the pre-recorded lead flightpath, described previously. Training was composed of 12 sessions which lasted for one and one quarter hours each. On the first day, subjects were introduced to the task and given the opportunity to operate the simulated F-15 aircraft. On the second day, they learned how to fly behind the pre-recorded lead aircraft (See Table 1 for the training schedule). Following these two days, subjects received standardized training which consisted of six full missions and four "landing only" segments. Following the second (Early),

TABLE 1. Training Schedule Sheet

Subject _____ Condition Order _____ Date _____

DAY 1:

Familiarization:

- Experimental Purpose and Task
- Introduction to the NWTB
 - Purpose
 - Instrumentation
 - Data Collection
- Introduction to Flight Program
 - Flight Path
 - Flight Procedures
 - Briefing Demo
- Sample Physiological Data
- Focused Training
 - Overview of Controls
 - Flaps and Spoilers
 - Demo Flight
- Hands On Training
 - Day and Night
 - (D) (N)
 - Take off
 - procedure for
 - lift off
 - Straight and level
 - altitude and
 - jink
 - Banking
 - procedure for
 - turning
 - Landing
 - approach
 - speed
 - rate of descent
 - controls
 - touchdown

DAY 2: -----

Review:

- Flight Procedures
- Overview of Controls
- Flaps and Spoilers
- Day and Night Flights
- Introduction to Top Gun
 - Formation Flying
 - Demo of pre-recorded flight
 - Performance Requirements
 - Following Lead
- Hands On Wing Training (same as DAY 1)

seventh (Middle) and twelfth (Late) training sessions, all the dependent measures were collected except the EEG, to provide information on training progress. On these data collection days, a two-minute EOG and ECG baseline measurement was taken, followed by two full warm-up flights. Following warm-up, two full missions were flown where EOG, ECG and RMS error scores were collected.

Training criterion was reached when subjects could maintain a distance of 1500 feet maximum between his own plane and that of the lead. A landing with a score of zero or more had to be obtained at least half the time. Of six subjects, five reached criterion by the last training session. These five subjects' data were used in all subsequent analyses.

Testing.

Data were also collected on the sixteenth (Test 1) and the seventeenth (Test 2) day. Because EEG data were collected during these sessions, which resulted in longer preparation and data reduction times, each session lasted approximately three hours. Similar to the data collection for training, two minutes of EOG and ECG baseline data were collected prior to flight. Also, EEG data were collected during the second minute prior to flight while the subjects monitored audio rare events (see below). Following baseline, subjects were given two full warm-up flights, and then required to fly two full missions during which all dependent measures were collected. The audio rare event occurred for one minute during each segment for both of these Test 1 and 2 flights.

Audio Rare Event (Oddball).

The secondary task was the Audio Rare Event, or Oddball test, which was used to elicit evoked potentials (EPs) from the background EEG. This standard test was taken from the NWTB. The Oddball intermittently presented two tones of

different pitch to the subject via headphones. The subjects' task was to count the number of tones occurring in a specific pitch while ignoring the other tone. The task was designed to present the counted tone between 20 to 40 percent of the time. Hence the name "rare" and "oddball". The parameters for this test are presented in Table 2.

Electrode Placement and Procedure.

Silver-silver chloride electrodes were used for data collection. Adhesive collars were placed around the cuff surrounding the electrode. The electrode was then filled with conducting creme. The subjects' skin was lightly scrubbed with a mild abrasive gel, rinsed with alcohol and dried with a gauze pad. Following preparations, one electrode was placed on each of the subjects' mastoids, one for reference and one for ground. For EOG, an electrode was placed centrally just above the eyebrow of the dominant eye. For ECG, an electrode was placed one half inch above the top of the sternum (fleshy midline indentation), with a reference electrode placed on the subjects' side, just below the lowest left rib. For the EEG, an electrode was positioned on the central parietal area (Pz) according to the 10-20 system of scalp electrode placement (Jasper, 1958). Impedances between signal and reference electrodes were kept below 20K ohms for ECG, below 10K ohms for EOG and below 5K ohms for EEG. The mastoid electrode with the lowest impedance was used to reference the EOG and EEG; the other electrode was used as ground for all three signals. Impedance for all connections was checked periodically throughout the data sessions.

TABLE 2. Parameters for the Auditory Oddball

Rate tone:	1501 Hz
Frequent tone:	1199 Hz
Interstimulus interval:	1500 msec
Probability of rare tone:	40 percent
Minimum number of rare tones:	14
Tone intensity:	1 (approx. 75-80 Db (A))

'Test will last 60 seconds' **

** (machine time was actually longer)

Section 5

DATA REDUCTION

REDUCING THE IRIS BEHAVIORAL DATA

After the behavioral data was sampled in binary fashion, a program was written to convert the data set into ASCII format. This same program further reduced the data into RMS error terms for each of the three axes (X, Y and Z). The RMS formula used here is presented in Figure 3.

The data were sorted between subjects and by flight segment. The data set was then written onto an ASCII IRIS.* file which was compatible with SAS. These files were transferred to a VAX 8650 via a Telnet communications interface. Once on the Vax the data set was ready to be statistically examined.

REDUCING THE NWTB PHYSIOLOGICAL DATA

Analysis of the physiological data on the NWTB was a very time-consuming task during this study. The ECG, EOG and evoked potentials required separate analysis techniques. Each of these techniques is described below.

ECG Analysis

The heart rate routine calculated the time between R waves, or inter-beat-intervals (IBIs), and the variance of the IBIs. Prior to these calculations, the program allowed certain parameters to be manipulated by the operator. These parameters included the minimum and maximum IBI time values, cardiac (R wave) amplitude, and a difference criterion in terms of slope of the R wave. For most of the subjects the default parameter values provided by the program were sufficient for the correct identification of the R waves, and the resultant IBIs. By calling a file name within the heart rate program, the first ten second block of heart rate data was displayed on the terminal. The R waves on the screen were marked with an asterisk by the program. The operator visually

FORMULA USED FOR RMS ERROR

RMS ERROR = $\sqrt{\frac{E(X_{Li} - X_{Wi})^2 - \frac{(E(X_{Li} - X_{Wi}))^2}{n}}{n-1}}$

L = LEAD (CANNED)
W = WING (SUBJECT)

FIGURE 3. Formula used for RMS error.

inspected the R waves and when it was determined that the program was identifying them correctly, a "C" was entered on the keyboard. Then the program calculated statistics for the entire file. The program displayed these statistics on the screen and noted any "bad beats" (those falling outside of the parameters) for the file. In most cases, adjusting the parameters removed the bad beats. Yet a problem arose when R waves occurred on the "edges" (beginning or end) of the 10 second blocks. These R waves were lost to the analysis and introduced artifactual variance to the IBI averages. This same problem was outlined by Albery (1988). It is suggested that an option be added to the heart rate program that allows the operator to insert an asterisk at the correct R wave occurrence, even if it falls at the edge of a ten second block.

The NWTB allowed for a printout of the summary statistics via a printer mounted at the front of the computer. This capability ensured that the operator obtained hard data copies of each file summary. However, the NWTB did not possess the capability to organize multiple heart rate files into a "master" file for further analysis. The summary statistics were entered by hand onto a data sheet, and ultimately input into a SAS file. It was recommended that this labor-intensive process be replaced by a software module that will organize master files. Recently, developing an NWTB interface for file transfer to other computers that have statistics software has greatly reduced operator time. Unfortunately, this interface was not available for use at the time of our data transfer.

The NWTB summary statistics gave the averages of the IBIs for each of the ten second blocks, as well as the overall segment average. When it was decided post hoc to break the overall segment averages down into the first and last 30 seconds of the segments, the IBI values were averaged across the first three and last three ten second blocks. The variability of the IBIs could not be averaged by blocks nor be examined in the same manner as the IBIs. A small program

module that would allow different combination averages of the ten second blocks is another recommended option that would have reduced operator time and produced a more detailed analysis.

EOG Analysis

The eyeblink data were the easiest to reduce using the NWTB. The feature that expedited the analysis was that of a moving cursor under the control of the operator. The parameters that identified an eyeblink were those of blink amplitude, minimum and maximum blink time and slope of the eye closure. Usually these parameters were sufficient. At times, however, blinks would occur that did not fit the subject's overall blink pattern. Changing the parameters to include or exclude an unusual blink often affected more "normal" blinks. The cursor option eliminated this problem by allowing the operator to add or delete a blink without changing parameter values. As with the heart rate program, when the operator was satisfied that the program was identifying blinks correctly, a "C" was entered and summary statistics obtained. A hard copy was also available from the NWTB printer. The form of the summary statistics was different in that number of blinks, inter blink interval, closing duration and one-half amplitude closing duration was given for the eyeblink data.

The same problems occurred during the eyeblink analysis as those found with the heart rate program, specifically, entering data by hand and lack of post hoc analysis programs. When examining the first and last 30 seconds of each segment, only the number of blinks could be averaged across the ten second blocks.

Other problems emerged during the eyeblink analysis not found with heart rate. In some instances, subjects did not blink at all. The operator was confronted with zeros across all summary statistics, and was required to scroll through the entire data file visually to ensure that the program had not missed

real blink occurrences. Furthermore, two or more blinks had to occur within a ten second block, or the blink variance could not be calculated. This was not a problem unique to the NWTB. Missing data (no blinks, or less than two blinks) are a function of the eyeblink measure, and were treated here as pertinent data during later analysis.

Evoked Potential Analysis

The routine on the NWTB averaged together the single evoked potentials elicited by the tones. The program produced separate averages for rare and frequent tones. Furthermore, the program automatically placed a vertical line at the place on the EP averaged waveform that was the largest in amplitude. The NWTB also provided an operator controlled cursor that allowed amplitude and latency measures to be obtained for any of the components of the averaged EPs.

The two most time consuming tasks in removing the pertinent data from the NWTB were those of "picking" the correct components of each waveform by moving the cursor, and transferring the corresponding amplitude and latency values to data sheets by hand (and ultimately to another computer for statistical analysis).

Other problems were encountered that were unique to the evoked potential measures. One minute of EP recording during the flight task limited the number of single trials available for each average. This problem was further compounded by the subjects' tendency to blink at the onset of each tone, especially the rare tones. Without an eyeblink correction program on the NWTB, the operator had to determine the minimum eyeblink amplitude threshold for each EP average, without going below a 12 single trial cut-off for each average. The overall eyeblink amplitude thresholds for the EP averages ranged from 500 microvolts to 2 and one half millivolts.

Section 6

RESULTS

The following paired comparisons for the behavioral data were performed using standard one-tailed t-tests, significant at $p < 0.05$. The paired comparisons for the physiological data were performed using the more conservative Bonferroni test, also significant at $p < 0.05$. The ANOVAs reported here were obtained through the 1985 version of SAS.

BEHAVIORAL DATA


The X axis data reported below represents the amount of the subjects' lateral off-set compared to the wing position. The Y axis data corresponds to the altitude difference between the subject and lead. Finally, the Z axis corresponds to the trail distance of the subject to the lead.

X Axis (Lateral Offset).

RMSX. The root mean square error in the X axis (RMSX) was affected by flight segment, $F(6,24)=15.32$, $p < 0.0001$. As can be seen in Figure 4., RMSX was larger during the two bank segments than during the rest of the flight. Day/night conditions and session block mediated this effect. The segment by day/night interaction was significant, $F(6,24)=3.34$, $p < 0.0154$. This interaction is depicted in Figure 5. During the first bank segment, RMSX was larger during the day condition than during night. The segment by session block interaction was also significant, $F(24,9)=3.44$, $p < 0.0001$. As can be seen in Figure 6, during the first and second bank segments and second straight and level the RMSX was larger early in the session blocks.

RMSX LATERAL OFFSET

SEGMENT F(6,24) = 15.32, p < .0001

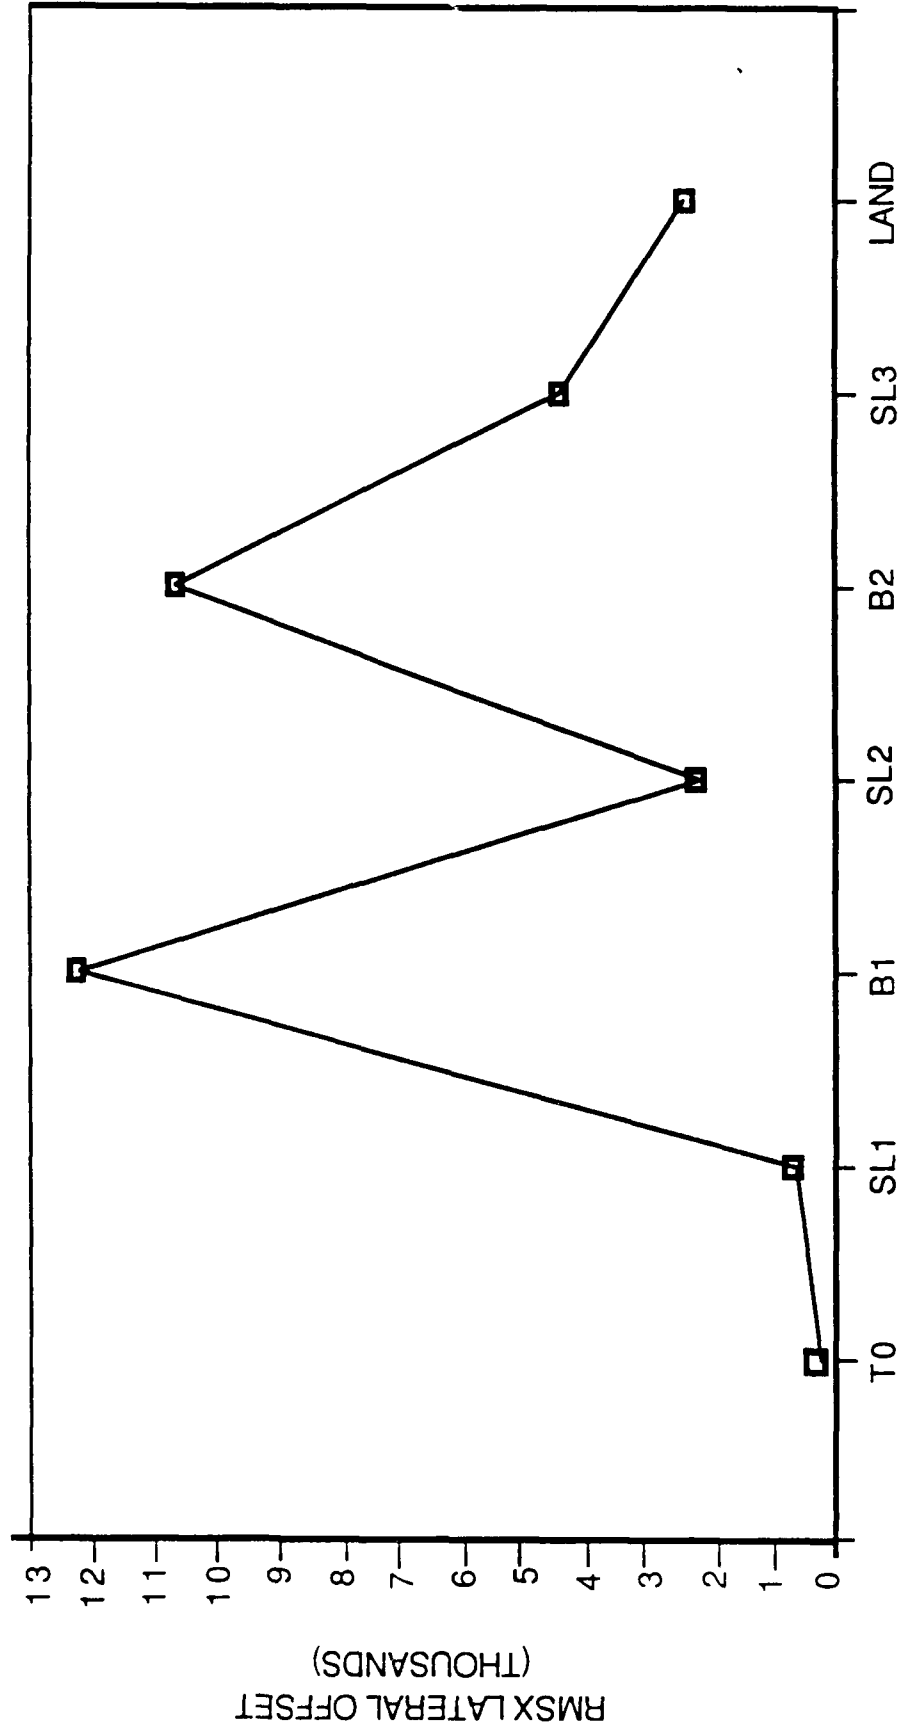

SIMULATED FLIGHT SEGMENT

FIGURE 4. RMSX Lateral Offset segment effects.

RMSX LATERAL OFFSET

SEGMENT *D/N F(6,24) = 3.34, p < 0154

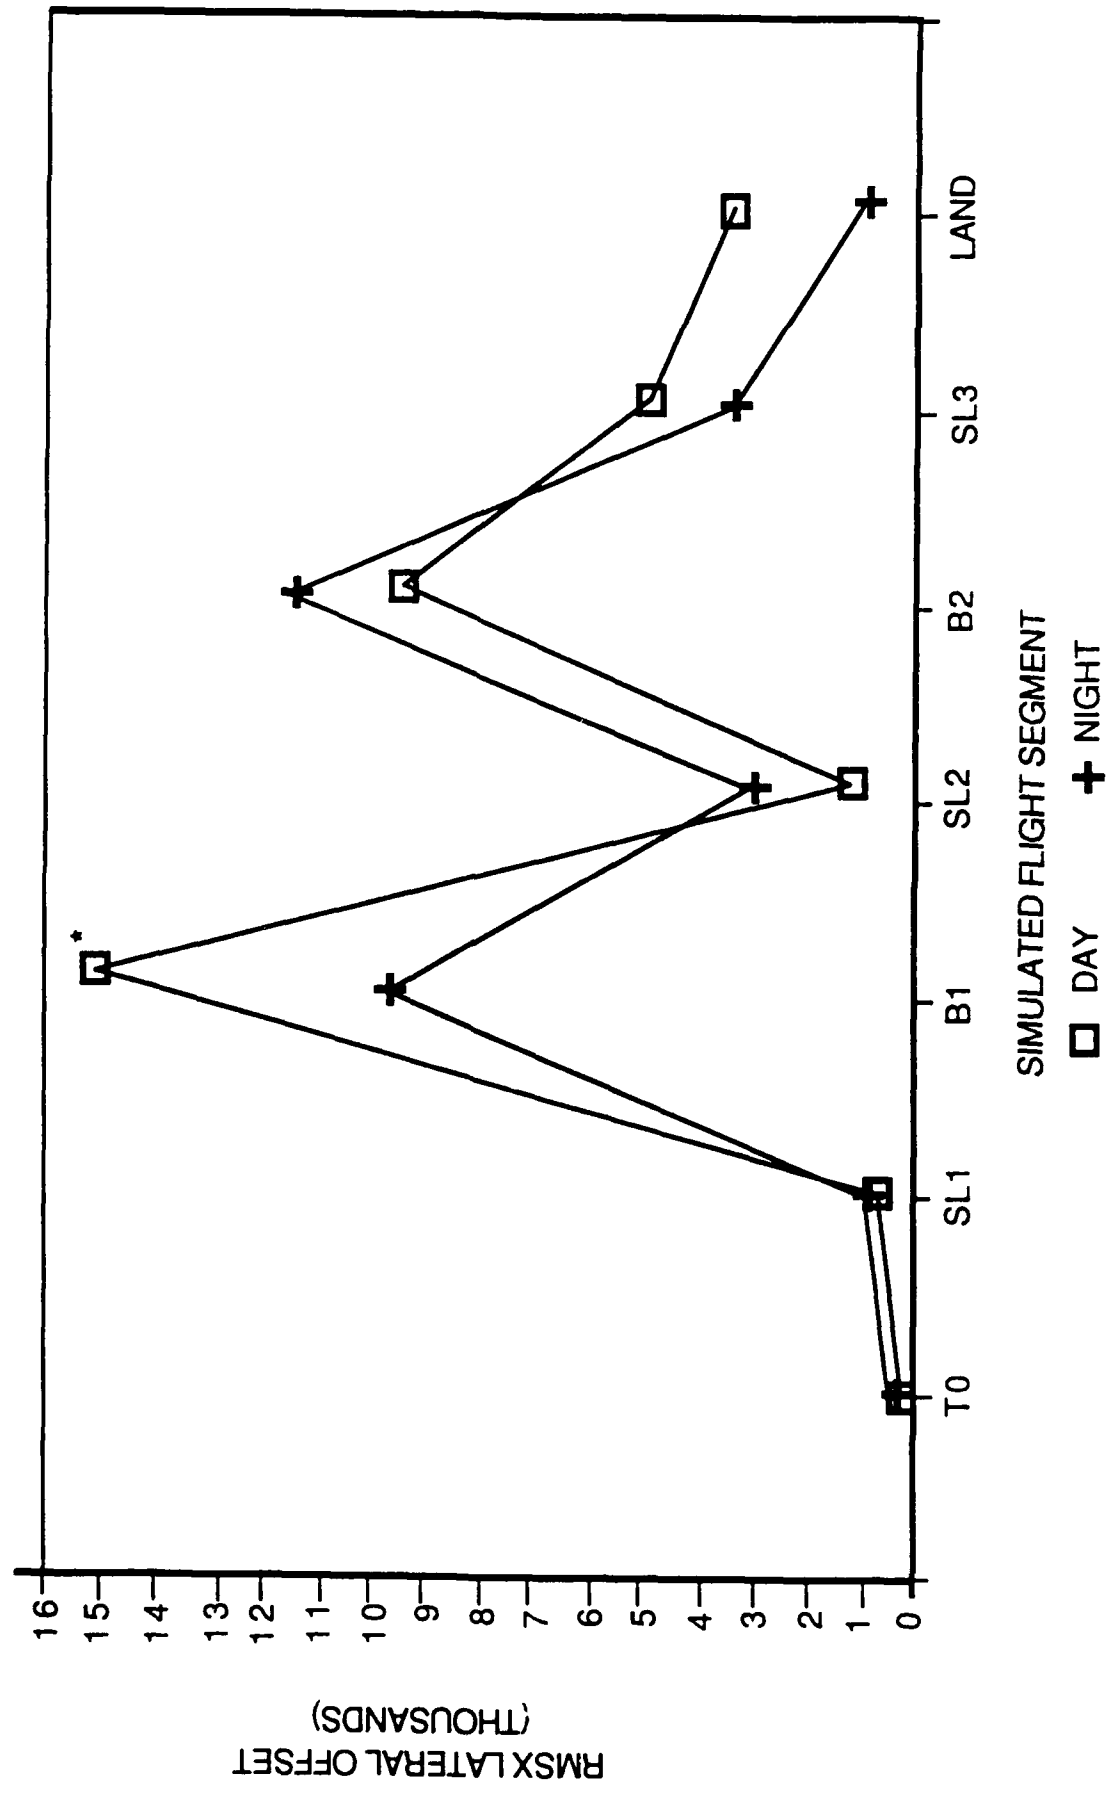


FIGURE 5. RMSX lateral offset segment by visibility effects.

RMSX LATERAL OFFSET

SEGMENT*BLOCK F(24,96) = 3.44, p < .0001

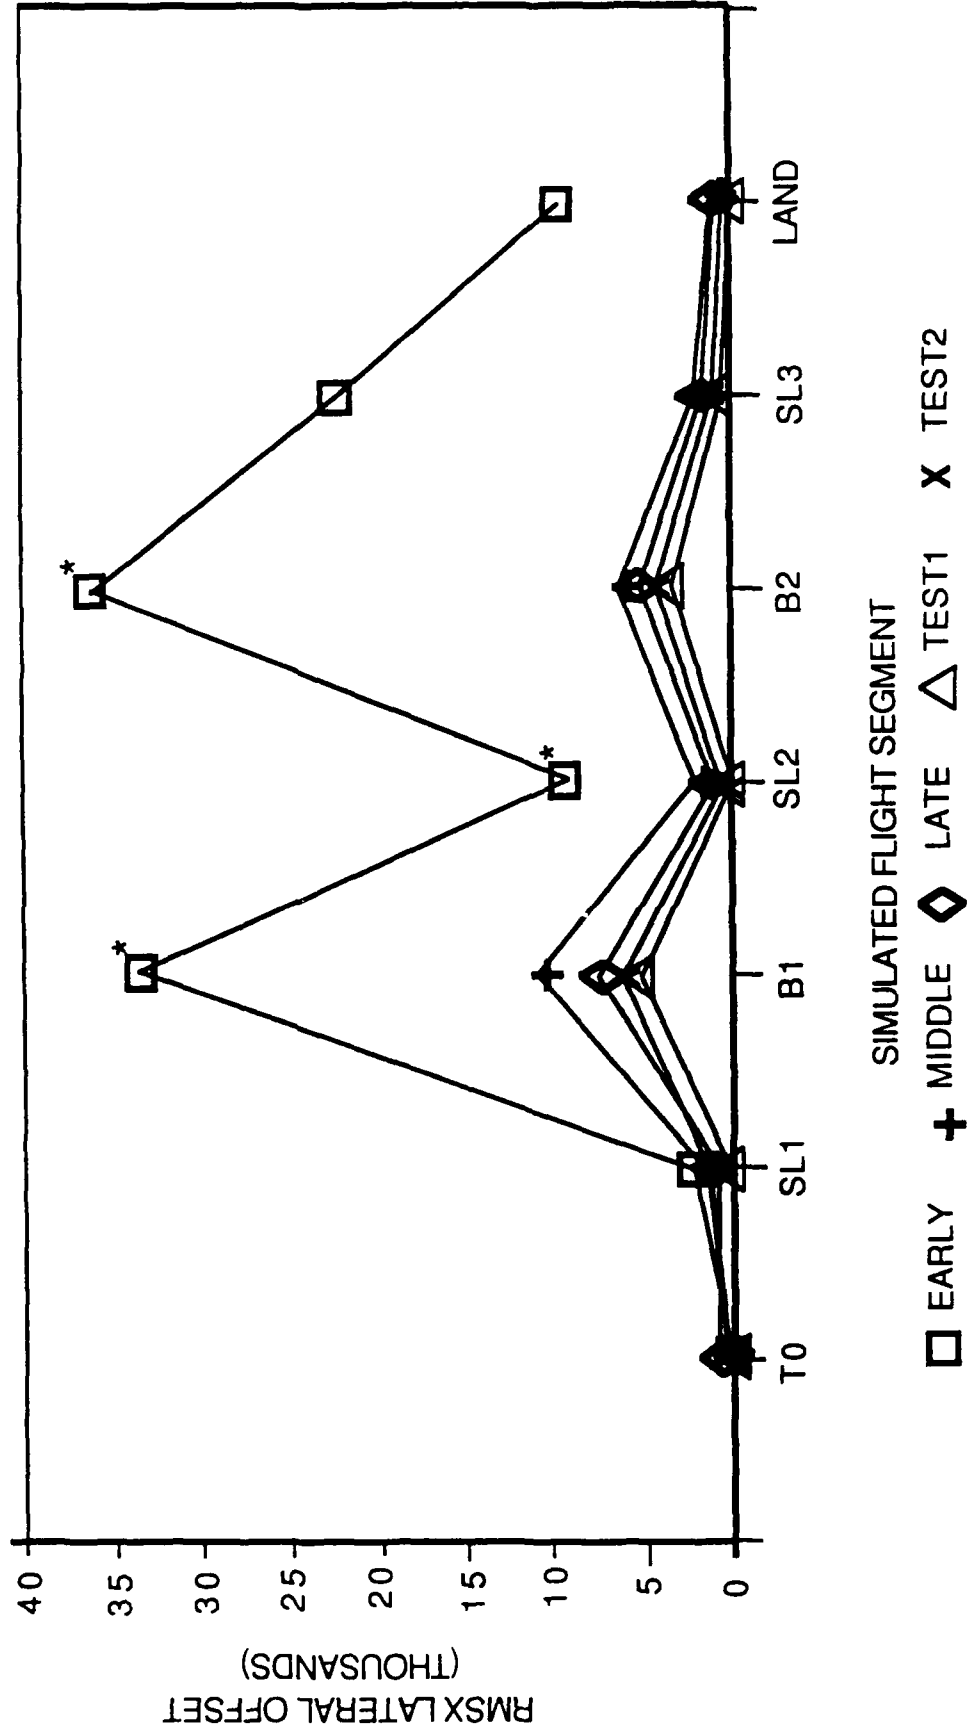


FIGURE 6. RMSX lateral offset segment by session block effects.

Y Axis (Altitude).

RMSY. The only significant effect for RMSY was that of session block, $F(4,16)=3.54$, $p < 0.0298$. This effect is shown in Figure 7. RMSY was larger during the early session block than during the rest of the sessions.

Z Axis (Trailing Distance).

RMSZ. There was a significant effect of segment on RMSZ, $F(6,24)=3.11$, $p < 0.0213$. RMSZ was larger during the second and third straight and level and the second bank than during the other flight segments (see Figure 8). Similar to the X axis, this segment effect was mediated by day/night conditions and session block. The segment by day/night interaction was significant, $F(6,24)=2.65$, $p < 0.0410$. As depicted in Figure 9, RMSZ was larger at the second straight and level segment during day than during night. The segment by session block interaction was significant, $F(24,96)=2.27$, $p < 0.0026$. Figure 10 shows that RMSZ was larger at the second and third straight and level, the second bank and landing segments during day flight than during night.


PHYSIOLOGICAL DATA

Heart Rate (ECG).

BPM. The first test performed on the heart rate in beats per minute (BPM) was a flight segment by session block interaction ANOVA (8 X 5). This interaction was not significant. The main effect of segment was significant, $F(7,28)=3.97$, $p < 0.0039$. As shown in Figure 11, during the landing segment subjects' heart rate was larger than during rest, take-off, the first straight and level and bank, and the second straight and level. The second bank and third straight and level were not significantly different from landing. The main effects of session block and day/night were not significant.

RMSY ALTITUDE DIFFERENCE

BLOCK $F(4,16) = 3.54, p < .0298$

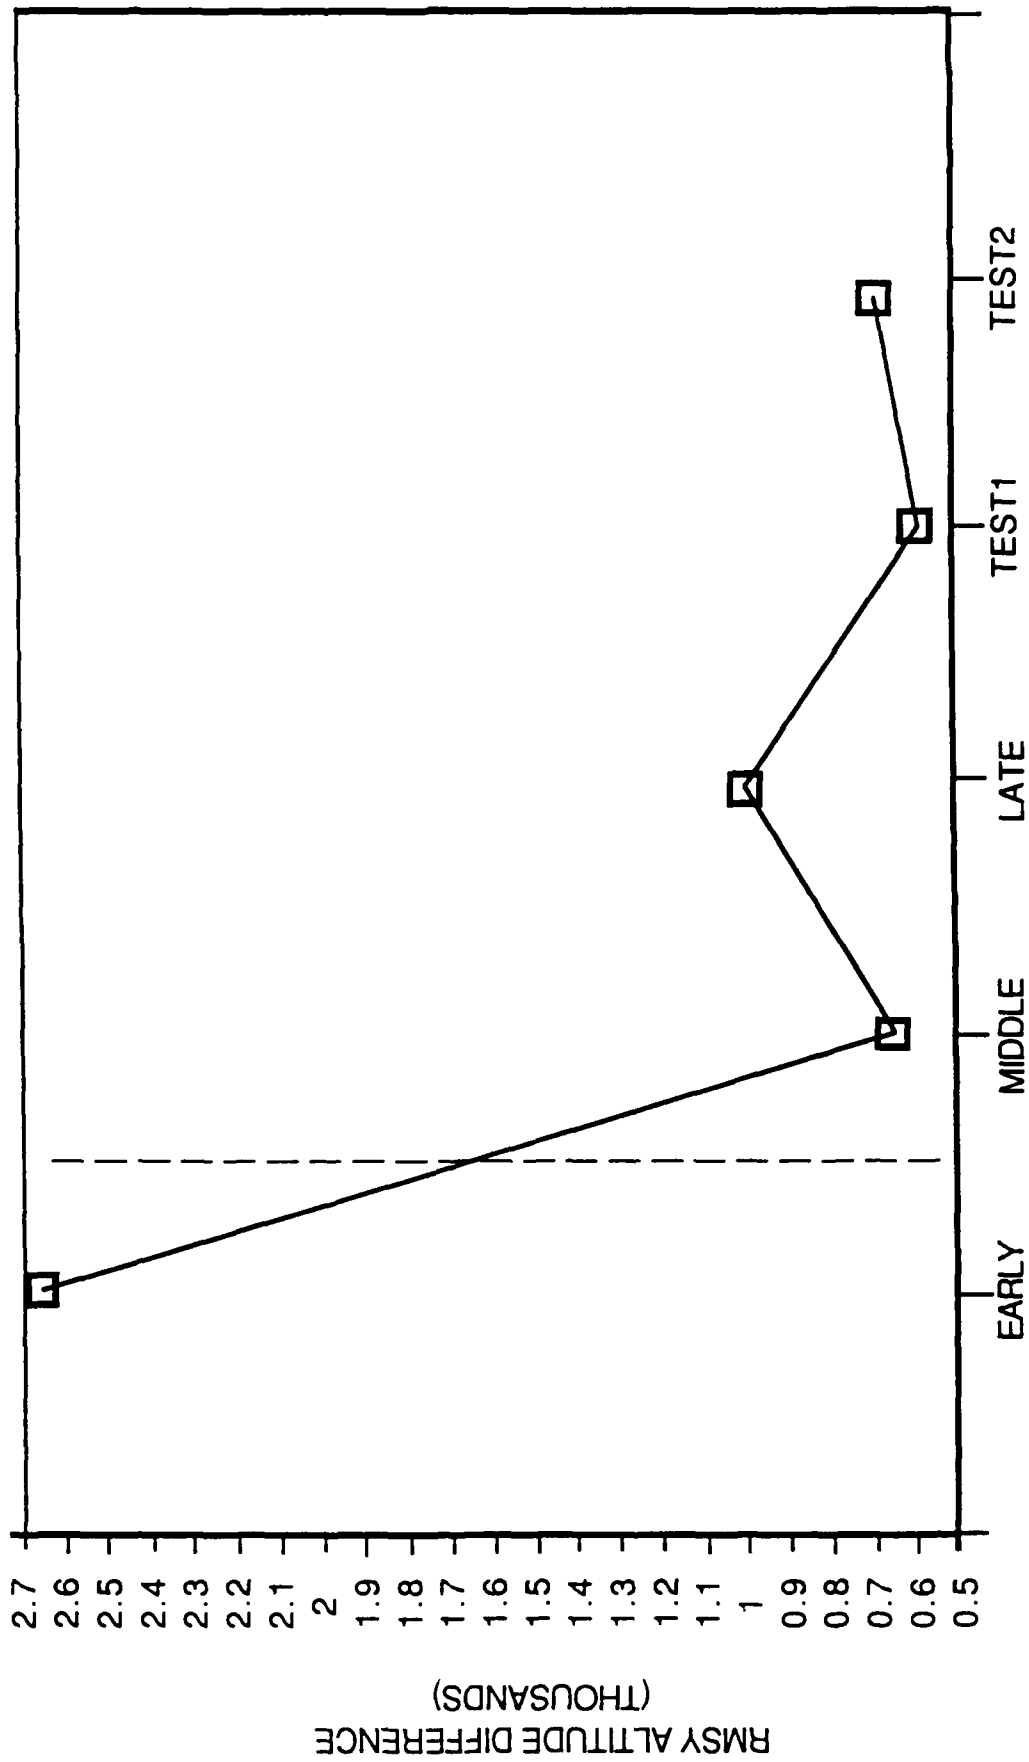


SESSION BLOCK

FIGURE 7. RMSY altitude session block effects.

RMSZ TRAILING DISTANCE

SEGMENT F(6,24) = 3.11, p < .0213

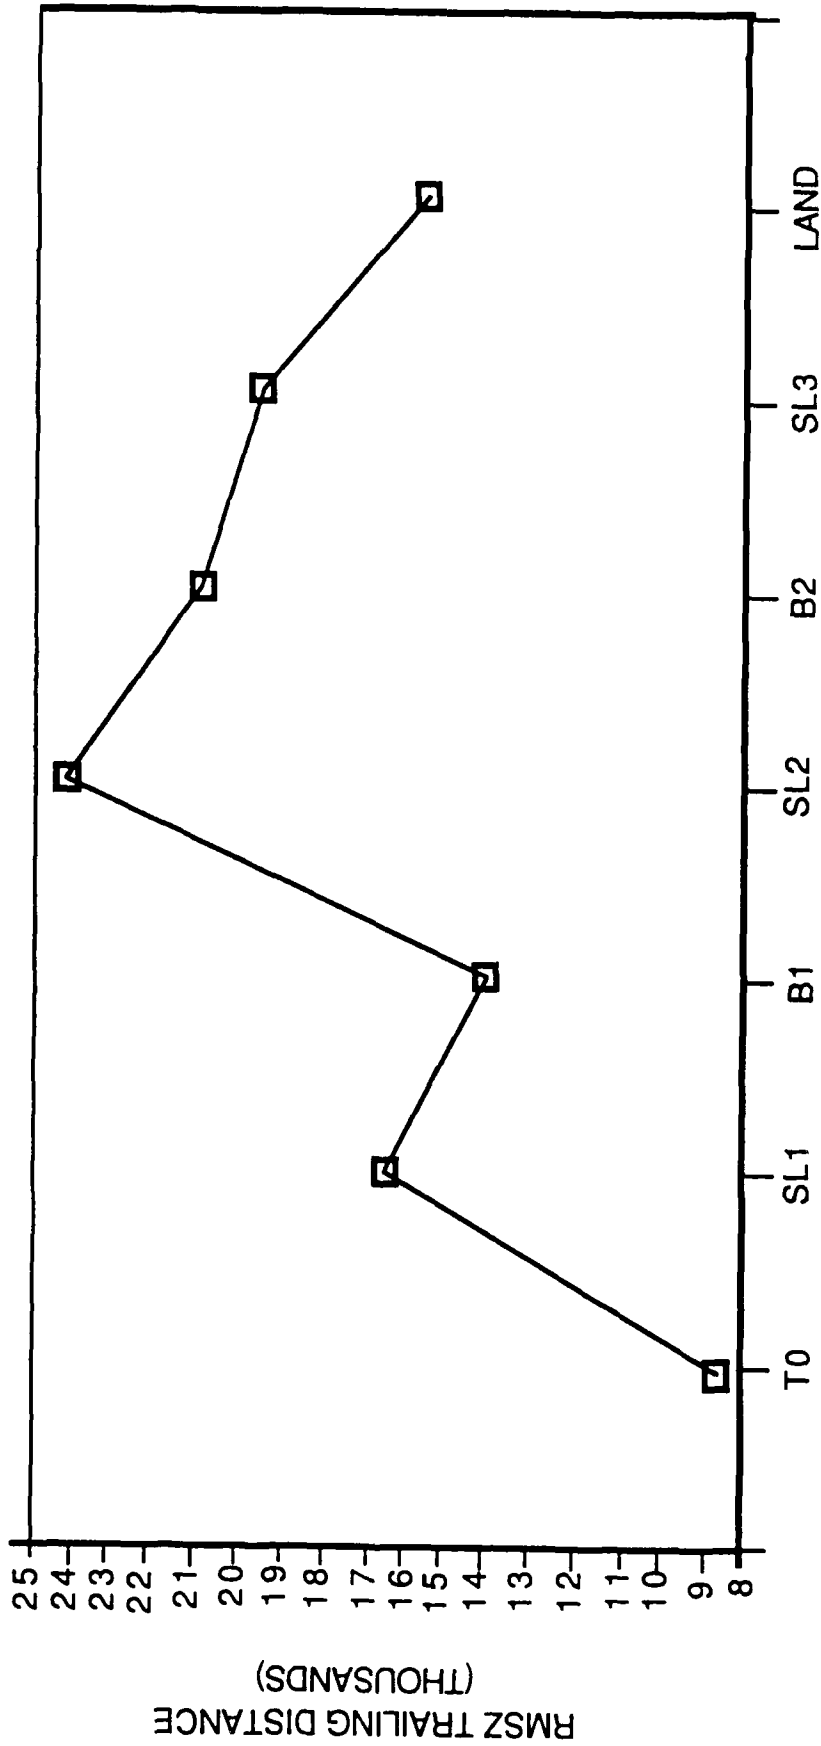

SIMULATED FLIGHT SEGMENT

FIGURE 8. RMSZ trail distance segment effects.

RMSZ TRAILING DISTANCE

SEGMENT*D/N F(6,24) = 2.65, p <.0410

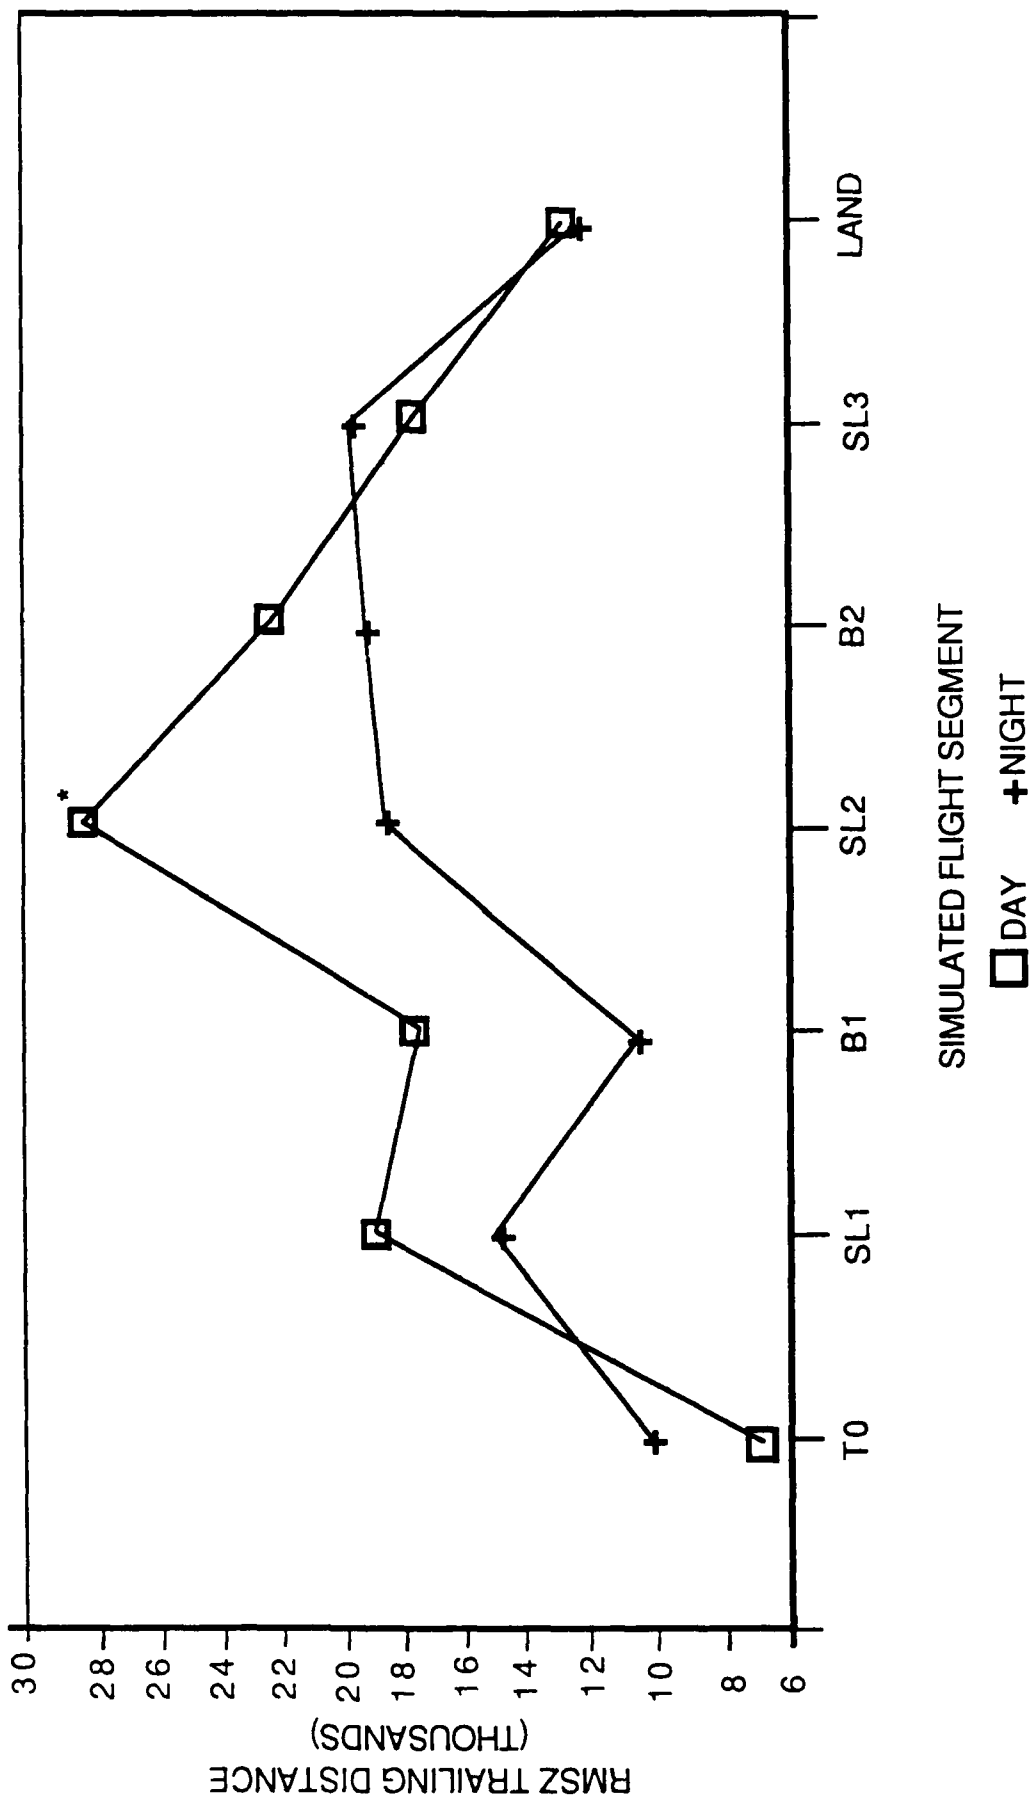


FIGURE 9. RMSZ trail distance segment by visibility effects.

RMSZ TRAILING DISTANCE

SEGMENT*BLOCK F(24,96) = 2.27, p <.0026


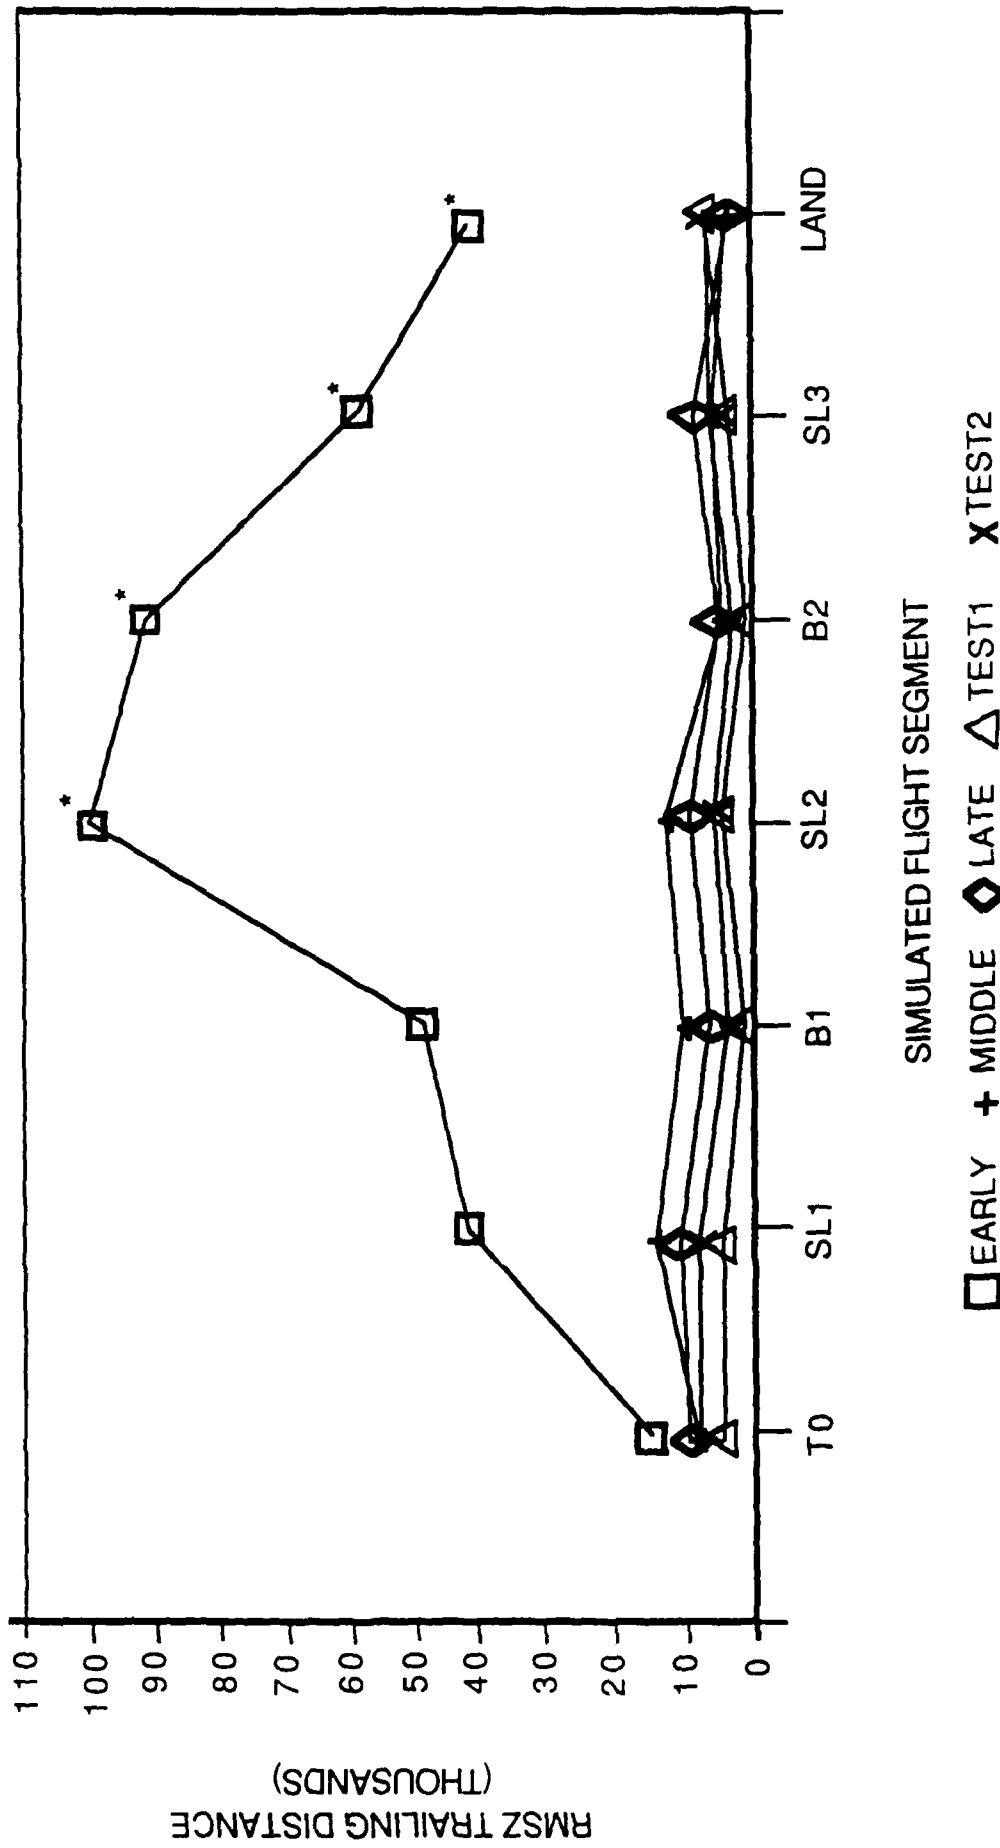


FIGURE 10. RMSZ trail distance segment by session block effects.

BPM IN RELATION TO SIMULATED FLIGHT SEGMENT

$F(7,28) = 3.97, p < 0.0039$

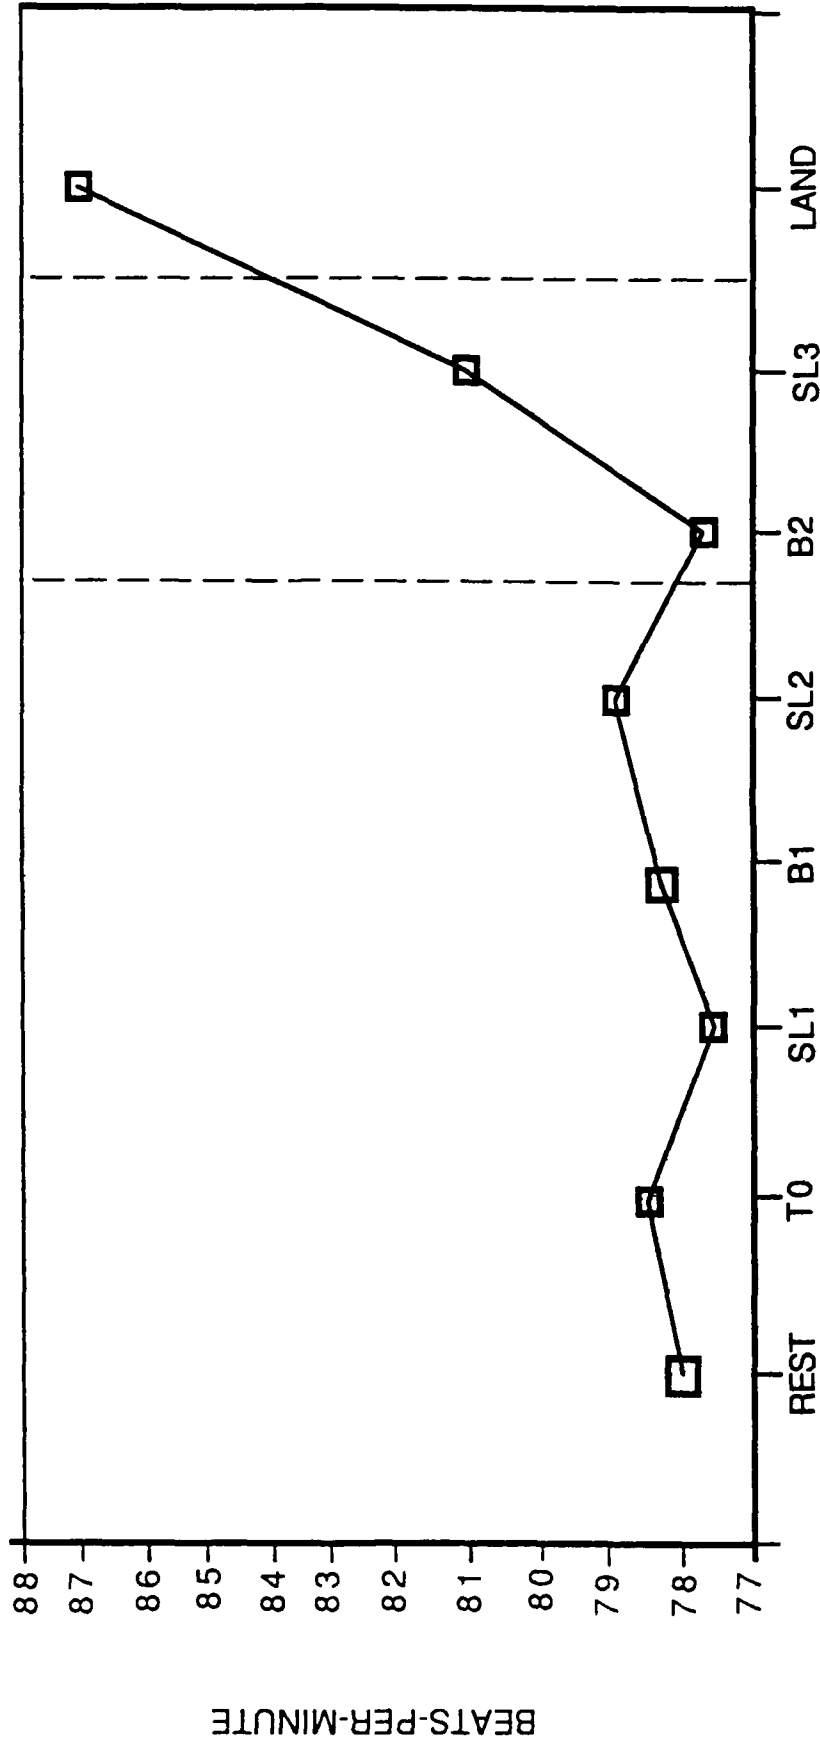

SIMULATED FLIGHT SEGMENT

FIGURE 11. Beats-per-minute segment effects.

Another test of heart rate was performed on BPM taken from the first and last 30 seconds of each segment. This flight segment by time block ANOVA interaction was not significant, even though visual inspection of Figure 12 suggests that BPM is larger during the last 30 seconds of the landing than during the first 30 seconds.

Even though the main effect of session block was not significant, a pattern of the five subjects' means emerged along training order. A regression was performed on the means, as shown in Figure 13. The r value equaled 0.7743, yet accounted for only 59.9 percent of the variance. Again, a pattern is apparent upon inspection, but not statistically significant.

Heart Rate Variability (HRV). The first test performed on the HRV was also a flight segment by session block ANOVA, which was not significant. All main effects, day/night, flight segment and session block, were not significant. However, HRV in relation to flight segment is presented in Figure 14. Recall the behavioral data in the X axis (lateral offset) during the bank segments (Figures 4, 5 and 6). The HRV appears to decrease as RMSX error increases during bank maneuvers.

Eyeblink (EOG).

Number of Blinks. The first test performed on the number of blinks was the flight segment by session block interaction ANOVA, which was not significant. The main effects of session block and day/night were also not significant. Flight segment was significant, $F(7,28) = 11.55$, $p < 0.0001$. As shown in Figure 15, subjects blinked more during take-off than during any of the other flight segments.

Another test was performed on the eyeblink data, similar to the heart rate. The first and last 30 seconds of data in each segment were obtained. The flight segment by time block (8 X 2) interaction was significant, $F(7,28) = 17.46$, p

BPM IN RELATION TO 1ST AND 2ND BLOCK

$F(15,64) = 1.26, p < 0.2561$


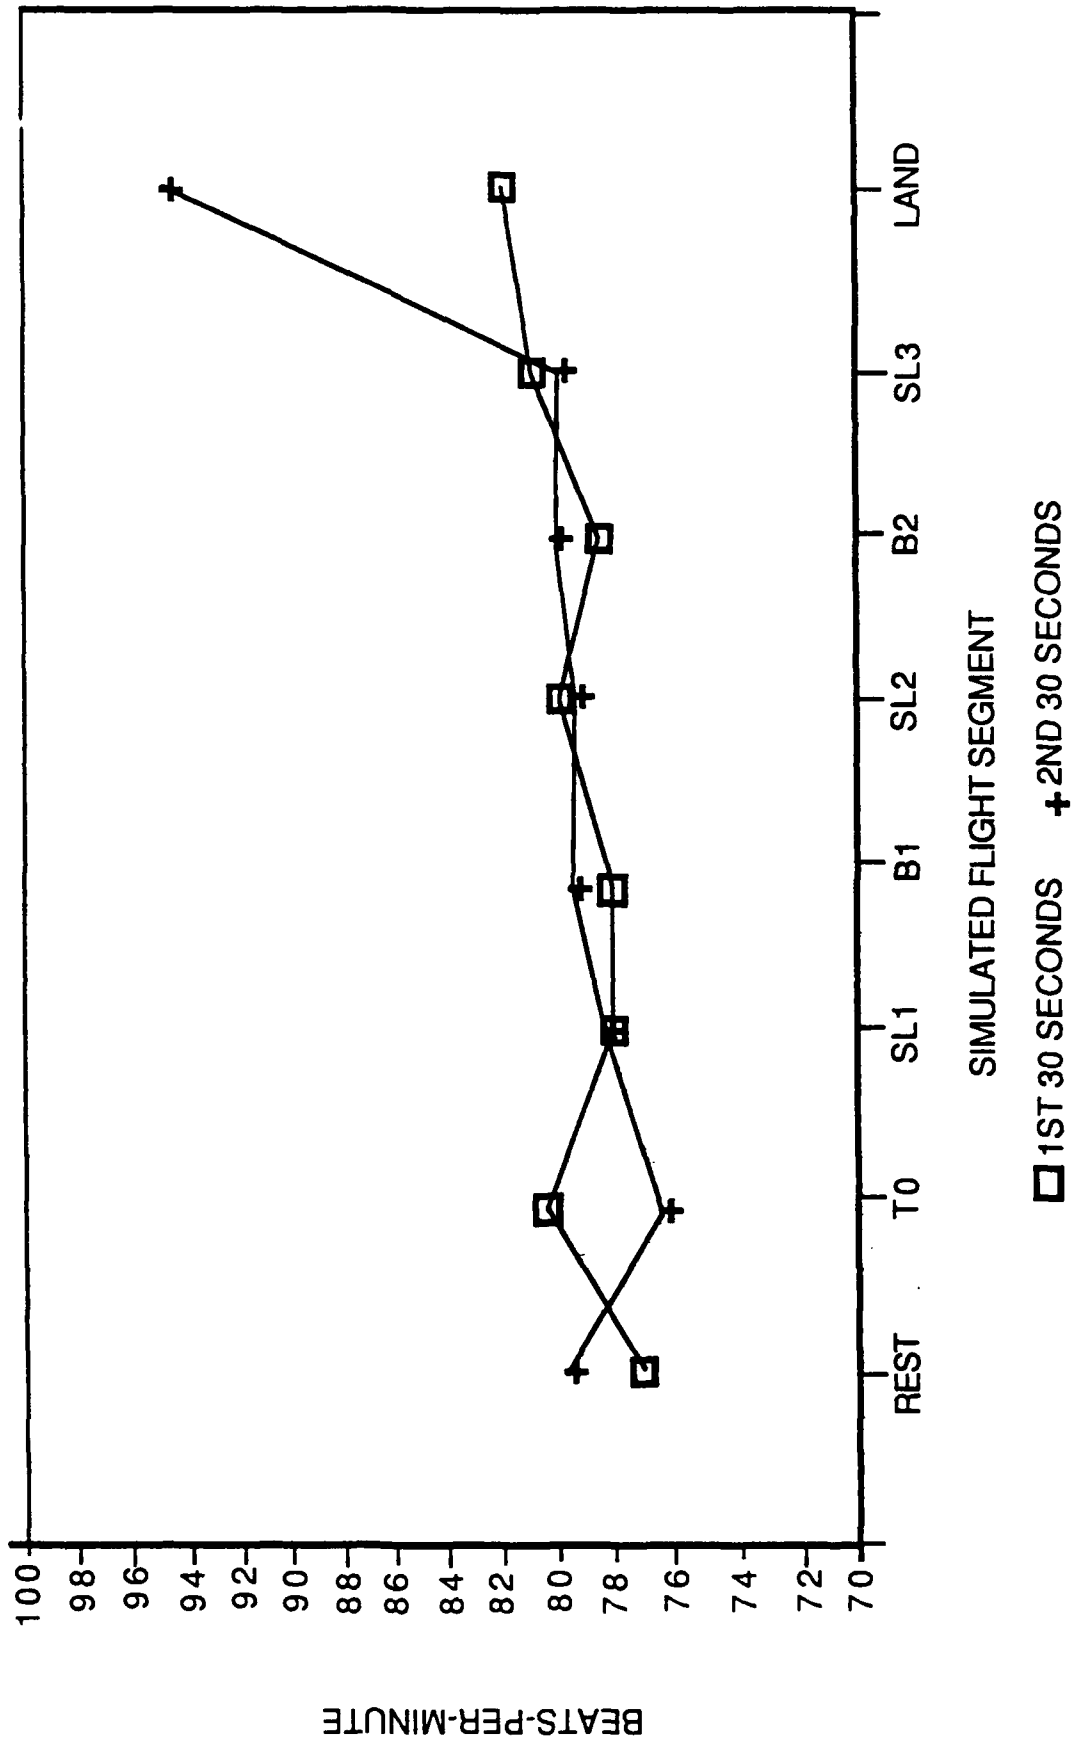


FIGURE 12. Beats-per-minute segment effects in first and second 30 second blocks.

BPM IN RELATION TO TRAINING BLOCKS

$r = .7743$

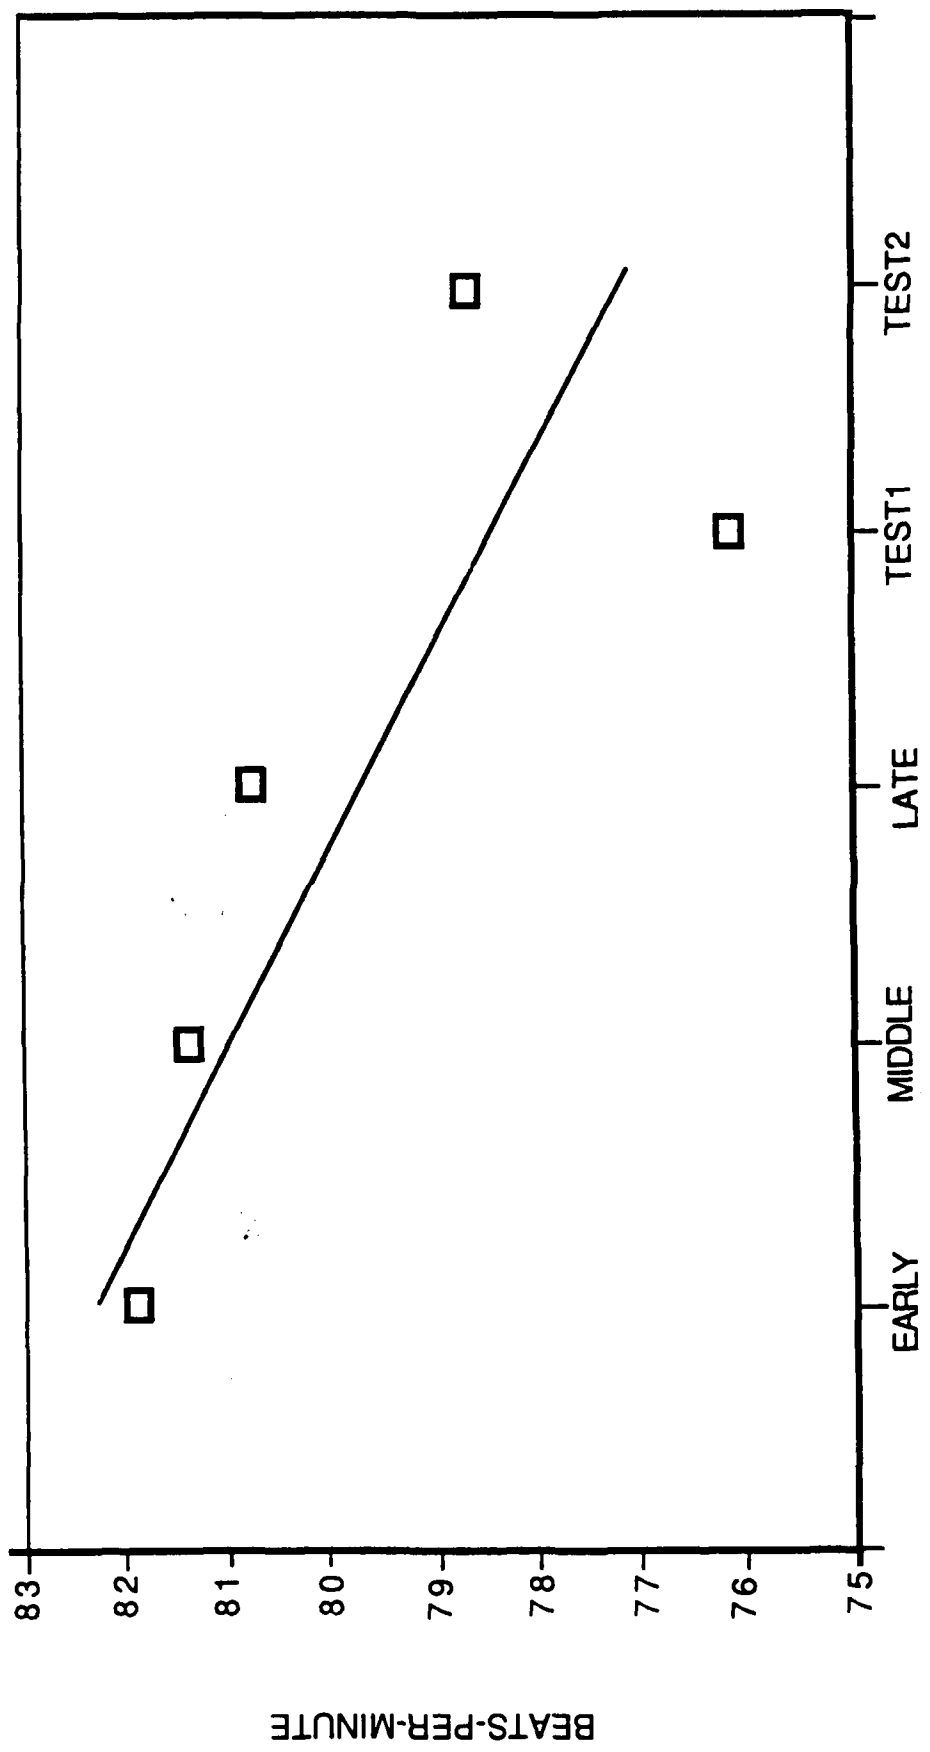


SESSION BLOCK

FIGURE 13. Beats - per - minute regressed with session block.

HRV IN RELATION TO FLIGHT SEGMENT

$F(7,28) = 2.32, p < 0.0535$

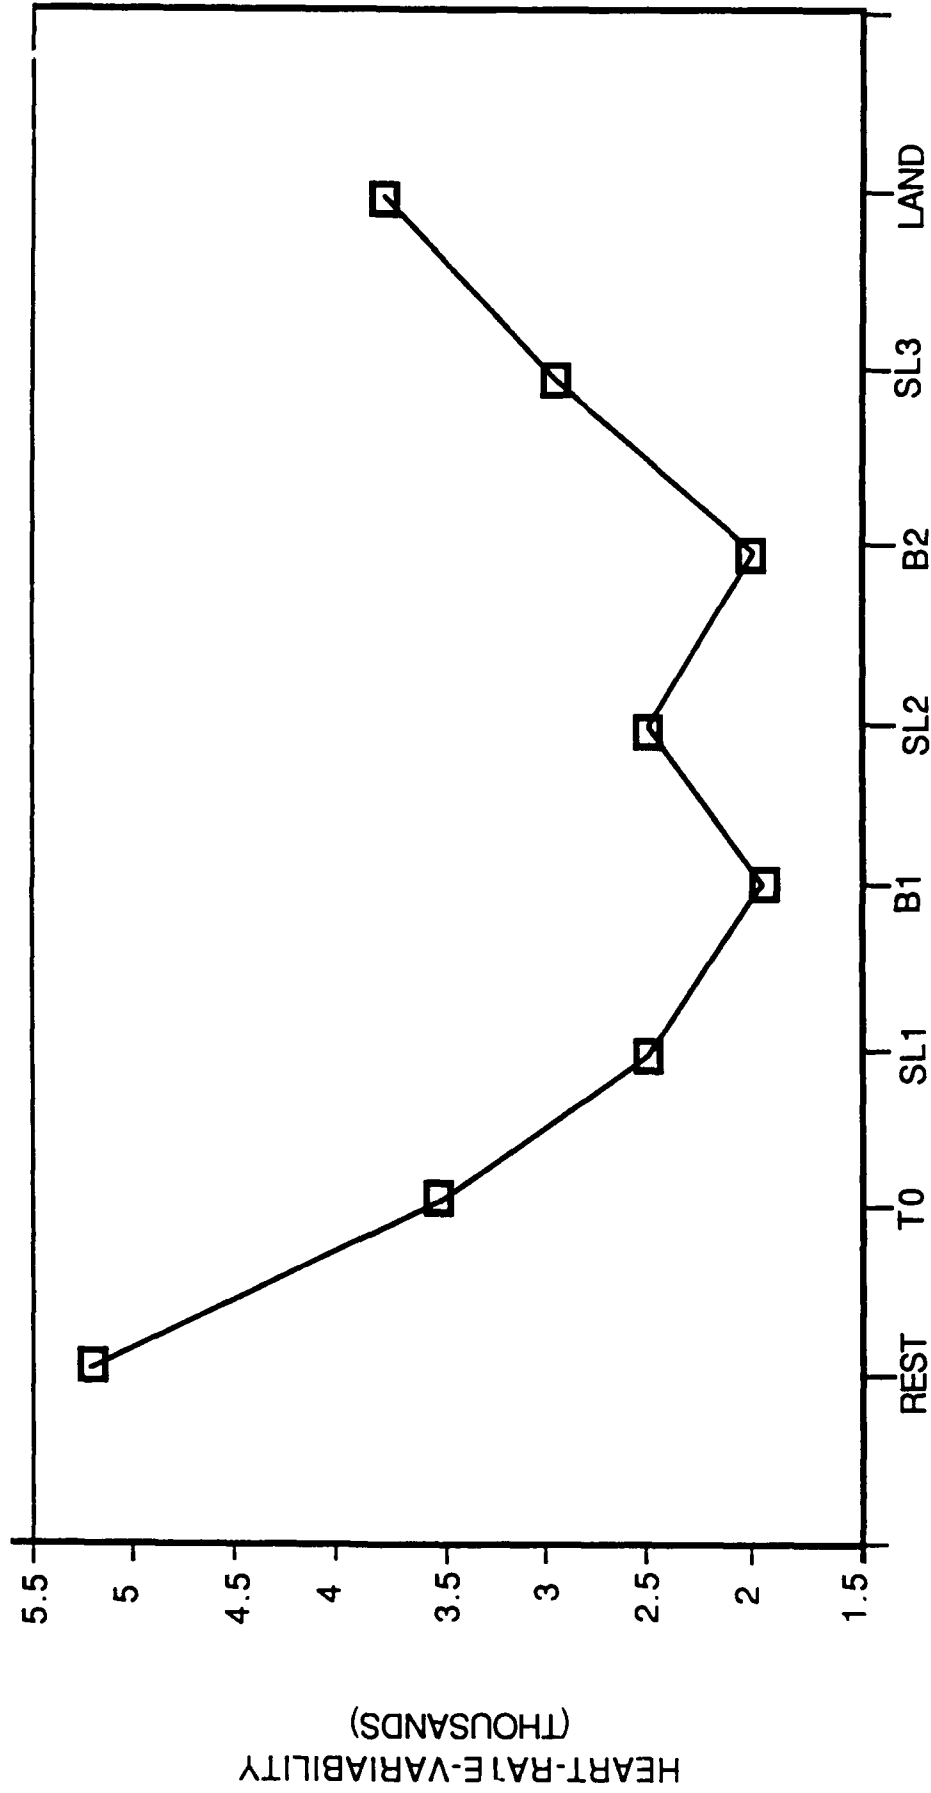


SIMULATED FLIGHT SEGMENT

FIGURE 14. Heart rate variability segment effects.

NUMBER OF BLINKS IN RELATION TO SEGMENT

$F(7,28) = 11.55, p < 0.0001$

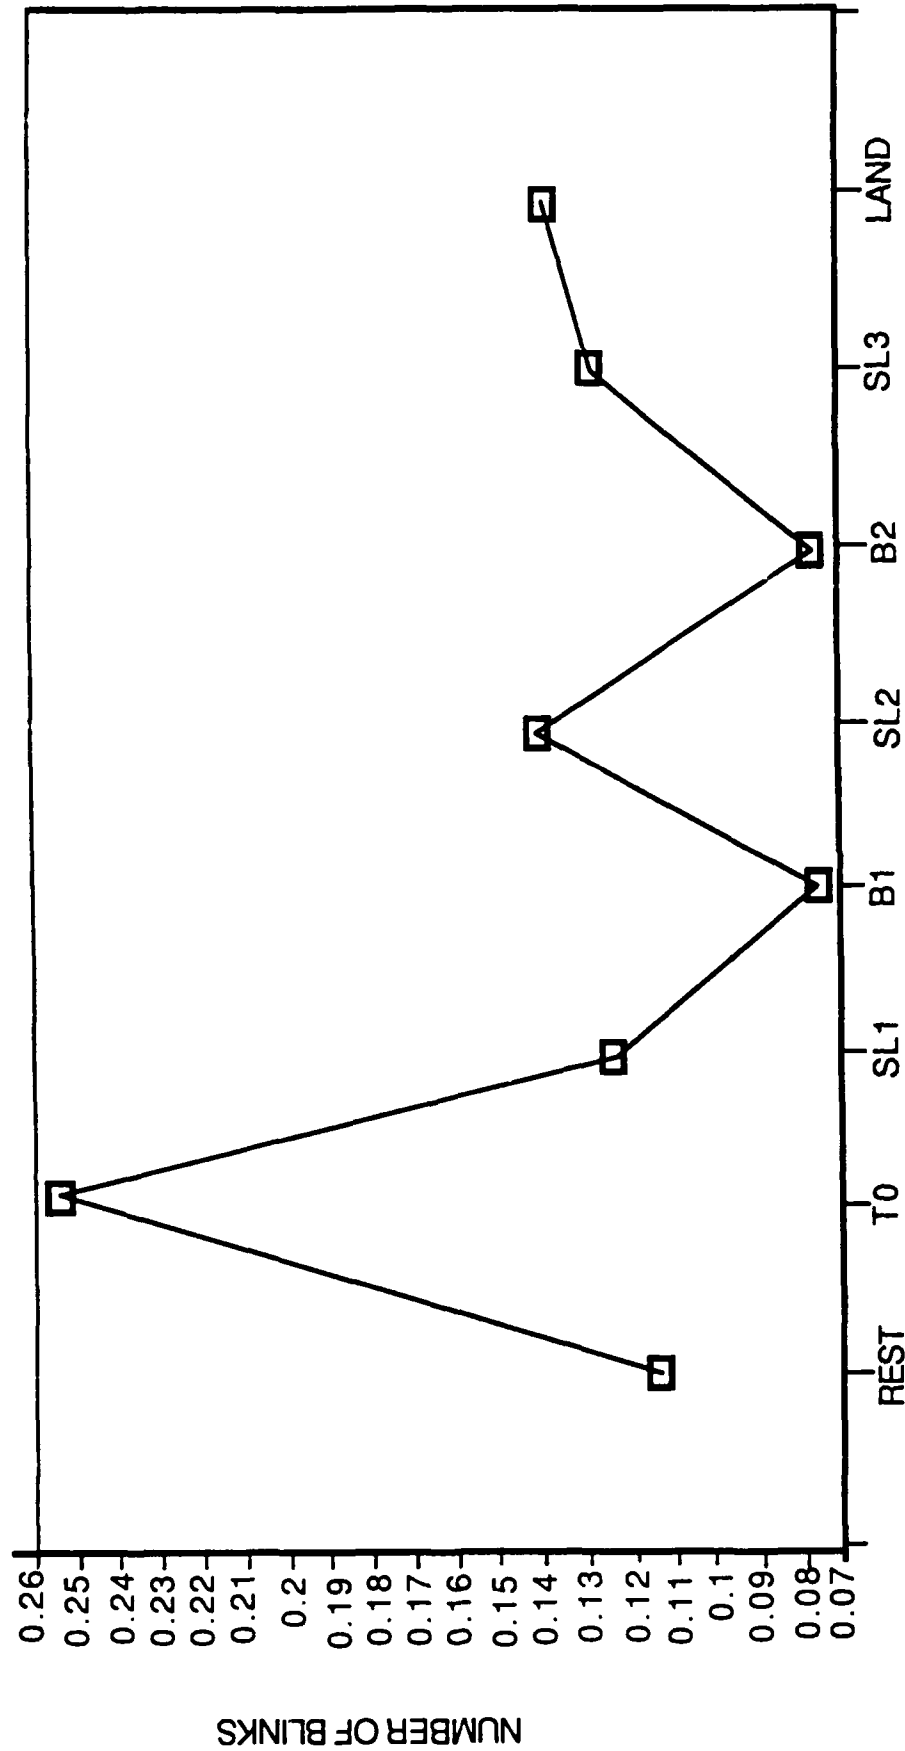

SIMULATED FLIGHT SEGMENT

FIGURE 15. Blink rate segment effects.

< 0.0001. As can be seen in Figure 16, subjects blinked more during the first 30 seconds of the take-off segment than during the last 30 seconds.

Blink Interval. None of the dependent variables affected blink interval, except for flight segment. The main effect of segment was significant, $F(7,28) = 2.68$, $p < 0.0297$. Blink interval was larger during the resting segment than during all other segments.

Half-amplitude Closing Duration. There were no significant interactions or main effects for this eyeblink measure.

Closing Duration. The interaction for flight segment by session block was not significant. However, all three main effects were significant: day/night, $F(1,4) = 11.18$, $p < 0.0287$; session block, $F(4,14) = 5.04$, $p < 0.0100$; and flight segment, $F(7,28) = 3.44$, $p < 0.0087$. As can be seen in Figure 17, closing duration was longer during day than during night flights. Also, closing duration was longer during both test conditions than during early, middle or late session blocks (see Figure 18). Closing duration was longer during the resting segment than during all other flight segments, as shown in Figure 19.

Evoked Potentials (EPs).

The data reported below were taken from both the rare tone and frequent tone evoked potentials obtained from the oddball task. Components were selected according to latency and waveform criterion. For the identification of the P200 component, a positive-going deflection had to occur within a 150-300 msec time window after onset of the stimulus. For the N200 component, a negative-going deflection had to occur within 150-350 msec. For the P300, a positive going component had to occur within 300-700 msec. In many instances there were missing components in the individual subjects' waveforms. For example, the

BLINK RATE IN RELATION TO 1ST AND 2ND

$F(7,28) = 17.46, p < 0.0001$


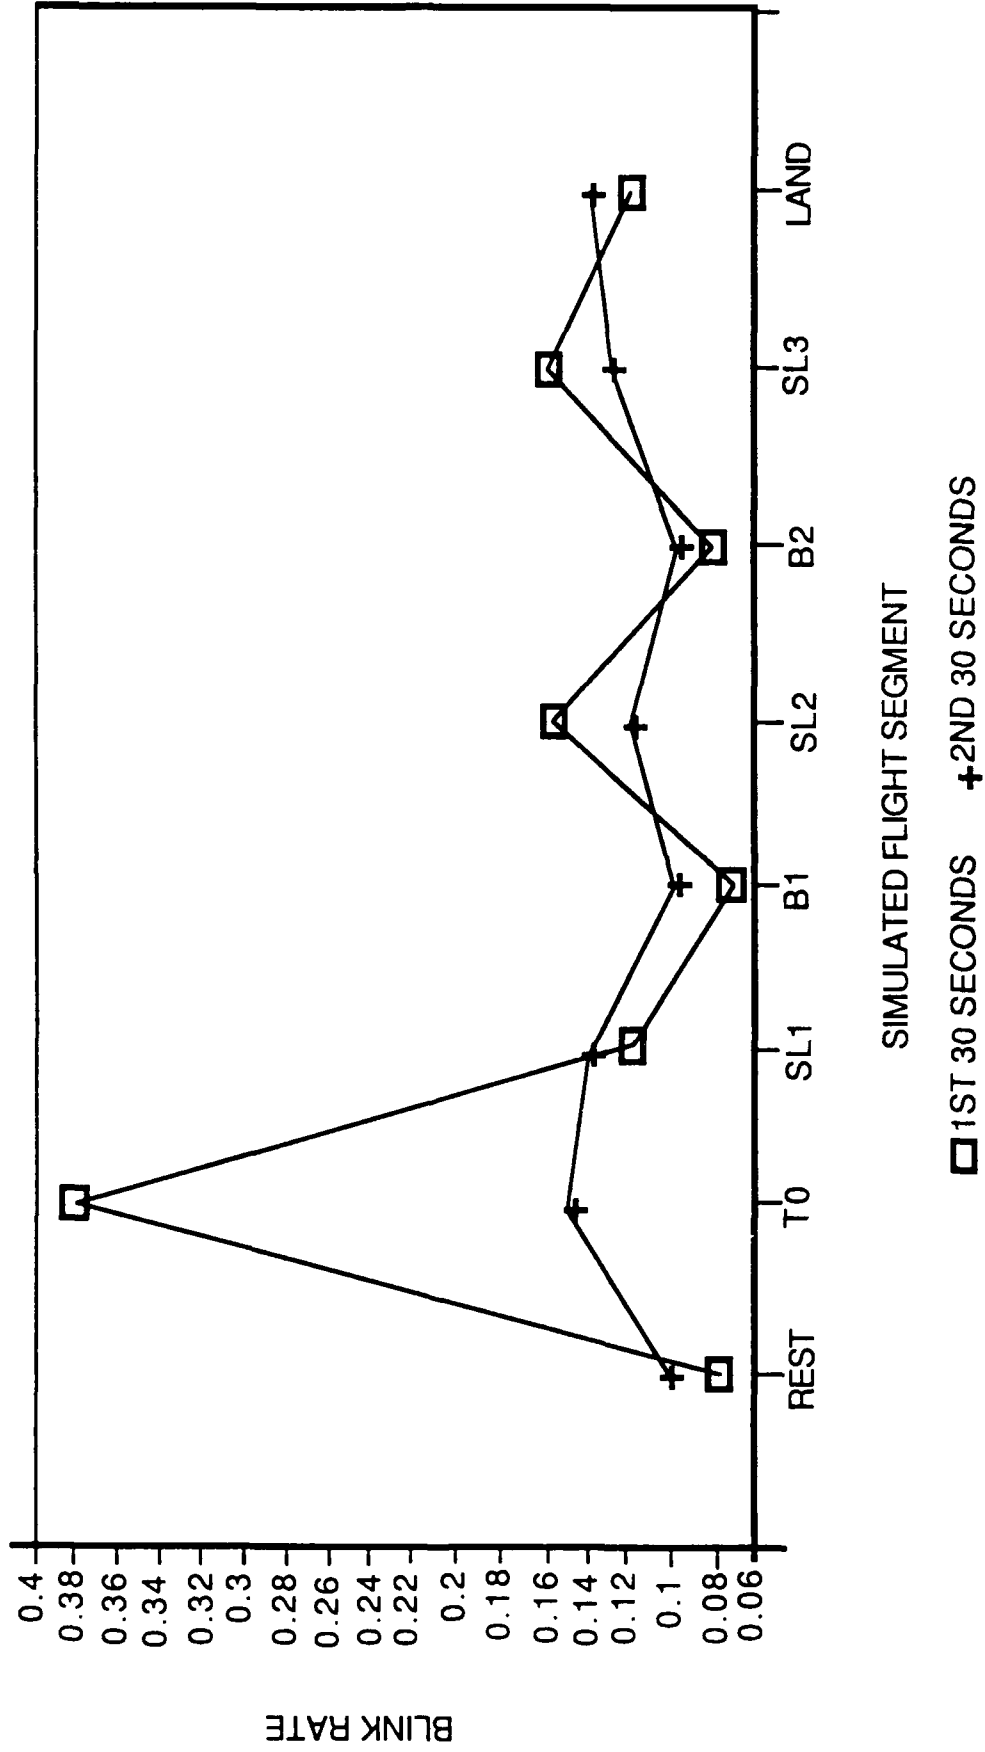


FIGURE 16. Blink rate segment effects in first and second 30 second blocks.

BLINK DURATION IN RELATION TO DAY/NIGHT

$F(1,4) = 11.18, p < 0.0287$

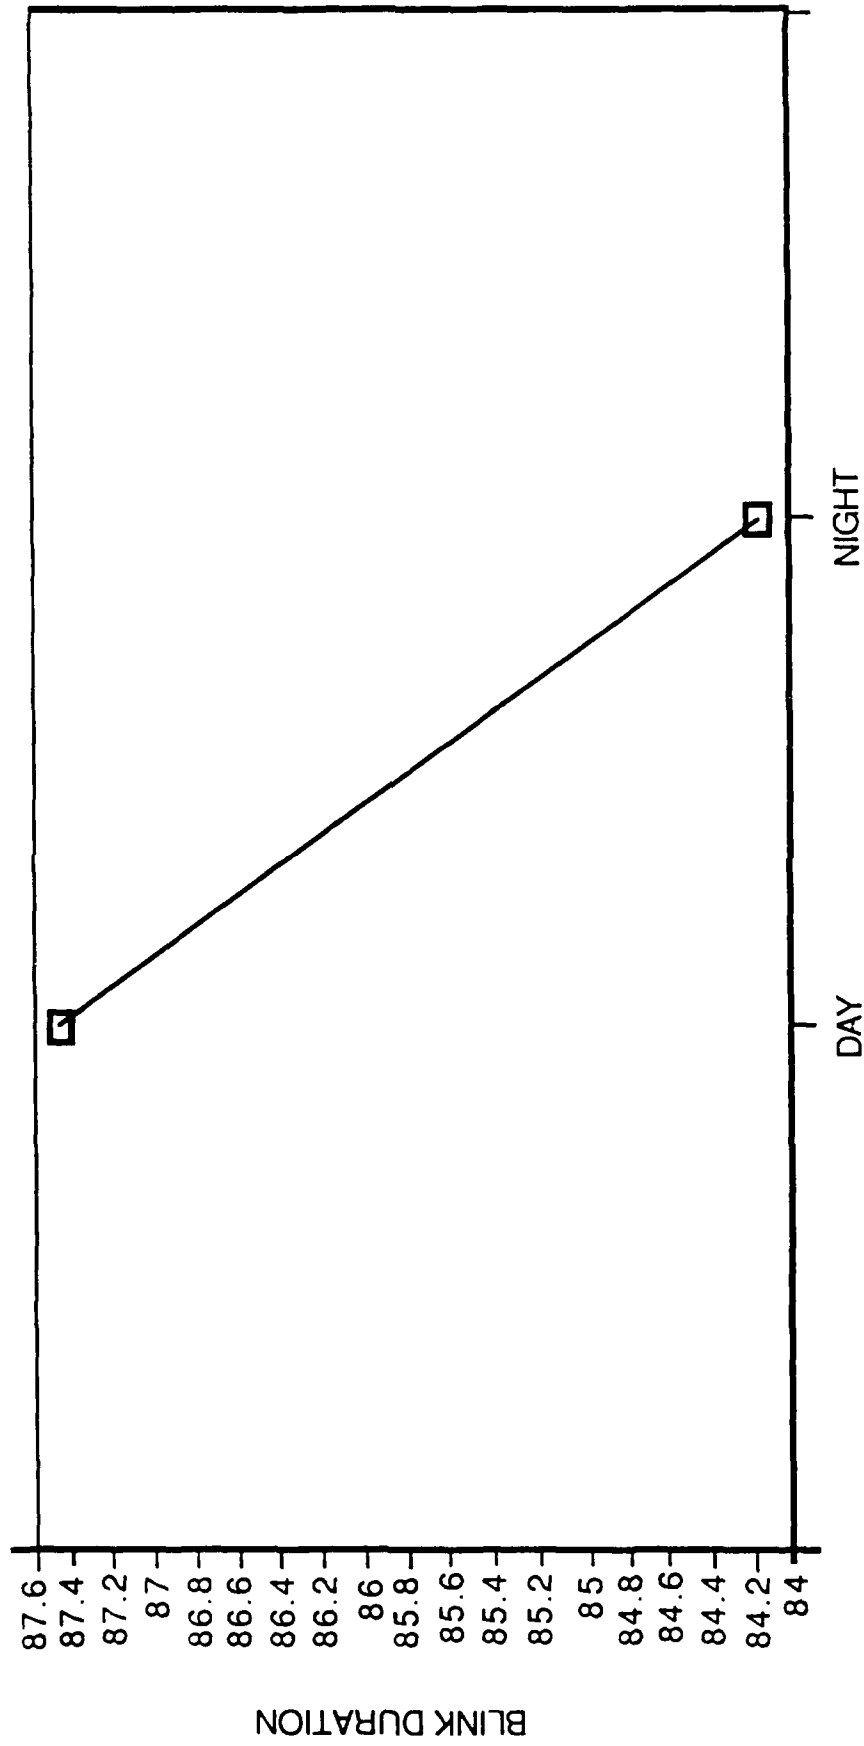


VISIBILITY (DAY/NIGHT)

FIGURE 17. Blink duration visibility effects.

BLINK DURATION IN RELATION TO BLOCK

$F(4,14) = 5.04, p < 0.01000$

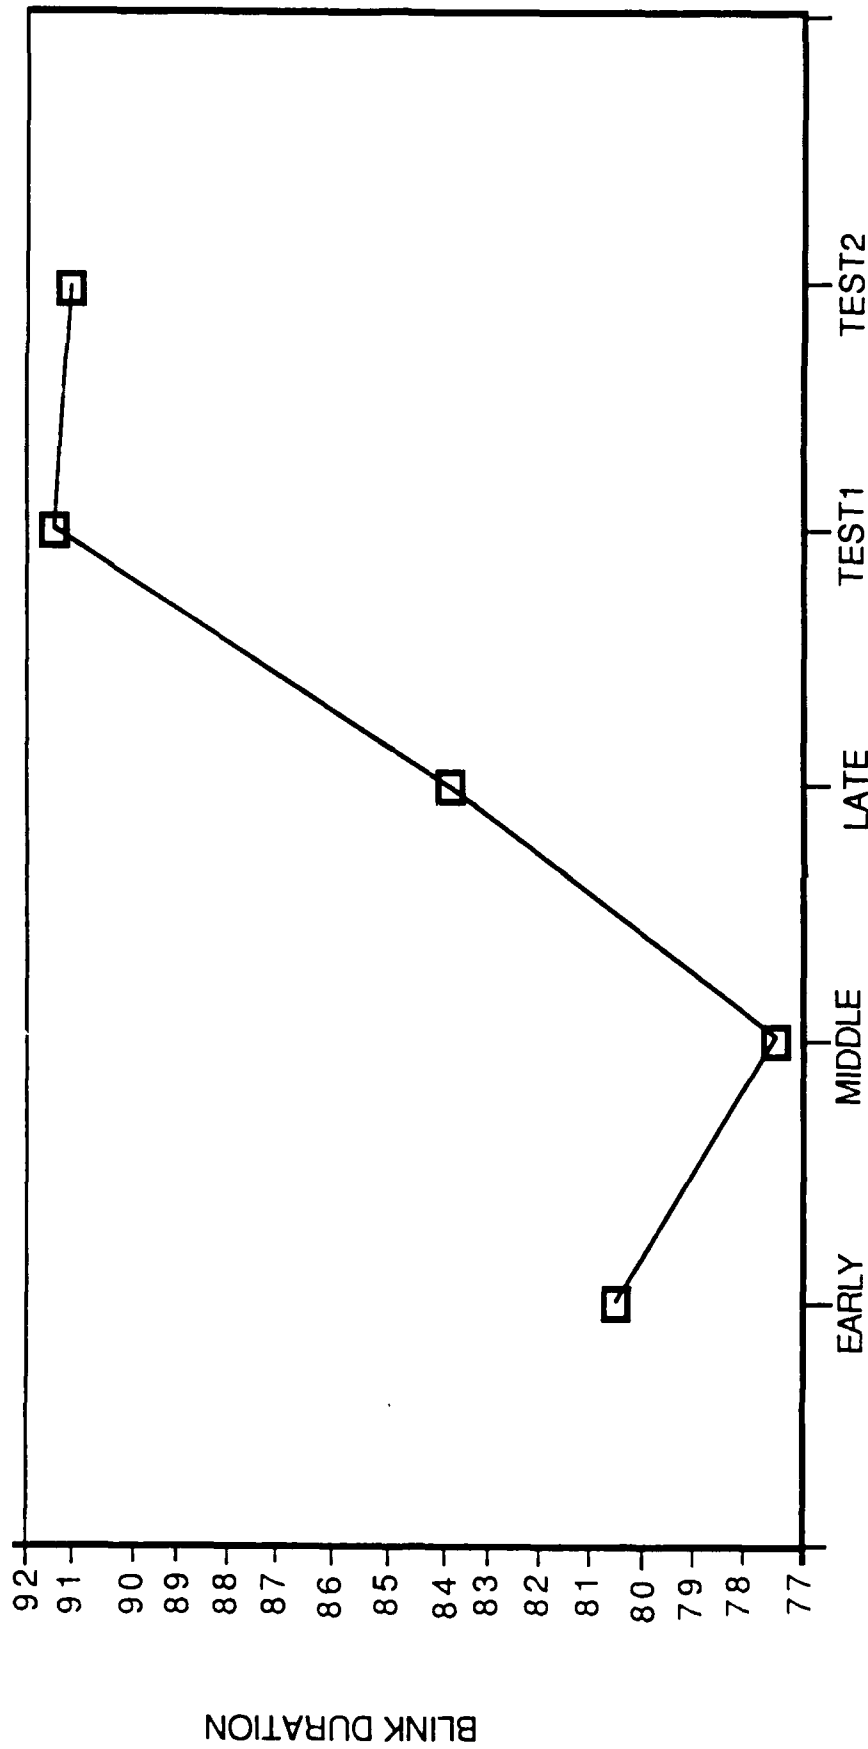


SESSION BLOCK

FIGURE 18. Blink duration session block effects.

BLINK DURATION IN RELATION TO SEGMENT

$F(7,28) = 3.44, p < 0.0087$

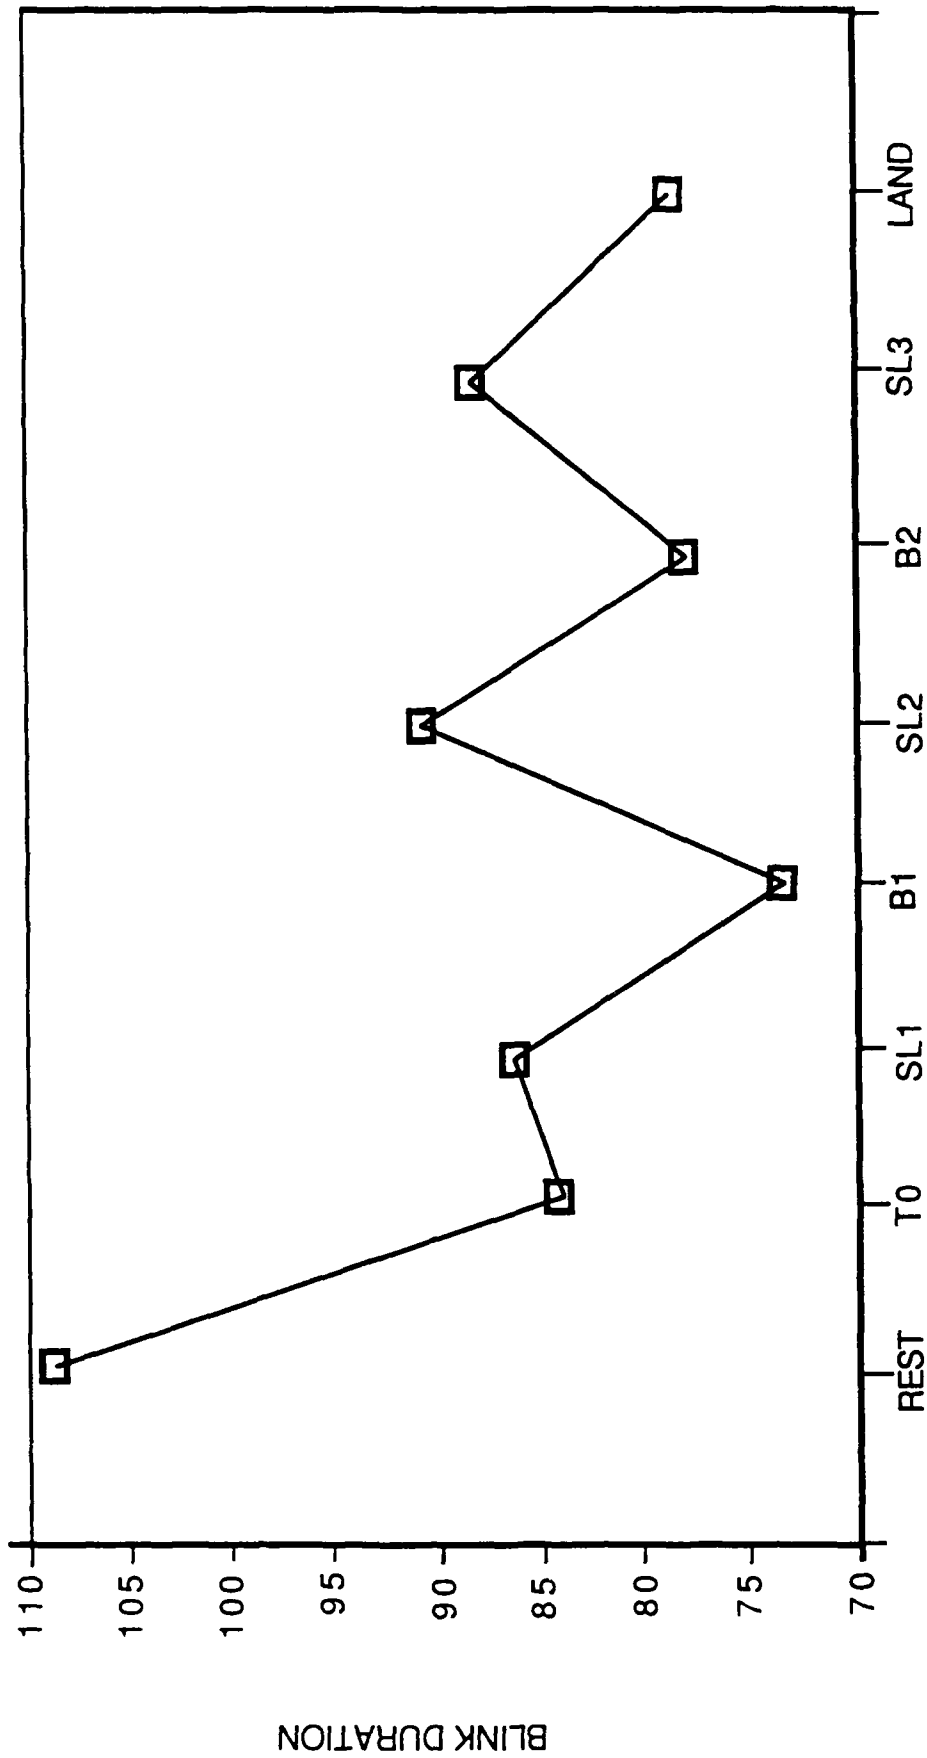

SIMULATED FLIGHT SEGMENT

FIGURE 19. Blink duration session block effects.

frequent tone does not elicit a N200 or P300 for most subjects. The analysis for these components was not included since over half of the data points were missing. For the rare tone evoked potentials there were also missing data points. However, all components were included in the analysis since the amount of missing points was negligible. Representative subject rare tone EPs, as plotted by the NWTB, are presented in Figure 20. The P300 components on both averages are marked by the cursor. The latency and amplitude values of the P300 are given at the bottom of each waveform.

Rare Tone Evoked Potentials.


The P200, N200 and P300 amplitude and latency values were all tested for significance in relation to day/night, flight segment and test block (see Table 3). The only component to show significance was the P200. P200 amplitude varied according to flight segment, $F(7,28) = 4.03$, $p < 0.0336$. Amplitude was larger during rest than during take-off, the first and second straight and level, and the first bank, which in turn were larger than the second bank, the third straight and level, and landing (see Figure 21).

Frequent Tone Evoked Potentials.

The P200 amplitude of the frequent tone evoked potential also varied according to flight segment, $F(7,28) = 6.33$, $p < 0.0002$. As can be seen in Figure 22, amplitude was larger during rest and take-off than during all other segments of the flight. Day/night and test block effects were not significant.

RARE

MICRO
VOLTS

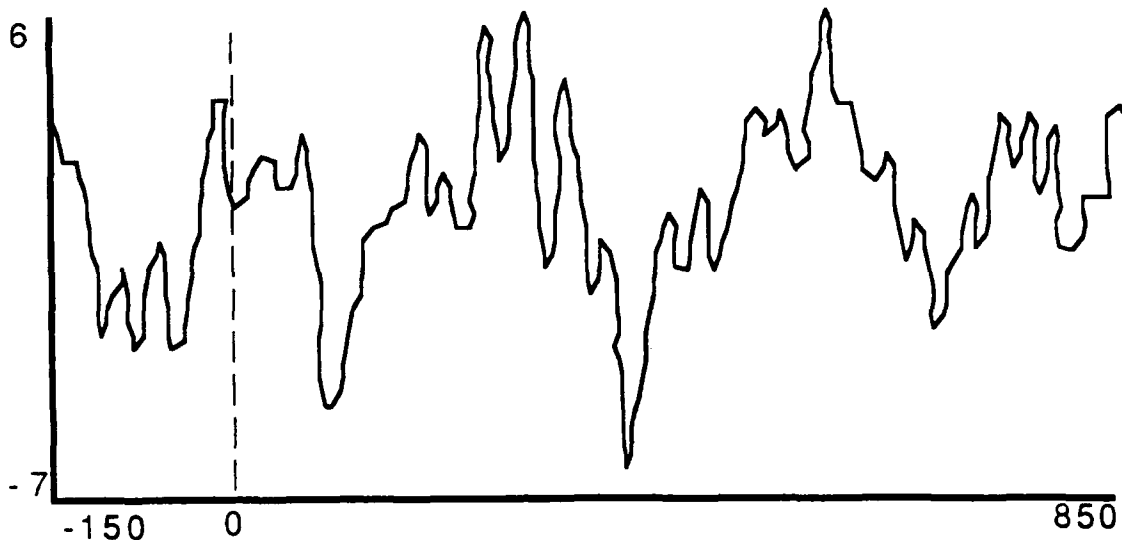


-- CURSOR VALUES --

AMPLITUDE: 6.47 MICRO VOLTS

LATENCY: 525

RARE

MICRO
VOLTS

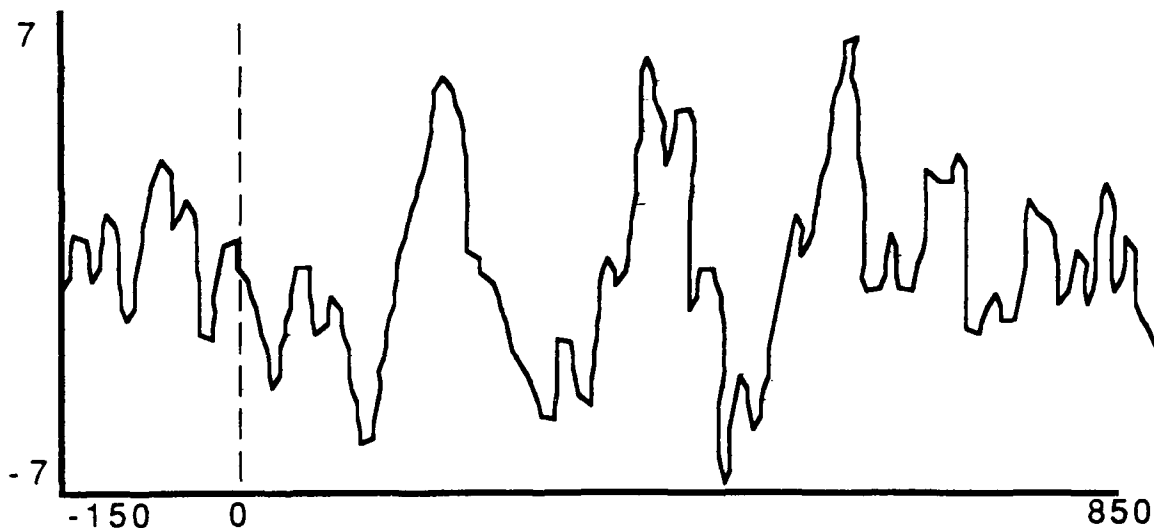

-- CURSOR VALUES --

AMPLITUDE: 5.70 MICRO VOLTS

LATENCY: 520

FIGURE 20. Representative evoked potentials from subjects 03 and 05.

TABLE 3. Significance Table for all EP Components (p values)

Rare Tone Components

	P200 Amplitude	P200 Latency	N200 Amplitude	N200 Latency	P300 Amplitude	P300 Latency
Day/Night	0.2058	0.9116	0.6989	0.7351	0.9502	0.4476
Segment	0.0036 ***	0.4529	0.6463	0.9698	0.1138	0.9630
Training Block	0.9858	0.1705	0.9222	0.4496	0.5112	0.3885
Day/Night X Segment	0.3804	0.1302	0.7005	0.1613	0.2955	0.3893


Frequent Tone Components

	P200 Amplitude	P200 Latency
Day/Night	0.0550	0.5259
Segment	0.0002 ***	0.3573
Training Block	0.4101	0.9891
Day/Night X Segment	0.7877	0.3254

*** p < 0.05

RARE TONE P200 AMPLITUDE

$F(7,28) = 4.03, p < 0.0036$

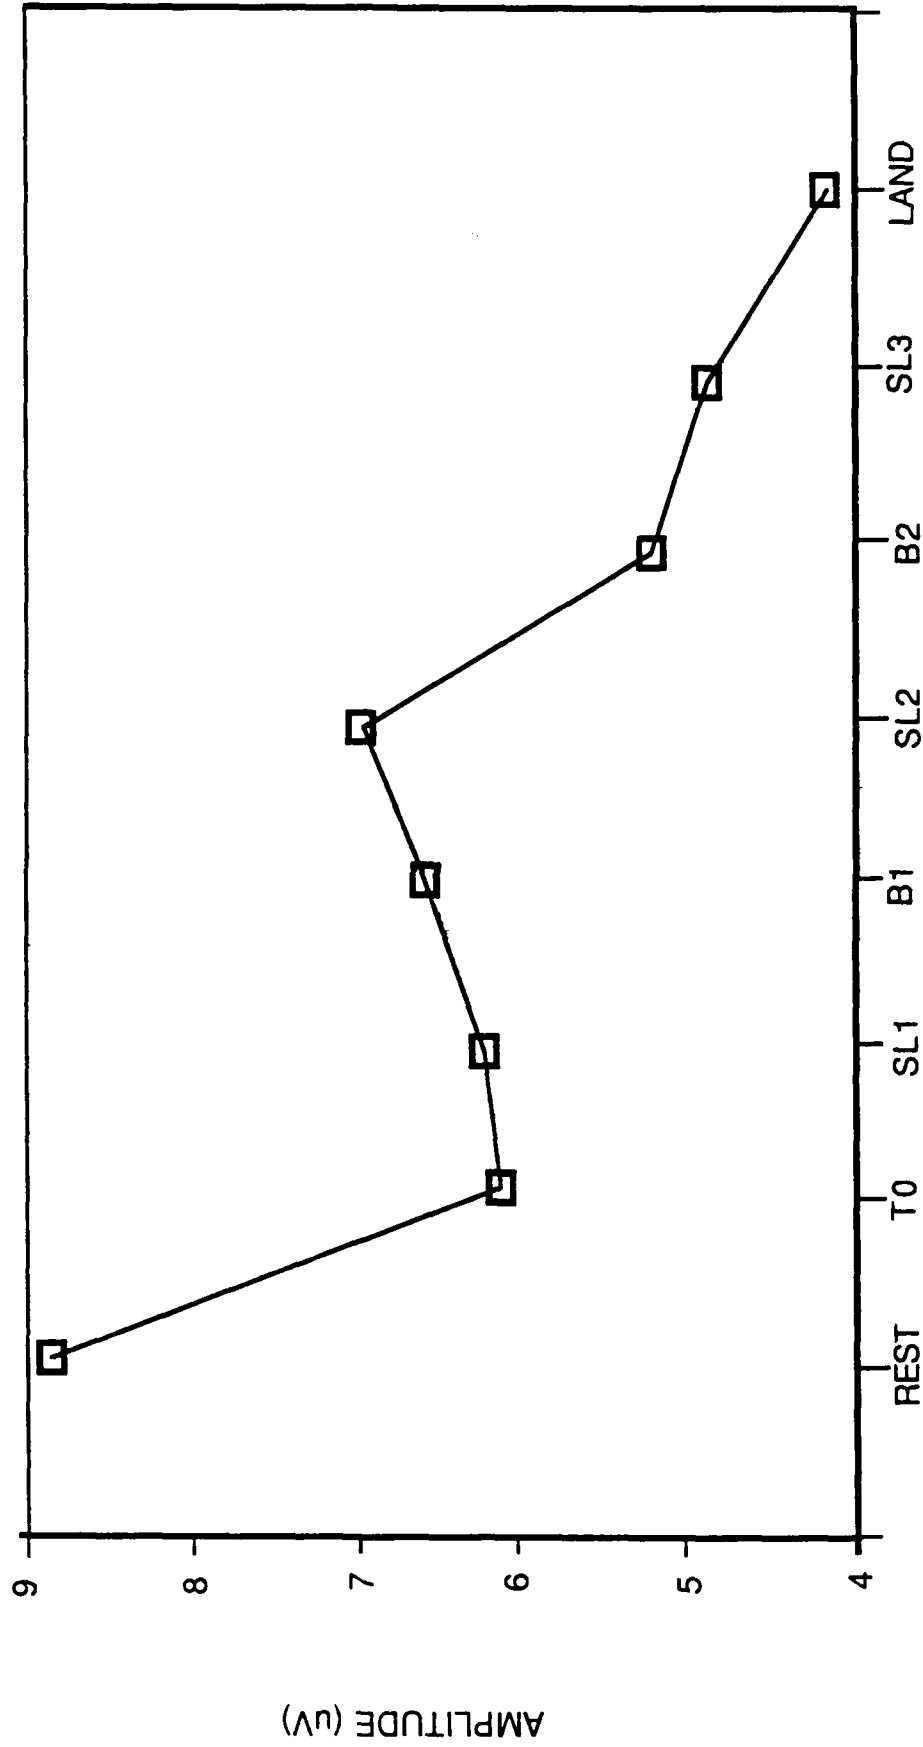


SIMULATED FLIGHT SEGMENT

FIGURE 21. Rare tone P200 amplitude segment effects.

FREQUENT TONE P200 AMPLITUDE

$F(7,28) = 6.33, p < 0.0002$

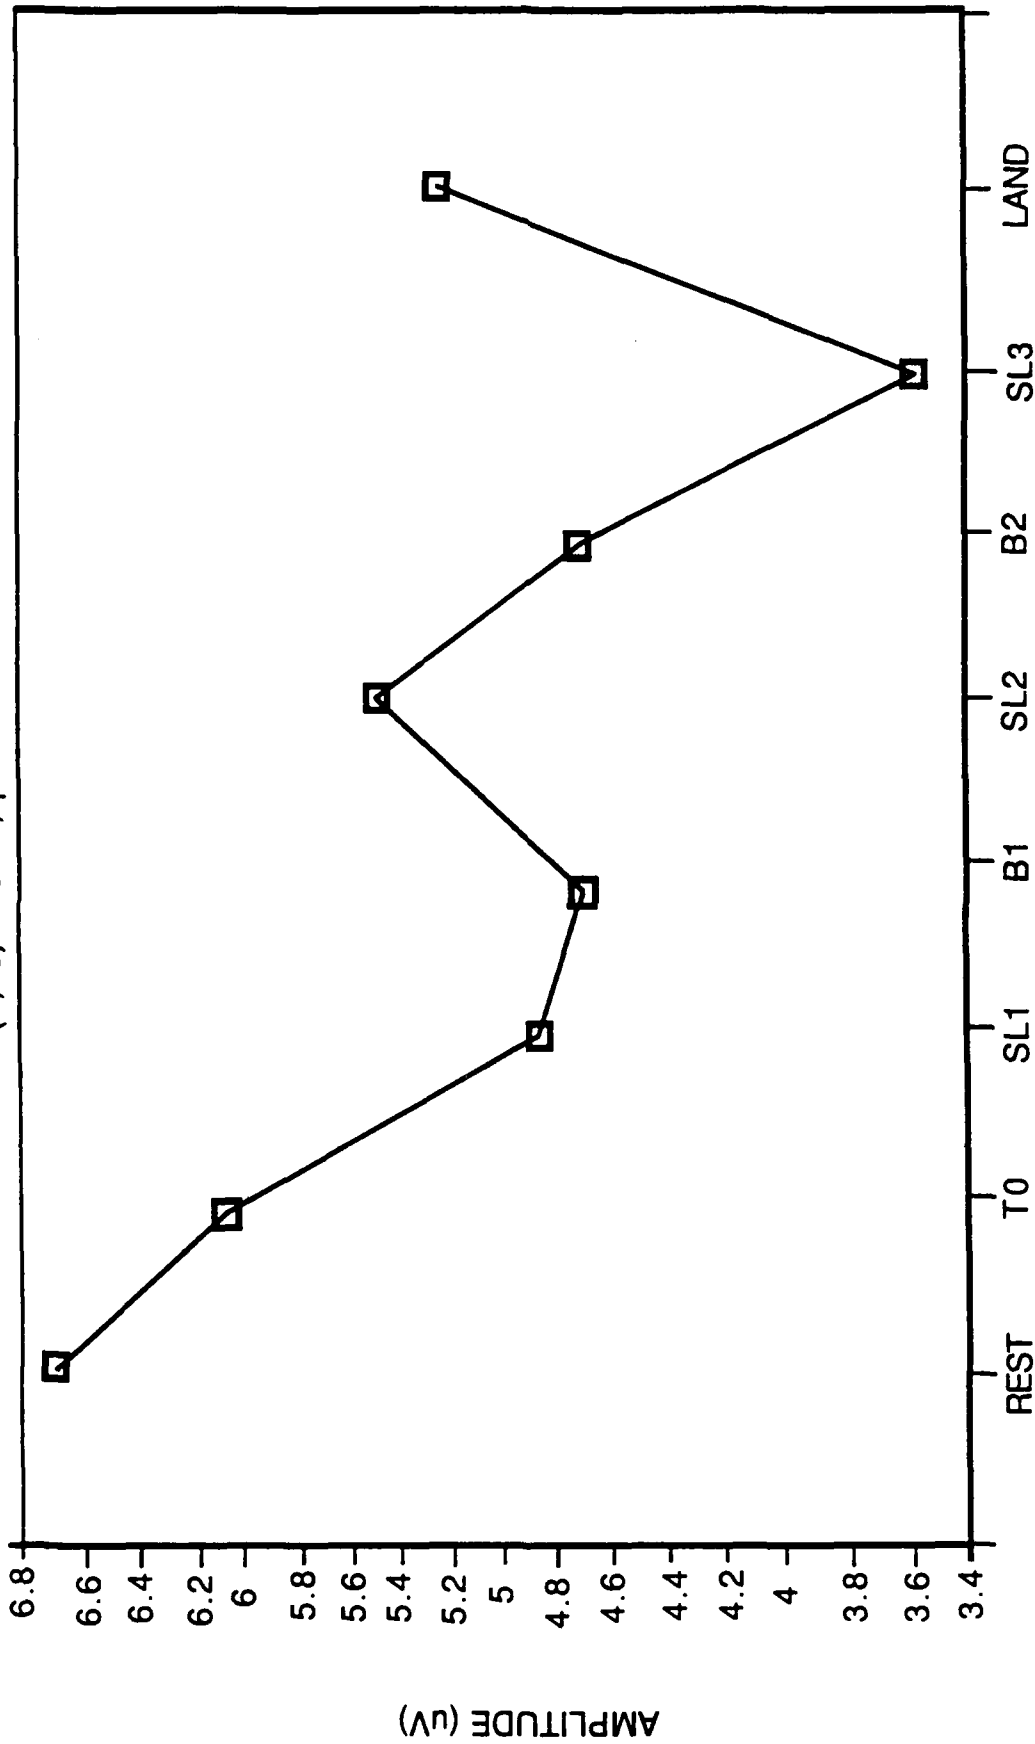

SIMULATED FLIGHT SEGMENT

FIGURE 22. Frequent tone P200 amplitude segment effects.

Section 7

DISCUSSION

The SG behavioral data showed clear session block effects in all three control axes. Subjects' error in controlling their aircraft and following the lead plane was larger at the beginning of the sessions. Furthermore, heart rate decreased as familiarity and competence on this flight task increased. The convergence of the behavioral error and heart rate data suggests a definite training effect during these sessions.

There was an effect attributed to day/night visibility which was surprising in its direction. Error in the lateral offset and trail distance axes increased during day flight over that found with night flight. Subjects' comments as to the difficulty of the flights under these visibility conditions matched the increase in error during the day flight. Most subjects said that the extraneous display information during day flight interfered with the task of following the lead plane. Night flight removed this visual information, and added more "relevant" display cues such as lead tail/wing lights and engine burn as well as landing lights on the runway. Subjects also reported improved depth cues during night flight. This visibility factor also affected blink behavior in the manner suggested by Morris (1985). The length of time the eye remained closed (blink duration) was longer when control error was greatest, ie., during day flight.

It should be noted here that the flight simulation was a low-fidelity simulation with un-realistic terrain and horizon cues. In light of this situation, it might not be too surprising to find converging behavioral and physiological data that suggests night flight was easier than day flight. These patterns would not be expected in a high-fidelity simulation or real flight.

The effects of the different flight segments on control error were different for lateral offset and trail distance. The lateral offset error between the subjects' plane and the lead was greatest during both the first and second bank maneuvers. Furthermore, both heart rate variability (HRV) and number of blinks decreased during these two bank segments. Recall that increased load on an operator decreases HRV and number of blinks. The corresponding changes in these three measures (offset error, HRV and blinks) strongly suggest that the first and second bank maneuvers were the most behaviorally difficult segments in the flight.

Trail distance error, however, was most affected only by the first bank maneuver. The data suggests that subjects were playing "catch-up" in trail distance to the lead from the first bank up until landing (see Figure 6).

An interesting aside is that, had only the error data in the three axis been obtained, it would be very difficult to say where in the flight the greatest control demand was imposed on the subjects. The altitude axis showed no segment effects, and the offset and trail axes show two distinctly different patterns of error. Without the physiological data, it would have been a toss-up between the offset and trail patterns in determining the segments with the greatest control load.

The evoked potential data were disappointing. The P300 components did not covary with any of the independent variables (segment, session or visibility). The rare and frequent tone P200 components did show differences between pre-flight baseline and all other segments of the flight. A decreasing rare tone P200 amplitude trend from the second straight and level to the landing segment was also apparent, albeit insignificant.

Other physiological results identified flight effects not found with the evoked potential or behavioral data. Heart rate in beats-per-minute showed increases during the landing segment, specifically during the last 30 seconds

where subjects were actually touching down on the runway. At least during the last few sessions, if the subjects were going to lose control of their aircraft and possibly crash, it would have been during this segment. The heart rate data reflect the heightened arousal during landing that the other measures do not.

The eyeblink data showed that number of blinks were greatest during take-off, specifically during the first 30 seconds of the segment where subjects were heavily scanning the cockpit instrumentation displays. This portion of the segment was spent readying the airplane for take-off (e.g. pre-take-off checks, such as wing flap position) prior to the lead fly-by. The last 30 seconds of the segment was actual take-off after the lead fly-by and during this portion the number of blinks are the same as the rest of the segments.

In summary, the physiological data provided information about the simulated flight task that not only corresponded to and further clarified the behavioral data, but also showed differences between segments of the flight task that would not have been apparent with the behavioral data alone.

Section 8

RECOMMENDATIONS

The three objectives outlined in the Phase I Simulation section of this paper included a test of the interface between the simulator and the NWTB, determining the value of the physiological data collected and formulating recommendations for further use of these measures in a larger simulation effort.

As shown elsewhere in this report, the problems of interfacing the simulator and NWTB were time-consuming, complicated and difficult to solve. Yet there is now in place the capability to record physiological data in conjunction with SABER simulator events. The interface problems have been solved during this preliminary effort. However, as discussed in the Data Reduction section, the NWTB still possesses user-intensive requirements for obtaining data means and summary statistics. Without a substantial investment in software changes these requirements will remain. It now becomes a question of a trade-off between the cost of employing a NWTB operator and the intrinsic worth of the data obtained.

From the data reported above, physiological results not only clarified behavioral issues, but also provided additional information not obtained otherwise. This simulation was a low-fidelity, "video-game" flight task, and yet the heart rate and eyeblink measures were sensitive to flight changes. With the exception of the evoked potential oddball task, these physiological measures added a wealth of information to the evaluative data base. It would be expected that with a more realistic simulation these measures would add the same, if not more, dimensionality and precision to any flight evaluation.

As to the failure of the evoked potential technique, there are two possible methodological changes that could be implemented in the future to increase measurement sensitivity. The first would be to attain an eyeblink correction

program to ensure a larger number of single trials in each of the subjects' averages. The other would be to change the evoking stimulus from a secondary oddball paradigm to a relevant flight task. Any flight event that is repeated throughout the course of the flight mission could be used to time-lock and average the EEG.

An important question for the future use of the SABER simulators would be that of practice and transfer of learning. The physiological measure most amenable to this has been heart rate (as reported in the literature and as evidenced above). The subjects used in the present study were not experienced pilots. Pilots with experience would be expected to give substantially different response profiles, not only behaviorally but physiologically. It is highly recommended that any SABER investigation of experts vs. novices, as well as responses obtained from simulation vs. actual flight, include physiological measures.

Other recommendations for a larger, high-fidelity simulation would be:

- 1) A priori identification of the flight task segments of interest, and timing of these segments to the nearest second (requires the simulation be in place with existing time-line analyses).
- 2) Allow for the marking of the simulator's and NWTB's time history for such things as pre-programmed emergencies and unplanned crashes, etc.
- 3) Obtain an operator trained on the NWTB and simulator parameters before data collection, as well as a consultant for the design of physiological methodology.

Overall, it is recommended that physiological response measures be obtained during any simulator mission. In both part-task and whole mission scenarios these measures can only add to the understanding of the pilot's role during flight.

REFERENCES

- AGARD (1987). The Practical Assessment of Pilot Workload. Stan Roscoe (Ed.), AGARD-AG-282, NATO Flight Mechanics Panel.
- Albery, W. B. (1988). The Effects of Biodynamic Stress on Workload in Human Operators. Technical Memorandum AAMRL-TR-88-004, AMD AFSC, Wright-Patterson AFB, Ohio.
- Bauer, L. O., Strock, B. D., Goldstein, R., Stern, J. A. and Walrath, L. C. (1984). Auditory discrimination and the eyeblink. Psychophysiology, 22, pp. 636-641.
- Gratton, G., Coles, M. G. H. and Donchin, E. (1983). A new method for off-line removal of ocular artifact. Electroencephalography and Clinical Neurophysiology, 55, pp. 464-484.
- Hart, S. G. (1982). Theoretical basis for workload assessment research at NASA Ames Research Center. In Proceedings of the Workshop on Flight Testing to Identify Pilot Workload and Pilot Dynamics, AFFTC-TR-82-5.
- Jasper, H. (1958). The ten-twenty electrode system of the international federation. Electroencephalography and Clinical Neurophysiology, 10, pp. 371-375.
- Kramer, A. F., Sirevaag, E. J. and Braun, R. (1987). A psychophysiological assessment of operator workload during simulated flight missions. Human Factors, 29, pp. 145-160.
- McCloskey, K. (1987). Evaluating a spatial task: Behavioral, subjective, and physiological correlates. In Proceedings of the 31st Annual Meeting of the Human Factors Society, pp. 774-778.
- Morris, T. L. (1985). Electrooculographic indices of changes in simulated flying performance. Behavior Research Methods, Instruments and Computers, 17, pp. 176-182.
- O'Donnell, R. D. (1979). Contributions of Psychophysiological Techniques to Aircraft Design and Other Operational Problems. AGARD-AG-244, NATO Aerospace Medical Panel.
- O'Donnell, R. D. and Eggemeier, F. T. (1986). Workload assessment methodology. In Handbook of Perception and Human Performance, (Boff, K. R., Kaufman, L. and Thomas, J. P., Eds.), John Wiley and Sons: New York, pp. 42-1 to 42-49.
- Roman, J., Older, H. and Jones, W. L. (1967). Flight research program: VII. Medical monitoring navy carrier pilots in combat. Aerospace Medicine, 38, pp. 133-139.

- Skelly, J. J., Purvis, B. and Wilson, G. F. (1987). Fighter pilot performance during airborne and simulator missions: Physiological comparisons. In Electric and Magnetic Activity of the Central Nervous System: Research and Clinical Applications in Aerospace Medicine, AGARD no. 432, pp. 23-1 to 23-15.
- Smith, H. P. R. (1967). Heart rate of pilots flying aircraft on scheduled airline routes. Aerospace Medicine, 38, pp. 1117-1119.
- Sterman, M. B., Schummer, G. J., Dushenko, T. W., and Smith, J. C. (1988). Electroencephalographic Correlates of Pilot Performance: Simulation and In-flight Studies. Unpublished manuscript. Sepulveda Veterans Administration Medical Center, Sepulveda, California.
- Stern, J. A. and Skelly, J. J. (1984). The eyeblink and workload considerations. In Proceedings of the 28th Annual Meeting of the Human Factors Society, pp. 942-944.
- Stern, J. A., Walrath, L.C. and Goldstein, R. (1984). The endogenous eye-blink. Psychophysiology, 21, pp. 22-33.
- Wickens, C. D., Kramer, A., Vanasse, L. and Donchin, E. (1983). Performance of concurrent tasks: A psychophysical analysis of the reciprocity of information-processing resources. Science, 221, pp. 1080-1082.
- Wilson, G. F. and O'Donnell, R. D. (1988). Measurement of operator workload with the Neuropsychological Workload Test Battery. In Human Mental Workload (P. Hancock and N. Meshkati, Eds.), Amsterdam, The Netherlands: North Holland.
- Wilson, G. F., Purvis, B. Skelly, J. J., Fullenkamp, P. and Davis, I. (1987). Physiological data used to measure pilot workload in actual flight and simulator conditions. In Proceedings of the 31st Annual Meeting of the Human Factors Society, pp. 779-783.
- Zwaga, H. J. G. (1973). Psychophysiological reactions to mental tasks: Effort or stress? Ergonomics, 16, pp. 61-67.