

AD-A208 882

GC-TR-88-1639

VOLUME III

RESEARCH AND DEVELOPMENT

IN SUPPORT OF THE

SURFACE CHEMISTRY BRANCH

Reproduced From
Best Available Copy

IDENTICAL

S

June 1988

1



GEO-CENTERS, INC.

89 JUN 03 06 88

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED		1b. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY		3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited.	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE			
4. PERFORMING ORGANIZATION REPORT NUMBER(S) GC-TR-88-1639		5. MONITORING ORGANIZATION REPORT NUMBER(S)	
6a. NAME OF PERFORMING ORGANIZATION GEO-CENTERS, INC.	6b. OFFICE SYMBOL (If applicable) Code 6170	7a. NAME OF MONITORING ORGANIZATION	
6c. ADDRESS (City, State, and ZIP Code) 7 Wells Avenue Newton Centre, MA 02159		7b. ADDRESS (City, State, and ZIP Code)	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION Naval Research Laboratory	8b. OFFICE SYMBOL (If applicable) Code 6170	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER Contract Number N00014-86-C-2096	
1c. ADDRESS (City, State, and ZIP Code) 4555 Overlook Avenue, S.W. Washington, DC 20375-5000		10. SOURCE OF FUNDING NUMBERS PROGRAM ELEMENT NO. PROJECT NO. TASK NO. WORK UNIT ACCESSION NO.	
11. TITLE (Include Security Classification) Research and Development in Support of the Surface Chemistry Branch (U)			
12. PERSONAL AUTHOR(S) D. Ballantine			
13a. TYPE OF REPORT Final	13b. TIME COVERED FROM 12/85 TO 4/88	14. DATE OF REPORT (Year, Month, Day) June 1988	15. PAGE COUNT 750
16. SUPPLEMENTARY NOTATION			
17. COSATI CODES FIELD GROUP SUB-GROUP		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) Surface analysis, surface modification and tribological characterization, chemical microensors, air purification and detection, electrochemical	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) GEO-CENTERS, INC. programs in support of the Naval Research Laboratory Surface Chemistry Branch of the Chemistry Division have addressed problems dealing with the properties of and chemistry occurring on/at surfaces and interfaces. Of particular interest to the Navy are the programs and advances described below: Modified ceramic and metal surfaces demonstrated significant improvements in tribological characteristics such as friction and wear resistance. In addition to the characterization and analysis of these materials, a large materials database was compiled. This information will assist in identifying important factors affecting stress propagation and tribological performance, and will aid in the development of models. (Continued on back of sheet)			
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT ☐ OTC USERS		21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL Dr. James S. Murday		22b. TELEPHONE (Include Area Code) (202) 767-3550	22c. OFFICE SYMBOL Code 6170

GC-TR-88-1639

VOLUME III

RESEARCH AND DEVELOPMENT

IN SUPPORT OF THE

SURFACE CHEMISTRY BRANCH

FINAL REPORT

PREPARED FOR

NAVAL RESEARCH LABORATORY

4555 OVERLOOK DRIVE, S.W.

WASHINGTON, D.C. 20375-5000


UNDER CONTRACT NUMBER N00014-86-C-2096

PREPARED BY

GEO-CENTERS, INC.

7 WELLS AVENUE

NEWTON CENTRE, MA 02159

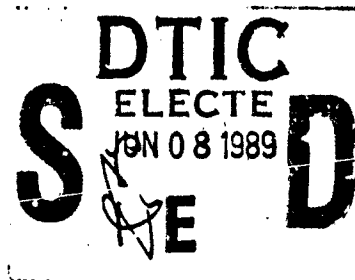

JUNE 1988

This document has been approved
for public release and sale in
distribution is unlimited.



GEO-CENTERS, INC.



LOCUS, INC.
2560 Huntington Ave. • Alexandria, VA 22303
(703) 960-1000

KAMAN

March 15, 1988

GEO-Centers, Inc.
7 Wells Avenue
Newton Centre, MA 02159

Attn: Russell Jeffries

Re: Report No. 1
Subcontract No. GC 1639-87-001

Gentlemen:

Enclosed are two (2) copies of the Final Report referenced above for work performed during January 1987 through April 1988, in accordance with the requirements of the referenced contract.

Sincerely,

Gladys M. Weller

Gladys M. Weller
Contracts Administrator

GMW/jc

Enclosures

Accession For	
NTIS GRA&I	
DTIC TAB	
Unannounced	
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	



FINAL REPORT

Subcontract No. 1639-87-001

LOCUS Project No. 3334

**Prepared by: Information Systems
Division**

Approved by:


**Charles Bocook
Asst. Vice President**

LIST OF FIGURES

Figure Number

Title

- | | |
|---|--|
| 1 | Rusty-Bolt Locator Prototype |
| 2 | Rusty-Bolt Radar Concept |
| 3 | Rusty-Bolt Radar Block Diagram |
| 4 | Dual Exposure showing RF Spectrum and IV curves super-imposed. The RF Spectrum is the IMI generated by this non-linearity. |
| 5 | Dual Exposure showing RF Spectrum and IV curves super-imposed. The RF Spectrum is the IMI generated by this non-linearity. |

LIST OF TABLES

Table Number

Title

- | | |
|---|---|
| 1 | Range & Resolution Performance of Rusty-Bolt Locator |
| 2 | Sample of Intermodulation Product Orders that can be generated in the HF Band by the choice of the fundamental frequencies. |

FINAL REPORT

Report No. 1

Subcontract No. 1639-87-001

LOCUS Project No. 3334

January 1987 through April 1988

This is the first Final Report on Subcontract Number 1639-87-001 covering technical progress for the reporting period.

Several efforts related to research in the EMI arena have been accomplished during 1987 and these are described below under separate headings.

Effort on Methods to Locate Rusty-Bolts (Rusty-Bolt Radar)

The first prototype of a device to excite, detect, and locate rusty-bolts was fabricated and tested. A block diagram of the prototype is shown in Figure 1. The prototype which operates in the UHF band radiates two fundamentals, f_1 and f_2 , and receives a third order intermodulation product at f_3 .

where $f_1 = 425 \text{ mHz}$

$f_2 = 435 \text{ mHz}$

$f_{\text{imp}} = m \cdot f_1 \pm n \cdot f_2$

$f_3 = 445 \text{ mHz}$, where $m=1$ and $n=2$

order = $m + n$

The locator operates in two discrete modes, search and location. Shipboard topside areas are searched for operating rusty-bolts (a rusty bolt is a tunneling non-linear metal-oxide-metal junction). When one is excited with the UHF energy radiated by the prototype locator, the

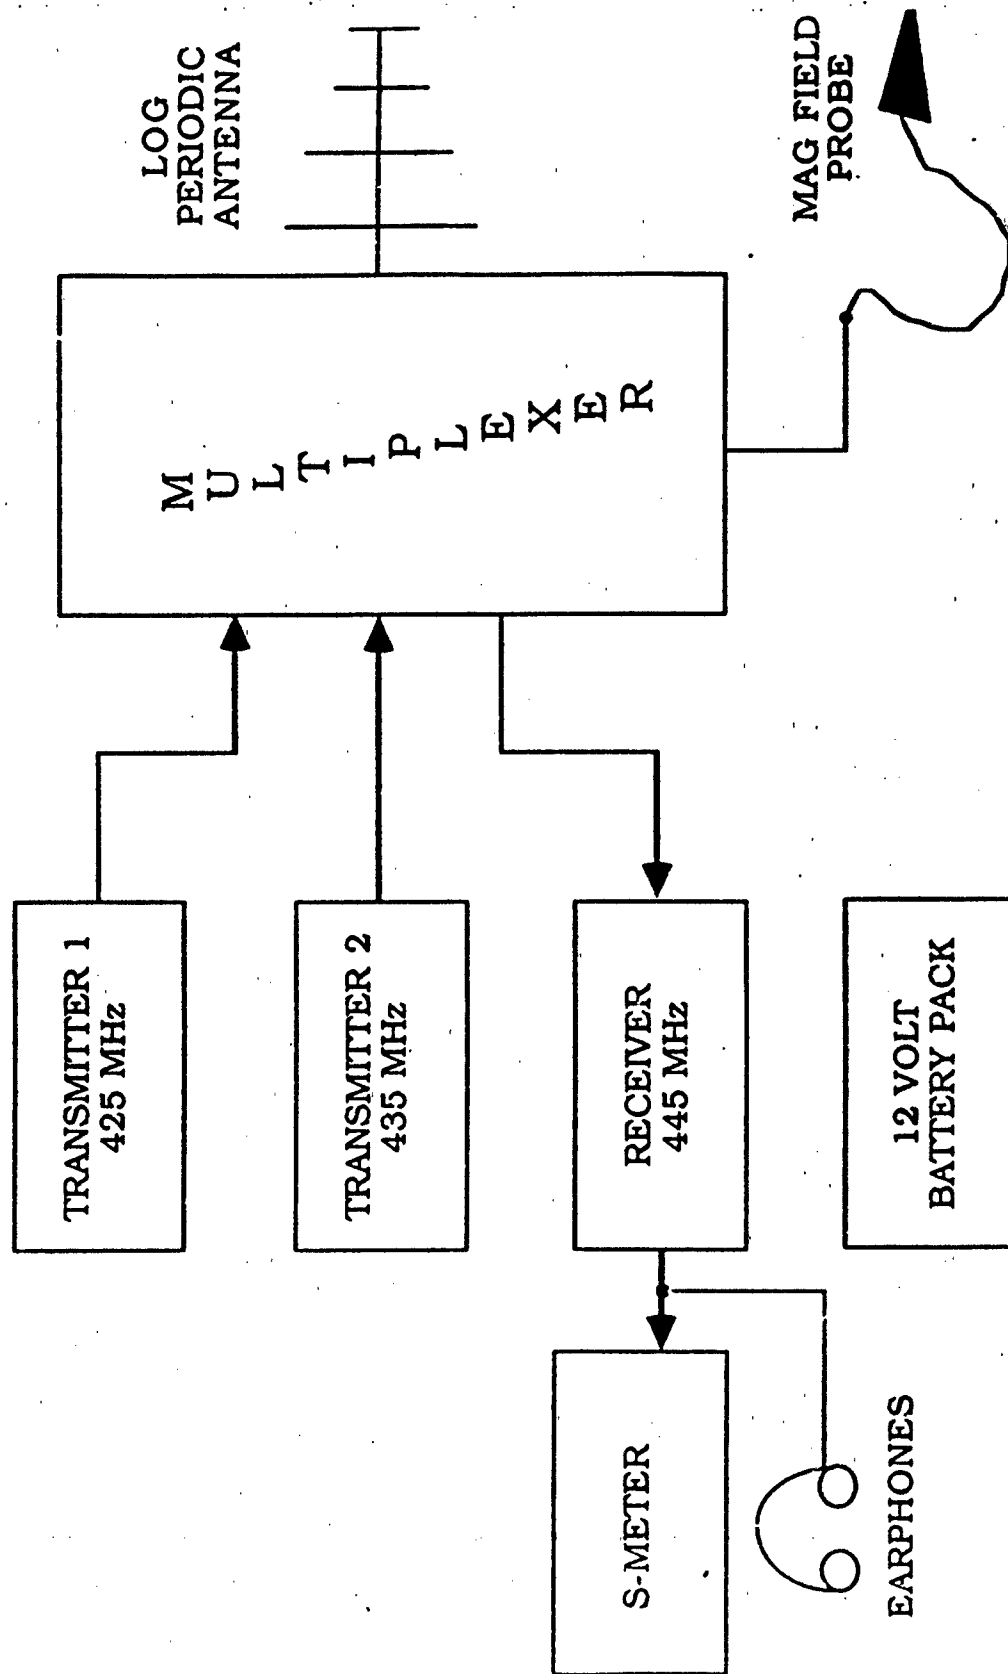


FIGURE 1 - RUSTY-BOLT LOCATOR PROTOTYPE

rusty-bolt mixes the two fundamental signals and generates the intermodulation products; one of four 3rd order intermodulation products is detected by a receiver tuned to 445 mhz. When the receiver receives this re-radiated energy, in the search mode, it desquelches and produces an audio tone in the earphones. Table 1 shows the approximate range and resolution performance in the search mode.

After a rusty-bolt has been detected in the search mode the illuminated area (approx 10' by 10') can be scanned with a small loop antenna attached to the receiver and the exact 'location' determined. Table 1 also shows the range and resolution performance in the location mode. The intermodulation signal is a maximum when the loop antenna is physically centered over the rusty-bolt.

This prototype was tested at State College PA. in August 1987 and is now being licensed so that it can be tested aboard ships.

An advanced version of this technique was designed, see Figure 2 and Figure 3, with two additional features, as follows: 1) provide an assessment of the detected rusty-bolt as to whether it is significant as an interferer in the HF band and 2) generate other than 3rd order intermodulation products in the HF band. This was done by choosing two fundamentals, f_1 and f_2 , which are separated by 2 to 1 plus or minus a slight frequency difference. Two frequency plans to accomplish this objective are shown in Table 2.

$$f_{imp} = m*f_1 \pm n*f_2$$

where $f_1 = 452.5 \text{ mhz}$ (or 451.25 mhz)

$f_2 = 900 \text{ mhz}$

order = $m + n$

Preliminary approval has been obtained to use these frequencies in the radar bands and since the radar frequencies are to be used it has been suggested by the US Navy licensing community that this device be called a "Rusty-Bolt Radar".

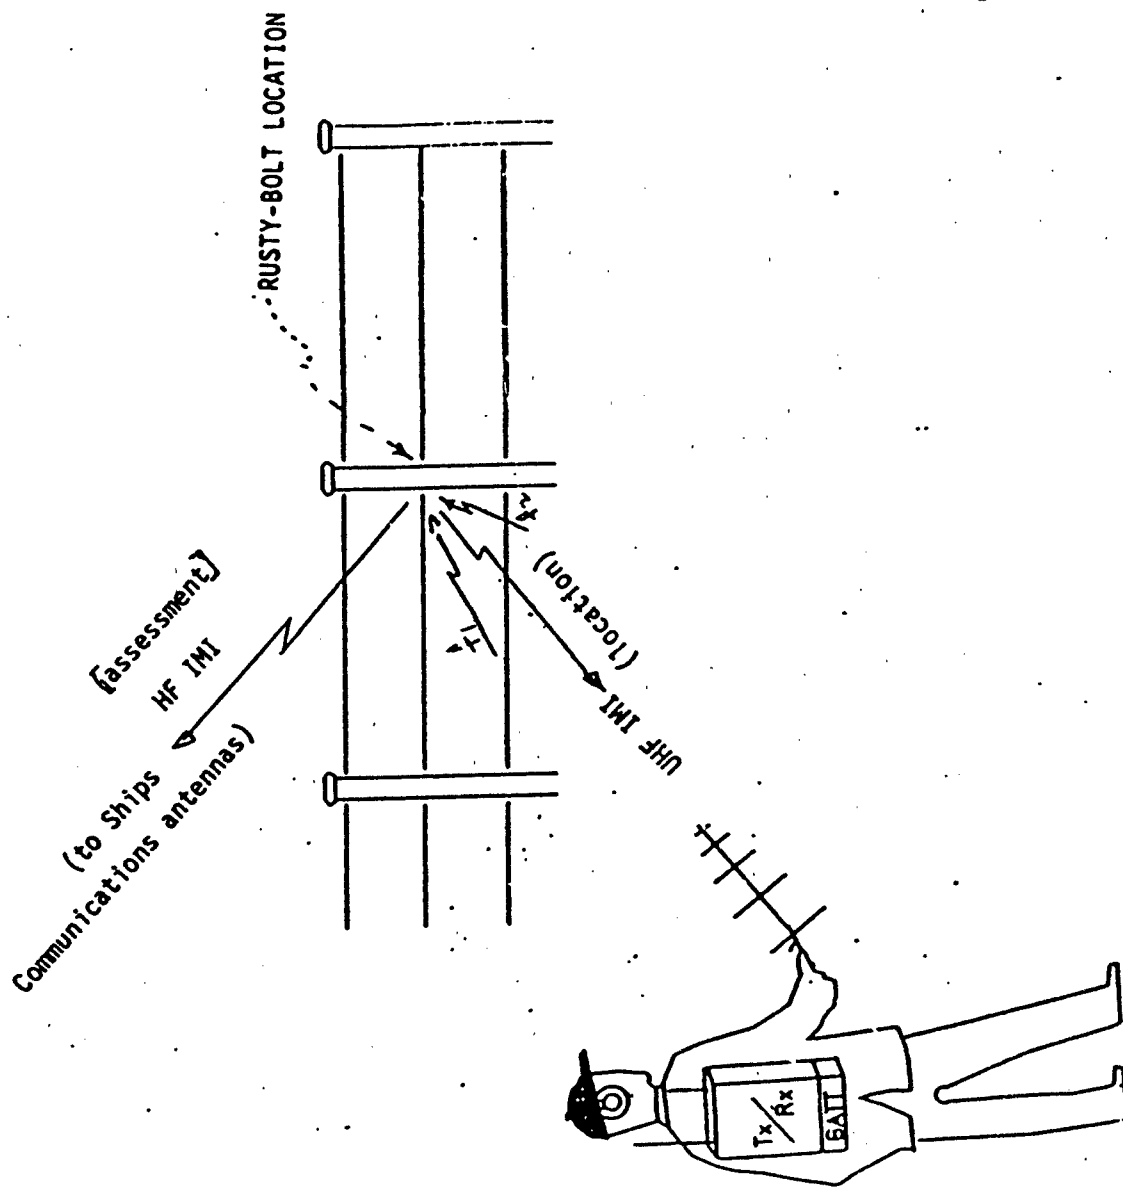


FIGURE 2 - RUSTY-BOLT RADAR CONCEPT

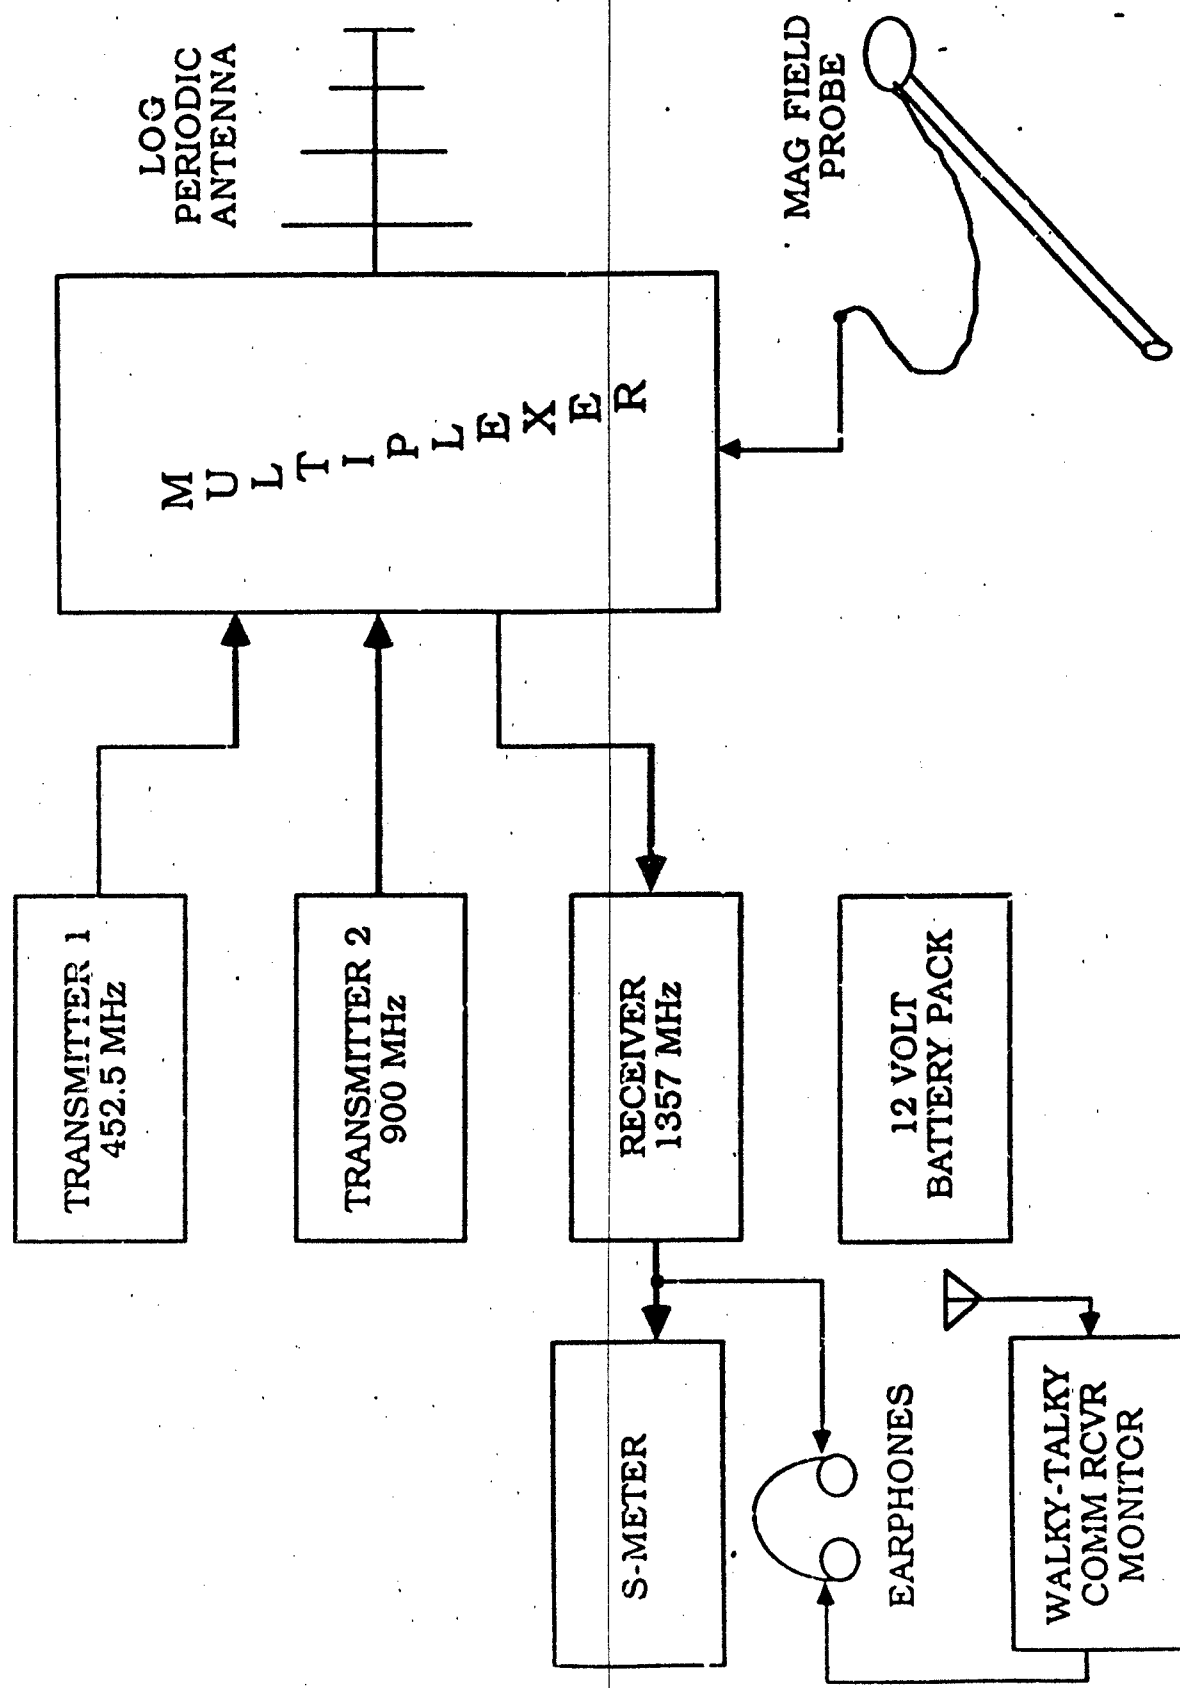


FIGURE 3 - RUSTY-BOLT RADAR BLOCK DIAGRAM

MODE	RANGE	RESOLUTION
SEARCH	30 FEET	10 FEET
LOCATION	12 INCHES	0.1 INCH

Table 1 - Range and Resolution Performance
of Rusty-Bolt Locator

Fundamentals [MHz]		Intermodulation Product Orders in the HF Band [mHz]											
f1	f2	3rd	6th	9th	12th	15th	18th	21st	24th	27th	30th	33rd	36th
452.5	900	5	10	15	20	25	30						
451.25	900	2.5	5	7.5	10	12.5	15	17.5	20	22.5	25	27.5	30

Table 2 - Sample of Intermodulation Product Orders that can be generated in the HF band by the choice of the fundamental frequencies

A commercially available rusty-bolt locator has been found and evaluated for its ability to satisfy the requirements for location of ship-board rusty-bolts. The candidate device is manufactured by MICROLAB Inc. and is sold as an anti-eavesdropping device which is marketed to governments and industry so they can detect and find "bugs." Although this device is capable of locating rusty-bolts it does not possess 1) the capability of generating intermodulation products in the HF band for the "assessment" feature or 2) generating other intermodulation frequencies in the HF band.

NSRDC Hardware Evaluation Report

The Naval Ship Research and Development Center (NSRDC) in Annapolis Md. has developed a corrosion protection coating for marine hardware (nuts and bolts). Preliminary data indicated that these coatings could suppress the generation of IMI on currents flowing through the hardware. IMI and conductivity tests were performed on samples of this hardware which had been subjected to extensive salt environments. This data was analyzed, correlated and a test report prepared and issued to NSRDC.

EMI Gasket Adhesive

A EMI gasket adhesive is being developed at NRL to solve a F/A-18 EMI shielding problem wherein the existing EMI gasket adhesive causes severe corrosion to the aluminum frames. Two formulations have been developed and tested. Initial testing was done on the IMI test set-up and subsequent testing has employed the HP4192A Impedance Analyzer and a salt spray test jig designed by Chomerics Inc.

The F/A-18 structures to be bonded are graphite epoxy 'skin' panels which are seated against aluminum frames. To determine what could take place where aluminum comes in contact with graphite, a physical junction of these two materials was made and it was determined that this junction was non-linear. This led to making just a graphite to graphite

junction, which was also determined to be non-linear. The IMI spectrum generated and the IV curves are shown in Figures 4 & 5. Two types of graphite materials were mated, one a small sample to the actual graphite-epoxy composite aircraft 'skin' and the second being a "hank" of the graphite fibers which are woven to make up the actual graphite epoxy composite structure. Figure 4a shows the IV curves and the IMI spectrum for an aluminum to graphite epoxy junction and Figure 4b shows the IV curves and the IMI spectrum for just a section of graphite epoxy composite. Figure 5a shows the IV curve and IMI spectrum generated by RF being mixed in 3 inches of carbon fiber bundles and Figures 5b shows the results of mixing action in a very short section of this same carbon fiber bundle. The high DC resistance associated with the long (3 inch) current path tends to swamp out some of the non-linearity and consequently the magnitude of the resulting IMI is reduced.

Other IMI Test and Evaluation

IMI test and evaluation was also performed on the following:

- Comercial water-based conductive paints
- CBA Greases
- Many special CBA's
- Gasket adhesive's
- Superconductive materials

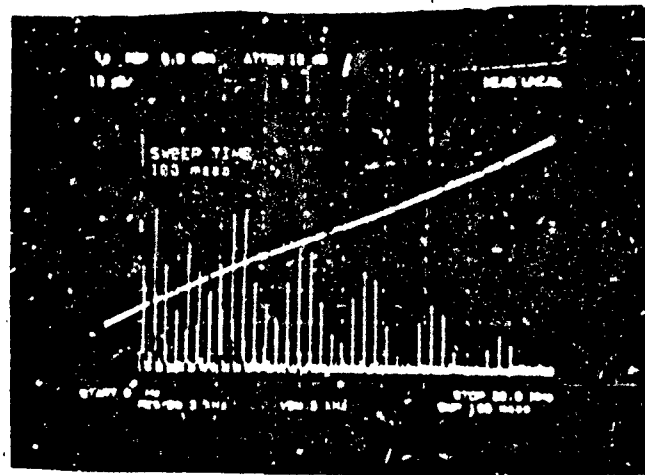


Figure 4 a - Aluminum to Graphite Junction

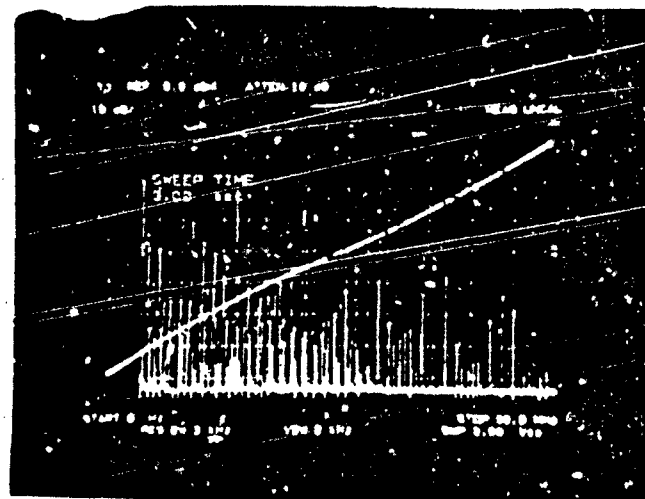


Figure 4 b - Graphite to Graphite Junction

Figure 4 Dual exposure showing RF Spectrum and IV curves super-imposed. The RF Spectrum is the IML generated by an Aluminum to graphite and a graphite to graphite non linearity.

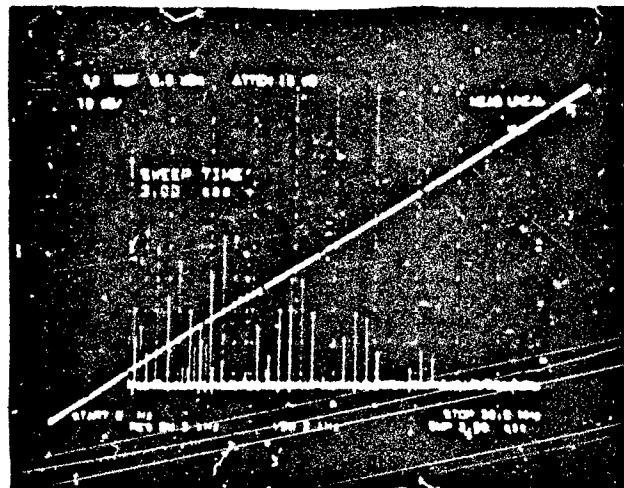


Figure 5 a - Carbon Fiber bundle, 3 inches long.

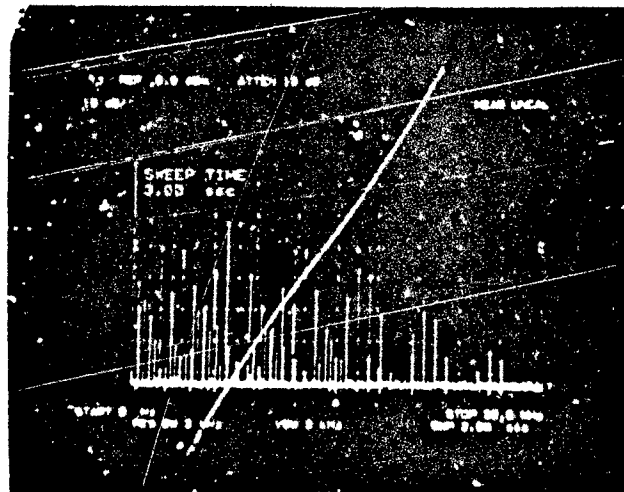


Figure 5 b - Carbon Fiber bundle, 0.25 inches

Figure 5 - Dual exposure showing RF Spectrum and IV curves super-imposed. The RF Spectrum is the IMI generated by 2 tones mixed by this graphite fiber non linearity.