

AD-A209 740


High-Power Free-Electron Lasers Driven by RF Linear Accelerators

T.F. GODLOVE

*FM Technologies, Inc.
Alexandria, VA 22304*

P. SPRANGLE

Plasma Physics Division

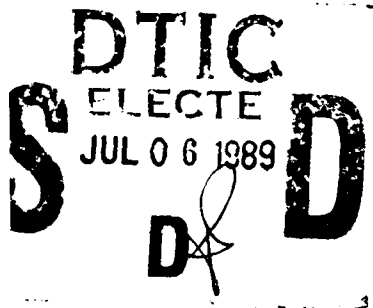

May 16, 1989

Approved for public release; distribution unlimited.

89 7 03 014

REPORT DOCUMENTATION PAGE				Form Approved OMB No 0704-0188	
1a REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b RESTRICTIVE MARKINGS		
2a SECURITY CLASSIFICATION AUTHORITY			3 DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution unlimited.		
2b DECLASSIFICATION/DOWNGRADING SCHEDULE					
4 PERFORMING ORGANIZATION REPORT NUMBER(S) NRL Memorandum Report 6463			5 MONITORING ORGANIZATION REPORT NUMBER(S)		
6a NAME OF PERFORMING ORGANIZATION Naval Research Laboratory		6b OFFICE SYMBOL (If applicable) Code 4790	7a NAME OF MONITORING ORGANIZATION		
6c ADDRESS (City, State, and ZIP Code) Washington, DC 20375-5000			7b ADDRESS (City, State, and ZIP Code)		
8a NAME OF FUNDING/SPONSORING ORGANIZATION Office of Naval Research		8b OFFICE SYMBOL (If applicable)	9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER		
8c ADDRESS (City, State, and ZIP Code) Arlington, VA 22217			10 SOURCE OF FUNDING NUMBERS		
PROGRAM ELEMENT NO		PROJECT NO	TASK NO	WORK UNIT ACCESSION NO	
		ONR			
11 TITLE (Include Security Classification) High-Power Free-Electron Lasers Driven by RF Linear Accelerators					
12 PERSONAL AUTHOR(S) Godlove,* T.F. and Sprangle, P.					
13a TYPE OF REPORT Interim		13b TIME COVERED FROM TO		14 DATE OF REPORT (Year, Month, Day) 1989 May 16	
				15 PAGE COUNT 51	
16 SUPPLEMENTARY NOTATION *FM Technologies, Inc., Alexandria, VA 22304					
17 COSATI CODES			18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP	Free-electron laser Strategic defense		
			Particle accelerator Electron beam		
			RF linac		
19 ABSTRACT (Continue on reverse if necessary and identify by block number) The free-electron laser (FEL) has been developed to the point where projections of its high-power capability have made it an important component of the directed-energy research program within the Strategic Defense Initiative. To achieve the desired near-visible wavelength and high intensity, stringent demands are placed on the electron beam that drives the FEL. Typical requirements are high peak current (0.2 to 2 kA) at a kinetic energy of 100 to 150 MeV, small energy spread (<1%), small diameter (<3mm), and low divergence (<0.1 mrad). Either an induction linear accelerator (linac) or an rf linac may be a suitable candidate to provide the electron beam. In this review, we describe the technical issues and technology needed to achieve a visible-light FEL driven by an rf linac. A recently installed rf linac at Boeing Aerospace is used as the principal illustrative example.					
20 DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT ☐ DTIC USERS			21 ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED		
22a NAME OF RESPONSIBLE INDIVIDUAL P. Sprangle			22b TELEPHONE (Include Area Code) (202) 767-3493		22c OFFICE SYMBOL Code 4706

CONTENTS

I.	INTRODUCTION	1
II.	FEL MECHANISM	2
III.	RF LINEAR ACCELERATORS	6
IV.	BOEING OPTICAL RESONATOR AND WIGGLER	14
V.	ISSUES AND PLANS	16
VI.	ACKNOWLEDGEMENTS	17
VII.	REFERENCES	18
	DISTRIBUTION LIST	27



Accession For	
NTIS CRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

HIGH-POWER FREE-ELECTRON LASERS DRIVEN BY RF LINEAR ACCELERATORS

I. INTRODUCTION

About the time that the Strategic Defense Initiative (SDI) began, in 1983, the free-electron laser was rapidly gaining acceptance as a strong candidate for directed-energy applications. There are several reasons for the increased interest. FELs provide direct conversion of electron beam energy to electromagnetic radiation with relatively high efficiency. Furthermore, the output wavelength can be made tunable by varying the electron energy. High average power comes naturally; in an amplifier mode, the FEL can operate without lenses, mirrors, or other material objects in the high-power-density region of the FEL interaction. Moreover, electron accelerators have been developed to the point where extension to the power needed to drive FELs, though extremely demanding in terms of cooling and beam handling, involves no new principles. For these reasons, among others, the FEL became the concept of choice for a ground-based laser system in 1986 [1].

Two distinct technologies are presently being pursued in the SDI program to provide the high-energy electron beam that drives the FEL. Induction accelerators, developed originally in the United States for the electron injector in the ASTRON fusion program at Lawrence Livermore National Laboratory (LLNL), can provide high beam current capability [2], but require further development to achieve high average power and low beam emittance (a measure of beam quality, defined in Sect. III). Microwave (more commonly, "rf") linear accelerators can provide high energy, high average power, and low emittance, but need further development to achieve the required combination of current and emittance.

It is not yet clear which electron beam technology is most suitable for ballistic missile defense, especially when system, reliability, and cost factors are considered. The SDI Organization is therefore presently pursuing a parallel development approach until a more educated choice can be made. LLNL is teamed with TRW to develop the induction method, while Los Alamos National Laboratory (LANL) is teamed with Boeing Aerospace to pursue the rf method.

Section II gives a general introduction to the FEL mechanism, including the important concept of optical guiding, viz., where the intense electron beam acts as a "light pipe" to guide and focus the generated radiation beam. In Sect. III the design principles of rf linacs are reviewed. The Boeing Aerospace linac is used to illustrate some of the methods employed to enhance performance. Section IV gives a summary of the Boeing wiggler and optical system, and the last section includes a brief discussion of additional technical issues and some recent LANL FEL results.

II. FEL MECHANISM

The first observation of the amplification of radiation (at 10 μm wavelength) using an rf linac was by John Madey's group at Stanford University [3]. But years before, the microwave Ubitron device developed by Robert Phillips at General Electric employed the same mechanism [4]. The FEL field began to flourish during the late 1970's, and at this writing ten international FEL conferences have been held, the most recent in Williamsburg, VA [5], and in Israel [6].

Figure 1 is a schematic of the basic FEL configuration. High-energy electrons are injected along the z-axis between rows of magnets which produce an alternating periodic field transverse to the axis. The periodic magnetic ("wiggler") field causes the electrons to bunch and oscillate in the (y-z) plane and emit radiation in the direction of the electron motion. In Fig. 1, the radiation is plane polarized with the electric vector in the plane of oscillation. The wavelength λ of the emitted radiation, for the fundamental resonance condition, is

$$\lambda = \lambda_w (1 + K^2) / 2\gamma^2, \quad (1)$$

where λ_w is the period of the wiggler, K is a dimensionless measure of the peak magnetic wiggler field B_w , and γ is the electron total energy in units of the rest energy, mc^2 . With B_w in Tesla and λ_w in meters, $K = 66.0 B_w \lambda_w$ for linear polarization wigglers. Fields of 0.5 to 1 T and wiggler periods from 2 to 5 cm yield visible light with electron beams in the energy range from 100 to 200 MeV.

An FEL may be operated in an amplifier or an oscillator mode. In either case, once an electromagnetic wave is moving along the axis with the polarization shown in Fig. 1, the wave, e-beam, and wiggler field interact to produce a force in the z direction (called "ponderomotive" force) which bunches the e-beam at the radiation wavelength. Bunching increases the interaction and enhances the coherent radiation intensity. If the beam current and wiggler field are strong enough, the radiation intensity can grow exponentially along the axis until saturation occurs. Moreover, a significant fraction of the electrons can become trapped by the ponderomotive wave and, if a "tapered" wiggler is employed as explained below, the intensity can continue to grow well beyond the normal saturation level.

Efficiency Enhancement

A tapered wiggler is a vital part of a high-power FEL. Loss of resonance, due to the normal decrease of electron energy, is compensated by spatially tapering the wiggler parameters, B_w and/or λ_w , to keep the output wavelength constant as the electron energy decreases. In this way the intensity, efficiency, and spectral purity are all improved. In an oscillator, tapering the wiggler reduces the overall gain, hence the conditions for starting the oscillation become an issue. However, the round-trip gain is normally sufficient to start oscillation.

In addition to tapering the wiggler, the FEL efficiency can also be enhanced by recovering energy from the spent e-beam. This can be accomplished in an rf linac by directing the spent beam into one or more sections of recovery waveguide structure. The recovery waveguide is, in principle, identical to the accelerating waveguide. Energy is coupled from the spent e-beam to an rf wave generated in the recovery waveguide because the electrons are still highly bunched at the rf frequency after emerging from the wiggler. This process is easily observed in multi-section linacs by simply turning off the power in one of the downstream sections and observing the rf power induced by the beam. Proof-of-principle recovery experiments have been conducted by the LANL group [7].

Optical Guiding

Recently, the importance of focusing the FEL radiation by the electron beam has been recognized [8,9]. If the e-beam is intense--several hundred amperes or more--then the refractive index in the vicinity of the beam is sufficient to refract, guide, and contain the FEL radiation, much like an optical fiber. The phenomena was first analyzed for low-gain FELs where the focusing effect was of primary interest. Recently, the effect has been studied in the small signal, exponential growth regime, to obtain the asymptotic behavior of the radiation. Optical guiding will clearly play a central role in high-gain, high-power, FEL systems that require long wigglers; otherwise the radiation would diffract out of the beam.

Use of the guiding mechanism together with a long wiggler makes possible an FEL power amplifier design that is attractive from a system viewpoint. The FEL radiation increases exponentially along the axis until saturation occurs, at which point the wiggler is tapered to enhance the efficiency. Sprangle et al. give example designs of such high-power, high-gain amplifiers for both rf and induction linacs [9].

Pulse Slippage

In general, the axial velocity of the beam pulses and the velocity of the radiation packets are not identical, although they are both close to the velocity of light. Because the micropulses from an rf linac are short (typically 10 to 30 ps) this velocity difference leads to the possibility of pulse "slippage," wherein the beam pulse may lag (or lead) the radiation packet produced. In extreme cases, this slippage can significantly reduce the gain and efficiency of the FEL. The effect can be estimated as follows.

To obtain the effective velocity (group velocity) of the wave, we use the dispersion relation

$$\omega^2 = (ck_z)^2 + (ck_t)^2, \quad (2)$$

where the longitudinal wave number is $k_z = 2\pi/\lambda$, the transverse wave number is $k_t \approx \pi/r_L$, and r_L is the radius of the radiation beam with frequency ω . Taking the partial derivative of ω with respect to k_z and using $k_z \gg k_t$, we obtain the group velocity

$$v_g/c = 1 - (1/2)(\lambda/2r_L)^2. \quad (3)$$

The axial electron velocity, v_z , is approximately

$$v_z/c = 1 - 1/2\gamma_z^2, \quad (4)$$

where $\gamma_z = \gamma/\sqrt{1+k^2}$. The slippage distance, s , defined positive for lagging electrons, is then

$$s = (L/c)(v_g - v_z) = (L/2)\{(1/\gamma_z)^2 - (\lambda/2r_L)^2\}, \quad (5)$$

where L is the wiggler interaction length. From Eq. (5) it can be seen that slippage is eliminated if the condition

$$r_L = (1+K^2)^{-1/2} \lambda\gamma/2, \quad (6)$$

is satisfied.

We use two cases to illustrate the magnitude of slippage. Preliminary designs for a strategic-defense FEL indicate that an interaction length as long as 80 m may be used. For $\lambda = 1 \mu\text{m}$, $K = 1$, $\gamma = 235$ (120 MeV), and $r_L = 0.5 \text{ mm}$, this gives $s \approx 1 \text{ mm}$, roughly 10% of the micropulse length. For a quite different application, heating fusion plasma with an rf linac-driven FEL, we obtain, for $\lambda = 0.5 \text{ mm}$, $K = 1$, $\gamma = 30$ (15 MeV), and $r_L = 0.5 \text{ cm}$, the result, $s \approx -0.1 \text{ mm}$, for an interaction length of 1 m. In this case the radiation packet lags the electron beam, and the slippage is small, approaching zero with increasing K . Clearly slippage needs to be checked for each application, particularly if very high efficiency is desired. However, in many cases it is negligible or can be minimized by adjusting the parameters to satisfy the condition in Eq. (6).

III. RF LINEAR ACCELERATORS

The most widely used electron linac design, the traveling-wave linac, was pioneered at Stanford University in the late 1940's, and is the basis for the two-mile long, 50-GeV linac used for high energy physics research at the Stanford Linear Accelerator Center (SLAC) [10]. Early standing-wave linacs for research were developed at M.I.T. and Yale for electrons, and at Berkeley for protons. Later, during the 1960's, the "side-coupled" standing-wave design was pioneered at Los Alamos, and was used for the half-mile long, 800-MeV Los Alamos Meson Physics Facility, LAMPF [11]. Thousands of electron linacs in the 3 to 30 MeV range have been built for radiation processing, x-ray analysis, cancer therapy, and other applications [12]. The Yale linac is especially noteworthy because its separate-cavity, 600-MHz design [13] is similar to that proposed by Boeing for the White Sands Missile Range FEL linac. However, none of the early linacs had beam currents sufficient to drive a high-power FEL.

Figure 2 shows a section of the Boeing rf linac structure, used here as an example structure. Both traveling-wave and standing-wave linacs operate by designing the accelerator to make the phase velocity of the wave equal to the particle velocity (a standing wave can be analyzed as opposing traveling waves). Bunches of particles are injected on the crest of the forward wave and accelerated through the entire length of the structure. Multi-section linacs frequently employ one high-power amplifier per section, and phasing between sections is easily accomplished by adjusting the phase at each amplifier input. The choice of rf frequency and the principal design parameters are normally determined by optimization studies based on cost, desired performance, available rf sources, and other factors.

In most cases rf power sources for linacs are klystrons. The development of klystrons to a large degree has been driven by the development of linacs. A famous example is the development of the klystron at Stanford University after WW-II. The Stanford group leaped from the then-available kilowatt level to more than a megawatt in one jump! Early klystrons were pulsed, with a typical duty factor

of 0.1%. Research needs were adequately met with pulsed accelerators, and they offered a cost-effective way to achieve high energy. Gradual development, recently spurred by the prospect of large linear colliders for high-energy physics research, has resulted in reliable 3 GHz tubes operating at the 50 MW level; and research klystrons have achieved 150 MW peak [14].

As with nuclear and high-energy physics, FEL research has been conducted initially with pulsed systems. High average power introduces a new set of problems, requiring advanced cooling techniques and careful beam handling. A great deal of experience with high-power rf linacs can be adapted to FEL linacs. For example, both SLAC and LAMPF are capable of hundreds of kilowatts of average beam power. A Chalk River group has operated a prototype cw linac section at 3 MW average rf input power [15]; and in recent years a number of cw klystrons have been developed [16].

The electron beam from a pulsed rf linac consists of a train of "micropulses." The sequence of micropulses forms the "macropulse." The micropulse duration is a small fraction of the rf period, and is repeated at the rf frequency or, for FEL linacs, at a subharmonic of the rf frequency. The macropulse is a train of hundreds or thousands of micropulses or ultimately, a continuous (cw) train of micropulses. All of this is shown schematically in Fig. 3, together with the radiation packets associated with the Boeing FEL oscillator.

Beam Voltage and Current

Linac design is most simply described by referring to "Ohm's law" for traveling-wave, uniform-structure linacs:

$$V/V_0 = 1 - (I/2I_m), \text{ where } V_0 = nk_1(PRL)^{1/2}. \quad (7)$$

Here V is the voltage acquired through the linac having n sections with beam current, I , averaged over the macropulse, V_0 is the "unloaded" (low current) voltage, P is the power input to each section, L is the section length, R is the shunt impedance per unit length, and k_1 and I_m are defined below. It is assumed in these

simplified formulas that the structure has been designed to make the phase velocity equal to that of light, and that the electrons are bunched at the peak of the sine wave.

The linear decrease of V versus I is known as the linac "load line." Maximum beam power (IV) and efficiency (IV/nP) is obtained when $I = I_m$, in which case $V = V_0/2$. This current, I_m , is obtained from

$$I_m = k_2(P/RL)^{1/2}, \quad (8)$$

where $k_1 = (2/\alpha L)^{1/2}(1 - e^{-\alpha L})$ and $k_2 = (\alpha L/2)^{1/2}(1 - e^{-\alpha L})/(\alpha L + e^{-\alpha L} - 1)$

are functions of αL only, for the uniform-structure case. Here α is the attenuation per unit length of the effective axial field strength, E , as a result of wall losses. That is, E varies as $\exp(-\alpha z)$, where α is related to the resonant Q by $\alpha = \omega/2Qv_g$ and v_g is the group velocity of the rf wave with angular frequency ω . Convenient units are V in megavolts, P in megawatts, L in meters, R in megohms per meter, I in amperes, and α in nepers/meter.

These formulas illustrate some of the performance tradeoffs involved in linac design. If energy is more important than current, the structure may be designed to make $\alpha L \approx 1.2$, in which case k_1 peaks at 0.9 and, for example, a 12 MW klystron powering a 3m section with a 50 MΩ/m shunt impedance would provide 21 MV per section at $I_m = 0.3$ A. For high-current FEL applications, αL may be reduced by using larger apertures, reducing the frequency, and using shorter sections. This procedure increases the beam current capability and efficiency with a modest sacrifice in voltage. For example, if $\alpha L = 0.4$, I_m is doubled while V_0 is reduced by only 18%, and the theoretical maximum efficiency, $I_m V_0/2P = k_1 k_2/2$, is an impressive 77%. In general, rf linacs specifically designed for high current are very efficient in converting rf power to beam power.

Structure Variations and Beam-Breakup

Structure details modify the above analysis somewhat. For example, Eqs. (7) and (8) refer to a uniform structure in which all cells are identical. The structure parameters R , v_g , and α , which depend primarily on the aperture, are constant. In practice, a tapered structure, in which the hole size decreases from cell to cell (or in groups), is normally designed to maintain the field strength more nearly constant along the axis. In this case the parameters vary and the structure is slightly more costly to fabricate. Equations (7) and (8) remain the same, but k_1 and k_2 change form. Standing-wave structures exhibit somewhat higher shunt impedance than traveling-wave structures (other parameters remaining the same), and require a different analysis. Figure 4 shows the load line for the Boeing linac, which is a tapered traveling-wave structure [17].

A tapered structure has another major benefit: it reduces the growth of the beam-breakup (BBU) instability. First observed at SLAC, BBU is a virulent instability for electron linacs [18]. Off-axis electrons excite higher order electromagnetic modes in the accelerating waveguide which have transverse electric fields. The instability is often sufficient to deflect the beam into the walls. Growth depends on details of the modes and increases with increasing beam current. Tapering the structure reduces the growth rate. Focusing also helps, as does a high quality, on-axis injected beam. Means for reducing BBU in the Boeing linac and in proposed White Sands designs are described below.

Pulse Considerations

The pulse structure of a linac depends on the application. High peak power is required for high-energy physics research, and moderate average power can be obtained at reasonable cost. Similar reasoning applies to FEL research. Substantial reductions in cost can be realized by using peak power appropriate to the FEL physics while reducing the average power to the level necessary for adequate data rate. In any event, the rf pulse duration must be longer than the time required to fill the accelerator with rf energy. This "fill time" is given by L/v_g and is typically $\sim 1 \mu s$. The fill time is thus not a limitation unless the macropulse is very short.

Additional considerations dictate the pulse structure for an FEL linac. To achieve high gain the instantaneous beam current in the micropulse must be a few hundred amperes or more. If every rf cycle ("bucket") were filled with electrons at this level, the average macropulse current, I , would be far greater than necessary, and very costly. To avoid this condition and still provide high gain, the injection system is designed to operate at a subharmonic of the rf frequency, filling only a fraction of the available rf buckets. The peak current, I_p , is then given by $I_p = hI(2\pi/\Delta\phi)$, where h is the subharmonic number (available rf buckets/filled buckets), and $\Delta\phi$ is the phase width of the micropulse. Judicious choice of h and careful design to achieve small $\Delta\phi$ can then yield a high micropulse current while keeping the macropulse current at a reasonable level.

For an FEL oscillator further conditions are imposed on the pulse structure. In particular, the macropulse duration must be longer than the buildup time of the oscillator. This time depends on mirror reflectivity, outcoupling, and other elements in the optical system, and frequently is tens of microseconds or more (60 μ s in the Boeing FEL oscillator). Also, the period between micropulses must be precisely equal to, or a multiple of, the round-trip time in the FEL cavity to guarantee synchronism between the radiation packets and the electron pulses, as shown in Fig. 3.

Injector Systems

Linac injector systems vary from simple electron guns to sophisticated bunching systems such as the Boeing system, shown in Fig. 5. For FELs, the highest possible current density must be used at the source to ensure a dense, small-diameter beam; aberrations must be kept to a minimum, so that particle trajectories are smooth and nearly laminar with a minimum number of crossing trajectories. Also focusing elements must be carefully designed to balance space charge forces without over-focusing. A complete injector system generally includes an electron gun, one or more prebunchers, and a high-power tapered-phase-velocity buncher/accelerator section. The micropulse current from well designed systems can be two orders of magnitude greater than the peak current available from the electron gun.

The design of high-current injector systems is seriously complicated by space-charge forces. These forces cause the beam to expand in both the transverse and longitudinal directions, and degrade the beam quality. Once the energy reaches 2 to 3 MeV, the relativistic cancellation of the self-electric repulsive force by the self-magnetic attractive force makes the beam relatively rigid, and space charge can then be largely neglected.

An interesting new type of injector employs laser-initiated photo-emission from the cathode. Research conducted at LANL indicates that substantially better performance results from combining the higher current density available from laser-induced cathode emission with placement of the cathode directly in a microwave cavity having a high electric field [19]. This "photoinjector" must be further developed to demonstrate reliability and adequate lifetime, but in any case is a promising venture. Figure 6 shows an experimental set-up used by LANL for this purpose.

Beam Quality

Emittance, a key measure of beam quality, can be loosely described as the product of beam diameter and angular divergence. More precisely, Eq. (9) gives a widely used definition of the "envelope" or "edge" emittance, ϵ , and the normalized emittance, ϵ_n .

$$\epsilon_n = \beta\gamma\epsilon = 4\beta\gamma[\langle x^2 \rangle \langle x'^2 \rangle - \langle xx' \rangle^2]^{1/2}, \quad (9)$$

where x is the coordinate of a particle in the beam, $x' = dx/dz$, and $\langle \rangle$ indicates averaging over the entire beam [20]. A separate equation, with y substituted for x , is written for the y plane (z is the axial coordinate).

The importance of normalized emittance derives from the fact that it remains constant through the entire linac and beam transport system for linear focusing systems; as the energy ($\beta\gamma$) increases, ϵ decreases, keeping ϵ_n constant. Thus, except for ever-present small errors that cause some emittance growth, a design specification on the normalized linac output emittance can be considered a specification of the required injector system.

Gain, efficiency and spectral purity of the FEL suffer from finite electron beam energy spread. In general, energy spread in rf linacs comes from five sources: (1) inherent spread introduced by the injector bunching system, typically 0.2-0.3 MV; (2) spread due to longitudinal wake fields induced by the beam; (3) spread due to the finite phase width, $\Delta\phi$, of the micropulse in the linac structure; (4) stability and pulse flatness of the power applied to the accelerating waveguide; and (5) stability of the beam current, since V (Eq. (7)) varies directly with current. With careful design these effects can be held to the desired level, $< 1\%$. In many cases, energy spread due to wake fields can be reduced by phasing the micropulses slightly ahead of the sine-wave peak in the accelerator.

The Boeing L-Band Linac

Linac development at Boeing began in the 1960's with the installation of a 20-MeV, S-band linac designed for radiation effect studies. Upgraded in 1980 and 1983, the linac was used for early FEL experiments in 1982 [21]. Installation of the L-band linac for research on a high-power, visible-light FEL began in 1985 and was completed in 1987. For this purpose the Physical Sciences Center at Boeing was enlarged to provide a new 12 m by 70 m FEL/linac room. A schematic of the facility is shown in Fig. 8. The first electron beams were obtained in 1986 and, with an incomplete optical system, spontaneous emission was observed in May, 1987. Lasing with red light was obtained in April, 1988.

Design specifications for the L-band accelerator were evaluated in a preliminary multiparameter FEL computer model [22]. The principal linac specifications are given in the first column of Table I and the major laser oscillator parameters are given in Table II. Early calculations of the FEL gain as a function of electron energy and emittance are shown in Fig. 7. These calculations, while approximate, show the strong dependence of gain on beam emittance. The nominal design point, also shown, was chosen slightly high in energy to allow for some uncertainty in the final beam emittance.

The L-band linac has a number of features which enable the Boeing group to produce an electron beam suitable for FEL oscillator experiments. Some of the important features are summarized below:

- o The accelerating waveguide is a constant-gradient, traveling-wave structure, with six 2.9 m-long sections. The load line (Fig. 4) accommodates a wide range of voltage and current. The cell apertures are large (5 to 7 cm), larger than simple scaling of S-band apertures, and the rf phase shift per cell is $3\pi/4$ radians. These features improve the beam stability to BBU and wakefield effects by reducing the number of higher order modes, and thereby increase the beam current capability [23].
- o The deleterious effect of higher modes is further reduced by lowering their Q with absorbers placed between the accelerating sections. This technique was developed at Boeing with prototype studies [24].
- o Shunt impedance, 40 M Ω /m, is enhanced by contouring the interior shape of the cavities [23].
- o The injector system (Fig. 5) employs a 100 keV SLAC-type gun, two low-power subharmonic prebunchers, and a high-power, tapered-phase-velocity buncher/accelerator section. The system was optimized with extensive use of computer calculations, primarily using EGUN, ORBIT, and MASK [25].
- o The klystron modulators employ closed-loop phase and amplitude stabilizing circuits to level the rf power.

High-Current Linac Survey

Very few linacs have the peak current necessary for advanced FEL research, primarily because of the sophistication required in the injector system. Table I gives a list of rf linacs with peak micropulse current exceeding 100 A. Assuming the energy spread is small (<1%), the most important parameters are peak current and emittance. These parameters are combined in the beam brightness, B.

Brightness is a frequently used figure of merit proportional to current divided by the square of emittance. Unfortunately, the constant multiplier in the definition for brightness varies in the literature. The definition used here, $2I_p/(\pi\epsilon_n)^2$, is tied to the basic definition of optical brightness [26].

The Boeing linac is unique in having the energy necessary for visible light as well as high brightness. The 40 MeV injector for the Stanford Linear Collider [27] and PHERMEX are also included in Table I. PHERMEX, primarily used for pulsed radiographic analysis at LANL, is listed because it provides the premier example of shifting to ultra-low frequency (50 MHz) combined with transient operation to obtain very high charge per pulse [28]. It cannot be used for FEL research because of the large energy spread. The linacs at the University of Osaka [29] and the Argonne National Laboratory [30] are used for single pulse, special purpose applications such as transient chemical studies and advanced accelerator research. The Los Alamos accelerator is discussed in the last section in connection with their recent FEL results.

IV. BOEING OPTICAL RESONATOR AND WIGGLER

Our review would not be complete without describing some of the development issues inherent in the optical system. Here again we use the Boeing design for this purpose. A ring resonator geometry, shown schematically in Fig. 8, was chosen for the Boeing FEL [32]. The principal advantage of the ring geometry is that grazing incidence mirrors can be used at the input and output of the FEL wiggler, where the power density is high and optical damage would occur on normal incident surfaces. The grazing angle is small, about 3° , and the mirrors have a hyperboloid shape. Two paraboloids and two flats complete the major optics of the resonator. One of the flats is a beamsplitter to provide out-coupling, and both flats are employed in a precision alignment system.

The resonator is large by laser standards, 50 m between hyperboloids and 133 m total path length. The calculated optical beam diameter is 1.4 mm at the wiggler midpoint. At the grazing hyperboloids it is ten times larger, and at the paraboloids the diameter is a tolerable 10 cm. A vacuum system connected directly to the linac vacuum contains the FEL radiation and resonator optics, except for the outcoupled radiation, which is passed to air through a fused silica window.

The 5 m long wiggler employs samarium cobalt permanent magnets combined with vanadium permendur pole pieces to give a 10 kG magnetic field, unusually high for a visible-light wiggler [33]. With 220 periods of 2.2 cm each, the field is tapered as described in Sect. II to increase the FEL power and efficiency. Adjustment of the taper, up to 12%, is accomplished by building the wiggler in ten 50 cm segments and adjusting the magnetic gap of each segment. The nominal gap is 4.8 mm, about 2.5 times the diameter of the radiation beam at the wiggler ends.

A technical issue common to all wigglers is stringent tolerances, necessary to ensure that the electron beam does not wander off axis or shift in phase. Focusing of the electrons is aided by canting the pole pieces slightly, which adds a quadrupole component to the magnetic field. This procedure has the net effect of adding focusing in the plane of the wiggler while sacrificing some of the natural focusing in the other plane, to give a balanced result.

The electron beam is brought onto the axis of the wiggler by means of the last bending magnet in a series of bending magnets and quadrupole focusing magnets. These magnets, together with collimators, steering coils, and numerous beam diagnostics, comprise the beam transport system from the linac exit to the wiggler. After traversing the wiggler, the electrons are bent downward in a magnetic spectrometer so that measurements can be made of the electron energy spectrum, as well as to deflect the beam away from sensitive optical components.

V. ISSUES AND PLANS

The Boeing group achieved lasing with red light in April, 1988 [34]. This was done using an optical system of normal-incidence mirrors while waiting for installation of the more complex ring resonator system. Optical damage was avoided by reducing the micropulse rate to lower the power, which was ≈ 2 kW averaged over an 80 μ s macropulse. The peak power was reported to be 40 MW, with $\approx 1\%$ of the electron energy converted into red light. Since this is the first visible-light rf-driven FEL to be operated with such high beam currents, a great deal of new operating experience remains. Numerous experiments must be performed on alignment, pulse stability, sidebands, modes of oscillation and harmonics. Harmonics in the ultraviolet, for example, are known to be more damaging to optical elements than visible light.

For a weapon-grade FEL system to be proposed for installation at White Sands a number of improvements are necessary. An important improvement in the linac is to adopt a lower operating frequency, specifically near 400 MHz, and shift to a standing-wave, independent-cavity, design rather than traveling wave. These changes will allow additional increases in the beam current and power handling capability, and will further reduce wake field effects and improve the stability to BBU. The Boeing group is currently installing an accelerator test bed known as the MCTD, designed to operate at an impressive 1 A average current at about 10 MeV. It will employ four 4 MW cw klystrons to power eight 433 MHz cavities, and will also be used to test a laser-driven photoinjector.

An equally major change is proposed for the FEL optical system. The higher currents available from the linac will allow a power amplifier FEL design to be used instead of the oscillator which is appropriate to the present linac. When combined with the optical guiding described in Sect. II, which occurs naturally in the presence of high-current, low-emittance beams, the result is an attractive design [9]. Driven by a separate low-power oscillator, the combination constitutes a Master-Oscillator-Power-Amplifier (MOPA)

system. Since the optical beam is maintained at a small radius over a much longer distance, a long wiggler can be employed, yielding very high gain. A MOPA is somewhat more complex than an oscillator system, and potentially introduces more stringent tolerances on the wiggler and electron beam. These issues and others are currently being explored theoretically and with prototype experimental development.

The Los Alamos FEL group has conducted an extensive program of research and development at a longer wavelength, typically $\sim 11 \mu\text{m}$. Recently the LANL group reported an FEL extraction efficiency as high as 4.4% in an oscillator configuration [31]. The LANL group made significant improvements in the accelerator and beam transport system and incorporated a special short wiggler ahead of the main wiggler to prebunch the electrons as they enter the wiggler. They also report a factor of two increase in the efficiency and cavity power by using the wiggler prebuncher. Two different wigglers were used, one with 12% taper and the other 30%. They studied the sidebands and found they could be suppressed by adjusting the length of the optical cavity to detune the cavity. In general, they found reasonable agreement with FEL modeling predictions.

In a large research program of this kind many important questions must be addressed which are beyond the scope of this review. These include atmospheric propagation, space mirror development, and vulnerability to countermeasures, to mention only three. However, it is clear that the FEL itself is well on the way to achieving its goals. A great deal of progress has been made in the development of tunable, high-power, visible-light FELs for strategic defense or for any application requiring such a powerful source.

VI. ACKNOWLEDGEMENTS

We are grateful to Boeing Aerospace for numerous discussions, in particular to J. Adamski, C. Cella, D. Pistoiresi, and D. Shoffstall. Thanks also to S. Penner for comments on the manuscript. This review was supported by ONR and SDIO.

VII. REFERENCES

- [1] P.J. Klass, Avia. Week and Space Tech., Aug. 18, 1986, p. 40.
- [2] R.J. Briggs et al., IEEE Cat. 87CH2387-9, 178 (1987).
- [3] L.R. Elias et al., Phys. Rev. Lett. 36, 717 (1976).
- [4] R.M. Phillips, Ref. [5], pg 1.
- [5] Proc. 9th Int'l FEL Conf., ed. P. Sprangle, C.M. Tang, and J. Walsh, North Holland Publ., Amsterdam, 1988).
- [6] Proc. 10th Int'l FEL Conf., No. Holland Publ. (in press).
- [7] D. Feldman et al., IEEE Cat. 87CH2387-9, 221 (1987).
- [8] E.T. Scharlemann et al., Phys. Rev. Lett. 54, 1925 (1985);
P. Sprangle, A. Ting and C.M. Tang, Phys. Rev. Lett. 59,
202 (1987) and Phys. Rev. A36, 2773 (1987).
- [9] P. Sprangle et al., IEEE Cat. 87CH2387-9, 189 (1987).
- [10] "The Stanford Two-Mile Accelerator", ed. R. Neal,
W.A. Benjamin, Inc. N.Y. (1968).
- [11] D.C. Hagerman, IEEE Trans. Nucl. Sci. NS-20, 905 (1973).
- [12] Jerome L. Duggan, IEEE Trans. Nucl. Sci. NS-30, 3039 (1983).
- [13] H.L. Schultz and W.G. Wadey, Rev. Sci. Inst. 22, 383 (1951).
- [14] T.G. Lee et al., IEEE Trans. Plasma Sci. PS-13, 545 (1985).
- [15] J.-P. Labrie, IEEE Trans. Nucl. Sci. NS-32, 2775 (1985).
- [16] G. Faillon, IEEE Trans. Nucl. Sci. NS-32, 2945 (1985).
- [17] J.L. Adamski et al., IEEE Trans. Nucl. Sci. NS-32, 3397 (1985).
- [18] W.K.H. Panofsky and M. Bander, Rev. Sci. Inst. 39, 206 (1968);
P. Wilson, AIP Conf. Proc. 87, Amer. Inst. Phys., N.Y. (1982).
- [19] J.S. Fraser and R.L. Sheffield, IEEE J. Quantum Elec QE-23, 1489
(1987); R.L. Sheffield, E.R. Gray and J.S. Fraser, Ref. [5],
p.222.
- [20] S. Penner, Proc. Accel. Conf., IEEE Cat. 87CH2387-9, 183 (1987).
- [21] J.M. Slater et al., IEEE J. Quantum Elec. QE-19, 374 (1983);
J.L. Adamski et al., IEEE Trans. Nucl. Sci. NS-30, 2696 (1983).
- [22] D. Quimby and J. Slater, IEEE J. Quantum Elec. QE-21, 988 (1985).
- [23] A.M. Vetter et al., IEEE Trans. Nucl. Sci. NS-32, 2329 (1985).
- [24] A.M. Vetter et al., Proc. Accel. Conf., IEEE Cat. 87CH2387-9,
1019 (1987).

- [25] J. Adamski et al., IEEE Trans. Nucl. Sci. NS-32, 2994 (1985);
also K.R. Eppley et al., RF Buncher Studies with MASK, Deacon
Research unpublished report, Sept. 30, 1986.
- [26] J. Lawson, The Physics of Charged Particle Beams, Clarendon
Press, Oxford, England (1977).
- [27] M.C. Ross et al., IEEE Trans. Nucl. Sci. NS-32, 3160 (1985);
M.B. James et al., IEEE Trans. Nucl. Sci. NS-30, 2992 (1983).
- [28] T.P. Starke, IEEE Trans. Nucl. Sci. NS-30, 1402 (1983);
D.C. Moir et al., IEEE Trans. Nucl. Sci. NS-32, 3018 (1985).
- [29] S. Takeda et al., IEEE Trans. Nucl. Sci. NS-32, 3219 (1985).
- [30] G. Mavrogenes et al., IEEE Trans. Nucl. Sci. NS-30, 2989 (1983).
- [31] J.M. Watson, IEEE Trans. Nucl. Sci. NS-32, 3363 (1985);
D.W. Feldman et al., IEEE J. Quantum Elec. QE-23, 1476 (1987);
D.W. Feldman et al., in Ref. [6], to be published.
- [32] D.M. Shemwell et al., IEEE J. Quantum Elec. QE-23, 1522 (1987);
J.M. Eggleston and J.M. Slater, IEEE J. Quantum Elec. QE-23,
1527 (1987); and S.V. Gunn and K.C. Sun, AIAA 19th FDPDL Conf.,
paper 87-1280 (June, 1987).
- [33] Kem E. Robinson et al., IEEE J. Quantum Elec. QE-23, 1497 (1987).
- [34] T.W. Meyer, R.L. Gullikson, B.J. Pierce and D.R. Ponikvar, in
Ref. [6] (in press).

TABLE I HIGH-CURRENT RF LINACS

Linac (Purpose)	Boeing (FEL)	LANL (FEL)	Osaka (Multi)	ANL (Multi)	SLAC (Injector)	PHERMEX (Note 1)
Energy (MeV)	120	21	34	22	40	26
Freq. (MHz)	1300	1300	1300	1300	2856	50
I_p (A)	250	300	600	1000	600	400
Charge (nC)	4	4	10	25	8	1300
ϵ_n (mm-mrad)	50	120	67	480	150	260
B (A/m ² rad ²)x10 ⁻⁹	20	4	28	0.9	5	1
dE/E (%)	1	1	1	1	1	10-30
T (μs)	200	120	Note 2	Note 2	1	0.2
Subharmonic	36	60	12	12	16	1
Rate (Hz)	1	10	720	1000	180	0.1
Reference	17	31	29	30	27	28

Symbols: I_p = peak micropulse current; T = macropulse duration;
 ϵ_n = normalized edge emittance = $4\beta\gamma[\langle x^2 \rangle \langle x'^2 \rangle - \langle xx' \rangle^2]^{1/2}$;
 B = brightness = $2I_p/(\pi\epsilon_n)^2$ (Ref. 26).

Note 1: LANL facility used primarily for radiographic analysis.
Note 2: Produces a single micropulse, at the rate noted.

Table II BOEING FEL OSCILLATOR DESIGN PARAMETERS

WIGGLER		OPTICAL CAVITY	
Length (m)	5	Length (m)	55
Wavelength (cm)	2.18	Rad. Diam., Wiggler (mm)	1.4
Taper (%)	0 to 12	Small Signal Gain (%)	10 to 20
Peak Field (kG)	10.2	Startup Time (μs)	60
Number Periods	220	Macropulse Output (kW)	30

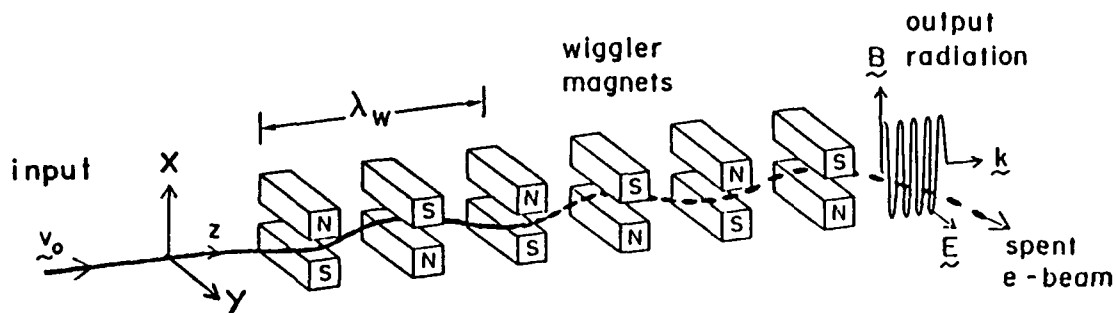


Fig. 1. Basic elements of a free-electron laser. Electrons are injected into an alternating periodic magnetic field produced by wiggler magnets as shown. The magnet array causes the electrons to oscillate in the y - z plane, parallel to the electric field, E , of the radiation. The transverse energy of the electrons is thereby coupled to, and amplifies, the radiation field. Although the radiation is shown at the wiggler output for simplicity, the interaction occurs over the entire length of the wiggler.

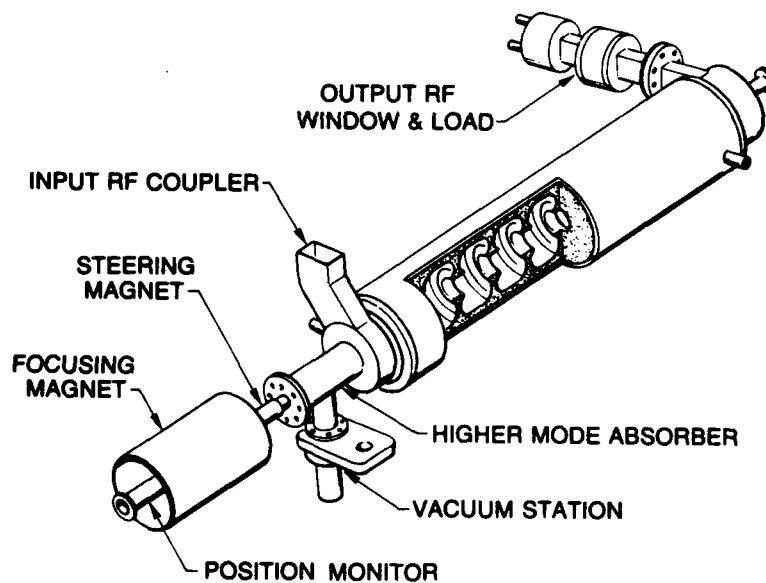


Fig. 2. Accelerator waveguide section, one of six, for the Boeing L-band linac. The design is typical of traveling-wave linac structures except for the contoured cells. The addition of high-order-mode probes between sections reduces the growth of deleterious transverse deflection modes.

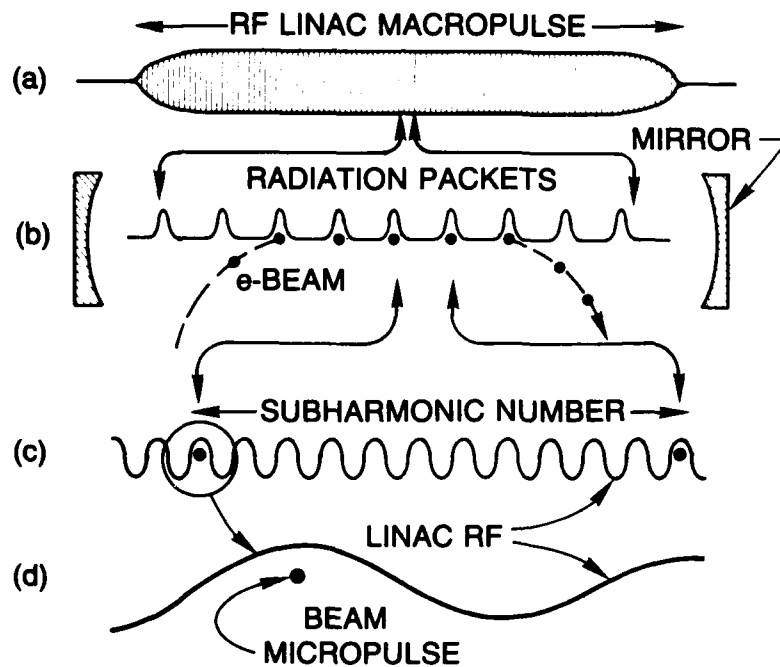


Fig. 3. Pulse timing sequence shows the time scale from macropulse to micropulse (values refer to the Boeing linac): (a) beam macropulse duration 200 μ s; (b) schematic of FEL resonator mirrors, showing synchronization between radiation packets and beam micropulses. Effective mirror one-way transit time 221 ns; (c) beam micropulses occupy a maximum of 1 out of every 36 rf "buckets," for a spacing of 27.7 ns; (d) beam micropulse duration about 20 ps. Linac rf frequency: 1.3 GHz; macropulse repetition rate: 1 Hz.

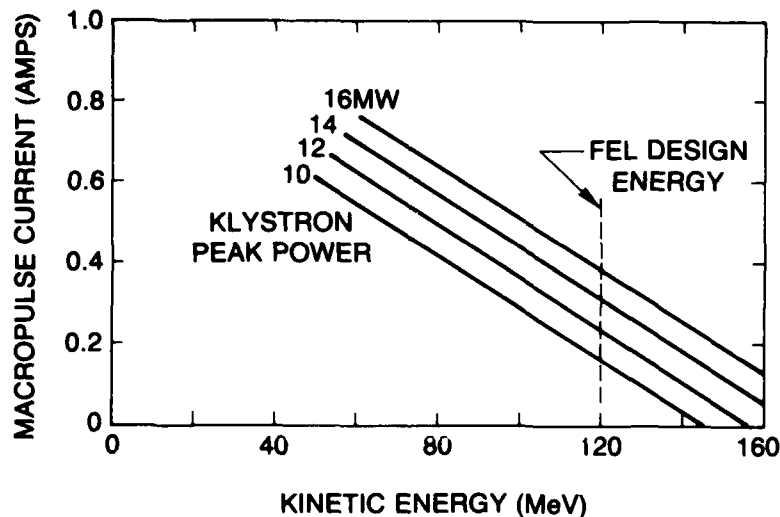


Fig. 4. RF linacs have a "load line" characteristic of the design parameters. Available beam current, averaged over the macropulse, decreases with kinetic energy. The Boeing design energy, 120 MeV, occurs at a current of 0.2 to 0.4 A, depending on applied klystron power (Ref. 17).

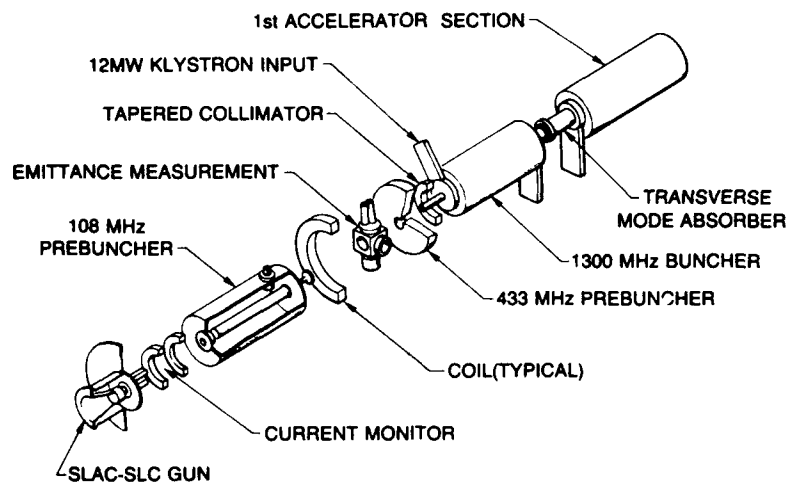


Fig. 5. The Boeing injector system, shown here in schematic form, is typical of advanced high-current linac injectors. Beam micropulses are formed by (a) pulsing the grid in the electron gun; (b) pre-bunching in two stages, at 108 MHz and again at 433 MHz; and (c) final bunching in a 1300-MHz high-power tapered-velocity buncher/accelerator section. The subharmonic number is set by pulsing the gun grid; the lower limit, 36, is determined by the charge per pulse and the maximum allowed macropulse current. Coils (not shown) are located along the injector axis to provide an axial magnetic field up to 500 G to help prevent the beam from spreading due to space charge. Electron gun voltage: 100 kV; output energy: 2 MeV (Ref. 17).

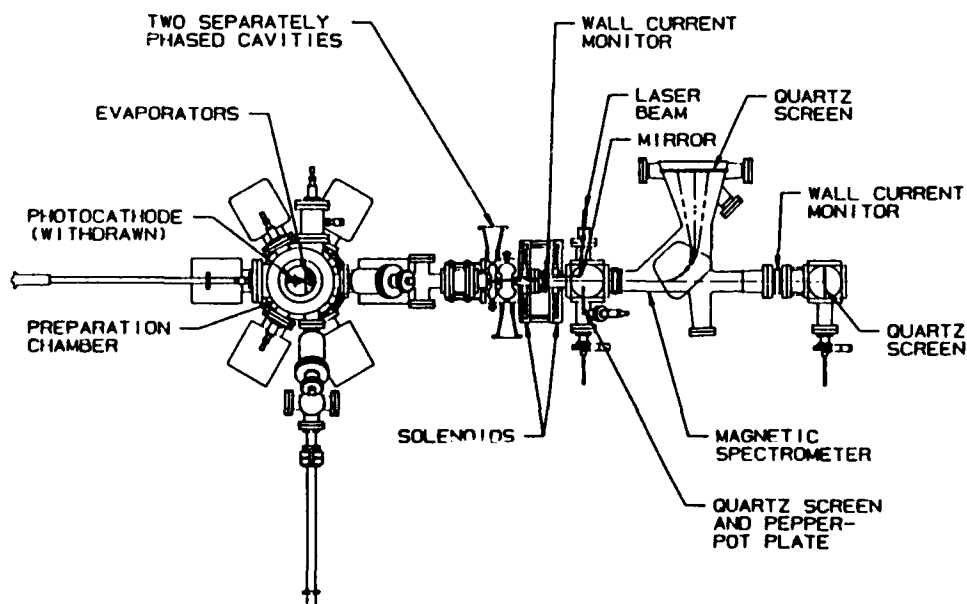


Fig. 6. Experimental setup used for photoinjector development at LANL. The schematic shown is for a two-cavity experiment (Ref. 19). Drawing courtesy of LANL.

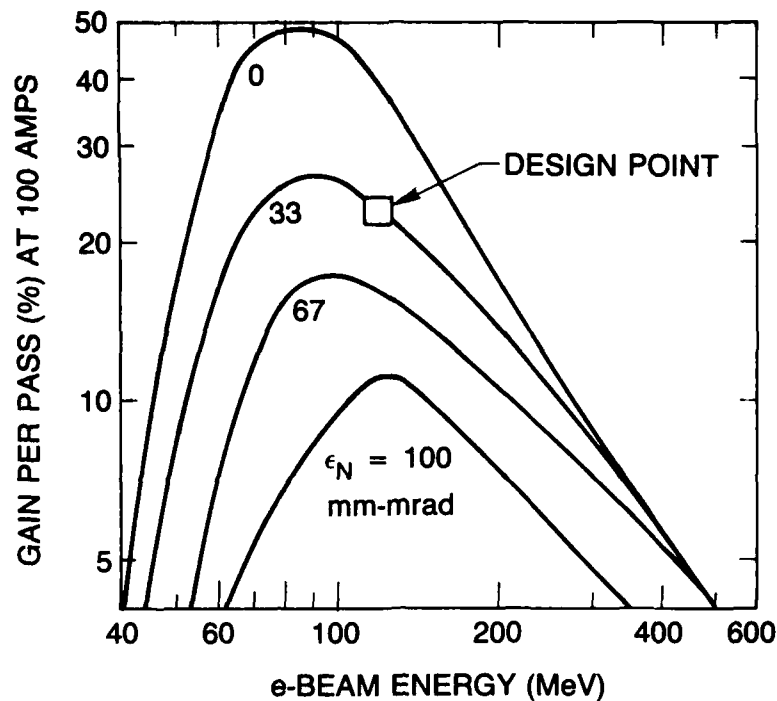


Fig. 7. FEL gain per pass is a sensitive function of linac beam emittance and kinetic energy. These design calculations were based on 0.5- μ m radiation from a 5-m long wiggler, using 5% extraction and a 100-A micropulse (Ref. 22). Shifting the design point off the peak allows for some uncertainty in the achievable emittance.

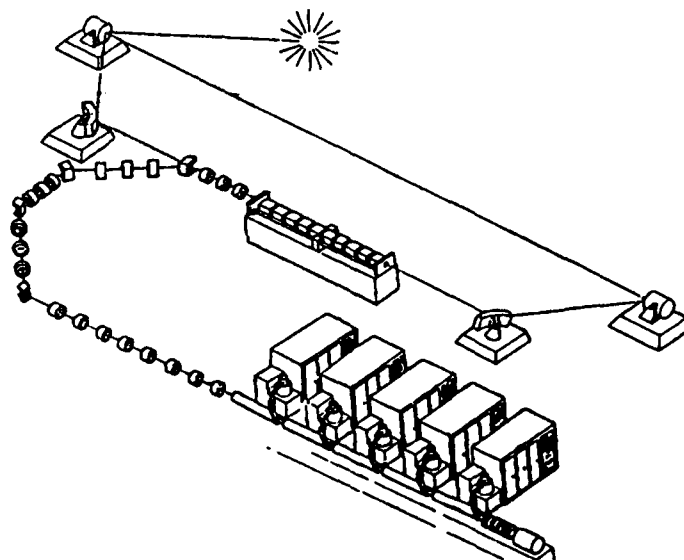


Fig. 8. Schematic layout of the Boeing facility. The 5-section, 120 MeV linac with klystrons and modulators is shown in the lower right. The optical design is based on a ring resonator, shown above the linac, which employs grazing-incidence hyperboloid mirrors 50 m apart to avoid mirror damage (Ref. 32]. The 5-m long wiggler is placed between the mirrors. The beam is transported to the wiggler through a series of bending and focusing magnets.

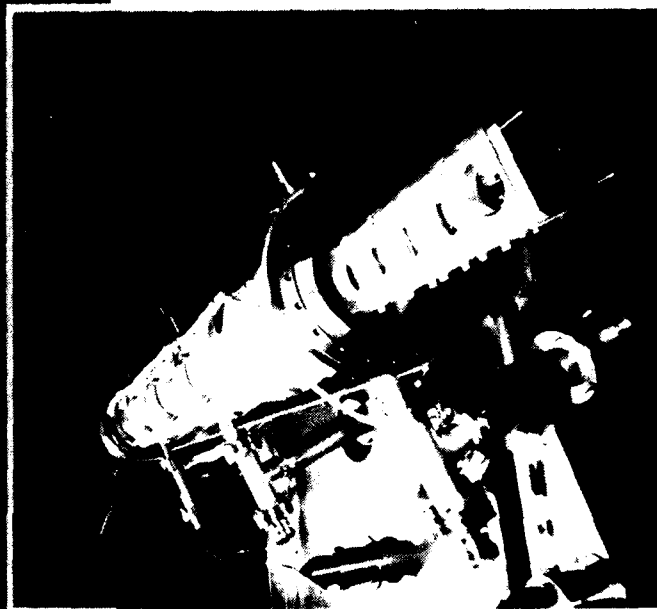
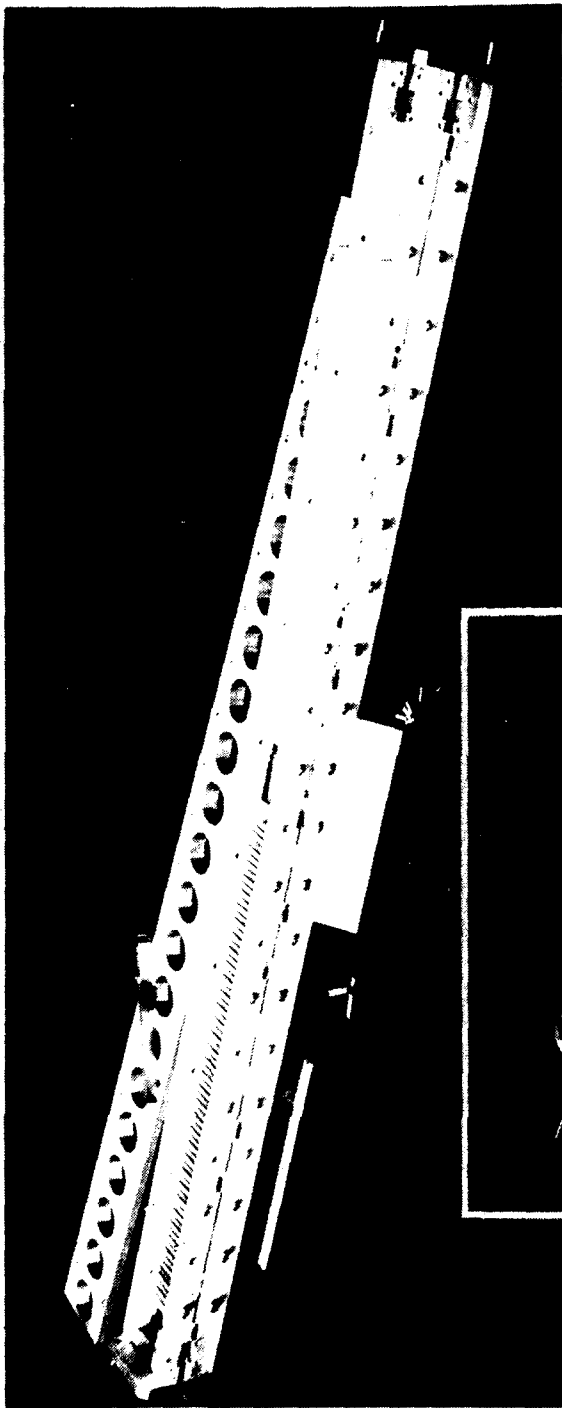


Fig. 9. Photograph of a wiggler used in some of the Los Alamos experiments, unassembled (upper) and in final assembly (lower). Photograph courtesy of LANL.

DISTRIBUTION LIST*

Naval Research Laboratory
4555 Overlook Avenue, S.W.
Washington, DC 20375-5000

Attn: Code 1000 - Commanding Officer, CAPT W. G. Clautice
1001 - Dr. T. Coffey
1005 - Head, Office of Management & Admin.
1005.1-Deputy Head, Office of Management & Admin.
1005.6-Head, Directives Staff
1200 - CAPT M. A. Howard
1201 - Deputy Head, Command Support Division
1220 - Mr. M. Ferguson
2000 - Director of Technical Services
2604 - NRL Historian
4000 - Dr. W. R. Ellis
0124 - ONR
4600 - Dr. D. Nagel
4603 - Dr. W. W. Zachary
4700 - Dr. S. Ossakow (26 copies)
4700.1-Dr A. W. Ali
4790 - Dr. P. Sprangle (25 copies)
4710 - Dr. C. A. Kapetanakos
4710 - Dr. J. Mathew
4730 - Dr. R. Elton
4740 - Dr. W. M. Manheimer
4740 - Dr. W. Black
4740 - Dr. A. W. Fliflet
4740 - Dr. S. Gold
4740 - Dr. D. L. Hardesty
4740 - Dr. A. K. Kinhead
4740 - Dr. M. Rhinewine
4770 - Dr. G. Cooperstein
4790 - Dr. C. M. Tang
4790 - Dr. G. Joyce
4790 - Dr. M. Lampe
4790 - Dr. Y. Y. Lau
4790 - Dr. A. Ting
4790 - Dr. E. Esarey
4790A- B. Pitcher (25 copies)
5700 - Dr. L. A. Cosby
5745 - Dr. J. Condon
6840 - Dr. S. Y. Ahn
6840 - Dr. A. Ganguly
6840 - Dr. R. K. Parker
6843 - Dr. R. H. Jackson
6843 - Dr. N. R. Vanderplaats
6843 - Dr. C. M. Armstrong
6875 - Dr. R. Wagner
2633 - Documents (22 copies)
2634 - D. Wilbanks

* Every name listed on distribution gets one copy except for those where extra copies are noted.

Dr. R. E. Aamodt
Lodestar Research Corp.
2400 Central Ave., P-5
Boulder, CO 80306-4545

Dr. J. Adamski
Boeing Aerospace Company
P.O. Box 3999
Seattle, WA 98124

Dr. H. Agravante
TRW, Inc.
One Space Park
Redondo Beach, CA 90278 / R1-2020

Prof. I. Alexeff
University of Tennessee
Dept. of Electrical Engr.
Knoxville, TN 37916

Dr. L. Altgilbers
3805 Jamestown
Huntsville, AL 35810

Dr. A. Amir
Quantum Inst. and Dept. of Physics
University of California
Santa Barbara, CA 93106

Dr. Bruce Anderson
Air Force Weapons Laboratory
Kirtland AFB
Albuquerque, NM 87117

Dr. Antonio Anselmo
VARIAN
MS K-416
611 Hanson Way
Palo Alto, CA 94303

Dr. T. M. Antonsen
University of Maryland
College Park, MD 20742

Dr. Tony Armstrong
Science Applications Intl. Corp.
P.O. Box 2351
La Jolla, CA 92038

Dr. Joseph Ashkenazy
M.I.T.
Research Lab. of Electronics
Room 36-219
Cambridge, MA 02139

Assistant Secretary of the
Air Force (RD&L)
Room 4E856, The Pentagon
Washington, D.C. 20330

Dr. W. P. Ballard
Sandia National Laboratories
ORG. 1231, P.O. Box 5800
Albuquerque, NM 87185

Dr. W. A. Barletta
Lawrence Livermore National Lab.
P. O. Box 808
Livermore, CA 94550

Dr. John J. Barnard
Lawrence Livermore Nat. Lab.
P. O. Box 808, L-626
Livermore, CA 94550

Dr. L. R. Barnett
3053 Merrill Eng. Bldg.
University of Utah
Salt Lake City, UT 84112

Project Manager
Ground Based Laser Project Office
ATTN: CSSD-H-F
White Sands Miss. Range, NM 88002-1198

CDR George Bates, PMS 405-300
Naval Sea Systems Command
Department of the Navy
Washington, DC 20362

Dr. W. Becker
Univ. of New Mexico
Institute for Mod. Opt.
Albuquerque, NM 87131

Dr. Robert Behringer
9342 Balcon Ave.
Northridge, CA 91325

Dr. G. Bekefi (5 copies)
Mass. Institute of Tech.
Room 36-213
Cambridge, MA 02139

Dr. S. Bender
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. J. Benford
Physics International
2700 Merced Street
San Leandro, CA 94577

Dr. Herbert S. Bennett
National Bureau of Standards
Bldg. 225, Rm. A352
Washington, DC 20234

Dr. Steven V. Benson
Physics Department
Stanford, CA 94305

Dr. I. B. Bernstein (10 copies)
Mason Laboratory
Yale University
400 Temple Street
New Haven, CT 06520

Dr. Vladislav Bevc
Synergy Research Institute
P.O. Box 561
San Ramon, CA 94583

Dr. Amitava Bhattacharjee
Columbia University
S. W. Mudd 210
Dept. of Applied Phys.
New York, NY 10027

Dr. Anup Bhowmik
Rockwell International/Rocketdyne Div.
6633 Canoga Avenue, FA-40
Canoga Park, CA 91304

Dr. K. Jim Bickford
RDA
2301F Yale Blvd., S.E.
Albuquerque, NM 87106

Dr. D. L. Bix
Lawrence Livermore National Laboratory
P. O. Box 808, L-627
Livermore, CA 94550

Dr. J. Bisognano
CEBAF
Newport News, VA 23606

Dr. Steve Bitterly
Rockwell International/Rocketdyne Div.
6633 Canoga Avenue, FA-40
Canoga Park, CA 91304

Dr. H. Boehmer
TRW DSSG
One Space Park
Redondo Beach, CA 90278

Dr. John Booske
Energy Research Bldg.
University of Maryland
College Park, MD 20742

Dr. P. Bosco
KMS Fusion Inc.
Ann Arbor, MI 48106

Dr. B. Boswell
Lab for Laser Energetics
University of Rochester
250 E. River Road
Rochester, NY 14623

Dr. G. Bourianoff
1901 Rutland Drive
Austin, TX 78758

Dr. J. K. Boyd
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. E. Bozoki
NSLS
Brookhaven National Lab.
Upton, NY 11973

Dr. H. Brandt
Department of the Army
Harry Diamond Laboratory
2800 Powder Mill Rd.
Adelphi, MD 20783

Dr. R. Briggs
Lawrence Livermore National Lab.
MS-626
P.O. Box 808
Livermore, CA 94550

Dr. H. L. Buchanan
Defense Advanced Research Projects Agency
1400 Wilson Blvd.
Arlington, VA 22209

Dr. D. L. Bullock
Optical Sciences Department
TRW Space and Technology Group
Redondo Beach, CA 90278

Dr. Fred Burskirk
Physics Department
Naval Postgraduate School
Monterey, CA 93940

Dr. Ken Busby
Mission Research Corporation
1720 Randolph Road, S.E.
Albuquerque, NM 87106

Dr. K. J. Button
Francis Bitter Natl. Magnet Lab.
Box 72, M. I. T. Branch
Cambridge, MA 02139-0901

Dr. J. A. Byers
Lawrence Livermore National Lab.
Attn: (L-630)
P. O. Box 808
Livermore, CA 94550

Dr. Malcolm Caplan
4219 Garland Drive
Fremont, CA 94536

Dr. Maria Caponi
TRW, Building R-1, Room 1184
One Space Park
Redondo Beach, CA 90278

Dr. B. Carlsten
Los Alamos National Laboratory
MS-H827 AT-7
P. O. Box 1663
Los Alamos, NM 87545

Mr. A. Carmichael
GBL Project Office
ATTN: CSSD-H-F
White Sands Miss. Range, NM 88002-1198

Dr. David Cartwright
Los Alamos National Laboratory
E527
Los Alamos, NM 87545

Dr. J. Cary
University of Colorado
Box 391
Boulder, CO 80309

Prof. William Case
Dept. of Physics
Grinnell College
Grinnell, IA 50112

Mr. Charles Cason
U. S. Army Strategic Def. Command
ATTN: Code CSSD-H-D
P. O. Box 1500
Huntsville, AL 35807-3801

Dr. S. Caspi
Lawrence Berkeley Lab.
Bldg. 46
Berkeley, CA 94720

Dr. R. Center
Spectra Tech., Inc.
2755 Northup Way
Bellevue, WA 98004

Dr. K. C. Chan
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. V. S. Chan
GA Technologies
P.O. Box 85608
San Diego, CA 92138

Dr. Will E. Chandler
Pacific Missile Test Center
Code 3123
Point Muga, CA 93042-5000

Dr. J. Chase
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. S. Chattopadhyay
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Prof. Frank Chen
School of Eng. & Applied Sciences
Univ. of Calif. at Los Angeles
7731 K Boelter Hall
Los Angeles, CA 90024

Dr. S. Chen
MIT Plasma Fusion Center
NW16-176
Cambridge, MA 01890

Dr. Yu-Juan Chen
L-626
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. D. P. Chernin
Science Applications Intl. Corp.
1720 Goodridge Drive
McLean, VA 22102

Dr. Art Chester
Hughes E51
Mail Stop A269
P.O. Box 902
El Segundo, CA 90245

Dr. S. C. Chiu
GA Technologies Inc.
P.O. Box 85608
San Diego, CA 92138

Dr. J. Christiansen
Hughes Aircraft Co.
Electron Dynamics Division
3100 West Lomita Blvd.
Torrance, CA 90509

Dr. T. L. Churchill
Spectra Technology, Inc.
2755 Northup Way
Bellevue, WA 98004

Major Bart Clare
USASDC
P. O. BOX 15280
Arlington, VA 22215-0500

Dr. Melville Clark
8 Richard Road
Wayland, MA 01778

Dr. Alan J. Cole
TRW
One Space Park
Redondo Beach, CA 90278

Dr. William Colson
Berkeley Research Assoc.
P. O. Box 241
Berkeley, CA 94701

Dr. Richard Cooper
Los Alamos National Scientific
Laboratory
P.O. Box 1663
Los Alamos, NM 87545

Dr. M. Cornacchia
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. R. A. Cover
Rockwell International/Rocketdyne Div.
6633 Canoga Avenue, FA-38
Canoga Park, CA 91304

Dr. D. Crandall
ER-55, GTN
Department of Energy
Washington, DC 20545

Mr. Thomas G. Crow
Ground Based Laser Project Office
ATTN: CSSD-H-FF
White Sands Missile Range, NM 88002-1198

Dr. Bruce Danly
MIT
NW16-174
Cambridge, MA 02139

Dr. R. Davidson (5 copies)
Plasma Fusion Center
Mass. Institute of Tech.
Cambridge, MA 02139

Dr. John Dawson (4 copies)
Physics Department
University of California
Los Angeles, CA 90024

Dr. David A. G. Deacon
Deacon Research
Suite 203
900 Welch Road
Palo Alto, CA 94304

Dr. Philip Debenham
Center for Radiation Research
National Bureau of Standards
Gaithersburg, MD 20899

Dr. T. L. Deloney
Dept. of Electrical Engineering
Stanford University
Stanford, CA 94305

Deputy Under Secretary of
Defense for R&AT
Room 3E114, The Pentagon
Washington, D.C. 20301

Prof. P. Diamant
Dept. of Electrical Engineering
Columbia University
New York, NY 10027

Dr. N. Dionne
Raytheon Company
Microwave Power Tube Division
Foundry Avenue
Waltham, MA 02154

Director
National Security Agency
Fort Meade, MD 20755
ATTN: Dr. Richard Foss, A42
Dr. Thomas Handel, A243
Dr. Robert Madden, R/SA

Director of Research (2 copies)
U. S. Naval Academy
Annapolis, MD 21402

Dr. T. Doering
Boeing Aerospace Company
P.O. Box 3999
Seattle, WA 98124

Dr. Gunter Dohler
Northrop Corporation
Defense Systems Division
600 Hicks Road
Rolling Meadows, IL 60008

Dr. Franklin Dolezal
Hughes Research Laboratory
3011 Malibu Canyon Rd.
Malibu, CA 90265

Dr. A. Drobot
Science Applications Intl. Corp.
1710 Goodridge Road
McLean, VA 22102

Dr. Dwight Duston
SDIO/IST
The Pentagon
Washington, DC 20301-7100

Dr. Joseph Eberly
Physics Department
Univ. of Rochester
Rochester, NY 14627

Dr. Jim Eckstein
VARIAN
MS K-214
611 Hanson Way
Palo Alto, CA 94303

Dr. J. A. Edighoffer
TRW, Bldg. R-1
One Space Park
Redondo Beach, CA 90278

Dr. O. C. Eldridge
University of Wisconsin
1500 Johnson Drive
Madison, WI 53706

Dr. Luis R. Elias (2 copies)
Creol-FEL Research Pavillion
Suite 400
12424 Research Parkway
Orlando, FL 32826

Dr. C. James Elliott
X1-Division, M.S. 531
Los Alamos Natl. Scientific Lab.
P. O. Box 1663
Los Alamos, NM 87545

Dr. A. England
Oak Ridge National Laboratory
P.O. Box Y
Mail Stop 3
Building 9201-2
Oak Ridge, TN 37830

Dr. William M. Fairbank
Phys. Dept. & High Energy
Phys. Laboratory
Stanford University
Stanford, CA 94305

Dr. Anne-Marie Fauchet
Brookhaven National Laboratories
Associated Universities, Inc.
Upton, L.I., NY 11973

Dr. J. Feinstein
Dept. of Electrical Engineering
Stanford University
Stanford, CA 94305

Dr. Frank S. Felber
JAYCOR
11011 Torreyana Road
San Diego, CA 92121

Dr. D. Feldman
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. Renee B. Feldman
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. L. A. Ferrari
Queens College
Department of Physics
Flushing, NY 11367

Dr. C. Finfgeld
ER-542, GTN
Department of Energy
Washington, DC 20545

Dr. A. S. Fisher
Dept. of Electrical Engineering
Stanford University
Stanford, CA 94305

Dr. R. G. Fleig
Hughes Research Laboratory
3011 Malibu Canyon Road
Malibu, CA 90265

Dr. H. Fleischmann
Cornell University
Ithaca, NY 14850

Dr. E. Fontana
Dept. of Electrical Engineering
Stanford University
Stanford, CA 94305

Dr. Norwal Fortson
University of Washington
Department of Physics
Seattle, WA 98195

Dr. Roger A. Freedman
Quantum Institute
University of California
Santa Barbara, CA 93106

Dr. Lazar Friedland
Dept. of Eng. & Appl. Science
Yale University
New Haven, CT 06520

Dr. Walter Friez
Air Force Avionics Laboratory
AFWAL/AADM-1
Wright/Paterson AFB, OH 45433

Dr. Shing F. Fung
Code 696
GSFC
NASA
Greenbelt, MD 20771

Dr. R. Gajewski
Div. of Advanced Energy Projects
U. S. Dept of Energy
Washington, DC 20545

Dr. H. E. Gallagher
Hughes Research Laboratory
3011 Malibu Canyon Road
Malibu, CA 90265

Dr. James J. Gallagher
Georgia Tech. EES-EOD
Baker Building
Atlanta, GA 30332

Dr. W. J. Gallagher
Boeing Aerospace Co.
P. O. Box 3999
Seattle, WA 98124

Dr. J. Gallardo
Quantum Institute
University of California
Santa Barbara, CA 93106

Dr. E. P. Garate
15482 Pasedena Avenue, #120
Tustin, CA 92680

Dr. A. Garren
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. Richard L. Garwin
IBM, T. J. Watson Research Ctr.
P.O. Box 218
Yorktown Heights, NY 10598

Dr. J. Gea-Banacloche
Dept. of Physics & Astronomy
Univ. of New Mexico
800 Yale Blvd. NE
Albuquerque, NM 87131

DR. R. I. Gellert
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. T. V. George
ER-531, GTN
Department of Energy
Washington, DC 20545

Dr. Edward T. Gerry, President
W. J. Schafer Associates, Inc.
1901 N. Fort Myer Drive
Arlington, VA 22209

Dr. Roy Glauber
Physics Department
Harvard University
Cambridge, MA 02138

Dr. B. B. Godfrey
Mission Research Corporation
1720 Randolph Road, S. E.
Albuquerque, NM 87106

Dr. John C. Goldstein, X-1
Los Alamos Natl. Scientific Lab.
P.O. Box 1663
Los Alamos, NM 87545

Dr. Yee Fu Goul
Plasma Physics Lab., Rm 102
S.W. Mudd
Columbia University
New York, NY 10027

Dr. C. Grabbe
Department of Physics
University of Iowa
Iowa City, Iowa 52242

Dr. V. L. Granatstein
Dept. of Electrical Engineering
University of Maryland
College Park, MD 20742

Dr. D. D. Gregoire
Quantum Institute and Dept. of Physics
University of California
Santa Barbara, CA 93106

Dr. Y. Greenzweig
Quantum Inst. and Dept. of Physics
University of California
Santa Barbara, CA 93106

Dr. Morgan K. Grover
R&D Associates
P. O. Box 9695
4640 Admiralty Highway
Marina Del Rey, CA 90291

Dr. A. H. Guenter
Air Force Weapons Laboratory
Kirtland AFB, NM 87117

Lt Col Richard Gullickson
Strategic Def. Initiative Org.
OSD/SDIO/DEO
Washington, DC 20301-7100

Dr. K. Das Gupta
Physics Department
Texas Tech University
Lubbock, TX 79409

Dr. Benjamin Haberman
Associate Director, OSTP
Room 476, Old Exe. Office Bldg.
Washington, D.C. 20506

Dr. R. F. Hagland, Jr.
Director, Vanderbilt University
Nashville, TN 37235

Dr. K. Halbach
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. P. Hammerling
La Jolla Institute
P.O. Box 1434
La Jolla, CA 92038

Dr. John Hammond
Director, Directed Energy Office
SDIO
The Pentagon, T-DE Rm. 1E180
Washington, DC 20301-7100

Dr. R. Harvey
Hughes Research Laboratory
3011 Malibu Canyon Road
Malibu, CA 90265

Prof. Herman A Haus
Mass. Institute of Technology
Rm. 36-351
Cambridge, MA 02139

Dr. S. Hawkins
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. Carl Hess
MS B-118
VARIAN
611 Hanson Way
Palo Alto, CA 94303

Dr. K. Hizanidis
Physics Dept.
University of Maryland
College Park, MD 20742

Dr. A. H. Ho
Dept. of Electrical Engineering
Stanford University
Stanford, CA 94305

Dr. Darwin Ho
L-477
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. J. Hoffman
Sandia National Laboratories
ORG. 1231, P.O. Box 5800
Albuquerque, NM 87185

Dr. R. Hofland
Aerospace Corp.
P. O. Box 92957
Los Angeles, CA 90009

Dr. Fred Hopf
Optical Sciences Building, Room 602
University of Arizona
Tucson, AZ 85721

Dr. Heinrich Hora
Iowa Laser Facility
University of Iowa
Iowa City, Iowa

Dr. H. Hsuan
Princeton Plasma Physics Lab.
James Forrestal Campus
P.O. Box 451
Princeton, NJ 08544

Dr. James Hu
Quantum Inst. and Phys. Dept.
University of California
Santa Barbara, CA 93106

Dr. Benjamin Hubberman
Associate Director, OSTP
Rm. 476, Old Executive Office Bldg.
Washington, DC 20506

Dr. J. Hyman
Hughes Research Laboratory
3011 Malibu Canyon Road
Malibu, CA 90265

Dr. H. Ishizuka
University of California
Department of Physics
Irvine, CA 92717

Prof. V. Jaccarino
Univ. of Calif. at Santa Barbara
Santa Barbara, CA 93106

Dr. A. Jackson
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. S. F. Jacobs
Optical Sciences Center
University of Arizona
Tucson, AZ 85721

Dr. Pravin C. Jain
Asst. for Communications Tech.
Defense Communications Agency
Washington, DC 20305

Dr. E. T. Jaynes
Physics Department
Washington University
St. Louis, MO 63130

Dr. B. Carol Johnson
Ctr. for Radiation Research
National Bureau of Standards
Gaithersburg, MD 20899

Dr. Bernadette Johnson
Lincoln Laboratory
Lexington, MA 02173

Dr. G. L. Johnston
NW 16-232
Mass. Institute of Tech.
Cambridge, MA 02139

Dr. Shayne Johnston
Physics Department
Jackson State University
Jackson, MS 39217

Dr. R. A. Jong
Lawrence Livermore National Laboratory
P. O. Box 808/L626
Livermore, CA 94550

Dr. Howard Jory (3 copies)
Varian Associates, Bldg. 1
611 Hansen Way
Palo Alto, CA 94303

Dr. C. Joshi
University of California
Los Angeles, CA 90024

Dr. Paul Kennedy
Rockwell International/Rocketdyne Div.
6633 Canoga Avenue, FA-40
Canoga Park, CA 91304

Dr. R. Kennedy
Boeing Aerospace Company
P.O. Box 3999
Seattle, WA 98124

Dr. K. J. Kim, MS-101
Lawrence Berkeley Lab.
Rm. 223, B-80
Berkeley, CA 94720

Dr. I. Kimel
Creol-FEL Research Pavillion
Suite 400
12424 Research Parkway
Orlando, FL 32826

Dr. Brian Kincaid
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. A. Kolb
Maxwell Laboratories, Inc.
8835 Balboa Avenue
San Diego, CA 92123

Dr. Eugene Kopf
Principal Deputy Assistant
Secretary of the Air Force (RD&L)
Room 4E964, The Pentagon
Washington, D.C. 20330

Dr. P. Korn
Maxwell Laboratories, Inc.
8835 Balboa Avenue
San Diego, CA 92123

Dr. S. Krinsky
Nat. Synchrotron Light Source
Brookhaven National Laboratory
Upton, NY 11973

Prof. N. M. Kroll
Department of Physics
B-019, UCSD
La Jolla, CA 92093

Dr. Thomas Kwan
Los Alamos National Scientific
Laboratory, MS608
P. O. Box 1663
Los Alamos, NM 87545

Dr. Jean Labacqz
Stanford University
SLAC
Stanford, CA 94305

Dr. Ross H. Labbe
Rockwell International/Rocketdyne Div.
6633 Canoga Avenue, FA-40
Canoga Park, CA 91304

Dr. Willis Lamb
Optical Sciences Center
University of Arizona
Tucson, AZ 87521

Dr. H. Lancaster
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. D. J. Larson
Department of Physics
University of Virginia
Charlottesville, VA 22901

Dr. J. LaSala
Physics Dept.
U. S. M. A.
West Point, NY 10996

Dr. Bernard Laskowski
M.S. 230-3
NASA-Ames
Moffett Field, CA 94305

Dr. Michael Lavan
U.S. Army Strategic Def. Command
ATTN: Code CSSD-H-D
P. O. Box 1500
Huntsville, AL 35807-3801

Dr. Ray Leadabrand
SRI International
333 Ravenswood Avenue
Menlo Park, CA 94025

Dr. Kotik K. Lee
Perkin-Elmer
Optical Group
100 Wooster Heights Road
Danbury, CT 06810

Dr. K. Lee
Los Alamos Nat. Scientific Lab.
Attn: X-1 MS-E531
P. O. Box 1663
Los Alamos, NM 87545

Dr. Barry Leven
NISC/Code 20
4301 Suitland Road
Washington, D.C. 20390

Dr. B. Levush
Dept. of Physics & Astronomy
University of Maryland
College Park, MD 20742

Dr. Lewis Licht
Department of Physics
Box 4348
U. of Illinois at Chicago Cir.
Chicago, IL 60680

Dr. M. A. Lieberman
Dept. EECS
Univ. of Cal. at Berkeley
Berkeley, CA 94720

Dr. Anthony T. Lin
Dept. of Physics
University of California
Los Angeles, CA 90024

Dr. Chuan S. Liu
Dept. of Physics & Astronomy
University of Maryland
College Park, MD 20742

Dr. D. D. Loventhal
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. A. Luccio
Brookhaven National Laboratory
Accelerator Dept.
Upton, NY 11973

Dr. A. Lumpkin
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. Phil Mace
W. J. Shafer Assoc., Inc.
1901 N. Fort Myer Drive
Arlington, VA 22209

Prof. J.M.J. Madey
117 Physics Bldg.
Duke University
Durham, NC 27706

Dr. R. Mako
205 South Whiting Street
Alexandria, VA 22304

Dr. Joseph Mangano
Science Research Laboratory
1600 Wilson Blvd.
Suite 1200
Arlington, VA 22209

Dr. Siva A. Mani
Science Applications Intl. Corp.
1040 Waltham Street
Lexington, MA 02173-8027

Dr. J. Mark
Lawrence Livermore National Lab.
Attn: L-477
P. O. Box 808
Livermore, CA 94550

Dr. T. C. Marshall
Applied Physics Department
Columbia University
New York, NY 10027

Dr. Xavier K. Maruyama
Dept. of Physics
Naval Postgraduate School
Monterey, CA 93943

Dr. Neville Marzwell
Jet Propulsion Lab.
MS 198-330
4800 Oak Grove Drive
Pasadena, CA 91109

Dr. A. Maschke
TRW
Mail Stop 01-1010
1 Space Park
Redondo Beach CA 90278

r. K. Matsuda
GA Technologies Inc.
P.O. Box 85608
San Diego, CA 92138

Dr. John McAdoo
8560 Cinderbed Road, Suite 700
Newington, VA 22122

Dr. D. B. McDermott
Electrical Engineering Dept.
University of California
Los Angeles, CA 90024

Dr. J. K. McIver
Dept. of Physics & Astronomy
Univ. of New Mexico
800 Yale Blvd. NE
Albuquerque, NM 87131

Dr. C. McKinstrie
Department of Mechanical Engineering
University of Rochester
Rochester, NY 14627

Dr. B. McVey
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. David Merritt
Space & Naval Warfare Command
Attn: PMW 145A
Washington, DC 20363-5100

Dr. John Meson
DARPA
1400 Wilson Boulevard
Arlington, VA 22209

Col Thomas Meyer
SDIO/DEO
The Pentagon, Rm. 1E180
Washington, DC 20301-7100

Dr. F. E. Mills
Fermilab
P.O., Box 500
Batavia, IL 60510

Dr. D. R. Mize
Hughes Research Laboratory
3011 Malibu Canyon Road
Malibu, CA 90265

Dr. Mel Month
Brookhaven National Laboratories
Associated Universities, Inc.
Upton, L.I., NY 11973

Dr. B. N. Moore
Austin Research Assoc.
1901 Rutland Dr.
Austin, TX 78758

Dr. Gerald T. Moore
University of New Mexico
Albuquerque, NM 87131

Dr. Warren Mori
1-130 Knudsen Hall
U.C.L.A.
Los Angeles, CA 90024

Dr. Philip Morton
Stanford Linear Accelerator Center
P.O. Box 4349
Stanford, CA 94305

Dr. Jesper Munch
TRW
One Space Park
Redondo Beach, CA 90278

Dr. James S. Murphy
National Synchrotron Light Source
Brookhaven National Laboratory
Upton, NY 11975

Prof. J. Nation
224 Phillips Hall
School of Elec. Eng.
Cornell University
Ithaca, NY 14850

Dr. R. Neighbours
Physics Department
Naval Postgraduate School
Monterey, CA 93943

Dr. George Neil
TRW
One Space Park
Redondo Beach, CA 90278

Dr. Kelvin Neil
Lawrence Livermore National Lab.
Code L-321, P.O. Box 808
Livermore, CA 94550

Dr. W. M. Nevins
L-639
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. Brian Newnam
MSJ 564
Los Alamos National Scientific Lab.
P.O. Box 1663
Los Alamos, NM 87545

Dr. W. Nexsen
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. Milton L. Noble (2 copies)
General Electric Company
G. E. Electric Park
Syracuse, NY 13201

Dr. K. O'Brien
Div. 1241 SNLA
Albuquerque, NM 87185

Dr. John D. O'Keefe
TRW
One Space Park
Redondo Beach, CA 90278

Dr. T. Orzechowski
L-436
Lawrence Livermore National Lab.
P. O. Box 808
Livermore, CA 94550

Prof. E. Ott (2 copies)
Department of Physics
University of Maryland
College Park, MD 20742

OUSDRE (R&AT)
Room 3D1067, The Pentagon
Washington, D.C. 20301

Dr. A. J. Palmer
Hughes Research Laboratory
3011 Malibu Canyon Road
Malibu, CA 90265

Dr. Robert B. Palmer
Brookhaven National Laboratories
Associated Universities, Inc.
Upton, L.I., NY 11973

Dr. J. Palmer
Hughes Research Laboratory
Malibu, CA 90265

Dr. Richard H. Pantell
Stanford University
Stanford, CA 94305

Dr. Dennis Papadopoulos
Astronomy Department
University of Maryland
College Park, Md. 20742

Dr. P. Parks
GA Technologies
P.O. Box 85608
San Diego, Ca 92138

Dr. John A. Pasour
Mission Research Laboratory
8560 Cinderbed Road
Suite 700
Newington, VA 22122

Dr. C. K. N. Patel
Bell Laboratories
Murray Hill, NJ 07974

Dr. Richard M. Patrick
AVCO Everett Research Lab., Inc.
2385 Revere Beach Parkway
Everett, MA 02149

Dr. Claudio Pellegrini
Brookhaven National Laboratory
Associated Universities, Inc.
Upton, L.I., NY 11973

Dr. S. Penner
Center for Radiation Research
National Bureau of Standards
Gaithersburg, MD 20899

Dr. J. M. Peterson
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. M. Piestrup
Adelphi Technology
13800 Skyline Blvd. No. 2
Woodside, CA 94062

Dr. Alan Pike
DARPA
1400 Wilson Boulevard
Arlington, VA 22209

Dr. Hersch Pilloff
Code 421
Office of Naval Research
Arlington, VA 22217

Dr. A. L. Pindroh
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. D. J. Pistoiresi
Boeing Aerospace Company
P. O. Box 3999
Seattle, WA 98124-2499

Major E. W. Pogue
SDIO
The Pentagon, T-DE Rm. 1E180
Washington, DC 20301-7100

Dr. Peter Politzer
General Atomic Tech., Rm. 13/260
P. O. Box 85608
San Diego, CA 92138

Major Donald Ponikvar
U. S. Army SDC
P. O. Box 15280
Arlington, VA 22245-0280

Dr. S. E. Poor
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Prof. M. Porkolab
NW 36-213
Mass. Institute of Technology
Cambridge, MA 02139

Dr. R. V. Pound
Physics Department
Harvard University
Cambridge, MA 02138

Mr. J. E. Powell
Sandia National Laboratories
ORG. 1231, P.O. Box 5800
Albuquerque, NM 87185

Dr. Anand Prakash
Ballistic Research Laboratory
Aberdeen Proving Ground, MD 21005

Dr. Mark A. Prelas
Nuclear Engineering
Univ. of Missouri-Columbia
1033 Engineering
Columbia, Missouri 65211

Dr. Donald Prosnitz
Lawrence Livermore National Lab.
Box 5511 L-626
Livermore, CA 94550

Dr. D. C. Quimby
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. Paul Rabinowitz
Xerox Research and Eng. Comp.
P. O. Box 45
Linden, NJ 07036

Dr. G. Ramian
Quantum Institute
University of California
Santa Barbara, CA 93106

Dr. L. L. Reginato
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. M. B. Reid
Dept. of Electrical Engineering
Stanford University
Stanford, CA 94305

Dr. D. A. Reilly
AVCO Everett Research Lab.
Everett, MA 02149

Dr. M. Reiser
University of Maryland
Department of Physics
College Park, MD 20742

Dr. S. Ride
Arms Control
Stanford University
Stanford, CA 94305

Dr. C. W. Roberson
Office of Naval Research
Code 112S
800 N. Quincy Street
Arlington, VA 22217

Dr. B. Robinson
Boeing Aerospace Company
P.O. Box 3999
Seattle, WA 98124

Dr. K. Robinson
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. D. Rogers
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. Jake Romero
Boeing Aerospace Company
P. O. Box 3999
Seattle, WA 98124-2499

Dr. T. Romesser
TRW, Inc.
One Space Park
Redondo Beach, Ca 90278

Dr. Marshall N. Rosenbluth
Dept. of Physics
B-019
Univ. of Calif., San Diego
LaJolla, CA 92093

Dr. J. B. Rosenzweig
The Inst. for Accelerator Physics
Department of Physics
University of Wisconsin-Madison
Madison, WI 53706

Dr. J. Ross
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. N. Rostoker
Department of Physics
University of California at Irvine
Irvine, CA 92717

Dr. Antonio Sanchez
Lincoln Laboratory
Mass. Institute of Tech.
Room B213
P. O. Box 73
Lexington, MA 02173

Dr. Aldric Saucier
BMD-PO
Ballistic Missile Defense
Program Office
P. O. Box 15280
Arlington, VA 22215

Dr. A. Saxman
Los Alamos National Scientific Lab.
P. O. Box 1663, MSE523
Los Alamos, NM 87545

Dr. J. Scharer
ECE Dept.
Univ. of Wisconsin
Madison, WI 53706

Dr. E. T. Scharlemann
L626
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Prof. S. P. Schlesinger
Dept. of Electrical Engineering
Columbia University
New York, NY 10027

Dr. Howard Schlossberg
AFOSR
Bolling AFB
Washington, D.C. 20332

Dr. George Schmidt
Stevens Institute of Technology
Physics Department
Hoboken, NJ 07030

Dr. M. J. Schmitt
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. Stanley Schneider
Rotodyne Corporation
26628 Fond Du Lac Road
Palos Verdes Peninsula, CA 90274

Dr. M. L. Scott
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. Richard L. Schriever (DP-23)
Director, Office of Inertial Fusion
U. S. Department of Energy
Washington, D.C. 20545

Dr. R. W. Schumacher
Hughes Research Laboratories
3011 Malibu Canyon Road
Malibu, CA 90265

Dr. H. Schwettmann
Phys. Dept. & High Energy
Physics Laboratory
Stanford University
Stanford, CA 94305

Dr. Marlan O. Scully
Dept. of Physics & Astronomy
Univ. of New Mexico
800 Yale Blvd. NE
Albuquerque, NM 87131

Dr. S. B. Segall
KMS Fusion
3941 Research Park Dr.
P.O. Box 1567
Ann Arbor, MI 48106

Dr. Robert Sepucha
DARPA
1400 Wilson Boulevard
Arlington, VA 22209

Prof. P. Serafim
Northeastern University
Boston, MA 02115

Dr. A. M. Sessler
Lawrence Berkeley Laboratory
University of California
1 Cyclotron Road
Berkeley, CA 94720

Dr. W. Sharp
L-626
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. Earl D. Shaw
Bell Laboratories
600 Mountain Avenue
Murray Hill, NJ 07974

Dr. J. P. Sheerim
KMS Fusion
P.O. Box 1567
Ann Arbor, MI 48106

Dr. R. Shefer
Science Research Laboratory
15 Ward Street
Somerville, MA 02143

Dr. R. L. Sheffield
Los Alamos National Laboratory
P.O. Box 1663
Los Alamos, NM 87545

Dr. Shemwall
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. Shen Shey
DARPA/DEO
1400 Wilson Boulevard
Arlington, VA 22209

Dr. D. Shoffstall
Boeing Aerospace Company
P.O. Box 3999
Seattle, WA 98124

Dr. I. Shokair
SNLA, Org. 1271
Albuquerque, NM 87185

Dr. J. S. Silverstein
Harry Diamond Laboratories
2800 Powder Mill Road.
Adelphi, MD 20783

Dr. Jack Slater
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. Kenneth Smith
Physical Dynamics, Inc.
P.O. Box 556
La Jolla, CA 92038

Dr. Lloyd Smith
Lawrence Berkeley Laboratory
University of California
1 Cyclotron Road
Berkeley, CA 94720

Dr. Stephen J. Smith
JILA
Boulder, CO 80302

Dr. Todd Smith
Hansen Labs
Stanford University
Stanford, CA 94305

Dr. J. Z. Sqn (22300)
Harry Diamond Laboratories
2800 Powder Mill Road
Adelphi, MD 20783

Dr. G. Spalek
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Mrs. Alma Spring
DARPA/Administration
1400 Wilson Boulevard
Arlington, VA 22209

SRI/MP Reports Area G037 (2 copies)
ATTN: D. Leitner
333 Ravenswood Avenue
Menlo Park, CA 94025

Dr. W. Stein
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. L. Steinhauer
STI
2755 Northup Way
Bellevue, WA 98004

Dr. Efrem J. Sternbach
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. W. C. Stwalley
Iowa Laser Facility
University of Iowa
Iowa City, Iowa 52242

Dr. R. Sudan
Lab. of Plasma Studies
Cornell University
Ithaca, NY 14850

Dr. P. W. Sumner
Hughes Research Laboratory
3011 Malibu Canyon Road
Malibu, CA 90265

Dr. David F. Sutter
ER 224, GTN
Department of Energy
Washington, D.C. 20545

Dr. Abraham Szoke
ML/L-470
Lawrence Livermore Natl. Lab.
P.O. Box 808
Livermore, CA 94550

Dr. T. Tajima
Institute for Fusion Studies
University of Texas at Austin
Austin, TX 78712

Dr. H. Takeda
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. J. J. Tancredi
Hughes Aircraft Co.
Electron Dynamics Division
3100 West Lomita Blvd.
Torrance, CA 90509

Dr. Milan Tekula
AVCO Everett Research Lab.
2385 Revere Beach Parkway
Everett, MA 02149

Dr. R. Temkin (2 copies)
Mass. Institute of Technology
Plasma Fusion Center
Cambridge, MA 02139

Dr. L. Thode
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. Keith Thomassen, L-637
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. Harold Thompson
TRW, Inc.
R1/2120
One Space Park
Redondo Beach, Ca 90278

Dr. Norman H. Tolk
Physics Department
Vanderbilt University
Nashville, TN 37240

Dr. Kang Tsang
Science Applications Intl. Corp.
10260 Campus Point Drive
San Diego, CA 92121

Dr. E. Tyson
Boeing Aerospace Company
P.O. Box 3999
Seattle, WA 98124

Dr. H. S. Uhm
Naval Surface Warfare Center
White Oak Lab.
Silver Spring, MD 20903-5000

Dr. L. Ulstrup
TRW, Inc.
One Space Park
Redondo Beach, Ca 90278

Under Secretary of Defense (R&D)
Office of the Secretary of Defense
Room 3E1006, The Pentagon
Washington, D.C. 20301

Dr. L. Vahala
Physics Dept.
College of William & Mary
Williamsburg, VA 23185

Dr. A. Valla
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. A. Vetter
Boeing Aerospace Company
P.O. Box 3999
Seattle, WA 98124

Dr. A. A. Vetter
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. G. Vignola
Brookhaven National Laboratories
Associated Universities, Inc.
Upton, L.I., NY 11973

Dr. S. A. Von Laven
KMS Fusion Inc.
Ann Arbor, MI 48106

Dr. John E. Walsh
Wilder Laboratory
Department of Physics (HB 6127)
Dartmouth College
Hanover NH 03755

Dr. Jiunn-Ming Wang
Brookhaven National Laboratories
Associated Universities, Inc.
Upton, L.I., NY 11973

Dr. T-S. Wang
Los Alamos National Laboratory
P. C. Box 1663
Los Alamos, NM 87545

Dr. J. F. Ward
Physics Department
1049 Randall
University of Michigan
Ann Arbor, MI 48109

Dr. Roger W. Warren
Los Alamos National Scientific Lab.
P.O. Box 1663
Los Alamos, NM 87545

Dr. J. Watson
Los Alamos National Laboratory
P. O. Box 1663
Los Alamos, NM 87545

Dr. B. Weber
Harry Diamond Laboratories
2800 Powder Mill Road
Adelphi, MD 20783

Dr. J. T. Weir
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Ms. Bettie Wilcox
Lawrence Livermore National Lab.
ATTN: Tech. Info. Dept. L-3
P.O. Box 808
Livermore, CA 94550

Dr. Mark Wilson
National Bureau of Standards
Bldg. 245, Rm. B-119
Gaithersburg, MD 20899

Dr. H. Winick
Stanford Synch. Rad. Lab.
SLAC Bin 69
P.O. Box 44349
Stanford, CA 94550

Dr. J. Workman
Berkeley Research Associates
P.O. Box 241
Berkeley, CA 94701

Dr. Jack Wong (L-71)
Lawrence Livermore National Lab.
P. O. Box 808
Livermore, CA 94550

Dr. Thomas P. Wright
Sandia National Laboratories
ORG. 1231, P.O. Box 5800
Albuquerque, NM 87185

Dr. J. Wurtele
M.I.T.
NW 16-234
Plasma Fusion Center
Cambridge, MA 02139

Dr. Ming Xie
Dept. of Physics
Stanford University
Stanford, CA 94305

Dr. Edward Yadlowsky
High-Tech Research
P. O. Box 3422
Radford, VA 24143

Dr. Yi-Ton Yan
SSC Central Design Group
c/o LBL 90-4040
University of California
1 Cyclotron Road
Berkeley, CA 94720

Dr. A. Yariv
California Institute of Tech.
Pasadena, CA 91125

Dr. J. Yeh
Allied Corporation
31717 La Tienda Dr.
Westlake Village, CA 91362

Dr. A. Yeremian
Boeing Aerospace Company
P.O. Box 3999
Seattle, WA 98124

Dr. Barbara Yoo
R & D Associates
1401 Wilson Blvd., Suite 500
Arlington, VA 22209

Dr. Li Hua Yu
725B, NSLS
Brookhaven National Laboratory
Upton, NY 11973

Dr. Simon S. Yu
Lawrence Livermore National Laboratory
P. O. Box 808
Livermore, CA 94550

Dr. M. S. Zisman
Lawrence Berkeley Laboratory
University of California, Berkeley
Berkeley, CA 94720

Dr. J. Zumdieck
Spectra Technology
2755 Northup Way
Bellevue, WA 98004

Dr. James E. Leiss
13013 Chestnut Oak Dr.
Gaithersburg, MD 20878

Dr. Anthony K. Hyder
Auburn University
Auburn, AL 36849

Ms. Carol Cella
Boeing Aerospace Co.
P. O. Box 3999
Seattle, WA 98124

Dr. Hermann Grunder
CEBAF
12070 Jefferson Ave.
Newport News, VA 23606

Prof. Herbert Uberall
Catholic University
Physics Dept.
620 Michigan Ave., NW
Washington, DC 20064

Dr. Sheldon Kahalas
Department of Energy
DP-23/GTN
Washington, DC 20545

Mr. Gerald Peters
Department of Energy
ER-224/GTN
Washington, DC 20545

Dr. Walter Polansky
Department of Energy
ER-16/GTN
Washington, DC 20545

Dr. Francis Cole
Fermilab
P. O. Box 500
Batavia, IL 60510

Dr. Steven Dean
Fusion Power Associates
2 Prof. Drive, #248
Gaithersburg, MD 20760

Prof. Murray Black
George Mason University
4400 University Drive
Fairfax, VA 22030

Dr. Andris Faltens
Lawrence Berkeley Lab.
One Cyclotron Road
Berkeley, CA 94720

Dr. Thomas Fessenden
Lawrence Berkeley Lab.
One Cyclotron Road
Berkeley, CA 94720

Dr. Denis Keefe
Lawrence Berkeley Lab.
One Cyclotron Road
Berkeley, CA 94720

Dr. Roger O. Bangerter
Lawrence Livermore Nat. Lab.
P. O. Box 808
Livermore, CA 94550

Dr. Bertram Hui
White Oak Laboratory
Naval Surface Warfare Center
Silver Spring, MD 20903-5000

Dr. Robert Burke
Rocketdyne - FA16
6633 Canoga Park
Canoga Park, CA 91304

Dr. William B. Herrmannsfeldt
Stanford Linear Accel. Center
2575 Sand Hill Road
Stanford, CA 94305

Dr. Perry Wilson
Stanford Linear Accel. Center
2575 Sand Hill Road
Stanford, CA 94305