

AD-A211 783



DTIC FILE COPY

Human Factors and Safety Considerations of Night Vision Systems Flight

(Reprint)

By

Robert W. Verona

Night Vision and Electro-Optics
Fort Belvoir, Virginia

Clarence E. Rash

Sensory Research Division

July 1989

Approved for public release; distribution unlimited.

89 8 28 006

United States Army Aeromedical Research Laboratory
Fort Rucker, Alabama 36362-5292

Notice

Qualified requesters

Qualified requesters may obtain copies from the Defense Technical Information Center (DTIC), Cameron Station, Alexandria, Virginia 22314. Orders will be expedited if placed through the librarian or other person designated to request documents from DTIC.

Change of address

Organizations receiving reports from the U.S. Army Aeromedical Research Laboratory on automatic mailing lists should confirm correct address when corresponding about laboratory reports.

Disposition

Destroy this document when it is no longer needed. Do not return it to the originator.

Disclaimer

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation. Citation of trade names in this report does not constitute an official Department of the Army endorsement or approval of the use of such commercial items.

Reviewed:



BRUCE C. LEIBRECHT, Ph.D.
LTC, MS
Director, Sensory Research
Division

Released for publication:



J. D. LaMOTHE, Ph.D.
COL, MS
Chairman, Scientific
Review Committee



DAVID H. KARNEY
Colonel, MC
Commanding

Unclassified

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

1a. REPORT SECURITY CLASSIFICATION Unclassified			1b. RESTRICTIVE MARKINGS N/A	
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION / AVAILABILITY OF REPORT Approved for public release; distribution unlimited	
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE				
4. PERFORMING ORGANIZATION REPORT NUMBER(S) USAARL Report 89-12			5. MONITORING ORGANIZATION REPORT NUMBER(S)	
6a. NAME OF PERFORMING ORGANIZATION U.S. Army Aeromedical Research Laboratory		6b. OFFICE SYMBOL (if applicable) SGRD-UAS-VS	7a. NAME OF MONITORING ORGANIZATION U.S. Army Medical Research and Development Command	
6c. ADDRESS (City, State, and ZIP Code) Fort Rucker, AL 36362-5292		7b. ADDRESS (City, State, and ZIP Code) Fort Detrick Frederick, MD 21701-5012		
8a. NAME OF FUNDING / SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (if applicable) SGRD-PLC	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
8c. ADDRESS (City, State, and ZIP Code)		10. SOURCE OF FUNDING NUMBERS		
		PROGRAM ELEMENT NO. 62787A	PROJECT NO. 3E162787A8	TASK NO. 9 BG
		WORK UNIT ACCESSION NO. 164		
11. TITLE (Include Security Classification) Human Factors and Safety Considerations of Night Vision Systems Flight				
12. PERSONAL AUTHOR(S) Verona, Robert W. and Rash, Clarence E.				
13a. TYPE OF REPORT		13b. TIME COVERED FROM _____ TO _____	14. DATE OF REPORT (Year, Month, Day) 1989 July	
			15. PAGE COUNT 13	
16. SUPPLEMENTARY NOTATION Published as proceedings of SPIE's 1989 Technical Symposium on Optics, Electro-Optics and Sensors, Orlando, FL, 27-31 March 1989.				
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB-GROUP		
20	06		NVG, ANVIS, image intensification, night vision devices,	
23	02		vision	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Military aviation night vision systems greatly enhance the capability to operate during periods of low illumination. After flying with night vision devices, most aviators are apprehensive about returning to unaided night flight. Current night vision imaging devices allow aviators to fly during ambient light conditions which would be extremely dangerous, if not impossible, with unaided vision. However, the visual input afforded with these devices does not approach that experienced using the unencumbered, unaided eye during periods of daylight illumination. Many visual parameters, e.g., acuity, field-of-view, depth perception, etc., are compromised when night vision devices are used. The inherent characteristics of image intensification based sensors introduce new problems associated with the interpretation of visual information based on different spatial and spectral content from that of unaided vision. In addition, the mounting of these devices onto the helmet is accompanied by concern of fatigue resulting from increased head supported weight and shift in center-of-gravity. All of these concerns have produced numerous human factors and safety				
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT. ☐ DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION Unclassified	
22a. NAME OF RESPONSIBLE INDIVIDUAL Chief, Scientific Information Center			22b. TELEPHONE (Include Area Code) (205) 255-6907	22c. OFFICE SYMBOL SGRD-UAX-SI

19. ABSTRACT (Cont'd)
issues relating to the use of night vision systems. These issues are identified and discussed in terms of their possible effects on user performance and safety.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution /	

Date _____	
A-1	



Human Factors and Safety Considerations
of Night Vision Systems Flight

Robert W. Verona
Clarence E. Rash

Office of the Program Manager
for
Night Vision and Electro-Optics
Fort Belvoir, Virginia 22060-5677

U.S. Army Aeromedical Research Laboratory
Fort Rucker, Alabama 36362-5292

ABSTRACT

Military aviation night vision systems greatly enhance the capability to operate during periods of low illumination. After flying with night vision devices, most aviators are apprehensive about returning to unaided night flight. Current night vision imaging devices allow aviators to fly during ambient light conditions which would be extremely dangerous, if not impossible, with unaided vision. However, the visual input afforded with these devices does not approach that experienced using the unencumbered, unaided eye during periods of daylight illumination. Many visual parameters, *e.g.*, acuity, field-of-view, depth perception, etc., are compromised when night vision devices are used. The inherent characteristics of image intensification based sensors introduce new problems associated with the interpretation of visual information based on different spatial and spectral content from that of unaided vision. In addition, the mounting of these devices onto the helmet is accompanied by concerns of fatigue resulting from increased head supported weight and shift in center-of-gravity. All of these concerns have produced numerous human factors and safety issues relating to the use of night vision systems. These issues are identified and discussed in terms of their possible effects on user performance and safety.

1. INTRODUCTION

In 1971, the Department of the Army adopted night vision devices (NVDs) for use in aviation. The purpose of these devices was to enhance the aviator's capability to operate during periods of low illumination. Since that time, the Army's doctrine of being able to carry out missions in darkness and under adverse weather conditions has resulted in the development and fielding of newer and more advanced night vision systems.

When the helmet is used as a platform for the presentation of flight imagery and symbology, certain characteristics become more important with regard to performance and safety. The visual input provided by these devices does not approach that experienced using the unaided eye during periods of daylight illumination. When compared to unaided daylight flight, many visual parameters, *e.g.*, acuity, field-of-view, depth perception, etc., are understandably compromised when night vision devices are used. In addition, the mounting of these devices on the helmet increases the hazards associated with such physical parameters as weight and center-of-gravity.

2. HELMET MOUNTED NIGHT VISION DEVICES

In the aviation environment night vision imaging devices are mounted totally, or in part, on the aviator's helmet. A simplified block diagram of an NVD is shown in Figure 1. The two basic sections

are the sensor and the display. Currently, the two technologies used for night vision sensors are image intensification and thermal imaging (forward looking infrared-FLIR). Image intensifiers (I^2) amplify, or intensify, reflected or emitted light so the eye can more readily see a poorly illuminated scene and depend on the presence of some minimum amount of light in order to produce a usable image. This is analogous to using a microphone, amplifier and speaker to allow the ear to more easily hear a faint sound. In both cases some of the "natural fidelity" may be lost in the amplification process. The intensified image resembles a black and white television image, only in shades of green (due to the selected display phosphor), instead of shades of gray.

The second type of night imaging sensor uses thermal imaging. This type of sensor does not depend on levels of ambient light but, rather, on temperature differences, based on infrared (IR) radiation generated by the scene. The FLIR sensor can be designed to "see" radiation in either the 3-5 or the 8-12 micron spectral range. All objects radiate measurable amounts of IR energy in this spectral range. An important measure of performance of a FLIR sensor is the minimum temperature difference that the sensor can resolve. This measure is called the minimum resolvable temperature (MRT).

The U.S. Army has fielded two night vision systems for aviation use based on the image intensifier tube. The first is known as the AN/PVS-5 Series Night Vision Goggles (NVG) and is based on second generation image intensifier tubes. The second, which utilizes third generation tubes, is known as the AN/AVS-6 Aviator's Night Vision Imaging System (ANVIS) (Figure 2).

The original version of the AN/PVS-5 NVG was a full face configuration. However, this design possessed several deficiencies for aviation, the major one being that the aviator's peripheral vision was totally occluded. This lack of peripheral vision was a major safety concern to the aviation community. In 1982, a modified faceplate version of the NVG, shown in Figure 3, was developed.¹

The NVG and ANVIS systems are imaging devices that amplify low level ambient light reflected from objects. An amplified image is presented on a phosphor screen.² Both systems use two image intensifier tubes to form a binocular device which is attached to the aviator's helmet.

The second generation NVGs have a typical system gain of 2,000 to 3,000 and a peak display luminance between 0.3 and 0.9 footlamberts. The third generation tubes in the ANVIS operate similarly to the second generation, but they have greater sensitivity and resolution, operate over a slightly different spectral range, and have a peak display luminance of between 0.7 and 2.2 footlamberts. For cockpit lighting compatibility, the interior surfaces of the objective lenses of ANVIS are coated with a dielectric film (a minus-blue filter) that rejects wavelengths less than 625 nanometers. From the user's point of view, the major difference between NVGs and ANVIS is that ANVIS, with third generation tubes, is usable during periods of lower light levels where starlight is the only source of illumination.

In the Army's newest production aircraft, the Apache helicopter (AH-64), the helmet mounted display used, known as the Integrated Helmet and Display Sighting System (IHADSS) (Figure 4), receives its input from the Pilot Night Vision System (PNVS), a thermal imaging sensor operating in the 8-12 micron spectral range. This sensor is mounted on the nose of the aircraft. The display which produces the image of what the sensor "sees" is a miniature (1 inch diameter) CRT mounted on the aviator's helmet. Imagery produced on the CRT is relayed optically through a series of lens elements and reflected off a beamsplitter into the aviator's eye. The CRT and relay optics, referred to as the Helmet Display Unit (HDU), are mounted on the right side of the aviator's helmet, providing imagery in a monocular format. The IHADSS display is designed to provide a one-to-one presentation of the 30 degrees vertical by 40 degrees horizontal field-of-view provided by the sensor.

The following discussions address the major characteristics of one of these night imaging technologies, image intensification. Helmet mounted systems based on image intensification technology are light amplification devices. A minimum amount of ambient light must be available for acceptable performance. The NVGs and the ANVIS are two I^2 systems currently used in aviation. Paramount in the discussions is the possible influence of these characteristics on user performance and safety.

3. HEAD SUPPORTED WEIGHT

The placing of the NVDs on the helmet has increased significantly the amount of weight which must be supported by the head. The head supported weights of the cutaway version of the NVG and ANVIS when worn with the SPH-4 aviator's helmet are 6.8 pounds (3.1 kg) and 5.9 pounds (2.7 kg), respectively. These weights include typical values of counterweights used by aviators to offset center-of-gravity (CG) shifts.

The effects of placing additional weight on the aviator's head generally can be grouped into two areas: fatigue and crash dynamics. Very little research has been done to document the fatigue factor associated with increased head supported weight. One study, conducted in 1968 by the U. S. Army Human Engineering Laboratories found that a total head supported weight in excess of 5.3 pounds (2.4 kg) degraded the performance of complex sighting tasks.³ This degradation manifested itself in slower head motions, most likely the result of muscle strain. Fatigue in the head-neck muscles can slow reaction times associated with movements of these muscle groups. In situations where the primary pilotage imagery input is controlled by head movement, this slowing of reaction time creates a dangerous condition and also may contribute to decreased maneuvering accuracy. However, the quantitative relationship between weight and performance degradation is not documented.

The effect of increased head supported weight in crash dynamics is a direct result of the additional mass. For the 50th-percentile male head, the head and neck weight is 11.7 pounds. In the case of AN/PVS-5 NVG mounted on the SPH-4 helmet with counterweights, an additional 6.8 pounds result in a 58 percent increase in head supported weight and accompanying G-force in a crash. This increased G-loading will further contribute to head and neck muscle fatigue during maneuvers of low to moderate accelerations ($< 5G$). However, of most concern is the additional amount of G-force which will act during crashes. In the absence of external forces and neglecting forces due to the neck muscles, the total internal force exerted on the skull base during acceleration is approximately equal to the product of the total mass of the helmeted head and the head acceleration. Thus, for a given head acceleration, the larger the mass (head supported weight), the larger the force and risk for injury.

It must be pointed out that the current NVDs (and their accompanying counterweights) are designed to break away at specified G-levels. For example, the ANVIS should break away from the aviator's helmet at a head acceleration of 10-15 G. The purpose of this type of design for NVDs is to reduce the total head/neck/HMD mass during the critical period of high accelerations.

4. CENTER-OF-GRAVITY

Both NVG and ANVIS are attached to the front of the helmet. Both of these systems cause a shift in the location of the center-of-gravity of the head/neck/NVD system and result in an asymmetrical loading of the head/neck system. A shifted center-of-gravity affects the same areas as weight: fatigue and crash dynamics. The offset center-of-gravity creates a moment arm by which the weight of the head/neck/NVD system produces a torque on the head/neck muscle group. The effort required to balance this torque contributes to fatigue. According to a study addressing various center-of-gravity positions for aviation helmets, aviators preferred rearward and vertical CG shifts to forward and sideways shifts.⁴ These conclusions are in conflict with a previous study which concluded that less fatigue was found for sideways and forward shifts.⁵ The current ANVIS and NVG have forward shifts. Although there is disagreement between which type of CG offset is best tolerated, any amount of offset most likely will increase fatigue which will further degrade performance during extended missions.

With respect to the dynamics of a crash, if no external forces are present and the effects of the neck muscles are again neglected, the torque at the skull base is approximately equal to the product of the mass of the head/neck/NVD system, the linear acceleration, and the distance from the head/neck center-of-gravity to the head/neck/NVD center-of-gravity. Thus, for a given head combination of head supported weight and acceleration, the greater the CG offset, the greater the torque and risk of injury.

As can be deduced from the above discussions, the effects of head supported weight and a shift in the CG are not independent. An increase in either parameter increases the torque or bending stresses in the neck due to maneuver flight loads and/or crash loads. In the design of future systems, it is imperative that the NVD CG be as close to the head/neck CG as possible to reduce fatigue and risk of injury.

5. VISUAL ACUITY

Visual acuity is a measure of the ability of the eye to resolve spatial detail. Snellen visual acuity commonly is used and is expressed as a comparison of the distance at which a given set of letters are correctly read to the distance at which the letters would be read by someone with clinically normal eyesight. A value of 20/80 indicates that an individual reads at 20 feet the letters normally read at 80 feet. Normal visual acuity is 20/20. Snellen visual acuity with the AN/PVS-5 NVG is 20/50 under optimal conditions (high contrast and scene luminance). Snellen visual acuity with the AN/AVS-6 ANVIS is 20/40 under optimal conditions. But, these optimal conditions will seldom be encountered by an aviator in the real world.

Visual acuity, as measured through an I^2 NVD, is a subjective measure of the operator's visual performance using these devices. In contrast, resolution is an objective measure of the capability of an I^2 NVD to distinguish a separation between two objects. Night vision device procurement, test, and end-of-life specifications are defined in terms of resolution rather than visual acuity.

Optimal I^2 NVD resolution is obtained under high light level conditions with high contrast targets. The resolving power of the I^2 NVD decreases with light level because the noise in the intensified image increases. The high light level resolution limit was stated earlier as equating to a visual acuity range of 20/40 to 20/50. The low light level resolution is not limited, but continues to decrease with decreasing light levels. Remember, image intensifiers are light amplification devices, requiring a minimum level of illumination to function effectively. Although there may be measurable resolution at very low light levels, the NVGs lose their operational effectiveness at about starlight, as visual acuity approaches 20/100, and ANVIS lose their operational effectiveness at overcast starlight.

In order for the aviator to take full advantage of the I^2 NVD's resolution capability, the eyepiece lenses in front of each eye must be adjusted to suit the wearer's eyes. Each eyepiece lens is independently adjustable over a range from +2 to -6 diopters. This adjustment may eliminate the need for some aviators to wear their spectacles when using I^2 NVDs. Aviators still may require spectacles to correct astigmatism or to see items in the crewstation under the I^2 NVDs.

6. BIOCLULAR VS. BINOCULAR PRESENTATION

The human visual system is binocular in nature. A binocular system receives two visual inputs from two sensors which are slightly displaced in space. This configuration is used in the AN/PVS-5 Series NVGs and AN/AVS-6 ANVIS where two separate image intensifier tubes, one tube for each eye, are the sources of the visual input. A variation in this design is a biocular system where one visual input is presented to both eyes using mirrors or prisms. This configuration is used in the AN/PVS-7 Series NVGs where one image intensifier is the source of visual input and the same image is presented to both eyes. The AN/PVS-7 may be used by crewmembers, but is not authorized for use by aviators.

Image intensifiers present "noisy" images to the eyes. This noise appears as scintillations, commonly called sparkles or snow. The noise increases as the ambient light level decreases. The noise is more predominant with second generation image intensifiers than with the more sensitive third generation image intensifiers. These scintillations block detailed information in the image. Since the intensity and location of the noise varies with time, it is unlikely that a scintillation will appear at the same place at the same time in both tubes. The observer therefore benefits from having two independent (uncorrelated) images in a binocular system compared to the duplication of the same (correlated) image in a biocular system. Therefore, there is a theoretical improvement in perceived image quality due to visual noise reduction in the binocular system compared to a biocular system.⁶

Binocular systems also present a brighter image to the viewer than biocular systems since the luminance output of the image intensifier in a biocular system is divided with half presented to each eye. An additional reliability benefit, particularly in aviation, of binocular systems is redundant image intensifiers. Increased cost, weight, and complexity are obvious detractors of binocular systems compared to biocular systems.

Binocular systems might be expected to provide the additional visual capabilities of depth perception and stereopsis such as with the unaided eyes. Depth perception is the ability of a viewer to judge the relative location of objects in space. Stereopsis is the ability of the observer to judge depth based purely on the differences in the two retinal images caused by the separation of the two eyes. However, the ANVIS and NVG binocular feature does not enhance the ability of users to perceive depth.

Depth perception with NVGs approximately is equal to that of the monocular unaided eye.⁷ Size consistency, overlay, interposition, motion parallax, shadows, and convergence of lines are monocular cues used for depth perception. Resolution also plays an important role in depth perception. The viewer can extract better monocular cues from a scene using an I² NVD with better resolution, thus enhancing the viewers's ability to judge relative distances. The ANVIS provides better depth perception cues than NVGs since ANVIS provides better resolution. Accommodation, convergence, and divergence are weak binocular cues used for unaided eye depth perception that are unavailable to night vision device users.

As stated above, stereoscopic vision results from images collected from two slightly different perspectives, such as with the two displaced eyes. Stereoscopic vision is used primarily in eye-hand coordination tasks and is most effective at ranges of less than 50 feet. Experiments with binocular and biocular NVGs (AN/PVS-5 Series vs AN/PVS-7 Series) have demonstrated that the image disparity obtained by the separation of image input in the binocular system does not provide effective stereoscopic vision. There was no statistically significant performance difference between the binocular and biocular systems.⁸ Neither does ANVIS offer effective stereoscopic vision.

The aviator's ability to judge depth using I² NVD is critical particularly during confined area maneuvers such as in parking areas and landing zones, and during hovering, bob-ups, and nap-of-the-earth flight. The depth perception cues available are, at best, equivalent to performing these maneuvers with one eye during the day.

In the human visual system, the eyes work together and change their focus together from about 6 inches to infinity. This variable focusing ability can occur consciously or unconsciously and is quite rapid. The objective focus on a night vision devices is quite different. The objective lenses on each channel are manually focused independently from about 10 inches to infinity (distances greater than 50 feet are equivalent to infinity for I² NVDs). The aviator must view an object greater than 20 feet away when focusing the objective lenses for distant viewing. Misadjusting the objective lenses will greatly reduce the ability of the aviator to view distant objects clearly. The objective lens of one or both channels must be manually adjusted to view objects closer than 20 feet through the I² NVD. The aviator does not need to refocus the I² NVD for viewing inside the crewstation because of the look-under capability of the I² NVDs.

7. FIELD-OF-VIEW AND VISUAL FIELDS

The human eye, as a sensor, has an instantaneous field-of-view (FOV) which is oval in shape and typically measures 120 degrees vertically by 150 degrees horizontally. When two eyes are used, the overall FOV measures approximately 120 degrees vertically by 200 degrees horizontally.⁹ In both NVGs and ANVIS, the FOV of a single image intensifier tube is a circular 40 degrees. The tubes have a 100 percent overlapping, hence the combined field is also a circular 40 degrees. A pictorial representation of the 40 degrees FOV for ANVIS and NVG is provided in Figure 5.

The circular 40 degree FOV seems small when compared to the overall FOV of the eyes, but the reduction is not as significant when compared to the aviator's unobstructed view of the outside world from

the design eye position in most aircraft. Still, the aviator must use continuous head movements in a scanning pattern to help compensate for the limited I² NVD FOV.

The effects of the reduced FOV on performance are not fully understood. The problem of determining a minimum FOV required to fly is not a simple one. First, the minimal FOV required is extremely task dependent. This becomes obvious when one considers the narrow FOV used in high speed transition flight versus that used in clearing the rotor blade during a hovering maneuver.

The 40 degree FOV of the I² NVD is a theoretical value based on the user being able to place his eye into the exit pupil of the I² NVD optics. Variations in head anthropometry and wearing protective mask or corrective lenses may prevent proper eye placement, resulting in a reduced FOV. Improper adjustment of the helmet attachment can also preclude the aviator from achieving a full 40 degree FOV. These small FOV losses are not always obvious to the aviator.

Current I² NVD designs extend the visual field besides that provided through the I² NVD optics. Instruments and other objects within the crewstation can be viewed by virtue of the I² NVD's limited look-under, look-around capabilities. However, the eyes are adapted to the light emitted by the image intensifiers. Supplemental lighting at a level equivalent to the output of the I² NVD is necessary for the aviator to see detailed scenes such as maps and dial legends.

8. SENSOR PARAMETERS

There are several measurable parameters that affect the performance of the image intensifiers in I² NVDs. These include spectral response, signal-to-noise (S/N) ratio, equivalent background input (EBI), sensitivity, and gain. There are also defects in the image intensifier tubes that can degrade their performance. Some of the tube characteristics are fixed at the time of manufacturing and others change during the lifetime of the tube. When the tube is manufactured, it has a certain spectral response based on the chemical composition of its photocathode. Second and third generation tubes have the spectral response shown in Figure 6. Second generation tubes are responsive to wavelengths between 380 and 850 nanometers, which includes all of the visible spectrum. Third generation intensifiers are responsive to wavelengths between 550 to 950 nanometers, which includes only a portion of the visible spectrum, but extends further into the near infrared. Even though objects appear to have the same shape when viewed through the two different generation tubes, they may have entirely different intensities. For example, dirt roads against green grass appear very dark through second generation tubes, but appear bright through third generation tubes. This type of contrast reversal is common when comparing second and third generation images. The contrast, and therefore, the visibility of objects must be related to a specific generation device.

The contrast and resulting image quality also are a function of the signal-to-noise ratio of the intensifier tube. Signal is the information transmitted through the intensifier. Noise is unwanted disruptions to the signal. Some effects of visual noise were discussed earlier in Section 6. The S/N ratio decreases as the image intensifier tube ages. Second generation tubes have lower S/N ratios than third generation tubes. The S/N ratio of second generation tubes continue to decrease throughout their 2,000-4,000 hour useful life. The S/N ratio of third generation tubes tends to remain constant over their 7,500 hour life and then falls off rapidly. End-of-life is defined as the point when the S/N ratio falls below a prescribed value.

Another important factor affecting image quality is equivalent background input (EBI). EBI is a measure of the output luminance of an image intensifier with no input. This parameter is important because if the EBI is too high, the contrast of the intensified image may be too low for the aviator.

The sensitivity of an image intensifier, whether second or third generation, is established when it is manufactured. The sensitivity of second generation intensifiers gradually decreases over time. Third generation intensifiers maintain a relatively constant sensitivity over time. The eventual loss of sensitivity results in a weakened signal, thus a lower S/N ratio, which signifies end-of-life.

The gain of an image intensifier is defined as the ratio of signal (light) in to signal (light) out. Tube gain is controlled primarily by the tube's power supply. Increasing the voltage between elements in the intensifier tube increases its gain. When the tube is new, increasing the gain increases both the signal level and the noise level. At some point in time near end-of-life when the sensitivity of the tube is low, increasing the gain increases the noise more than the signal, thus decreasing the S/N ratio.

Other characteristics affecting image quality are tube defects. Some minor defects are normal and may be present when the tubes and systems are accepted from the manufacturer; others develop during the life of the device. Some black spots, fixed pattern noise, and distortion are permissible in new image intensifiers. The tube specifications define the limits of acceptable defects.

The size, location, and number of black spots are measured and compared with a specification to determine if they are acceptable. Large spots in the central area of the image large enough to block objects from view, such as other aircraft, are unacceptable. Fixed pattern noise may appear as a faint geometrical pattern of the internal fiberoptics. If the presence of the pattern interferes with the aviator's ability to use the I² NVD, the tube is rejected. Finally, excessive distortion of the internal fiberoptic inverter is measured. Unacceptable distortion levels can cause flat surfaces to appear to have depressions or bulges. Tubes exhibiting this level of distortion are obviously unacceptable for flight.

The aviator always has the right to reject any I² NVD for flight because it has unacceptable performance characteristics. There is an established routine inspection schedule for I² NVD to ensure they are performing properly. Presently, the ANVIS are inspected visually and tested every 30 days, and NVGs used for aviation are visually inspected every 90 days (based on the limited availability of test sets).

9. ENVIRONMENTAL CONSIDERATIONS

Environmental conditions can affect greatly the performance of I² NVDs. These conditions include illumination, weather, cloud cover, and obscurants. Some environmental conditions can enhance and others can degrade I² NVD performance. As stated earlier, I² NVDs are amplification devices. A minimum amount of energy is necessary for acceptable performance. Major sources of this energy are the moon, stars, and artificial lighting.

Energy from natural sources such as the moon and stars, and energy from artificial sources such as nearby towns or tactical flares reflect from objects. The composition, surface characteristics, and environmental conditions determine the amount and spectral distribution of the reflected energy that reaches the I² NVD. The I² NVD's objective lens characteristics determine the amount and spectral distribution of the energy which is transmitted to the photocathode (light sensitive portion of the image intensifier tube) of the I² NVD. The chemical composition, age, and voltage of the photocathode determine characteristics of the reflected energy which finally is presented to the viewer.

The moon and stars emit a significant amount of energy that cannot be seen by the human eye, but can be seen by the I² NVDs. The stars are a uniform omnidirectional source of energy. The moon, like the sun, is a point source of energy that casts shadows as it moves across the sky from moonrise to moonset. The percent of moon illumination, rise and set times, and the maximum moon angle above the horizon are data available from the weather service for a specific geographical area.

The direction of flight with respect to the location of the moon, sky glow, and ground lighting is critical to I² NVD performance. Flying toward light sources will reduce the effectiveness of the I² NVD, similar to flying toward the sun during daylight. Flying away from the light sources may enhance the I² NVD image. Shadows cast by terrain features and manmade objects from the external lighting are important considerations for the aviators. Most wires are not detectable through I² NVDs, but often their support poles and towers provide cues to the existence and path of the wires. The configuration of the external lighting with respect to the aircraft's direction of flight can enhance or mask the shadow cues.

Atmospheric conditions also can have a significant effect on I² NVD performance. The energy reflected from objects is scattered by water vapor and particulate matter suspended in the air. Optimal performance is obtained on a dry, clear night. The presence of precipitation (e.g., rain and snow) and obscurants (e.g., fog, dust, and smoke) degrade the performance to varying degrees. In general, atmospheric conditions that degrade unaided visual performance will also degrade the performance of I² NVDs.

Aviators with minimal I² NVD experience often overextend themselves by failing to recognize the gradual degradation in their NVD's performance due to deteriorating atmospheric conditions. One feature of I² NVDs is that they maintain a constant average display luminance over a wide range of input energy. Therefore, it may not be obvious to the aviator that conditions are deteriorating. The experienced I² NVD aviator has learned that deteriorating environmental conditions are indicated by an increase in image noise. High visual noise levels indicate the device is operating at its performance limits.

The presence of cloud cover can increase or decrease the amount and distribution of predicted energy available to I² NVDs. Cloud cover may attenuate the energy from natural sources but enhance the amount of energy available from artificial sources, such as sky glow from towns, shopping centers, and highway lighting.

Modern artificial lights, e.g., high efficiency sodium and mercury vapor lamps, by design, produce a large percentage of their energy in the visual portion of the spectrum. Second generation image intensifiers are sensitive to all of the visual spectrum and can see all of the artificial light, but the third generation image intensifiers see only a part of the visible spectrum, and hence, only a part of the artificial light. Therefore, energy generated by artificial sources may be more beneficial to second generation I² NVDs than to third generation devices.

Current Army policy restricts I² NVD flights to periods of natural illumination which meet or exceed the lunar conditions of 23 percent fractional illumination and 30 degrees altitude above the horizon. These conditions can be waived when the aircraft is equipped with an artificial infrared search or landing light. This policy was implemented when only second generation devices were available. It does not require the aviators to use the infrared light, but they must have it available. The policy has not changed with the fielding of the more sensitive third generation devices.

When selecting the correct lamp wattage and dispersion pattern to be used with an infrared filter in the search or landing light with the I² NVD, it is critical to consider the environment in which the aircraft will be flown. Some lights generate large area footprints of low intensity and others generate small footprints of light with high intensity. In either case, there is a tendency to become channelized by the infrared light, similar to driving at night with headlights. The aviator becomes less aware of the periphery and significantly limits the peripheral visual scans.

10. INTERNAL AND EXTERNAL LIGHT SOURCES

Once the aviator is assured the I² NVD is operating properly and the environmental conditions will permit I² NVD flight operations, the next major concern is the crewstation lighting environment in which the I² NVD will be used. Proper internal crewstation lighting is critical to the overall effectiveness of the I² NVD. Because I² NVDs based on image intensification operate on the principle of light amplification, bright lights emitting energy in that portion of the electromagnetic spectrum in which these devices are sensitive produce severe veiling glare that can obscure the overall image and degrade the performance of the I² NVD.¹⁰ To prevent this, and to protect the image intensifier assembly from permanent phosphor burns, both NVGs and ANVIS are equipped with a bright source protection (BSP) circuit, which operates as an automatic gain control. The BSP circuit decreases the sensitivity of the image intensifier tubes when they are exposed to bright lights emitting energy in the ANVIS/NVG-sensitive portion of the electromagnetic spectrum. The net result is a reduced response to energy originating from external scene, effectively reducing the aviator's capability to view outside the cockpit.

Numerous methods, i.e., low-reflectance black paint, light louvers, filters, low intensity lamps, etc., have been attempted to provide "compatible" cockpits.¹¹ However, only limited success has been achieved using any of these methods. A design solution to this problem is incorporated in the ANVIS. The interior surface of the objective lenses in the ANVIS have been coated with a dielectric film (called a "minus-blue filter") that would reject wavelengths less than 625 nm. This design was planned to make the ANVIS compatible with cockpits having blue-green crewstation lighting. However, programs to convert current aircraft to blue-green lighting have not been fully implemented. Therefore, some aircraft are currently being flown without compatible lighting as specified in MIL-L-85762, "Lighting, aircraft, interior, night vision imaging system compatible."¹²

Flares, rocket motors, strobe lights, lightning, and other bright light sources may affect temporarily the performance of the I² NVD. The interruption may last only a few seconds, but if unexpected, the interruption of the image presentation may be quite disconcerting. A bright flash will cause the image intensifier to saturate, evidenced by a temporary, but complete, loss of detail in the intensified image. Since saturation limits the light passed to the eye, recovering from a flash through an image intensifier is much more rapid than recovering from a flash to the unaided dark adapted eye.

As stated earlier, the output image of the I² NVD is presented to the viewer on a green phosphor screen. All color information from the surrounding environment is converted to shades of green analogous to the imagery in black and white television. This is particularly important when considering color coded information from external light sources, such as aircraft navigation and tower lights. The lights on an approaching and departing aircraft look the same. Color coded taxiway and runway lights appear the same through an I² NVD, too.

Intensity and distance cues easily are confused at night, particularly with I² NVDs. A light source can appear the same to an aviator whether it is small and close, or large and far away. Lights from other aircraft can blend easily into ground lights. Midair collisions have resulted because aircrews were not able to differentiate lighted aircraft in their flight path from background lights.

Anticollision strobe lights improve the conspicuity of aircraft, but not without trade-offs. Often, the high intensity xenon strobe lights interfere with the I² NVD and distract the aviators because their light reflects off the rotor blades and nearby objects in terrain flight. The front 180 degrees of the anticollision light is covered with tape to prevent the unwanted reflections. During formation flight, only the trailing aircraft can use an anticollision light since other aircrafts' strobe lights would be in the view of aviators in the back of the formation. The upper position lights have their lower hemisphere taped and the lower position lights have their upper hemisphere taped to reduce unwanted external light from entering the crewstation. Some newer aircraft use small near infrared lights, visible only with I² NVDs, to covertly mark their position without interfering with the I² NVD.

Light from internal and external sources scatter off of dirt, grease, moisture, and abrasions on the windscreen and reduce the contrast of the intensified scene. Clean, dry, and unabraded windscreens are essential to optimum I² I² NVD performance. Using the night driving analogy is again appropriate. Oncoming headlights through a dirty, wet, pitted windshield cause the same visual degradation. Information concerning the optical condition of the windscreen and other transparencies prior to an accident would be beneficial in determining if the condition of the transparencies was a factor in the accident.

11. FAILURE MODES

The binocular design (two independent channels) of the I² NVDs used for aviation provide an inherent redundancy for the optics and image intensifiers. However, an aviator is more likely to experience a battery failure than a image intensifier or optical element failure. Battery redundancy is provided by a dual battery pack with a selector switch for the primary or spare battery. Battery failure initially will cause both intensifiers to exhibit luminance variations, followed by a complete failure of both

intensifiers. The aviator can recover from this failure simply by moving the selector switch to the spare battery position. A luminous low battery indicator on the ANVIS mount signals eminent battery failure.

A gradual single image intensifier failure is more likely to occur than a catastrophic failure of one or both intensifiers. The battery and intensifier redundancy features significantly enhance the I² NVD reliability by duplicating system components that have a greater chance of failure over time than other components. Other I² NVD components may have a higher probability of failure in the shipping, maintenance or assembly, but not during flight operations.

12. SUMMARY

Night vision devices based on I² technology allow aviators to fly during ambient light conditions which would be extremely dangerous, if not impossible, with unaided vision. While these devices do not change night into day, they do significantly enhance night operations compared to the unaided eye. With night vision devices, compromises must be accepted in many visual parameters, e.g., acuity, field-of-view, depth perception, etc., and the effects of these compromises on performance must be understood.

13. ACKNOWLEDGMENTS

The authors wish to thank SSG John S. Martin for his technical assistance and Dr. Roger W. Wiley for his guidance and assistance in the preparation of this paper.

Disclaimer: The views, opinions, and/or findings contained in this paper are those of the authors and should not be construed as an official Department of the Army position unless so designated by other official documentation.

14. REFERENCES

1. McLean, W. E., "Modified faceplate for the AN/PVS-5 Night Vision Goggles," USAARL Report 83-1, Fort Rucker, AL (1982).
2. Verona, R. W., "Image intensifiers: Past and present," AGARD-CP-379, Advisory Group for Aerospace Research and Development, Neuilly-sur-Seine, France (1985).
3. U.S. Army Human Engineering Laboratories, "Aircraft crewman helmet weight study: Progress report No. 1," U.S. Army Human Engineering Laboratories, Aberdeen Proving Ground, MD (1968).
4. Butler, B. P., Maday, R. E., and Blanchard, D. M., "Effects of helmet weight and center-of-gravity parameters in a vibration environment," USAARL LR-87-12-4-5, Fort Rucker, AL (1987).
5. Phillips, C. A. and Petrofsky, J. S., "Influence of U.S. Army headgear parameters on neck muscle loading and fatigue," Annual Report, Wright State University, Dayton, OH (1982).
6. Davon, H., The Physiology of the Eye, p. 254, Academic Press, New York (1976).
7. Wiley R.W., Glick D.D., Bucha C.T., and Park C.K., "Depth perception with the AN/PVS-5 Night Vision Goggle," USAARL Report 76-25, Fort Rucker, AL (1976).
8. Wiley, R.W., unpublished data on stereoscopic vision with NVGs, (1988).
9. Zuckerman, J., Perimetry, p. 237, J.B. Lippincott Company, Philadelphia, PA (1954).
10. Keane, J., "Forward looking infrared and Night Vision Goggles, a pilot's perspective related to JvX," Naval Air Development Center, Warminster, PA (1984).
11. Holly, F. F., "A Night Vision Goggle compatible lighting system for Army aircraft," USAARL LR-80-4-2-2, Fort Rucker, AL (1980).
12. Department of Defense, Military specification: Lighting aircraft interior, night vision imaging system compatible, MIL-L-85762, Department of Defense, Washington, DC (1986).

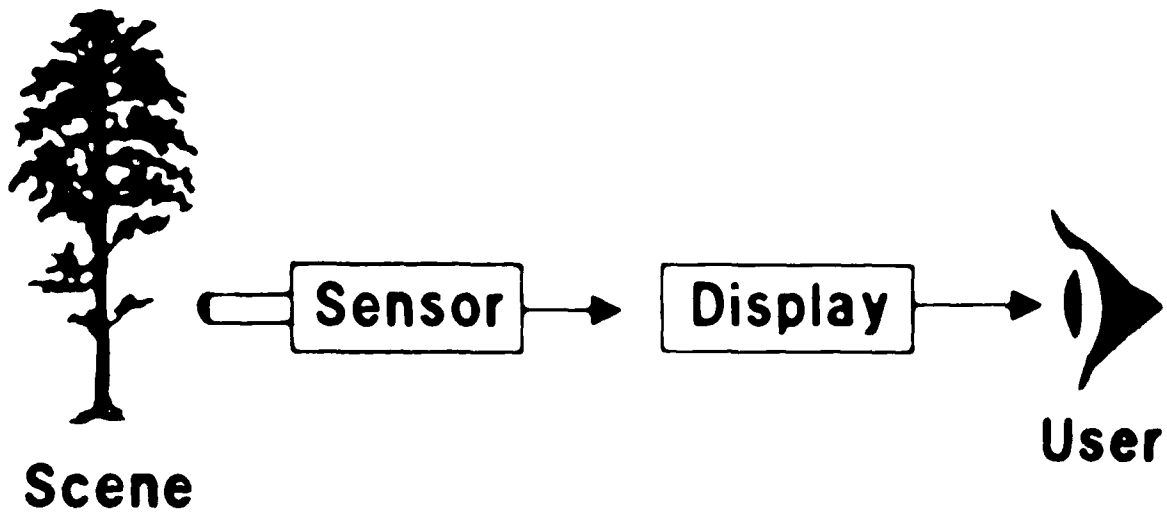


Figure 1. Night vision device (NVD) block diagram.



Figure 2. Aviator's Night Vision Imaging System (ANVIS).

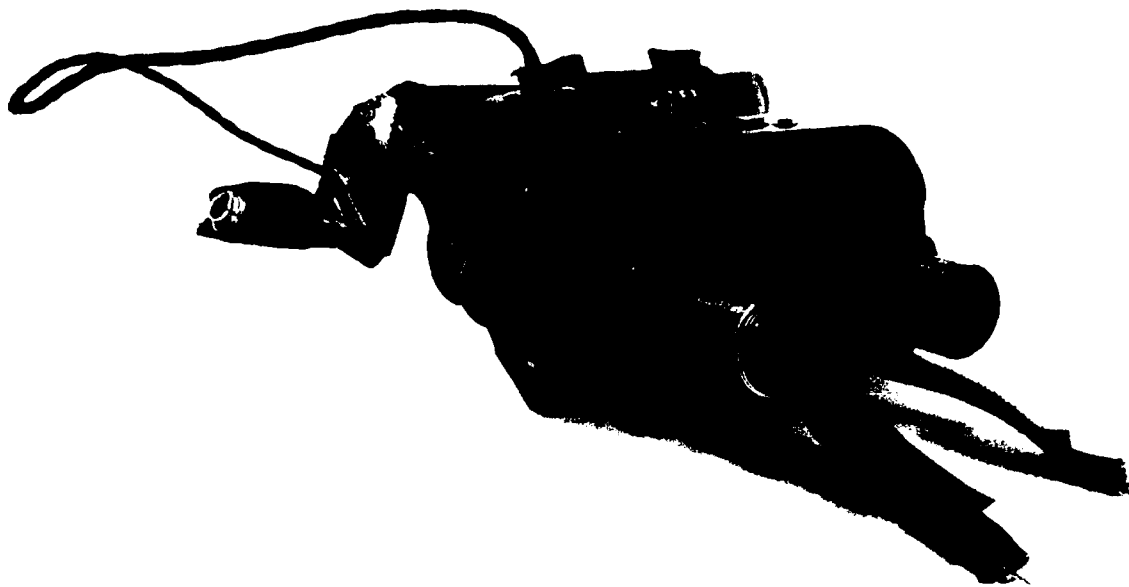


Figure 3. AN/PVS-5 Night Vision Goggles (cut-a-way version).



Figure 4. Integrated Helmet and Display Sighting System (IHADSS).

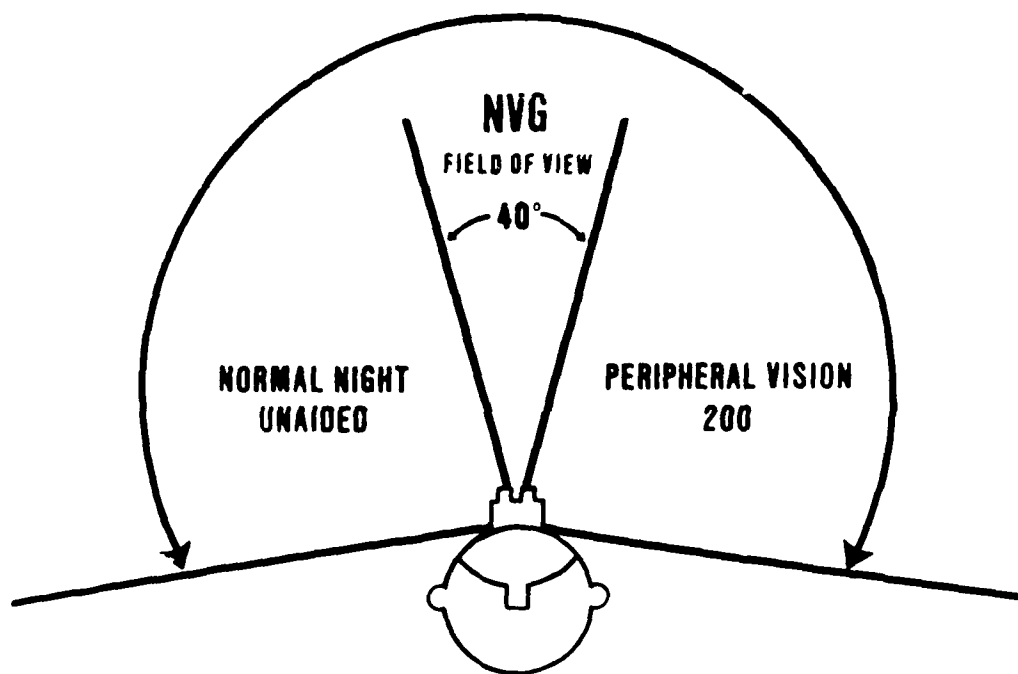


Figure 5. Instantaneous field-of-view for the human visual system and current helmet mounted displays (HMDs).

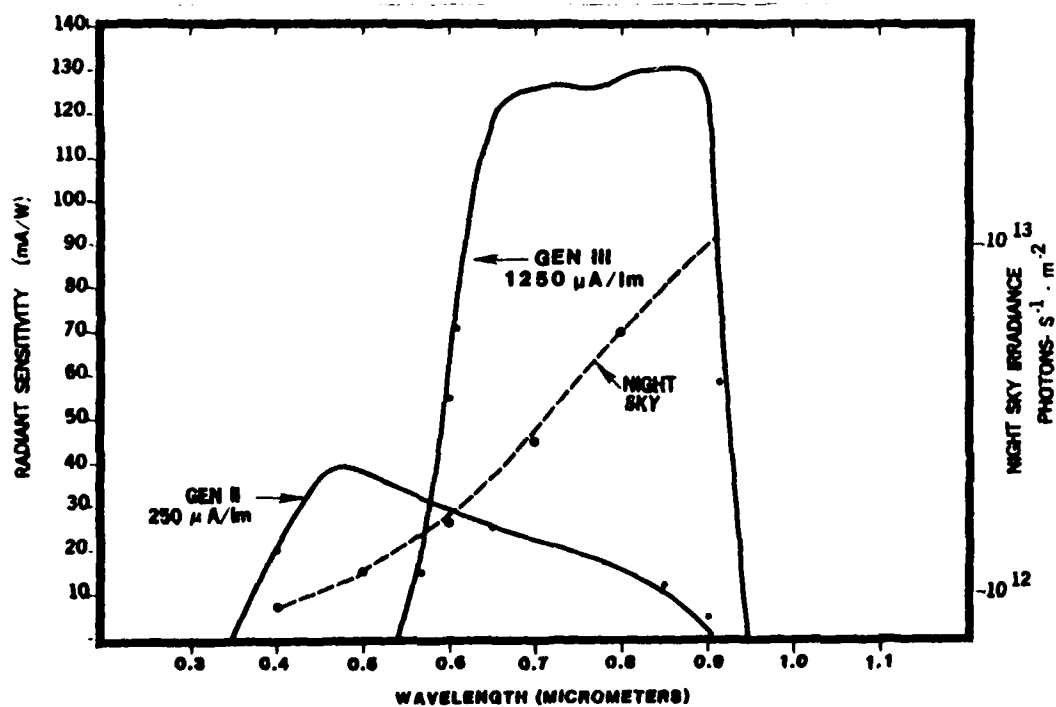


Figure 6. Comparison of sensitivities between second and third generation image intensifier tubes.

Initial distribution

Commander
U.S. Army Natick Research
and Development Center
ATTN: Documents Librarian
Natick, MA 01760

Naval Submarine Medical
Research Laboratory
Medical Library, Naval Sub Base
Box 900
Groton, CT 05340

Commander/Director
U.S. Army Combat Surveillance
& Target Acquisition Lab
ATTN: DELCS-D
Fort Monmouth, NJ 07703-5304

Commander
10th Medical Laboratory
ATTN: Audiologist
APO NEW YORK 09180

Commander
Naval Air Development Center
Biophysics Lab
ATTN: G. Kydd
Code 60B1
Warminster, PA 18974

Naval Air Development Center
Technical Information Division
Technical Support Detachment
Warminster, PA 18974

Commanding Officer
Naval Medical Research
and Development Command
National Naval Medical Center
Bethesda, MD 20014

Under Secretary of Defense
for Research and Engineering
ATTN: Military Assistant
for Medical and Life Sciences
Washington, DC 20301

Commander
U.S. Army Research Institute
of Environmental Medicine
Natick, MA 01760

U.S. Army Avionics Research
and Development Activity
ATTN: SAVAA-P-TP
Fort Monmouth, NJ 07703-5401

U.S. Army Research and Development
Support Activity
Fort Monmouth, NJ 07703

Chief, Benet Weapons Laboratory
LCWSL, USA ARRADCOM
ATTN: DRDAR-LCB-TL
Watervliet Arsenal, NY 12189

Commander
Man-Machine Integration System
Code 602
Naval Air Development Center
Warminster, PA 18974

Commander
Naval Air Development Center
ATTN: Code 6021 (Mr. Brindle)
Warminster, PA 18974

Commanding Officer
Harry G. Armstrong Aerospace
Medical Research Laboratory
Wright-Patterson
Air Force Base, OH 45433

Director
Army Audiology and Speech Center
Walter Reed Army Medical Center
Washington, DC 20307-5001

COL Carl F. Tyner, MC
Walter Reed Army Institute
of Research
Washington, DC 20307-5100

HQ DA (DASG-PSP-0)
5109 Leesburg Pike
Falls Church, VA 22041-3258

Naval Research
Laboratory Library
Code 1433
Washington, DC 20375

Harry Diamond Laboratories
ATTN: Technical Infor-
mation Branch
2800 Powder Mill Road
Adelphi, MD 20783-1197

U.S. Army Materiel Systems
Analysis Agency
ATTN: Reports Processing
Aberdeen Proving Ground
MD 21005-5017

U.S. Army Ordnance Center
and School Library
Building 3071
Aberdeen Proving Ground,
MD 21005-5201

U.S. Army Environmental Hygiene
Agency
Building E2100
Aberdeen Proving Ground,
MD 21010

Technical Library
Chemical Research
and Development Center
Aberdeen Proving Ground,
MD 21010-5423

Commander
U.S. Army Institute
of Dental Research
Walter Reed Army Medical Center
Washington, DC 20307-5300

Naval Air Systems Command
Technical Air Library 950D
Rm 278, Jefferson Plaza II
Department of the Navy
Washington, DC 20361

Naval Research Laboratory Library
Shock and Vibration Infor-
mation Center, Code 5804
Washington, DC 20375

Director
U.S. Army Human Engineer-
ing Laboratory
ATTN: Technical Library
Aberdeen Proving Ground,
MD 21005-5001

Commander
U.S. Army Test
and Evaluation Command
ATTN: AMSTE-AD-H
Aberdeen Proving Ground,
MD 21005-5055

Director
U.S. Army Ballistic
Research Laboratory
ATTN: DRXBR-OD-ST Tech Reports
Aberdeen Proving Ground,
MD 21005-5066

Commander
U.S. Army Medical Research
Institute of Chemical Defense
ATTN: SGRD-UV-AO
Aberdeen Proving Ground,
MD 21010-5425

Commander
U.S. Army Medical Research
and Development Command
ATTN: SGRD-RMS (Ms. Madigan)
Fort Detrick, Frederick,
MD 21701

Commander
U.S. Army Medical Research
Institute of Infectious Diseases
Fort Detrick, Frederick,
MD 21701

Director, Biological
Sciences Division
Office of Naval Research
600 North Quincy Street
Arlington, VA 22217

Commander
U.S. Army Materiel Command
ATTN: AMCDE-XS (MAJ Wolfe)
5001 Eisenhower Avenue
Alexandria, VA 22333

Commandant
U.S. Army Aviation
Logistics School
ATTN: ATSQ-TDN
Fort Eustis, VA 23604

U.S. Army Training
and Doctrine Command
ATTN: ATCD-ZX
Fort Monroe, VA 23651

Structures Laboratory Library
USARTL-AVSCOM
NASA Langley Research Center
Mail Stop 266
Hampton, VA 23665

Naval Aerospace Medical
Institute Library
Bldg 1953, Code 102
Pensacola, FL 32508

Command Surgeon
U.S. Central Command
MacDill Air Force Base
FL 33608

Air University Library
(AUL/LSE)
Maxwell AFB, AL 36112

Commander
U.S. Army Biomedical Research
and Development Laboratory
ATTN: SGRD-UBZ-I
Fort Detrick, Frederick,
MD 21701

Defense Technical
Information Center
Cameron Station
Alexandria, VA 22313

U.S. Army Foreign Science
and Technology Center
ATTN: MTZ
220 7th Street, NE
Charlottesville, VA 22901-5396

Director,
Applied Technology Laboratory
USARTL-AVSCOM
ATTN: Library, Building 401
Fort Eustis, VA 23604

U.S. Army Training
and Doctrine Command
ATTN: Surgeon
Fort Monroe, VA 23651-5000

Aviation Medicine Clinic
TMC #22, SAAF
Fort Bragg, NC 28305

U.S. Air Force Armament
Development and Test Center
Eglin Air Force Base, FL 32542

U.S. Army Missile Command
Redstone Scientific
Information Center
ATTN: Documents Section
Redstone Arsenal, AL 35898-5241

U.S. Army Research and Technology
Laboratories (AVSCOM)
Propulsion Laboratory MS 302-2
NASA Lewis Research Center
Cleveland, OH 44135

AFAMRL/HEX
Wright-Patterson AFB, OH 45433

University of Michigan
NASA Center of Excellence
in Man-Systems Research
ATTN: R. G. Snyder, Director
Ann Arbor, MI 48109

John A. Dellinger,
Southwest Research Institute
P. O. Box 28510
San Antonio, TX 78284

Project Officer
Aviation Life Support Equipment
ATTN: AMCPO-ALSE
4300 Goodfellow Blvd.
St. Louis, MO 63120-1798

Commander
U.S. Army Aviation
Systems Command
ATTN: DRSAB-ED
4300 Goodfellow Blvd
St. Louis, MO 63120

Commanding Officer
Naval Biodynamics Laboratory
P.O. Box 24907
New Orleans, LA 70189

U.S. Army Field Artillery School
ATTN: Library
Snow Hall, Room 14
Fort Sill, OK 73503

Commander
U.S. Army Health Services Command
ATTN: HSOP-SO
Fort Sam Houston, TX 78234-6000

U.S. Air Force Institute
of Technology (AFIT/LDEE)
Building 640, Area B
Wright-Patterson AFB, OH 45433

Henry L. Taylor
Director, Institute of Aviation
University of Illinois-
Willard Airport
Savoy, IL 61874

Commander
U.S. Army Aviation
Systems Command
ATTN: DRSAB-WS
4300 Goodfellow Blvd
St. Louis, MO 63120-1798

Commander
U.S. Army Aviation
Systems Command
ATTN: SGRD-UAX-AL (MAJ Lacy)
4300 Goodfellow Blvd., Bldg 105
St. Louis, MO 63120

U.S. Army Aviation Systems Command
Library and Information
Center Branch
ATTN: DRSAB-DIL
4300 Goodfellow Blvd
St. Louis, MO 63120

Federal Aviation Administration
Civil Aeromedical Institute
CAMI Library AAC 64D1
P.O. Box 25082
Oklahoma City, OK 73125

Commander
U.S. Army Academy
of Health Sciences
ATTN: Library
Fort Sam Houston, TX 78234

Commander
U.S. Army Institute
of Surgical Research
ATTN: SGRD-USM (Jan Duke)
Fort Sam Houston, TX 78234-6200

Director of Professional Services
AFMSC/GSP
Brooks Air Force Base, TX 78235

U.S. Army Dugway Proving Ground
Technical Library
3Bldg 5330
Dugway, UT 84022

U.S. Army Yuma Proving Ground
Technical Library
Yuma, AZ 85364

AFFTC Technical Library
6520 TESTG/ENXL
Edwards Air Force Base,
CAL 93523-5000

Commander
Code 3431
Naval Weapons Center
China Lake, CA 93555

Aeromechanics Laboratory
U.S. Army Research
and Technical Labs
Ames Research Center,
M/S 215-1
Moffett Field, CA 94035

Sixth U.S. Army
ATTN: SMA
Presidio of San Francisco,
CA 94129

Commander
U.S. Army Aeromedical Center
Fort Rucker, AL 36362

Directorate
of Combat Developments
Bldg 507
Fort Rucker, AL 36362

U.S. Air Force School
of Aerospace Medicine
Strughold Aeromedical Library
Documents Section, USAFSAM/TSK-4
Brooks Air Force Base, TX 78235

Dr. Diane Damos
Department of Human Factors
ISSM, USC
Los Angeles, CA 90089-0021

U.S. Army White Sands
Missile Range
Technical Library Division
White Sands Missile Range,
NM 88002

U.S. Army Aviation Engineering
Flight Activity
ATTN: SAVTE-M (Tech Lib)
Stop 217
Edwards Air Force Base,
CA 93523-5000

Ms. Sandra G. Hart
Ames Research Center
MS 239-5
Moffett Field, CA 94035

Commander
Letterman Army Institute
of Research
ATTN: Medical Research Library
Presidio of San Francisco,
CA 94129

Director
Naval Biosciences Laboratory
Naval Supply Center, Bldg 844
Oakland, CA 94625

Commander
U.S. Army Medical Materiel
Development Activity
Fort Detrick, Frederick,
MD 21701-5009

Directorate
of Training Development
Bldg 502
Fort Rucker, AL 36362

Chief
Army Research Institute
Field Unit
Fort Rucker, AL 36362

Commander
U.S. Army Safety Center
Fort Rucker, AL 36362

U.S. Army Aircraft Development
Test Activity
ATTN: STEBG-MP-QA
Cairns AAF
Fort Rucker, AL 36362

Commander
U.S. Army Medical Research
and Development Command
ATTN: SGRD-PLC (COL Sedge)
Fort Detrick, Frederick
MD 21701

Chief
Human Engineering Laboratory
Field Unit
Fort Rucker, AL 36362

Commander
U.S. Army Aviation Center
and Fort Rucker
ATTN: ATZQ-T-ATL
Fort Rucker, AL 36362

President
U.S. Army Aviation Board
Cairns AAF
Fort Rucker, AL 36362