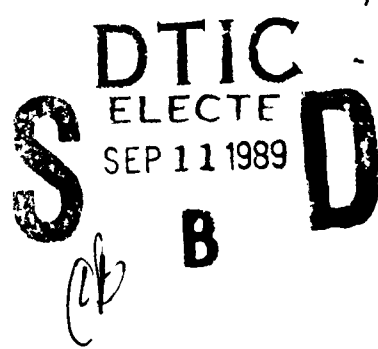


AD-A212 236

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. Agency Use Only (Leave blank).		2. Report Date. Oct. 1988 - May 1989		3. Report Type and Dates Covered. Contract	
4. Title and Subtitle. A Hybrid Architecture for feature Labelling of Oceanographic Satellite Images				5. Funding Numbers. Program Element No 62435N Project No RM35G87 Task No Accession No DN258050	
6. Author(s). S. Sitharama Iyengar					
7. Performing Organization Name(s) and Address(es). Louisiana State University Baton Rouge, LA 70803-4020				8. Performing Organization Report Number. CR N00014-88-K-6002	
9. Sponsoring/Monitoring Agency Name(s) and Address(es). Naval Ocean Research and Development Activity Code 321 SSC, MS 39529-5004				10. Sponsoring/Monitoring Agency Report Number.	
11. Supplementary Notes.					
12a. Distribution/Availability Statement. Approved for public release; distribution is unlimited.				12b. Distribution Code.	
13. Abstract (Maximum 200 words). 					
14. Subject Terms. Remote Sensing, Satellite Image Interpretation, Feature Labeling, Oceanographic Features, Relaxation Labeling				15. Number of Pages.	
				16. Price Code.	
17. Security Classification of Report. Unclassified	18. Security Classification of This Page. Unclassified	19. Security Classification of Abstract.		20. Limitation of Abstract.	

Annual Report

Introduction

The objective of this project is to develop an automatic oceanographic image interpretation system. This system will aid the operator in identifying various oceanic features and will predict the dynamic behavior of these features. Presently these tasks are handled by experts in oceanography and obviously, a time consuming process. The proposed project has been divided into three phases : In Phase I the features present in the oceanographic image are identified. In this phase an efficient feature labeling algorithm will be implemented. In Phase II an Expert System that helps in predicting the dynamic behavior of the oceanic features will be developed. In Phase III these two modules will be integrated and the system will be tested with real-time data.

Current Progress

The design and development of Phase I started in May 1988. Various techniques for feature labeling were studied. As a result of a series of discussion with Ron Holyer and Matthew Lybanon , it was decided to use non-linear probabilistic relaxation labeling scheme for the oceanographic feature labeling problem. We believe that this approach is the first of its kind , namely , the application of relaxation labeling

for identifying oceanic features. The design of the feature labeling module was completed in June 1988. The implementation of the feature labeling algorithm was initiated in June 1988. As a first step, the a priori probabilities of all the features are estimated and tested on a reference image. The results obtained in the first step are published in 5th International conference on Intelligent Information Processing Systems, to be held in Jan 1989. The second step in the relaxation scheme called, "iterative updating" is ready for implementation. The design of this sub-module was completed in August 1988. It is proposed to complete this implementation by October 1988. The experimental results were published in two parts in two conferences. For more information on these results please refer :

- 1. A Technique for Feature Labeling in Infrared Oceanographic Images , appeared in Fifth International Conference on IIPS, Jan 1989.**
- 2. An Expert System for Interpreting Mesoscale Features in Oceanographic Satellite Images, appeared in SPIE Conference on Applied Artificial Intelligence, March 1989.**

The design and development of the Phase II of the project was initiated in December 1988. The ground work for the design of Phase II

has already been started. We have started analyzing the various components involved in an Expert System, especially for the oceanographic application. The objective of the Phase II is to develop a powerful expert system that incorporates the nature of the oceanic features as facts and rules. The expert system will make use of the results obtained from Phase I. The two modules will then be integrated in Phase III.



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution/ _____	
Availability Codes	
Dist	Avail and/or Special
A-1	

A Report on Feature Labeling Software

The software modules are written in C. In this report, we give some general comments about the program and various assumptions made. The software modules are to run on VAX-VMS system. Several system-related functions are used and hence modifications are required if necessary to port to another machine. The modules are written in standard C. The following paragraph describes the source files and input files used in the software:

1. A1.C

Source file containing the first part of the a priori program. It calculates the mean, covariance vectors etc

INPUT : there are FIVE input files for this module.

a) **IMAGE.DAT** - the actual image (512 X 512) in the line oriented format. To prepare this image take the (512 X 512) I^2S file; give it as input to the C'DISKTRANSFER function; rename the output as IMAGE.DAT.

b) **CLUSTER.DAT**-the output of the cluster shade edge detector algorithm. Again this file HAS TO BE i the line oriented format.

c) **ANGLE.DAT** - this file contains the angle subtended by the vector (X,Y) to the X-axis. This file is prepared only once and hence need to be just copied while executing A1.EXE file.

d) **DIST.DAT** - this file contains the magnitude of the vector (X,Y). this is very similar to ANGLE.DAT ; need to be just copied while executing A1.EXE file.

e) **OBJ.DAT** - this file contains the information about the objects that are to be labeled in the image. This is a structured file. The information about the objects are got from an external data file. To prepare this file, a program called **RDATA.EXE** has to be executed for every new image and data set. The details about this is given later in this report

OUTPUT : a file called **MEAN.DAT** which contains the mean and covariance vectors for the given image and data.

2. A2.C

Source file containing the second part of the a priori program.

INPUT : There are SIX input files. They are **IMAGE.DAT**, **CLUSTER.DAT**, **ANGLE.DAT**, **DIST.DAT**, **OBJ.DAT** and **MEAN.DAT**.

OUTPUT: The output of this module is the a priori image. It is stored in a file called **APR.IMAGE**. This file will be used subsequently in the labeling process.

3. LABEL.C

Source file containing the last part of the labeling program, namely, assigning labels to the objects.

INPUT: - TWO input files : **CLUSTER.DAT** and **APR.IMAGE** (prepared by **A2.EXE**).

OUTPUT: - A file called LABEL.IMAGE which is the final output of the feature labeling software and it is NOT DISPLAYABLE. The output image is still in the line oriented format. The last step is to convert this image into I²S file format , use C'DISKENTER function. We can call the displayable output as LABEL.DIS.

4. RDATA.C

Source file that converts the external data file (containing the points on the GULF STREAM etc.) to the format understandable by the feature labeling module.

INPUT : - an EXTERNAL DATA file (eg., mpr8605)

OUTPUT: - OBJ.DAT which is used by A1 and A2 programs. If you feel that there are more objects than needed, you can edit the OBJ.DAT file (which is in the text format) with the help of the information given below as a note.

NOTE ON THE STRUCTURE OF OBJ.DAT:

The objects to be labeled are of two types: one with all the pixels on it listed (eg., GULF STREAM, SHELL etc) and the other with center and radius given (eg., WCR, CCR). The first type is given a code 0 and the second type a code 1 in the OBJ.DAT file structure. Hence the structure is : code of the object followed by the data. In the case of object type 0, the data contains all

the pixel coordinates and in the case of object type 1, the data contains the center and radius.

HOW TO RUN THE PROGRAM ?


First compile these source files using CC command and use LINK command to prepare the EXE files. For example to create A1.EXE use the following sequence of commands.

CC A1.C

LINK A1

Run the programs A1.EXE, A2.EXE and LABEL.EXE in the correct sequence to get the final output.

For further information please contact Prof.S.S.Iyengar or N.Krishnakumar at LSU (Ph# 504-388-1249).

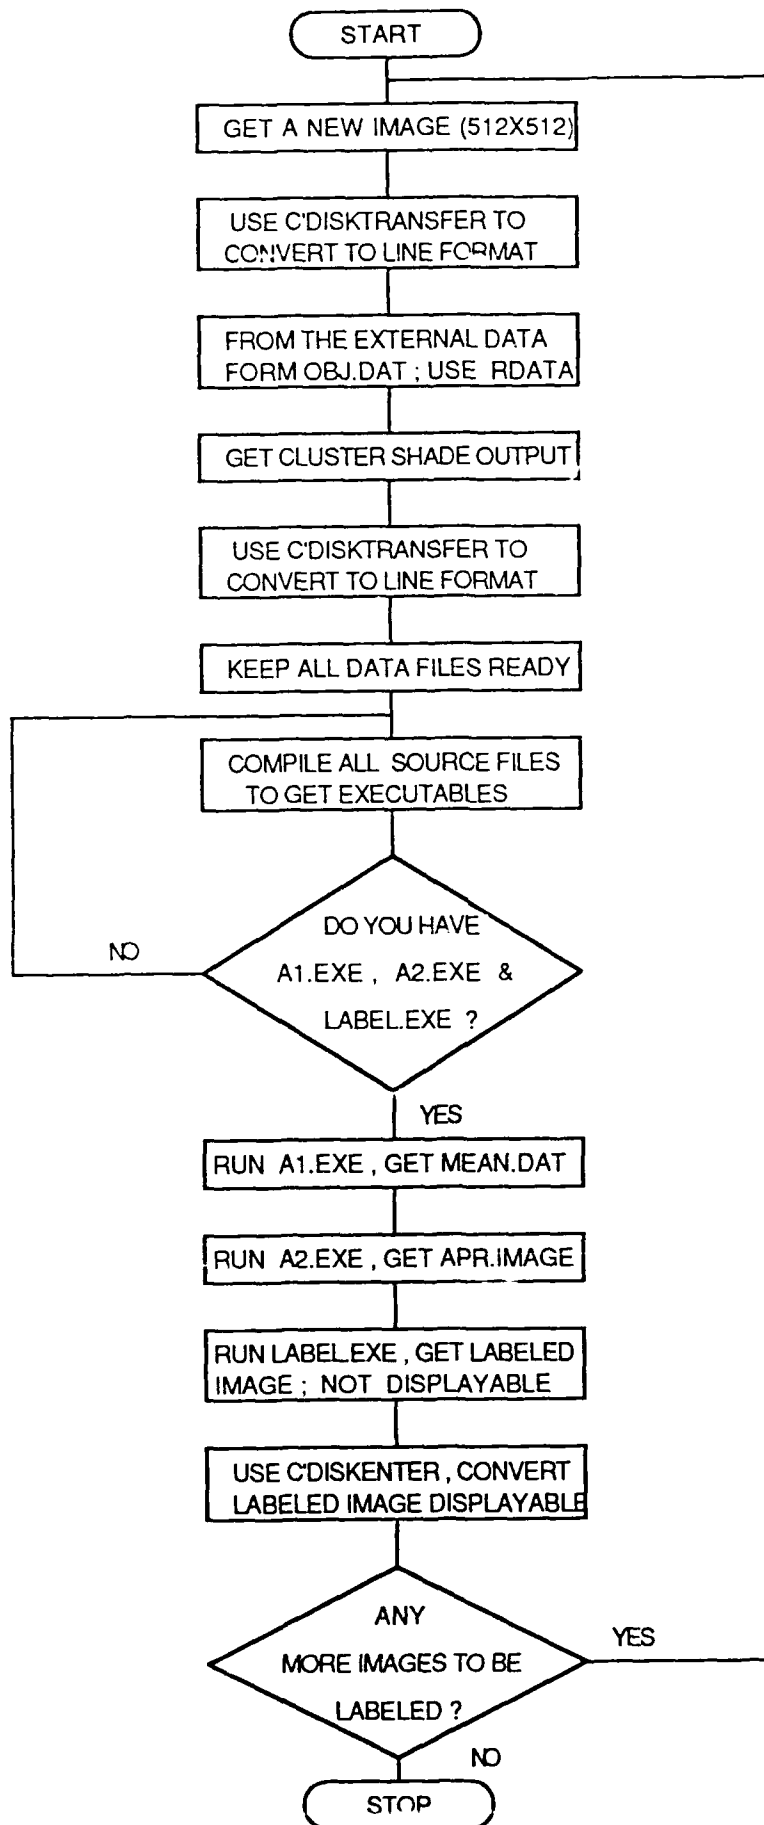

An Expert System for Interpreting Mesoscale Features in Oceanographic Satellite Images

N. Krishnakumar^{*}, S. Sitharama Iyengar^{*}, Ron Holyer^{**} and Matthew Lybanon^{**}

^{*} Louisiana State University, Department of Computer Science
Baton Rouge, LA 70803.

^{**} Remote Sensing Branch, Naval Ocean Research and Development Activity
Stennis Space Center, MS 39529.

ABSTRACT

Thermal infrared images of the ocean obtained from satellite sensors are widely used for the study of ocean dynamics. The derivation of mesoscale ocean information from satellite data depends to a large extent on the correct interpretation of infrared oceanographic images. The difficulty of the image analysis and understanding problem for oceanographic images is due in large part to the lack of precise mathematical descriptions of the ocean features, coupled with the time varying nature of these features and the complication that the view of the ocean surface is typically obscured by clouds, sometimes almost completely. Towards this objective, the present paper describes a hybrid technique that utilizes a nonlinear probabilistic relaxation method and an expert system for the oceanographic image interpretation problem. A unified mathematical framework that helps in solving the problem is presented. This paper highlights the advantages of using the contextual information in the feature labeling algorithm. The paper emphasizes the need for the feedback from the high level modules to the intermediate modules in an automatic image interpretation system. The paper presents some important results of the series of experiments conducted at Remote Sensing Branch, NORDA, on the NOAA AVHRR imagery data.

Key words: feature labeling, feature extraction, oceanic features, edge detection, knowledge based systems, expert system, relaxation, infrared imagery.

1. INTRODUCTION

Satellite-borne sensors potentially offer many advantages for the study of oceanic processes. They provide global synoptic measurements of various oceanic surface properties, in contrast to the local measurements, possibly at a range of depths, provided by conventional oceanographic measurement techniques. Thermal infrared (IR) images of the ocean obtained from satellite sensors are widely used for the study of ocean dynamics. Fig.1 shows a sample infrared image of the Gulf-Stream obtained from the Advanced Very High Resolution Radiometer (AVHRR) aboard the NOAA-7 satellite. Brightness in this infrared image is inversely proportional to the ocean surface temperature (dark areas represent warmer temperatures and light areas represent colder temperatures). Vortices (areas of closed circulation) within this turbulent flow pattern are called *eddies*. The Gulf Stream and its associated eddies are examples of mesoscale features ("mesoscale" is the name commonly applied to the features existing on spatial scales of the order of 50 to 300 km). Mesoscale features are important to the study of ocean dynamics, to the fisheries and to many other diverse interests.

Current image analysis techniques rely on human interpretation of the satellite imagery. Human interpretation is obviously varied in its level of expertise and is highly labor-intensive. With the proliferation of high volume Advanced Very High Resolution Radiometer image applications, it becomes highly desirable for certain applications to move from the labor-intensive manual interpretation of infrared imagery towards a capability for automated interpretation of these images. The complete automation of the oceanographic image interpretation function is probably not feasible, but one can begin to address certain subsets of the problem with the present-day image processing and artificial intelligence techniques. This was the motivation for the work reported by Lybanon et al., [1], in the development of a prototype oceanographic expert system.

Several previous studies have addressed the automation of the analysis of infrared satellite imagery for mesoscale features. Gerson and Gabroski [2] and Gerson et al. [3] investigated the detection of the Gulf Stream in infrared images from the Geostationary Operational Environmental Satellite (GOES). Gerson and Gabroski [2] used a hierarchical approach where 16×16 pixel (128×128 km) "frames" within the image were evaluated for the possibility of containing the Gulf Stream. Frames flagged as Gulf Stream possibilities were then further evaluated to determine the exact location of the Stream within the frame by looking at statistics based on 5×5 pixel "local neighborhoods". As an outgrowth of the work reported in [2] and [3], Coulter [4] performed automated feature extraction studies using the higher resolution Advanced Very High Resolution Radiometer data. Janowitz [5] studied the automatic detection of the Gulf Stream eddies using Advanced Very High Resolution Radiometer data. Nichol [6] used a region adjacency graph to define spatial relationships between elementary connected regions of constant gray level called atoms. Although satisfactory emulation of human extraction of eddy structure is claimed for this method, Nichol [6] did point out that not all enclosed uniform areas identified by the method will correspond to real ocean structure. The authors [7] have approached this problem and shown some preliminary results on the relaxation based feature labeling scheme, the development of a prototype expert system and the interface between these two modules.

2. MOTIVATION OF THE PRESENT WORK

In this section we present the motivation behind the present work. Our primary objective is to build a powerful automatic image interpretation system for oceanographic satellite images. In order to make this difficult problem tractable, we divide the problem into two parts: feature labeling problem and the development of an expert system. It is clear that the performance of the labeling algorithm depends heavily on the low level image processing algorithms. Particularly, the output of an edge detector algorithm plays a major role in the feature labeling process. In view of this, a new efficient edge detector algorithm proposed by Holyer and Peckinpaugh [8] is employed in our feature labeling technique. It is known that the conventional edge derivative operators are very sensitive to noise and are not suitable for analyzing oceanographic satellite image. The new edge detector algorithm proposed by Holyer and Peckinpaugh [8] is based on the gray level co-occurrence matrix, which is commonly used in image texture analysis. This algorithm [8] is found to exhibit the characteristics of fine structure rejection while retaining edge sharpness. In this paper we focus on the preliminary results of a feature labeling algorithm and the development of an expert system to aid the interpretation of these features. In the following paragraph we briefly outline the various steps taken to solve the second subproblem.

The objective of an oceanographic expert system is to correctly interpret the dynamics of the ocean process with minimal human interaction. Towards this objective, the development of a powerful oceanographic expert system is under way at Remote Sensing Branch, NORDA. We have already developed a prototype expert system for Gulf Stream regional dynamics [1]. The current activities focus on building an expert system that makes use of the information about the position of mesoscale features obtained from the relaxation labeling scheme. One element of an expert system is a database of knowledge about the subject matter, with the knowledge represented in a form suitable for manipulation by the "inference engine" of the expert system (i.e., the logical and heuristic

procedures for solving problems in the problem domain). With the help of the knowledge gained from discussions at NORDA and from the literature in oceanography, a knowledge base about the nature of the mesoscale features (occurrence, mean lifetime, movement, etc.) was built [1]. Presently, we are in the process of designing an expert system which makes use of positional information about the features (obtained from the relaxation labeling) and the knowledge base of mesoscale information.

This paper presents a relaxation labeling scheme to label features in thermal infrared images obtained from satellite. The technique presented in this paper exploits the advantages of using contextual information in the labeling algorithm. The remainder of the paper is organized as follows: Section 3.0 gives an overview of the architecture of the proposed image interpretation system. Section 4.0 introduces the probabilistic relaxation scheme and briefly discusses the application of this scheme to the oceanographic labeling problem. In section 5.0 we develop a mathematical framework which is necessary for our labeling problem. Section 6.0 discusses the performance of our technique and describes the steps that are involved in implementing this technique. Section 7.0 describes the prototype expert system and the interface between the expert system and the feature labeling module. Section 8.0 concludes with all the important features of this technique and future extensions to the available scheme.

3. ARCHITECTURE OF THE INTERPRETER

In this section, we briefly describe the various components involved in the image interpretation system. The block diagram shown in figure.2 depicts the underlying architecture of the proposed system. The IR image obtained from the satellite is the input to the feature labeling module. The feature labeling module consists of two submodules : one estimating the initial feature probabilities and one implementing the iterative updating scheme. The initial pixel probabilities are assigned with the help of the previous analysis and the ground truth data. These probability values are then iteratively updated using the nonlinear probabilistic relaxation scheme. Finally, the relevant features that are present in the image are labeled with the aid of a decision process.

The labeled features are fed to the expert system module. This module is divided into two submodules. The first submodule consists of a knowledge base and an inference engine. The knowledge base has a thorough collection of facts and rules about the mesoscale features such as gulf stream, warm core rings etc., Based on the positional information obtained from the feature labeling module and the knowledge base, the inference engine attempts to interpret the dynamics of these features. Basically the inference engine is a pattern matching module. The second submodule evaluates the consistency of the labeling process with the help of the knowledge base as well as from the input from the operator. This evaluation results in assigning a confidence factor to each of the features detected. This factor is then "fed back" to the feature labeling module, in addition to the previous data analysis, to improve the consistency of the labeling process in the future.

4. RELAXATION PROCESS

An important research area in image analysis and image interpretation technology is the development of methods that blend contextual information with conventional image processing algorithms. A literature survey clearly indicates that such a hybrid approach yields good results. Relaxation labeling is one such process. Relaxation labeling has been applied to a variety of image processing problems e.g., linear feature enhancement [9], edge enhancement [10], image enhancement [11], pixel classification [12,13]. A recent survey article by Kitten and Illingworth [14] on relaxation labeling highlights the importance of this area of research. The survey [14] also points out the advantages and possible applications of relaxation methods. More importantly, the relaxation labeling approach was elegantly described by Rosenfeld et al. [15] who investigated the problem of labeling the sides of a triangle and proposed a set of schemes to solve the problem. The paper [15] concluded with the result that the

nonlinear probabilistic relaxation schemes yield better results than the others. The labeling algorithm presented in this paper is based on the non linear probabilistic relaxation technique.

The goal of the relaxation process is to reduce the uncertainty (and improve the consistency) in the assignment of one of the labels to each object in a set of related objects. In the oceanographic feature classification problem, the classes are the various oceanographic features, namely the north and south walls of the Gulf Stream, cold eddy, warm eddy, shelf front and coastal boundary. Refer to figure.3 to identify the positions of these oceanic features in a typical image. The objects are the individual pixels in a set of registered multi-temporal images. The uncertainty could be due to the cloud cover or the overlap of the features, features not belonging to one of the classes, noise in the image, or other factors. In this paper, we are attempting to label mesoscale features, but the ocean exhibits variability on all spatial scales. Thermal structure on scales smaller than mesoscale will interfere with the mesoscale feature labeling process. The underlying mathematical framework necessary for the relaxation labeling method is described in the next section of the paper.

5. MATHEMATICAL FRAMEWORK

Let $\Lambda = \{\lambda_1, \lambda_2, \dots, \lambda_m\}$ be the set of possible labels that may be assigned to each pixel x in the IR image. Also we let $p_\lambda^k(x, t)$ denote the probability that the pixel at $x(i, j)$ and time instant t , belongs to the object λ after k iterations of the relaxation algorithm. Note that the probabilities are functions of time unlike the conventional pixel relaxation labeling schemes where the probability is a function of position alone. This allows the relaxation labeling algorithm to utilize temporal continuity to reduce the ambiguity in labeling. The ambiguity may arise due to noise (cloud cover, for example).

There are two steps in executing the probabilistic relaxation algorithm. In the first step, a priori probabilities are evaluated with the help of ground truth data and / or a previous but recent mesoscale analysis. In the second step, these a priori probabilities are iteratively updated (relaxation) until a consistent labeling is reached. We now discuss these two steps in detail.

Step 1: Estimating the a priori probabilities

Let $p_\lambda^0(x, t)$ denote the a priori value, that is, the probability that pixel $x(i, j)$ at time t belongs to the object λ at the zeroth iteration. The Bayesian probability equation is used to evaluate this value. The equation (5.1) is used to calculate $p_\lambda^0(x, t)$.

$$p_\lambda^0(x, t) = \frac{p(x, t | \lambda) P(\lambda)}{\sum_\lambda p(x, t | \lambda) P(\lambda)} \quad (5.1)$$

where $p(x, t | \lambda)$ denotes the conditional density function and $P(\lambda)$ the probability of occurrence of the object λ .

To evaluate the conditional density function $p(x, t | \lambda)$, a set of parameters is measured at the pixel $x(i, j)$. Let X denote the parameter vector. The following parameters are used to form the vector X :

- (1) vector from origin to pixel $x(i, j)$, both the magnitude and direction.
- (2) gray scale intensity value at the pixel $x(i, j)$.

(3) the edge magnitude (Section 6.1 presents the chosen edge operator algorithm).

For each object, the mean vector μ_λ and the covariance matrix Σ_λ are computed. Also it is assumed that the conditional density function follows a normal distribution. Hence the conditional density function $p(x, t | \lambda)$ is evaluated using equation (5.2).

$$p(x, t | \lambda) = (2\pi |\Sigma_\lambda|)^{-1/2} \exp \left\{ -\frac{1}{2} (X - \mu_\lambda)' \Sigma_\lambda^{-1} (X - \mu_\lambda) \right\} \quad (5.2)$$

To compute $P(\lambda)$, relative areas of the objects are considered. The number of pixels in the object λ is n_λ . Then $P(\lambda)$ can be calculated using equation (5.3).

$$P(\lambda) = \frac{n_\lambda}{\Sigma_\lambda n_\lambda} \quad (5.3)$$

Step 2: Iterative updating algorithm

We now discuss the probability updating rule. The new estimate of the probability of λ at $x(i, j)$ is given by (5.4).

$$p_{\lambda}^{k+1}(x, t) = \alpha_\lambda \frac{p_{\lambda}^k(x, t) (1 + q_{\lambda}^k(x))}{\Sigma_\lambda p_{\lambda}^k(x, t) (1 + q_{\lambda}^k(x))} + (1 - \alpha_\lambda) p_{\lambda}(x, t) \quad (5.4)$$

where $q_{\lambda}^k(x)$ is called the update factor and α_λ is called the temporal weighting function.

The method of estimating these factors is illustrated below. The updating factor for the estimate $p_{\lambda}^k(x, t)$ at the k th iteration is given by equation (5.5).

$$q_{\lambda}^k(x) = \frac{1}{m} \sum_y \Sigma_\lambda r_{\lambda\lambda}(x, y) p_{\lambda}^k(y) \quad (5.5)$$

where m is the number of objects. In this equation, $r_{\lambda\lambda}(x, y)$ denote compatibility coefficients. These coefficients are computed as in [13,15]. According to the relaxation scheme, $r_{\lambda\lambda}(x, y)$ is a measure of the probabilistic compatibility between label λ on point x and label λ' on point y , and has the following characteristics:

- (1) If λ on x frequently co-occurs with λ' on y , then $r_{\lambda\lambda'}(x,y) > 0$, and if they always co-occur, then $r_{\lambda\lambda'}(x,y) = 1$.
- (2) If λ on x rarely co-occurs with λ' on y , then $r_{\lambda\lambda'}(x,y) < 0$, and if they never co-occur, then $r_{\lambda\lambda'}(x,y) = -1$.
- (3) If λ on x occurs independently of λ' on y , then $r_{\lambda\lambda'}(x,y) = 0$.

These compatibility coefficients are computed using equation (5.6).

$$r_{\lambda\lambda'}(x,y) = \frac{\text{cov}(\lambda, \lambda')}{\sigma(\lambda) \sigma(\lambda')} \quad (5.6)$$

where $\text{cov}(\lambda, \lambda')$ denotes the covariance of two events, namely, the pixel x is assigned the label λ and the pixel y is assigned the label λ' , and is given as:

$$\text{cov}(\lambda, \lambda') = p(\lambda \& \lambda') - p(\lambda)p(\lambda') \quad (5.7)$$

The joint probability $p(\lambda \& \lambda')$ can be calculated using the position vectors of the pixels $\bar{x}$ and $\bar{y}$. Let m and m' be the mean position vectors of the objects λ and λ' respectively. Then the joint probability can be computed using simple functions as given by equations (5.8a) and (5.8b).

$$p(\lambda \& \lambda') = \frac{y - x}{m' - m} \quad \text{if } \lambda \neq \lambda' \quad (5.8a)$$

$$p(\lambda \& \lambda') = 1 - \frac{x - m}{x + m} \quad \text{if } \lambda = \lambda' \quad (5.8b)$$

The new estimate of the probability of λ at $x(i,j)$ is :

$$p_{\lambda}^{k+1}(x,t) = \alpha_{\lambda} \frac{p_{\lambda}^k(x,t) (1+q_{\lambda}^k(x))}{\sum_{\lambda} p_{\lambda}^k(x,t) (1+q_{\lambda}^k(x))} + (1-\alpha_{\lambda}) p_{\lambda}(x,t') \quad (5.9)$$

where $p_{\lambda}(x,t')$ denotes the probability value at the pixel $x(i,j)$ at time instant t' , $t' < t$ and α_{λ} denotes the temporal weighting function for the object λ . The function α_{λ} determines the weight that is given to the current probability values and the factor $(1-\alpha_{\lambda})$ associates a weight to the probability values calculated at previous time instant t' .

To estimate the new probability value, either (a) the probability value at the previous time frame t' or (b) a set of probability values at time frames t' , t'' , t''' etc., can be used. In the present analysis and the

implementation, method (a) is chosen. Also it is proposed to implement method (b) and compare improvements (if any) in the feature labeling. The temporal weighting function can be determined with the help of the previous analysis of the images. It is understood that this temporal weighting function can not be constant in the real time situation. For example in some cases, the performance of the labeling may be less satisfactory and correspondingly the temporal weighting function should be given a relatively smaller value. Hence the selection of this function itself may be a problem in some cases. One may use different values for this function and the performance of the labeling can be compared. The iterative updating is terminated when the difference between the probability values at the k th and the $(k + 1)$ th iterations is very small (say less than 0.1 %).

6. DISCUSSION OF THE TECHNIQUE

The implementation of the above mentioned technique is carried out in two stages.

Stage 1

At the first stage, the a priori probabilities are estimated using a manually prepared mesoscale analysis from a time period of five days prior to the test image.

The objects present in the oceanographic IR image are identified with the help of the previous analysis. The shapes (or boundaries) of these objects are then determined and represented by a regular polygon. The parameter values are then computed for all the pixels inside these polygons. A reasonably accurate algorithm which finds out whether a pixel is inside a polygon or not is implemented.

From the parameter vector X for a pixel $x(i,j)$, the mean vector μ_λ is calculated. Also for each object λ , the covariance matrix Σ_λ is computed. Equation (5.2) is used to compute the conditional density function $p(x, t | \lambda)$. Finally the initial probability $p_\lambda^0(x, t)$ is computed using the equation (5.1). The output of the first stage is shown in figure.4. Fig.4 shows the output of the labeling module with all five features labeled. Refer to figure.3 to compare the labeling with the hand segmented image. To illustrate the labeling process five different features are considered. They are: two parts of the north wall, south wall and two warm eddies. The labeling of these five features is shown in figure 4. The individual pixels in the oceanographic image are labeled depending on the initial probability values obtained in the first stage.

6.1 DISCUSSION OF CLUSTER SHADE EDGE ALGORITHM

In this section, we discuss the features of the edge detection algorithm proposed by Holyer and Peckinpaugh [8]. The motivation behind the development of such a new edge detector algorithm is to aid the analysis of oceanographic satellite images. The popular derivative-based edge operators viz, Sobel's operator are shown to be too sensitive to edge fine-structure and to weak gradients to be useful in this application. The edge algorithm proposed by Holyer and Peckinpaugh [8] is based on the cluster shade texture measure, which is derived from the gray level co-occurrence (GLC) matrix. The authors [8] have suggested that the edge detection technique based on the GLC matrix can be effectively used in automated detection of mesoscale features. The (i, j) th element of the GLC matrix, $P(i, j | \Delta x, \Delta y)$, is the relative frequency with which two image elements, separated by distance $(\Delta x, \Delta y)$, occur in the image, one with intensity level i and the other with intensity level j . The elements of the GLC matrix could be combined in many different ways to give a single numerical value that would be a measure of the edges present in the image. Holyer and Peckinpaugh [7] have used a cluster shade function which is found to be very effective in the edge detection process. The new edge algorithm computes the cluster shade function at each pixel. Then the edges are detected by finding the significant zero crossings in the cluster shade image. The advantages of this new edge algorithm over the conventional derivative-based techniques are discussed in [7]. It is known that using large windows in derivative-based edge detector algorithms results in poor smoothing. This

problem is circumvented in the new algorithm. Because edges are detected by finding zero crossings, precisely positioned lines result, even if the GLC matrix is calculated using a larger window. So, the desired edge detection characteristic of retaining sharp edges while eliminating edge detail is achieved with the help of the new algorithm. As an input to our feature labeling algorithm, we used the image output generated by cluster shade algorithm, with a window size of 16×16 pixels and zero crossing threshold of 50. The edge magnitudes obtained from this new edge detector algorithm are used as an input to the feature labeling algorithm. In particular the edge magnitudes are used to evaluate the a priori probability values. It can be seen from figure 4, that only the edge pixels participate actively in the labeling process. Also the speed of the algorithm that computes the a priori probability values is greatly improved because of the reduced number of pixels considered.

In the second stage, the iterative updating rule is implemented. The compatibility coefficients are evaluated using equation (5.6). The coefficients are calculated using the initial class probability values obtained in the first stage. These are fixed during the update process. As a concluding step in the second stage of the implementation, the iterative updating algorithm is implemented using the equation (5.9). The iterative algorithm terminates when $(p_k^{k-1}(x,t) - p_k^k(x,t)) < \epsilon$, where ϵ is a very small quantity. Clearly the time parameter is helpful in reducing the ambiguity, especially when the image is contaminated with noise.

7. PROTOTYPE EXPERT SYSTEM

The expert system described here is based on an embryonic model of the expected movement and evolution of warm-core rings (WCRs) and cold-core rings (CCRs). The information in the knowledge base comes from a compilation of rules produced by a survey of the oceanographic literature. The prototype expert system is presently implemented on a VAX 8300 in a combination of computer languages. The rule based modules are coded in OPS83. Some supporting modules that provide primarily arithmetic calculation are in C. The module that provides the graphics support is in FORTRAN.

7.1 PROTOTYPE EXPERT SYSTEM CAPABILITIES

The prototype oceanographic expert system depicts expected motions and size changes of warm-core rings (WCRs) and cold-core rings (CCRs), and their interactions with each other and with the Gulf Stream, in different regions of the northwest Atlantic Ocean. The domain of the system is bounded on the west by the east coast of the United States and Canada. There are no explicit limits on the east, north and south. The domain is divided into nine regions, primarily based on longitude. The rules that describe the expected behavior of WCRs and CCRs, and Gulf Stream activity, are different in each region.

In each time step, each ring has its "status" (i.e., position, size) updated. That operation is followed by a determination of the ring's interaction with the Gulf Stream. The ring-Gulf Stream interaction is determined by the distance and direction of the center of the ring to the nearest point on the Gulf Stream boundary. Because of the ring-Gulf Stream interaction, Gulf Stream evolution is also simulated. The flow chart given in figure 5, depicts the important steps involved in the prototype expert system.

8. SUMMARY AND RECOMMENDATIONS FOR FUTURE WORK

In this paper, the need for automatic interpretation of oceanographic images is emphasized. The advantage of exploiting the contextual information in feature labeling is highlighted. An efficient and simple technique for

labeling of oceanic features is described. The underlying theoretical framework and the steps involved in estimating the probability functions are explained in detail. The overall architecture of the proposed image interpretation system is presented. Results of the first stage of the labeling technique are presented. The first stage, namely, the estimation of a priori probabilities for the reference image, is complete and has been tested on real oceanographic images. An expert system that uses the knowledge base and the information obtained from the labeling algorithm is in the process of development.

As a future extension to the present work we propose to :

- (i) investigate the possibility of implementing a parallel relaxation labeling algorithm to speed up the labeling process.
- (ii) make the oceanographic expert system "learn" from its past experience in analyzing the satellite imagery data.

9. ACKNOWLEDGMENTS

This research project is funded by the Department of Navy under the contract number N00014-88-K-6002.

10. REFERENCES

1. M. Lybanon, J.D. McKendrick, R.E. Blake, J.R.B. Cockett and M.G. Thomason, *A prototype knowledge-based system to aid the oceanographic image analyst*, SPIE Vol 635- *Applications of Artificial Intelligence III*, 203-206 (1986).
2. D.J. Gerson and P.Gaborski, *Pattern analysis for automatic location of oceanic fronts in digital satellite imagery*, Naval Oceanographic Office, TN 3700-65-77 (1977).
3. D.J. Gerson, E. Khedouri and P. Gaborski, *Detecting the gulf stream from digital infrared data pattern recognition*, *The Belle W. Baruch Library in Marine Science*, No.12, 19-39 (1982).
4. R.E. Coulter, *Application of the Bayes decision rule for automatic water mass classification from satellite infrared data*, *Proc. 17th Int. Symposium on remote sensing of environment*, Vol II, 589-597 (1983).
5. M.F. Janowitz, *Automatic detection of gulf stream rings*, Technical report TR-J8501, Office of Naval Research, Contr N-00014-79-C-0629, (1985).
6. D. G. Nichol, *Autonomous extraction of eddy-like structure from infrared images of the ocean*, *IEEE Trans. Geoscience and Remote Sensing*, 25, 28-34 (1987).
7. N. Krishnakumar, S.Sitharama Iyengar, Ron Holyer and Matthew Lybanon, *A Technique for feature labeling in infrared oceanographic images*, *To appear in Fifth Int. Conf. on IIPS*, Jan 1989.
8. R.J. Holyer and S.H. Peckinpaugh, *Edge detection applied to satellite imagery of the oceans*, *IEEE Trans. GeoScience and Remote Sensing*, 27, No.1, 46-56 (1989).
9. S.W. Zucker, R.A. Hummel and A. Rosenfeld , *An application of relaxation labeling to line and curve enhancement*, *IEEE Trans.Computer*, 26, 399-403 (1977).
10. B.J. Schachter, A. Lev, S.W. Zucker and A. Rosenfeld, *An application of relaxation methods to edge reinforcement*, *IEEE Trans.Syst.Man Cyber*, 7, 813-816 (1977).

11. L.S. Davis and A. Rosenfeld , *Noise cleaning by iterated local averaging*, *IEEE Trans. Syst. Man Cyber* , 8, 705-710 (1978).
12. J.O. Eklundh, H. Yamamoto and A. Rosenfeld, *A relaxation method in multispectral pixel classification*, *IEEE PAMI*, 2, 72-75 (1980).
13. L.S. Davis, C.Y. Wang and H.C. Xie, *An experiment in multispectral, multitemporal crop classification using relaxation techniques*, *Computer Vision, Graphics and Image Processing*, 23, 227-235 (1983).
14. J. Kittler and J. Illingworth, *Relaxation labeling algorithms - a review*, *Image and Vision Computing*, 206-216 (1985).
15. A. Rosenfeld, R.A. Hummel and S.W. Zucker, *Scene labeling by relaxation operations*, *IEEE Trans. Syst. Man Cyber*, 6, 420-434 (1976).



figure 1. typical IR image

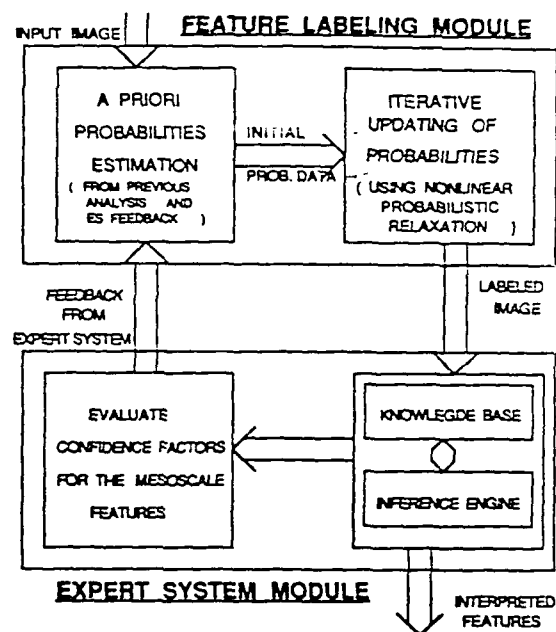


figure 2. architecture of the hybrid system

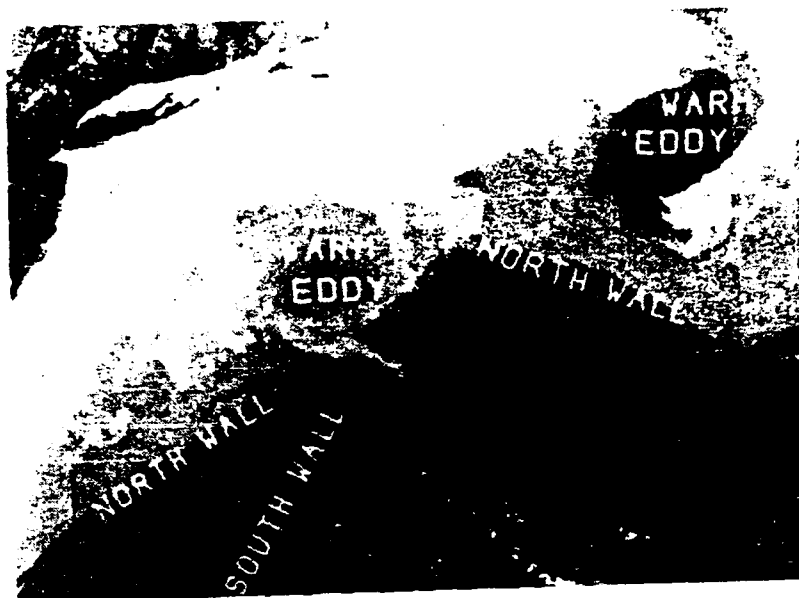


figure 3. hand segmented image



figure 4. results of the labeling algorithm

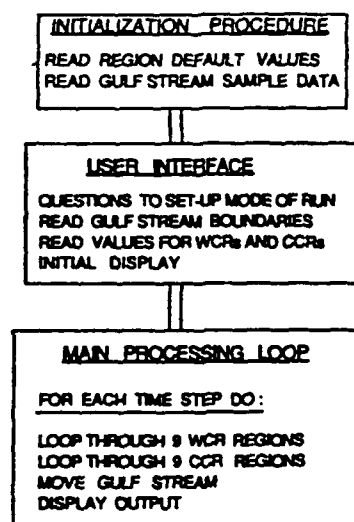


figure 5. steps of prototype expert system

DR. S. S. LYEE JR

Fifth International Conference

Interactive Information and Processing Systems For Meteorology, Oceanography, and Hydrology

January 30—February 3, 1989

Anaheim, California

Sponsored By
American Meteorological Society

Cosponsored By
World Meteorological Organization
Joint Oceanographic Institutions, Inc.
American Water Resources Association
Association of American Geographers

Copyright © 1988, American Meteorological Society. This copyright notice applies only to the overall collection of papers; authors retain their individual rights and should be contacted directly for permission to use their material separately. Contact AMS for permission pertaining to the overall collection. The manuscripts reproduced herein are unrefereed papers presented at the Fifth International Conference on Interactive Information and Processing Systems for Meteorology, Oceanography, and Hydrology; their appearance in this collection does not constitute formal publication.

AMERICAN METEOROLOGICAL SOCIETY
45 Beacon Street, Boston, Massachusetts, USA 02108

A TECHNIQUE FOR FEATURE LABELING IN INFRARED OCEANOGRAPHIC IMAGES

N. Krishnakumar* , S. Sitharama Iyengar*

*Department of Computer Science
Louisiana State University
Baton Rouge, LA 70803.

Ron Holyer** , Matthew Lybanon**

**Remote Sensing Branch
Naval Ocean Research and Development Activity
Stennis Space Center, MS 39529.

ABSTRACT

Thermal infrared images of the ocean obtained from satellite sensors are widely used for the study of ocean dynamics. The derivation of mesoscale ocean information from satellite data depends to a large extent on the correct interpretation of infrared oceanographic images. The difficulty of the image analysis and understanding problem for oceanographic images is due in large part to the lack of precise mathematical descriptions of the ocean features, coupled with the time varying nature of these features and the complication that the view of the ocean surface is typically obscured by clouds, sometimes almost completely. Towards this objective, the present paper describes a technique that utilizes a non linear probabilistic relaxation method for the oceanographic feature labeling problem. A unified mathematical framework that helps in solving the problem is presented. This paper highlights the advantages of using the contextual information in the feature labeling algorithm. The feature labeling technique makes use of a new, efficient edge detection algorithm based on cluster shade texture measure. This new algorithm is found to be more suitable for labeling the mesoscale features present in the oceanographic satellite images. The paper presents some important results of the series of experiments conducted at Remote Sensing Branch, NORDA on the NOAA AVHRR imagery data. The paper concludes with a motivation for using this technique to build an oceanographic expert system.

Key words: feature labeling, feature extraction, oceanic features, edge detection, knowledge based systems, relaxation, infrared imagery.

1.0 INTRODUCTION

Satellite-borne sensors potentially offer many advantages for the study of oceanic processes. They provide global synoptic measurements of various oceanic surface properties, in contrast to the local measurements, possibly at a range of depths, provided by conventional oceanographic measurement techniques. Thermal infrared images of the ocean obtained from satellite sensors are widely used for the study of ocean dynamics. Fig.1 shows a sample infrared image of the Gulf-Stream obtained from the

Advanced Very High Resolution Radiometer (AVHRR) aboard the NOAA-7 satellite. Brightness in this infrared image is inversely proportional to the ocean surface temperature (dark areas represent warmer temperatures and light areas represent colder temperatures). Vortices (areas of closed circulation) within this turbulent flow pattern are called *eddies*. The Gulf Stream and its associated eddies are examples of mesoscale features ("mesoscale" is the name commonly applied to the features existing on spatial scales of the order of 50 to 300 km). Mesoscale features are important to the study of ocean dynamics, the fisheries and to many other diverse interests.

Current image analysis techniques rely on human interpretation of the satellite imagery. Human interpretation is obviously varied in its level of expertise and is highly labor-intensive. With the proliferation of high volume Advanced Very High Resolution Radiometer image applications, it becomes highly desirable for certain applications to move from the labor-intensive manual interpretation of infrared imagery towards a capability for automated interpretation of these images. The complete automation of the oceanographic image interpretation function is probably not feasible, but one can begin to address certain subsets of the problem with the present-day image processing and artificial intelligence techniques. This was the motivation for the work reported by Lybanon et al., [1] [15], in the development of a prototype oceanographic expert system.

Several previous studies have addressed the automation of the analysis of the infrared satellite imagery for mesoscale features. Gerson and Gabroski [2] and Gerson et al., [3] investigated the detection of the Gulf Stream in infrared images from the Geostationary Operational Environmental Satellite (GOES). Gerson and Gabroski [2], used a hierarchical approach where 16x16 pixel (128x128 km) "frames" within the image were evaluated for the possibility of

This project is funded by the Department of Navy under the contract number N00014-88-K-6002.

containing the Gulf Stream. Frames flagged as Gulf Stream possibilities were then further evaluated to determine the exact location of the Stream within the frame by looking at statistics based on 5x5 pixel "local neighborhood". As an outgrowth of the work reported in [2] and [3], Coulter [4] performed automated feature extraction studies using the higher resolution Advanced Very High Resolution Radiometer data. Janowitz [5] studied the automatic detection of the Gulf Stream eddies using the Advanced Very High Resolution Radiometer data. Nichol [6] uses a region adjacency graph to define spatial relationships between elementary connected regions of constant gray level called atoms. Eddy-like structure is then identified by searching the graph for isolated atoms of high temperature that are enclosed by atoms of lower temperature (for the case of warm eddies). Although satisfactory emulation of human extraction of eddy structure is claimed for this method, Nichol[6] does point out that not all enclosed uniform areas identified by the method will correspond to real ocean structure.

2.0 MOTIVATION OF THE PRESENT WORK

In this section we present the motivation behind the present work. Our primary objective is to build a powerful automatic image interpretation system for oceanographic satellite images. In order to make this difficult problem tractable, we divide the problem into two parts : feature labeling problem and the development of an expert system. In this paper we focus on the feature labeling problem. It is clear that the performance of the labeling algorithm depends heavily on the low level image processing algorithms. Particularly, the output of an edge detector algorithm plays a major role in the feature labeling process. In view of this, a new efficient edge detector algorithm proposed by Holyer and Peckinpaugh [7] is employed in our feature labeling technique. It is known that the conventional edge derivative operators are very sensitive to noise and are not suitable for analyzing oceanographic satellite images. The new edge detector algorithm proposed by Holyer and Peckinpaugh [7] is based on the gray level co-occurrence matrix, which is commonly used in image texture analysis. This algorithm [7] is found to exhibit the characteristics of fine structure rejection while retaining edge sharpness. In this paper we focus on the preliminary results of a feature labeling algorithm and the effect of the cluster shade edge detector algorithm on the performance of the labeling. In the following paragraph we briefly outline the various steps taken to solve the second sub problem.

The objective of an expert system for oceanographic system is to correctly interpret the dynamics of the ocean process with minimal human interaction. Towards this objective, the development of a powerful oceanographic expert system is in the process of development at Remote Sensing Branch, NORDA. We have already developed a prototype expert system for Gulf Stream regional dynamics [1]. The current activities focus on building an expert system that makes use of the information about the position of mesoscale features obtained from the relaxation labeling scheme. One element of an expert system is a database of knowledge about the subject matter, with the knowledge represented in a form suitable for manipulation by the "inference engine" of the expert system (i.e., the logical and heuristic procedures for solving problems in the problem domain). With the help of the knowledge gained from discussions at NORDA and from the literature in oceanography, a knowledge base about the nature of the mesoscale features (occurrence, mean life time, movement, etc.) was built [1]. Presently, we are in the process of designing an expert system which makes use of the positional information about the features (obtained from the relaxation labeling) and the knowledge base of mesoscale information.

This paper presents a relaxation labeling scheme to label features in thermal infrared images obtained from satellite. The technique presented in this paper exploits the advantages of using the contextual information in the labeling algorithm. The remainder of the paper is organized as follows: Section 3.0 introduces the probabilistic relaxation scheme and briefly discusses the application of this scheme to the oceanographic labeling problem. In section 4.0 we develop a mathematical frame work which is necessary for our labeling problem. Section 5.0 discusses the performance of our technique and describes the steps that are involved in implementing this technique. Section 6.0 gives a brief description on the implementation of this technique on the image analysis system at NORDA. Section 7.0 concludes with all the important features of this technique and future extensions to the available scheme.

3.0 RELAXATION PROCESS

An important research area in image analysis and image interpretation technology is the development of methods that blend contextual information with the conventional image processing algorithms. The

literature survey clearly indicates that such a hybrid approach yields good results. Relaxation labeling is one such process that approaches this problem. Relaxation labeling has been applied to a variety of image processing problems e.g., linear feature enhancement [8], edge enhancement [9], image enhancement [10], pixel classification [11,12]. Recently a survey article by Kitten and Illingworth [13] on relaxation labeling highlights the importance of this area of research. The survey [13] also points out the advantages and possible applications of relaxation methods. More importantly, the relaxation labeling approach was elegantly described by Rosenfeld et al. [14] who investigated the problem of labeling the sides of a triangle and proposed a set of schemes to solve the problem. The paper [14] concluded with the result that the non linear probabilistic relaxation schemes yield better results than the others. The labeling algorithm presented in this paper is based on the non linear probabilistic relaxation technique.

The goal of the relaxation process is to reduce the uncertainty (and improve the consistency) in the assignment of one of the labels to each object in a set of related objects. In the Oceanographic feature classification problem, the classes are the various Oceanographic features namely North and South wall of Gulf Stream, cold eddy, warm eddy, shelf front and coastal boundary. Refer to fig.2 to identify the position of these oceanic features in a typical image. The objects are the individual pixels in a set of registered multi-temporal images. The uncertainty could be due to the cloud cover or the overlap of the features that are mentioned above, features not belonging to one of the classes, noise in the image, or other factors. In this paper, we are attempting to label mesoscale features, but the ocean exhibits variability on all spatial scales. Thermal structure on scales smaller than mesoscale will interfere with the mesoscale feature labeling process. The underlying mathematical framework necessary for the relaxation labeling method is described in the next section of the paper.

4.0 MATHEMATICAL FRAMEWORK

Let $\Lambda = \{\lambda_1, \lambda_2, \dots, \lambda_m\}$ be the set of possible labels that may be assigned to each pixel x in the IR image. Also we let $p_\lambda^k(x, t)$ denote the probability that the pixel at $x(i, j)$ and time instant t , belongs to the object λ after k iterations of the relaxation algorithm. Note

that the probabilities are functions of time unlike the conventional pixel relaxation labeling schemes where the probability is a function of position alone. This allows the relaxation labeling algorithm to utilize temporal continuity to reduce the ambiguity in labeling. The ambiguity may arise due to noise (cloud cover, for example).

There are two steps in executing the probabilistic relaxation algorithm. At the first step, a priori probabilities are evaluated with the help of ground truth data and / or a previous but recent mesoscale analysis. In the second step, these a priori probabilities are iteratively updated (relaxation) until a consistent labeling is reached. We now discuss these two steps in detail.

Step 1: Estimating the a priori probabilities

Let $p_\lambda^0(x, t)$ denote the a priori value, that is, the probability that pixel $x(i, j)$ at time t belongs to the object λ , at the zeroth iteration. The Bayesian probability equation is used to evaluate this value. The equation (4.1) is used to calculate $p_\lambda^0(x, t)$.

$$p_\lambda^0(x, t) = \frac{p(x, t | \lambda) P(\lambda)}{\sum_\lambda p(x, t | \lambda) P(\lambda)} \quad (4.1)$$

where $p(x, t | \lambda)$ denote the conditional density function and $P(\lambda)$ the probability of occurrence of the object λ .

To evaluate the conditional density function $p(x, t | \lambda)$, a set of parameters is measured at the pixel $x(i, j)$. Let X denote the parameter vector. The following parameters are used to form the vector X :

- (1) distance of the pixel $x(i, j)$ from the origin, both the magnitude and direction.
- (2) gray scale intensity value at the pixel $x(i, j)$.
- (3) the edge magnitude (Section 5.1 presents the chosen edge operator algorithm).

For each object, the mean vector μ_λ and the covariance matrix Σ_λ are computed. Also it is assumed that the conditional density function follows a normal distribution. Hence the conditional density function $p(x, t | \lambda)$ is evaluated using equation (4.2).

$$p(x, t | \lambda) = (2\pi | \Sigma_\lambda |)^{-1/2} \exp \left\{ -\frac{1}{2} (X - \mu_\lambda)' \Sigma_\lambda^{-1} (X - \mu_\lambda) \right\} \quad (4.2)$$

To compute $P(\lambda)$, relative areas of the objects are considered. The number of pixels in the object λ be n_λ . Then $P(\lambda)$ can be calculated using equation (4.3).

$$P(\lambda) = \frac{n_\lambda}{\sum_\lambda n_\lambda} \quad (4.3)$$

Step 2: Iterative updating algorithm

We now discuss the probability updating rule. The new estimate of the probability of λ at $x(i,j)$ is given by (4.4).

$$p_{\lambda}^{t+1}(x,t) = \alpha_\lambda \frac{p_{\lambda}^t(x,t)(1+q_{\lambda}^t(x))}{\sum_{\lambda'} p_{\lambda'}^t(x,t)(1+q_{\lambda'}^t(x))} + (1-\alpha_\lambda) p_{\lambda}(x,t) \quad (4.4)$$

where $q_{\lambda}^t(x)$ is called the update factor and α_λ is called temporal weighting function.

The method of estimating these factors are illustrated below. The updating factor for the estimate $p_{\lambda}^t(x,t)$ at the k th iteration is given by equation (4.5).

$$q_{\lambda}^t(x) = \frac{1}{m} \sum_y \sum_{\lambda'} r_{\lambda\lambda'}(x,y) p_{\lambda'}^t(y) \quad (4.5)$$

where m is the number of objects. In this equation, $r_{\lambda\lambda'}(x,y)$ denote compatibility coefficients. These coefficients are computed as in [13,16]. According to the relaxation scheme, $r_{\lambda\lambda'}(x,y)$ is a measure of the probabilistic compatibility between label λ on point x and label λ' on point y , and has the following characteristics:

- (1) If λ on x frequently co-occurs with λ' on y , then $r_{\lambda\lambda'}(x,y) > 0$, and if they always co-occur, then $r_{\lambda\lambda'}(x,y) = 1$.
- (2) If λ on x rarely co-occurs with λ' on y , then $r_{\lambda\lambda'}(x,y) < 0$, and if they never co-occur, then $r_{\lambda\lambda'}(x,y) = -1$.
- (3) If λ on x occurs independently of λ' on y , then $r_{\lambda\lambda'}(x,y) = 0$.

These compatibility coefficients are computed using the equation (4.6).

$$r_{\lambda\lambda'}(x,y) = \frac{\text{cov}(\lambda, \lambda')}{\sigma(\lambda) \sigma(\lambda')} \quad (4.6)$$

where $\text{cov}(\lambda, \lambda')$ denotes the covariance of two events, namely, the pixel x is assigned the label λ and the pixel y is assigned the label λ' and is given as:

$$\text{cov}(\lambda, \lambda') = p(\lambda \& \lambda') - p(\lambda)p(\lambda') \quad (4.7)$$

The joint probability $p(\lambda \& \lambda')$ can be calculated using the position vectors of the pixels x and y . Let m and m' be the mean position vectors of the objects λ and λ' respectively. Then the joint probability can be computed using simple functions as given by equations (4.8a) and (4.8b).

$$p(\lambda \& \lambda') = \frac{y-x}{m'-m} \quad \text{if } \lambda \neq \lambda' \quad (4.8a)$$

$$p(\lambda \& \lambda') = 1 - \frac{x-m}{x+m} \quad \text{if } \lambda = \lambda' \quad (4.8b)$$

The new estimate of the probability of λ at $x(i,j)$ is :

$$p_{\lambda}^{t+1}(x,t) = \alpha_\lambda \frac{p_{\lambda}^t(x,t)(1+q_{\lambda}^t(x))}{\sum_{\lambda'} p_{\lambda'}^t(x,t)(1+q_{\lambda'}^t(x))} + (1-\alpha_\lambda) p_{\lambda}(x,t) \quad (4.9)$$

where $p_{\lambda}(x,t)$ denotes the probability value at the pixel $x(i,j)$ at time instant t' , $t' < t$ and α_λ denotes the temporal weighting function for the object λ . The function α_λ determines the weight that is given to the current probability values and the factor $(1-\alpha_\lambda)$ associates a weight to the probability values calculated at previous time instant t' .

To estimate the new probability value, either (a) the probability value at the previous time frame t' or (b) a set of probability values at time frames t' , t'' , t''' etc., can be used. In the present analysis and the implementation, the method (a) is chosen. Also it is proposed to implement the method (b) and compare improvements (if any) in the feature labeling. The temporal weighting function can be determined with

the help of the previous analysis of the images. It is understood that this temporal weighting function can not be constant in the real time situation. For example in some cases, the performance of the labeling may be less satisfactory and correspondingly the temporal weighting function should be given a relatively smaller value. Hence the selection of this function itself may be a problem in some cases. One may use different values for this function and the performance of the labeling can be compared. The iterative updating is terminated when the difference between the probability values at the k th and the $(k + 1)$ th iterations is very small (say less than 0.1 %).

5.0 DISCUSSION ON THE TECHNIQUE

The implementation of the above mentioned technique is carried out in two stages. The flow chart shown in fig.4 depicts the various steps involved in implementing the technique.

At the first stage, the a priori probabilities are estimated using a manually prepared mesoscale analysis from a time period of five days prior to the test image.

The objects present in the oceanographic IR image are identified with the help of the previous analysis. The shapes (or boundaries) of these objects are then determined and represented by a regular polygon. The parameter values are then computed for all the pixels inside these polygons. A reasonably accurate algorithm which finds out whether a pixel is inside a polygon or not is implemented.

From the parameter vector X for a pixel $x(i,j)$, the mean vector μ_λ is calculated. Also for each object λ , the covariance matrix Σ_λ is computed. The equation (4.2) is used to compute the conditional density function $p(x,i|\lambda)$. Finally the initial probability $p_\lambda^0(x,i)$ is computed using the equation (4.1). The output of the first stage is shown in fig.3. The output image is split into six parts to illustrate the labeling. Fig.3.1 shows the output of the labeling module with all the five features labeled. Refer to fig.2 to compare the labeling with the hand segmented image. To illustrate the labeling process five different features are considered. They are : two parts of the north wall, south wall and two warm eddies. The labeling of these five features is shown in figures 3.2 to 3.6. The

individual pixels in the oceanographic image are labeled depending on the initial probability values obtained in the first stage.

5.1 DISCUSSION ON CLUSTER SHADE EDGE ALGORITHM

In this section, we discuss the features of the edge detection algorithm proposed by Holyer and Peckinpaugh [7]. The motivation behind the development of such a new edge detector algorithm is to aid the analysis of oceanographic satellite images. The popular derivative-based edge operators viz Sobel's operator [19] are shown to be too sensitive to edge fine-structure and to weak gradients to be useful in this application. The edge algorithm proposed by Holyer and Peckinpaugh [7] is based on the cluster shade texture measure, which is derived from the gray level co-occurrence matrix (GLC). The authors [7] have suggested that the edge detection technique based on the GLC matrix can be effectively used in automated detection of mesoscale features. The (i,j) th element of the GLC matrix, $P(i,j|\Delta x,\Delta y)$ is the relative frequency with which two image elements, separated by distance $(\Delta x,\Delta y)$ occur in the image, one with intensity level i and the other with intensity level j . The elements of the GLC matrix could be combined in many different ways to give a single numerical value that would be a measure of the edges present in the image. Holyer and Peckinpaugh [7] have used a cluster shade function which is found to be very effective in the edge detection process. The new edge algorithm computes the cluster shade function at each pixel. Then the edges are detected by finding the significant zero crossings in the cluster shade image. The advantages of this new edge algorithm over the conventional derivative-based techniques are discussed in [7]. It is known that using large windows in derivative-based edge detector algorithms results in poor smoothing. This problem is circumvented in the new algorithm. Because edges are detected by finding zero crossings, precisely positioned lines result, even if the GLC matrix is calculated using a larger window. So, the desired edge detection characteristics of retaining sharp edges while eliminating edge detail is achieved with the help of the new algorithm. As an input to our feature labeling algorithm, we used the image output generated by cluster shade algorithm, with a window size of 16×16 pixels and zero crossing threshold of 50. The edge magnitudes obtained from this new edge detector algorithm is used as an input to the feature labeling algorithm. In particular the edge magnitudes are used to evaluate the a priori probabil-

ity values. It can be seen from fig 3, that the only the edge pixels participate actively in the labeling process. Also the speed of the algorithm that computes the a priori probability values is greatly improved because of the reduced number of pixels for consideration.

In the second stage, the iterative updating rule is implemented. The compatibility coefficients are evaluated using the equation (4.6). The coefficients are calculated using the initial class probability values obtained in the first stage. These are fixed during the update process. As a concluding step in the second stage of the implementation, the iterative updating algorithm is implemented using the equation (4.9). The iterative algorithm terminates when $(p_k^{t+1}(x,t) - p_k^t(x,t)) < \epsilon$ where ϵ is a very small quantity. Clearly the time parameter is helpful in reducing the ambiguity, especially when the image is contaminated with noise.

6.0 IMPLEMENTATION

In this section, we present the experimental results of the first stage of the relaxation labeling technique : estimating the a priori probability values of a reference image. The software that computes the a priori probabilities is developed on VAX 8300 system running the VMS operating system installed at the Remote Sensing Branch, NORDA. We used the Interactive Digital Satellite Image Processing System consisting of International Imaging System's S600 software with NORDA extensions to process the oceanographic satellite images. The software modules are developed in 'C' language. The positional information about the oceanographic features present in the image can be provided either manually or from the previous analysis of the satellite imagery data. The module first computes the mean vectors and covariance matrices for all the objects present in the reference image. The second part of the software module computes the a priori probability values as given by equation (4.1).

To illustrate the performance of the labeling algorithm, an oceanographic infrared image with some of the typical oceanic features is taken (refer to fig.1). The objects that are selected for labeling are north wall, south wall and warm eddies. The a priori knowledge about the objects, namely the position is taken from the prior analysis shown in fig.3 and given as an input to the labeling module. The a priori probability values are then computed for all the pix-

els present in the image. To highlight the performance of this initial labeling algorithm, a decision making algorithm based on these a priori probability values is implemented. A pixel that has a probability value above 0.8 for an object is given the label for that object. The decision algorithm selects the pixels in the neighborhood of the objects to illustrate the results obtained. The edges of the labeled objects are dilated for clear identification of the labels. The covariance matrices for the objects are shown in fig.5.

7.0 SUMMARY AND RECOMMENDATIONS FOR FUTURE WORK

In this paper, the need for automatic interpretation of oceanographic images is emphasized. The advantage of exploiting the contextual information in feature labeling is highlighted. An efficient and simple technique for labeling of oceanic features is described. The underlying theoretical framework and functions are explained in detail. Results of the first stage of the labeling technique are presented. The results and the performance analysis of the proceeding stages of the technique will appear in forthcoming issues. The first stage, namely, the estimation of a priori probabilities for the reference image, is complete and has been tested on real oceanographic images. An expert system that uses the knowledge base and the information obtained from the labeling algorithm is in the process of development.

As a future extension to the present work we propose to :

- (i) investigate the possibility of implementing a parallel relaxation labeling algorithm to speed up the labeling process.
- (ii) make the oceanographic expert system "learn" from its past experience in analyzing the satellite imagery data.
- (iii) incorporate additional information about the mesoscale features (size, physical properties, etc.) during the labeling process to reduce the ambiguity in labeling the features.

REFERENCES

1. M. Lybanon, J.D. McKendrick, R.E. Blake, J.R.B. Cockett and M.G. Thomason, *A prototype knowledge-based system to aid the oceanographic image analyst*, SPIE Vol 635- Applications of Artificial Intelligence III, 1986, 203-206.
2. D.J. Gerson and P. Gaborski, *Pattern analysis for automatic location of oceanic fronts in digital satellite imagery*, Naval Oceanographic Office, TN 3700-65-77, October, 1977.
3. D.J. Gerson, E. Khedouri and P. Gaborski, *Detecting the gulf stream from digital infrared data pattern recognition*, The Belle W. Baruch library in Marine Science, No.12, 1982, 19-39.
4. R.E. Coulter, *Application of the Bayes decision rule for automatic water mass classification from satellite infrared data*, Proc. 17th Int. Symposium on remote sensing of environment, Vol II, 1983, 589-597.
5. M.F. Janowitz, *Automatic detection of gulf stream rings*, Technical report TR-J8501, Office of Naval Research, Contr N-00014-79-C-0629, June 1985.
6. D. G. Nichol, *Autonomous extraction of eddy-like structure from infrared images of the ocean*, IEEE Trans. GeoScience and Remote Sensing, 25, 1987, 28-34.
7. R.J. Holyer and S.H. Peckinpaugh, *Edge detection applied to satellite imagery of the oceans*, To appear in IEEE Trans. GeoScience and Remote Sensing.
8. S.W. Zucker, R.A. Hummel and A. Rosenfeld, *An application of relaxation labeling to line and curve enhancement*, IEEE Trans. Computer, 26, 1977, 399-403, 922-929.
9. B.J. Schachter, A. Lev, S.W. Zucker and A. Rosenfeld, *An application of relaxation methods to edge reinforcement*, IEEE Trans. Syst. Man Cyber, 7, 1977, 813-816.
10. L.S. Davis and A. Rosenfeld, *Noise cleaning by iterated local averaging*, IEEE Trans. Syst. Man Cyber, 8, 1978, 705-710.
11. J.O. Eklundh, H. Yamamoto and A. Rosenfeld, *A relaxation method in multispectral pixel classification*, IEEE PAMI, 2, 1980, 72-75.
12. L.S. Davis, C.Y. Wang and H.C. Xie, *An experiment in multispectral, multitemporal crop classification using relaxation techniques*, Computer vision, Graphics and Image Processing, 23, 1983, 227-235.
13. J. Kittler and J. Illingworth, *Relaxation labeling algorithms - a review*, Image and Vision Computing, 1985, 206-216.
14. A. Rosenfeld, R.A. Hummel and S.W. Zucker, *Scene labeling by relaxation operations*, IEEE Trans. Syst. Man Cyber, 6, 1976, 420-434.
15. M. Lybanon, *Oceanographic expert system knowledge base evaluation*, NORDA Technical Note 350, May 1987.
16. S. Peleg and A. Rosenfeld, *Determining compatibility coefficients for curve enhancement relaxation processes*, IEEE Trans. Syst. Man Cyber, 8, 1978, 548-555.



fig.1 sample IR image



fig.2 hand segmented image



fig.3.1 labeled image

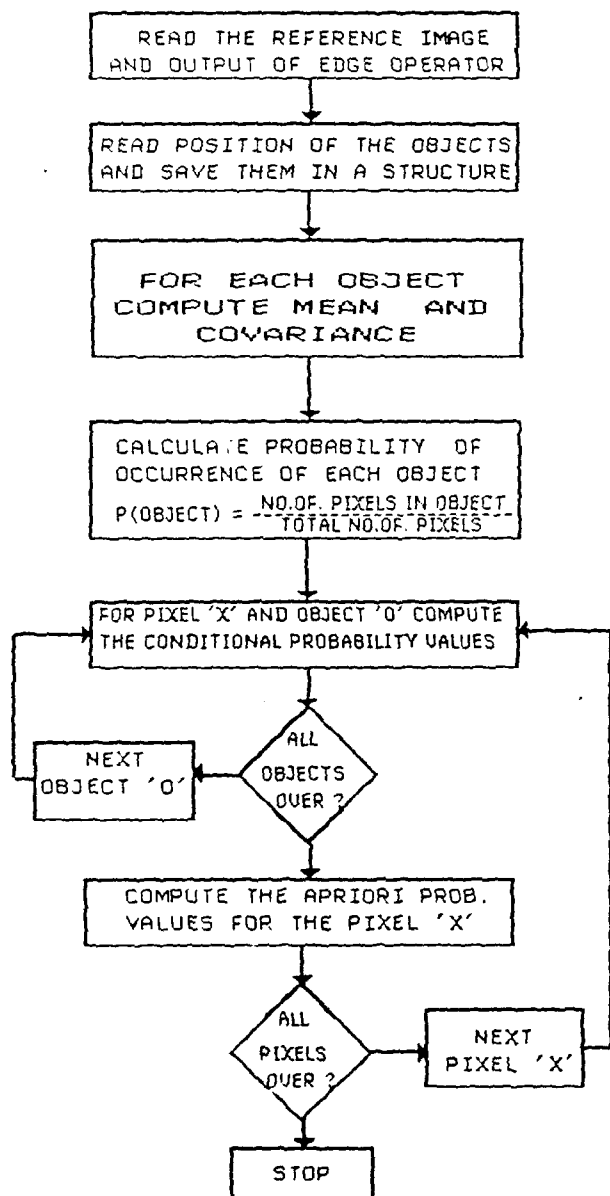


fig.4 algorithm to find apriori probabilities

fig.3.2 - 3.6 individual features labeled

NORTH WALL (I) OF GULF STREAM

851.9	-51.9	-106.3	-10.3
-51.9	35.5	9.4	6.9
-106.4	9.4	55.2	-10.3
-10.3	6.9	-10.3	3000.4

NORTH WALL (II) OF GULF STREAM

891.0	3.6	-48.2	56.5
3.6	17.6	-19.2	6.9
-48.2	-19.2	119.3	-100.9
56.5	12.7	-100.9	3280.3

SOUTH WALL OF GULF STREAM

1349.5	78.4	-74.4	-318.4
78.4	4.8	-2.5	-22.3
-74.5	-2.5	44.7	-39.5
-318.4	-22.3	-39.5	3419.7

WARM EDDY (I)

143.8	-8.2	104.4	-128.8
-8.2	3.4	-9.2	15.9
104.4	-9.2	509.6	-203.5
-128.8	15.9	-203.5	3872.9

WARM EDDY (II)

228.5	-9.9	-17.1	58.6
-9.9	1.9	3.4	4.4
-17.1	3.4	23.7	33.1
58.6	4.4	33.1	3305.2

fig.5 covariance matrices