

ARL-MAT-TM-398

AR-005-647

(4)



AD-A215 764

DEPARTMENT OF DEFENCE
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION
AERONAUTICAL RESEARCH LABORATORY
MELBOURNE, VICTORIA

Aircraft Materials Technical Memorandum 398

**A COUNTER GATING CIRCUIT FOR ACOUSTIC EMISSION
MONITORING OF STRUCTURES CRACKING UNDER REPETITIVE
ALTERNATING LOADS**

by

M.R. Kindermann

Approved for public release.



(C) COMMONWEALTH OF AUSTRALIA 1989

SEPTEMBER 1989

89 12 18 133

AR-005-647

DEPARTMENT OF DEFENCE
DEFENCE SCIENCE AND TECHNOLOGY ORGANISATION
AERONAUTICAL RESEARCH LABORATORY

Aircraft Materials Technical Memorandum 398

**A COUNTER GATING CIRCUIT FOR ACOUSTIC EMISSION
MONITORING OF STRUCTURES CRACKING UNDER REPETITIVE
ALTERNATING LOADS**

by

M. R. Kindermann

SUMMARY

A circuit for gating the input to an electronic counter used in the acoustic emission monitoring of cyclically loaded propagating cracks is described. The circuit ensures that acoustic emission signals registered by the counter arise principally from propagating cracks and that the counting of extraneous signals such as those occurring as a result of rubbing and fretting of contacting surfaces are minimised.



(C) COMMONWEALTH OF AUSTRALIA 1989

POSTAL ADDRESS: Director, Aeronautical Research Laboratory,
P.O. Box 4331, Melbourne, Victoria, 3001, Australia

TABLE OF CONTENTS

1.	INTRODUCTION.....	1
2.	ACOUSTIC EMISSION (AE) MONITORING.....	1
3.	TEST CONDITIONS.....	2
4.	THE GATING CIRCUIT.....	2
5.	DISCUSSION.....	4

ACKNOWLEDGEMENT

REFERENCES

FIGURES

DISTRIBUTION

DOCUMENT CONTROL DATA

Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By _____	
Distribution / _____	
Availability / _____	
Distribution / _____	
Dist / _____	
A-1	

1. INTRODUCTION

Acoustic Emission (AE) signals generated by structures undergoing cyclic loading arise from several simultaneous processes. If the structure being monitored is subject to stresses near the yield point of the material, emissions due to cracking are likely to occur. Thus, signals due to cracking are expected at, or near to, the positive (tensile) peak of the loading cycle. Emissions occurring at lower stresses are mainly due to machine noise and the rubbing and fretting of contacting surfaces. These noise signals often arise at the site of fasteners and near negative (compressive) peaks where crack surfaces can come into contact. These extraneous signals need to be minimised in the recorded AE data. Consequently, emissions occurring at or near the positive peak of the loading cycle give the most reliable and unambiguous indications of fatigue crack growth. This note describes a gating circuit which only allows recording of acoustic emissions at or near to the peak tensile load.

2. ACOUSTIC EMISSION (AE) MONITORING

The frequency band of acoustic emission is dependent on the material composition of the cracking component, and for aluminium alloys is centred at about 50 kilohertz. Transducers with a fundamental resonance centred in the AE frequency band are basically piezo-electric accelerometers without the mass placed on the upper surface of the piezo-electric element. These accelerometers are acoustically coupled to the surface of the test piece with a viscous fluid.

The response characteristic of a typical AE transducer is approximately Gaussian with an effective 'Q' factor of about 5. A convenient definition of Q for this application is

$$Q = \frac{f_0}{f_2 - f_1} \text{ where}$$

f_0 is the resonant frequency of the transducer and f_1 and f_2 are the lower and upper half-power frequencies respectively, where the signal power falls to one

half its value at the central resonant response peak; (i.e. three decibels below the peak). If increased 'sharpness' of the overall response is required, then this may be achieved by passing the received signal through cascaded, tuned amplifying stages prior to it being monitored by the counter.

Having defined and established the system for the detection of the AE signal, we must now define the test conditions under which such signals will be monitored.

3. TEST CONDITIONS

Conditions applying to a typical test are as follows:-

An airframe was to be monitored for cracking under simulated flight loading. Loading sequences, generated by computer, were applied electro-hydraulically to selected regions of the airframe. These loading sequences were approximations to actual in-flight loads obtained by strain-gauge measurements on an aircraft in flight. The loading sequence comprised waves of various amplitudes, periods and waveform (harmonic content).

A diagram representing these conditions is shown in Fig. 1 where the counter is activated at point A and disabled at point B. Thus it is seen that a circuit was required that would activate the AE counter at a particular amplitude V_A of rising load and disable it at a second predetermined amplitude V_B under falling load. These conditions are met in the circuit to be described.

4. THE GATING CIRCUIT

A block diagram of the gating circuit is shown in Fig. 2. The voltage analogue of the load function e_1 is applied simultaneously to two voltage comparators and a differentiator. The voltage comparator "start" selects the voltage amplitude V_A , and the "stop" selects the voltage amplitude V_B .

The differentiator senses the slope of the waveform, giving an output proportional to its negative differential coefficient. The circuit logic is designed to:

- (i) direct V_A and positive slope information to the start pulse output.
- (ii) direct V_B and negative slope information to the stop pulse output.
- (iii) constrain the negative slope and V_B signals to follow a trigger from the V_A and positive slope condition.

In specific terms, the circuit functions as follows:

The output of the differentiator is passed to two comparators denoted ' - ' and ' + '. The comparator ' - ' is arranged so that when the differentiator output falls below -50 millivolts, it fires, and produces a logic 1 output; similarly comparator ' + ' produces a logic 1 output when the differentiator output rises above +50 millivolts. The ± 50 millivolt levels were chosen as it was found that these values are those closest to zero volts which gave stable and reliable operation of the comparators. The outputs from the 'START' comparator and the ' - ' comparator were 'AND' gated together to provide a trigger signal for multivibrator 1 which provides the 'start' pulse. Similarly, outputs from the 'STOP' and ' + ' comparators were AND gated together at A2 to trigger multivibrator 2 to provide the 'stop' pulse. When multivibrator 1 fires, it also activates a latch comprising a type 7476 flip-flop. This latch controls the third input to 'AND' gate A2, enabling it to switch the V_B and negative slope information to multivibrator 2 when the latch is activated. Thus, multivibrator 2 is prevented from operating unless the latch has been activated (triggered). When the load function analogue falls to V_B with a negative gradient and the latch has been activated, multivibrator 2 generates a 'STOP' pulse and resets the latch. Thus a 'STOP' pulse is prevented from being generated unless a 'START' pulse had immediately preceded it. Such a condition could arise as shown graphically at point C on Fig. 1. It will be noted that the 'START' and 'STOP' outputs are buffered by inverters prior to being made input to the counter.

This was found to be necessary to obviate erratic triggering of the counter occurring as a result of it loading the multivibrator outputs.

The circuit diagram depicted in Fig. 3, shows that the 7400 family of logic devices has been used. Other logic families, such as the 74LS00 series of low power Schottky devices, could be substituted if desired with appropriate changes to the circuit elements (resistors, capacitors) as required. However, the 'START' and 'STOP' outputs may require buffering with devices selected from the 7400 family, depending on the counter used, the length (capacitance) of the cables used etc, in order to provide the low incremental source impedance and driving capability (fan-out) necessary for reliable triggering of the counter.

Design features, found necessary for reliable operation, are as follows:-

The output circuit of the differentiator has two zener diodes connected in series with opposing polarity, together with a 560 ohm current limiting resistance, to limit the voltage excursions generated by the differentiator to about ± 9.8 volts. This was found to be necessary to prevent the large voltage excursions generated by the differentiator from overloading the inputs to the comparators.

All four voltage comparators were fitted with hysteresis networks at their positive inputs. This was necessary to stabilize operation by improving noise immunity.

The trigger inputs to the two multivibrators were by-passed with 0.33 microfarad capacitors to prevent spurious triggering by random noise.

5. DISCUSSION

This circuit was used in conjunction with a General Radio Model 1192B counter and a Hewlett Packard Model 562 printer, the printer being used to record the data from the counter for each successive test cycle. The printer may be exchanged for a modern computer-based data acquisition system, suitably interfaced to the counter if desired.

The system gave reliable performance when monitoring an airframe undergoing simulated flight loading. The onset of structural cracking was successfully indicated as later verified by radiography after cracking had proceeded to a point where the resolution of the radiographic technique enabled the cracks to be detected.

No attempt was made to use the equipment in a crack-location mode; such testing would require several transducers together with their associated circuitry. However, this circuit could be adapted to such an application and, for such testing, it is suggested that a separate gating circuit be used with each transducer rather than resorting to multiplexing, as gating times could overlap and thus lead to loss of data.

ACKNOWLEDGEMENT

The author wishes to express his appreciation to Mr D.A. Olley, of N.D.I.S.L., R.A.A.F Amberley, Queensland, who carried out acoustic emission monitoring of an airframe under cyclic loading using this circuit; and who also made periodic radiographic inspections of the airframe resulting in verification of the initiation and progression of cracking.

REFERENCES

1. Integrated Electronics, J. Millman and C.C. Halkias, McGraw Hill Kogakusha Ltd, 1972.
2. Applications of Linear Integrated Circuits, E.R. Hnatek, John Wiley and Sons, 1975.
3. Operational Amplifiers, J.G. Graeme, G.E. Tobey, and L.P. Huelsman, McGraw Hill Kogakusha Ltd, 1971.
4. Amplifier Handbook, R.F. Shea, McGraw Hill, 1966.

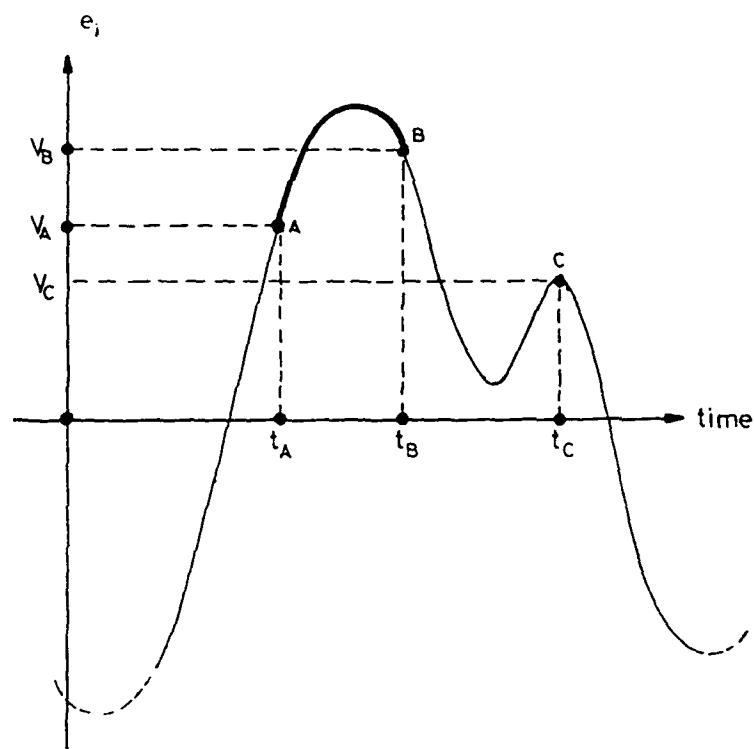


Fig. 1
Representation of Loading Sequence

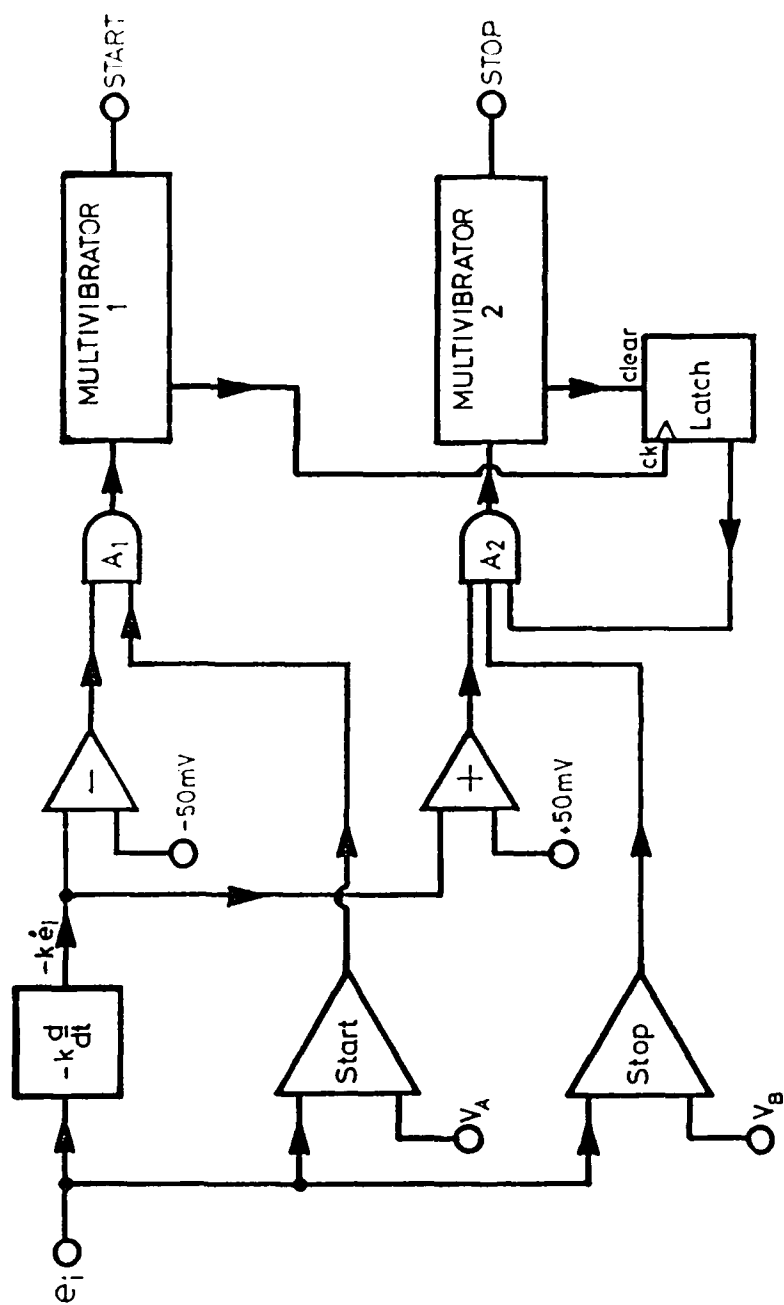


Fig. 2
Block Diagram

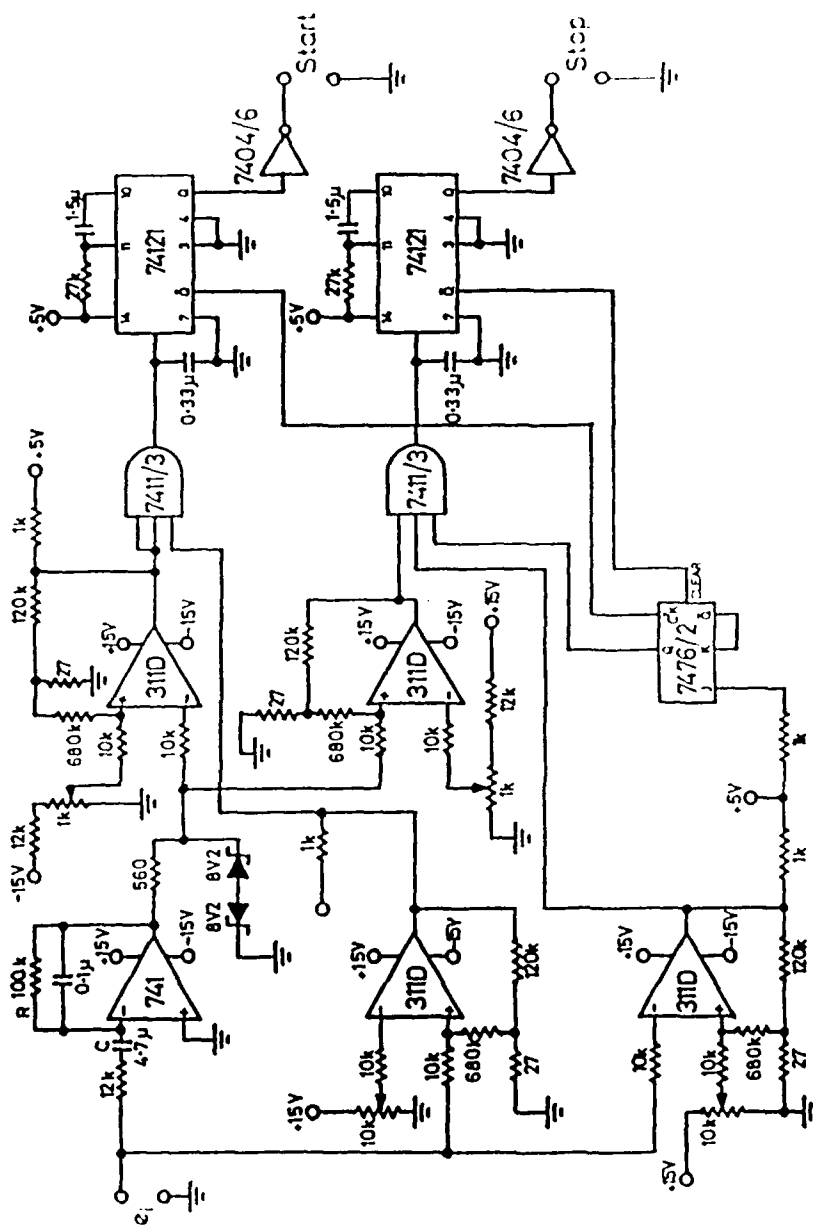


Fig. 3
Circuit Diagram

DISTRIBUTION

AUSTRALIA

Department of Defence

Defence Central

Chief Defence Scientist
FAS, Science Corporate Management (shared copy)
FAS, Science Policy (shared copy)
Director, Departmental Publications
Counsellor, Defence Science, London (Doc Data Sheet Only)
Counsellor, Defence Science, Washington (Doc Data Sheet Only)
OIC TRS, Defence Central Library
Document Exchange Centre, DISB (18 copies)
Librarian H Block, Victoria Barracks, Melbourne
Director General - Army Development (NSO) (4 copies)

Aeronautical Research Laboratory

Director
Library
Chief of Aircraft Materials Division
Divisional or Branch File Aircraft Materials
Author: M.R. Kindermann

Materials Research Laboratory

Director/Library

Defence Science & Technology Organisation - Salisbury

Library

Navy Office

Navy Scientific Adviser (3 copies Doc Data sheet)
Aircraft Maintenance and Flight Trials Unit
Director of Naval Aircraft Engineering
Superintendent, Aircraft Maintenance and Repair
Director of Naval Ship Design

Army Office

Scientific Adviser - Army (Doc Data sheet only)
Engineering Development Establishment Library

Air Force Office

Air Force Scientific Adviser (Doc Data sheet only)
Aircraft Research and Development Unit
Library
Engineering Division Library
Director General Aircraft Engineering - Air Force
D.A. Olley, NDISL, RAAF Amberley

Department of Transport & Communication

Library

Statutory and State Authorities and Industry

Aero-Space Technologies Australia, Manager/Library (2 copies)
Ansett Airlines of Australia, Library
Australian Airlines, Library
Qantas Airways Limited
Civil Aviation Authority
Hawker de Havilland Aust Pty Ltd, Victoria, Library
Hawker de Havilland Aust Pty Ltd, Bankstown, Library
Rolls Royce of Australia Pty Ltd, Manager
Australian Nuclear Science and Technology Organisation
Gas & Fuel Corporation of Vic., Manager Scientific Services
SEC of Vic., Herman Research Laboratory, Library
Ampol Petroleum (Vic) Pty Ltd, Lubricant Sales & Service Mgr
Australian Coal Industry Research Labs Ltd, Director
BHP, Melbourne Research Laboratories
BP Australia Ltd, Library
Australian Institute of Petroleum Ltd

Universities and Colleges

Adelaide
Barr Smith Library
Professor Mechanical Engineering

Flinders
Library

LaTrobe
Library

Melbourne
Engineering Library

Monash
Hargrave Library
Prof I.J. Polmear, Materials Engineering

Newcastle
Library

New England
Library

Sydney
Engineering Library
Head, School of Civil Engineering

NSW
Physical Sciences Library
Prof R.A.A. Bryant, Mechanical Engineering
Prof G.D. Sergeant, Fuel Technology
Library, Australian Defence Force Academy

Queensland
Library

Tasmania
Engineering Library

Western Australia
Library
Prof B.J. Stone, Mechanical Engineering

RMIT
Library
Mr M.L. Scott, Aerospace Engineering

University College of the Northern Territory
Library

CANADA

CAARC Coordinator Structures
International Civil Aviation Organization, Library

NRC
Aeronautical & Mechanical Engineering Library

Universities and Colleges
Toronto
Institute for Aerospace Studies

FRANCE
ONERA

GERMANY
Fachinformationszentrum: Energie, Physik, Mathematik GMBH

INDIA
CAARC Coordinator Materials
CAARC Coordinator Structures
Defence Ministry, Aero Development Establishment Library
Gas Turbine Research Establishment, Director
Vikram Sarabhai Space Centre, Library
INTERNATIONAL COMMITTEE ON AERONAUTICAL FATIGUE
per Australian ICAF Representative (25 copies)

ISRAEL
Technion-Israel Institute of Technology
Professor J. Singer

JAPAN
National Research Institute for Metals, Fatigue Testing Div.
Institute of Space and Astronautical Science, Library

NETHERLANDS
National Aerospace Laboratory (NLR), Library

NEW ZEALAND

Defence Scientific Establishment, Library
RNZAF
Transport Ministry, Airworthiness Branch, Library

Universities

Canterbury
Library
Head, Mechanical Engineering
Head, Chemical Engineering

SINGAPORE

Director, Defence Materials Organisation

SWEDEN

Aeronautical Research Institute, Library
Swedish National Defense Research Institute (FOA)

SWITZERLAND

F + W (Swiss Federal Aircraft Factory)

UNITED KINGDOM

CAARC, Secretary
Royal Aircraft Establishment
Bedford, Library
Pyestock, Director
Farnborough, Dr G. Wood Materials Department
Commonwealth Air Transport Council Secretariat
National Physical Laboratory, Library
National Engineering Laboratory, Library
CAARC Coordinator, Structures

British Aerospace
Kingston-upon-Thames, Library
Hatfield-Chester Division, Library

Universities and Colleges

Bristol
Engineering Library

Cambridge
Library, Engineering Department

London
Professor G.J. Hancock, Aero Engineering

Manchester
Professor, D.I.A. Poll, Dept of Engineering (Aeronautical)

Nottingham
Science Library

Southampton
Library

Strathclyde
Library

Cranfield Inst. of Technology
Library

Imperial College
Aeronautics Library

UNITED STATES OF AMERICA

NASA Scientific and Technical Information Facility
Boeing Company

Dr M.R. Johnson - Director Structures Eng

Kentex Research Library

United Technologies Corporation, Library

Lockheed-California Company

Lockheed Missiles and Space Company

Lockheed Georgia

McDonnell Aircraft Company, Library

Nondestructive Testing Information Analysis Center

Universities and Colleges

Chicago
John Crerar Library

Florida
Aero Engineering Department
Head, Engineering Sciences

Johns Hopkins
Prof S. Corrsin, Engineering Department

Iowa State
Dr G.K. Serovy, Mechanical Engineering

Iowa
Prof R.I. Stephens

Princeton
Prof G.L. Mellor, Mechanics Department

Massachusetts Inst. of Technology
MIT Libraries

SPARES (10 COPIES)

TOTAL (173 COPIES)

DOCUMENT CONTROL DATA

PAGE CLASSIFICATION
UNCLASSIFIED

PRIVACY MARKING

1a. AR NUMBER AR-005-647	1b. ESTABLISHMENT NUMBER ARL-MAT-TM-398	2. DOCUMENT DATE SEPTEMBER 1989	3. TASK NUMBER 87/033
4. TITLE A COUNTER GATING CIRCUIT FOR ACOUSTIC EMISSION MONITORING OF STRUCTURES CRACKING UNDER REPETITIVE ALTERNATING LOADS		5. SECURITY CLASSIFICATION (PLACE APPROPRIATE CLASSIFICATION IN BOX (S) IE. SECRET (S), CONFIDENTIAL (C) RESTRICTED (R), UNCLASSIFIED (U)). U U U DOCUMENT TITLE ABSTRACT	6. NO. PAGES 10 7. NO. REFS. 4
8. AUTHOR(S) M.R. KINDERMANN		9. DOWNGRADING/DELIMITING INSTRUCTIONS NOT APPLICABLE	
10. CORPORATE AUTHOR AND ADDRESS AERONAUTICAL RESEARCH LABORATORY P.O. BOX 4331, MELBOURNE VIC 3001		11. OFFICE/POSITION RESPONSIBLE FOR: SPONSOR <u>DSTO</u> SECURITY _____ DOWNGRADING _____ APPROVAL _____	
12. SECONDARY DISTRIBUTION (OF THIS DOCUMENT) APPROVED FOR PUBLIC RELEASE OVERSEAS ENQUIRIES OUTSIDE STATED LIMITATIONS SHOULD BE REFERRED THROUGH ASIDS, DEFENCE INFORMATION SERVICES BRANCH, DEPARTMENT OF DEFENCE, CAMPBELL PARK, ACT 2601			
13a. THIS DOCUMENT MAY BE ANNOUNCED IN CATALOGUES AND AWARENESS SERVICES AVAILABLE TO NO LIMITATIONS			
13b. CITATION FOR OTHER PURPOSES (IE. CASUAL ANNOUNCEMENT) MAY BE ☒ UNRESTRICTED OR ☐ AS FOR 13a.			
14. DESCRIPTORS Crack Propagation acoustic emissions gating(synchronizing) circuits fretting rubbing cyclic loads			15. DRDA SUBJECT CATEGORIES 0071L 0046E 0049B
16. ABSTRACT A circuit for gating the input to an electronic counter used in the acoustic emission monitoring of cyclically loaded propagating cracks is described. The circuit ensures that acoustic emission signals registered by the counter arise principally from propagating cracks and that the counting of extraneous signals such as those occurring as a result of rubbing and fretting of contracting surfaces are minimised.			

PAGE CLASSIFICATION
UNCLASSIFIED

PRIVACY MARKING

THIS PAGE IS TO BE USED TO RECORD INFORMATION WHICH IS REQUIRED BY THE ESTABLISHMENT FOR ITS OWN USE BUT WHICH WILL NOT BE ADDED TO THE DISIS DATA UNLESS SPECIFICALLY REQUESTED.

16. ABSTRACT (CONT)		
17. IMPRINT AERONAUTICAL RESEARCH LABORATORY, MELBOURNE		
18. DOCUMENT SERIES AND NUMBER AIRCRAFT MATERIALS TECHNICAL MEMORANDUM 398	19. COST CODE 341115	20. TYPE OR REPORT AND PERIOD COVERED
21. COMPUTER PROGRAMS USED		
22. ESTABLISHMENT FILE REF(S)		
23. ADDITIONAL INFORMATION (AS REQUIRED)		