



REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE January 1990		3. REPORT TYPE AND DATES COVERED presentation/paper	
4. TITLE AND SUBTITLE A 1075-LINE VIDEO-RATE LASER-ADDRESSED LIQUID-CRYSTAL LIGHT-VALVE PROJECTION DISPLAY				5. FUNDING NUMBERS PE: 0605804N WU: DN306 246 PN: XB18	
6. AUTHOR(S) J. Trias, W. Robinson, T. Phillips, B. Merry, and T. Hubin					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Ocean Systems Center San Diego, CA 92152-5000				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Naval Ocean Systems Center San Diego, CA 92152-5000				10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES					
12a. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.				12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) An all-solid-state 1075-line laser-raster-scanner system conforming to EIA RS 343A with a limiting resolution greater than 1300 TV lines has been developed. The laser raster scanning designed with vertical and horizontal acousto-optic deflectors is used to photoactivate a liquid-crystal light valve for a video-rate large-screen projection display.					
Published in <i>Proceedings of the Society for Information Display</i> , Vol. 29, No. 4, 1988.					
14. SUBJECT TERMS technical assistance program technology transfer				15. NUMBER OF PAGES	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED		18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED		19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	
				20. LIMITATION OF ABSTRACT UNLIMITED	

DTIC
ELECTE
JAN 30 1990
S E D

**PROCEEDINGS OF THE
SOCIETY FOR INFORMATION DISPLAY**

**REPRINTED FROM
VOLUME 29 NO. 4 • 1988
PAGES 275-277**

S I D

**A 1075-LINE VIDEO-RATE LASER-ADDRESSED LIQUID-CRYSTAL
LIGHT-VALVE PROJECTION DISPLAY**

J. Trias, W. Robinson, and T. Phillips

*Naval Ocean Systems Center
San Diego, CA*

B. Merry and T. Hubin

*Chesapeake Laser Systems
Lanham, MD*

Abstract—An all-solid-state 1075-line laser-raster-scanner system conforming to EIA RS 343A with a limiting resolution greater than 1300 TV lines has been developed. The laser raster scanning designed with vertical and horizontal acousto-optic deflectors is used to photoactivate a liquid-crystal light valve for a video-rate large-screen projection display.

Accession For	
NTIS GRA&I	☒
DTIC TAB	☒
Unannounced	☐
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	20



A 1075-LINE VIDEO-RATE LASER-ADDRESSED LIQUID-CRYSTAL LIGHT-VALVE PROJECTION DISPLAY

J. Trias, W. Robinson, and T. Phillips

Naval Ocean Systems Center
San Diego, CA

B. Merry and T. Hubin

Chesapeake Laser Systems
Lanham, MD

Abstract—An all-solid-state 1075-line laser-raster-scanner system conforming to EIA RS 343A with a limiting resolution greater than 1300 TV lines has been developed. The laser raster scanning designed with vertical and horizontal acousto-optic deflectors is used to photoactivate a liquid-crystal light valve for a video-rate large-screen projection display.

I. INTRODUCTION

Light-valve-projector technology offers potential solutions to high-brightness and high-resolution large-screen display requirements. Previously developed liquid-crystal light valves are capable of real-time projection imaging at video rates.¹⁻³ These light valves have the potential of achieving resolution greater than 2,000 TV lines and photosensitivity less than 50 $\mu\text{W}/\text{cm}^2$. However, the current use of these light valves prevents their full utilization potential as an ultra-high resolution device because they are limited by the resolution of the cathode ray tube (CRT) used to photoactivate the liquid-crystal light valve (LCLV).

The goal of this work is to develop an ultra-high resolution (greater than 2,000 TV lines) laser-addressed LCLV imaging system operating at video rates for real-time applications to large-area projection displays. The approach is to identify and develop state-of-the-art high-speed laser-beam scanning techniques with resolution greater than 1,000 TV lines at video rates to photoactivate the LCLV. With this high-resolution objective, high-speed mechanical scanners, such as multifaceted-spinning polygon mirrors, have several disadvantages when operated at TV rates. This display system employs the technique of laser addressing to photoactivate the LCLV.

To exploit the high-resolution and relatively high-speed display capability of the photoactivated LCLV, and to develop a more compact and rugged raster scanner, a 525-line video-rate laser-addressed LCLV, was developed initially.⁴ This first prototype, conforming to an EIA RS-170 TV Standard, included a compact all-solid-state laser raster scanner (LRS) using acousto-optic (AO) components to modulate and deflect the laser beam. The high-speed AO horizontal laser beam deflector employed in this LRS design operated in a conventional way. However, in order to achieve resolution higher than 1,000 TV lines using AO devices, the acoustic traveling wave lens (ATWL)^{5,7} approach was employed.

This paper describes the basic design parameters of the

LRS (using all AO devices to modulate and deflect the laser beam), the characteristics of the major components, and the performance of the prototype display system.

II. CHIRP SCANNER DESCRIPTION

The primary constraint upon the design of the LRS was the desire to use the RS-343-A input signal format. As shown in Table I, this defines the total horizontal line time T to be 31 μsec , of which 7 μsec is allotted to blanking during horizontal flyback.

If standard AOBD is used to produce the horizontal scan, the number of resolvable spots N for such a device can be approximated by⁶

$$N = \tau \Delta f (T - \tau) / T$$

where τ is the time for the acoustic wave to transit the optical beam, Δf is the bandwidth of the frequency sweep, and T is the time during which frequency sweep occurs.

With RS-343-A, only 7 μsec are available to fully develop the diffracted beam, $t = 7 \mu\text{sec}$. Likewise, frequency sweep can occur only over the total line time, giving

$$T = 31 \mu\text{sec}.$$

The requirement for $N = 1280$ resolvable spots/line, therefore, indicates the need for a frequency bandwidth of $f = 236 \text{ MHz}$. Combining this with the necessity of preventing overlap between the first and second diffraction orders, results in the need to operate in a frequency range of 236–472 MHz. Design of a TeO scanner capable of maintaining uniform Bragg diffraction efficiency across this frequency range is difficult.

To avoid this difficulty, a traveling-lens-type AO scanner was used. This technique utilizes the principle that an acoustic chirp (frequency sweep) causes light to converge or diverge like a cylindrical lens. If a short-duration chirp is produced and allowed to propagate across an illuminated aperture, the effect is to scan a focused spot along a line.

TABLE I. LRS Characteristics.

Raster format	1075 lines
Active line time	24 μsec
Horizontal blanking time	7 μsec
Total horizontal line time	31 μsec
Frame rate	30 Hz (interlaced 2:1)
Timing and levels	RS-343-A EIA TV Standard

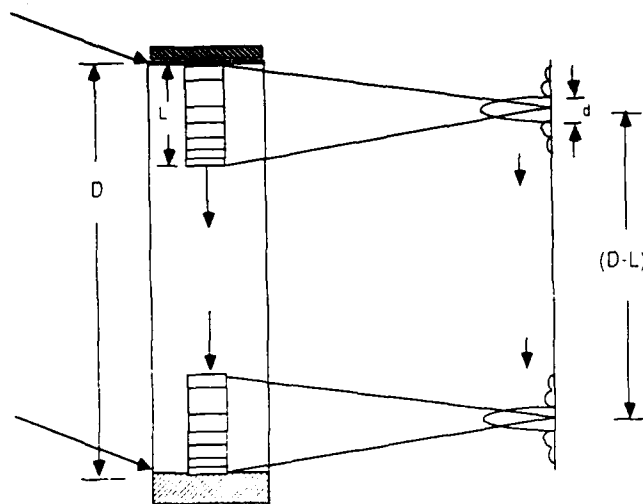


FIG. 1. Acoustic traveling wave lens schematic.

To get an approximation of the resolution of this device, consider Fig. 1. The diffraction-limited spot width d for a lens with uniformly illuminated square aperture of length L is given by

$$d = 2\lambda f_x / L,$$

where f_x is the lens focal length and λ is the vacuum wavelength of the light. The distance d is measured between the first zeros on either side of the central maximum in the diffraction pattern. A chirp lens of duration t_c , traveling in a medium with acoustic velocity v , will have a length

$$L = vt_c.$$

Its focal length can be approximated by⁶

$$f_x = v^2 / (\lambda \Delta f / \Delta t),$$

where $\Delta f / \Delta t$ is the frequency chirp rate. Combining these two equations and noting that the chirp rate is $\Delta f / t_c$,

$$d = \frac{2\lambda}{vt_c} \cdot \frac{v^2}{(\lambda \Delta f / t_c)} = 2v / \Delta f.$$

Typically Rayleigh's criterion is invoked to determine when adjacent spots are "just resolvable". In this case the peak of one spot is aligned with the first zero of the adjacent spot (i.e., their separation is $d/2$). If this criterion is accepted, the total number of spots is found by dividing the length of the active line,

$$D - L = vt_{(\text{active})}$$

by one-half the spot width giving

$$N = \Delta f t_{(\text{active})}.$$

Using this method with RS-343-A active line time and $N = 1280$, we have

$$\Delta f = 1280 / 24 \mu\text{sec} = 53.3 \text{ MHz}.$$

Thus, using the traveling chirp lens approach allows one to achieve the desired resolution using acoustic frequencies in the 50-100 MHz range, which are much better suited for flat response in TeO_2 crystals.

III. BASIC DESIGN OF THE LRS

Acousto-optic laser scanning with resolutions greater than

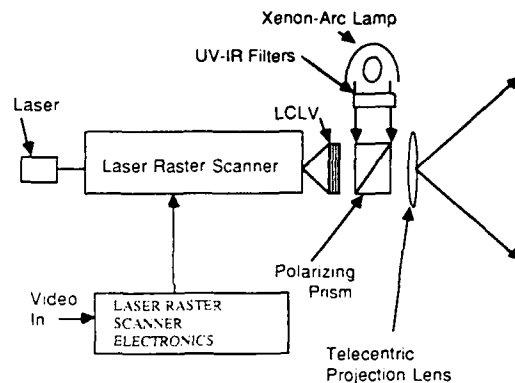


FIG. 2. Schematic diagram of laser/light-valve display prototype.

one thousand spots per scan line has been shown previously by several workers.⁵⁻⁷ However, these scanning systems operated at less than video frame rates.

The specifications for the video-rate LRS design are given in Table 1.

IV. MAJOR COMPONENTS

The major components or subsystems are the laser, the laser raster scanner (LRS), the LCLV, and the projection optics. Figure 2 shows a schematic of the prototype incorporating the LRS for a large-area projection-display application.

V. THE LASER

A 20-mW air-cooled argon-ion CW laser at 514.5 nm was sufficient to get the required $100 \mu\text{W}/\text{cm}^2$ at the plane surface of the LCLV photoconductor.

Recently, the argon-ion laser was replaced with a frequency-doubled diode-pumped Nd:YAG laser, with 20-mW output at 532 nm.

VI. THE LASER RASTER SCANNER

The key optical components of the LRS are shown in Figure 3. The main components shown in Figure 3 are the following: BC1 is an acousto-optic modulator (AOM) Bragg cell, with an MTF of 0.5 at 50 MHz; BC2 is a low-resolution AO beam deflector to allow the laser beam to track the chirp (the ATWL) in BC3 which increases the optical efficiency of the scanner system; BC3 is a high-resolution AO horizontal traveling lens deflector driven by the chirp; BC4 is a high-resolution but low-speed AO deflector for the vertical scan; S is an optical stop; C is a cylindrical lens; and $\lambda/4$ is a quarter-wave plate.

VII. THE LIQUID-CRYSTAL LIGHT VALVE (LCLV)

The LCLV spatially modulates the high-intensity light from an arc lamp source for projection onto a large screen. The LCLV employed is a reflective-mode device which has a cadmium sulphide photosensor on one side to read the laser write-beam and a liquid-crystal layer on the other side to modulate the high-intensity xenon read-out beam.

In operation, the LCLV photosensor layer is illuminated

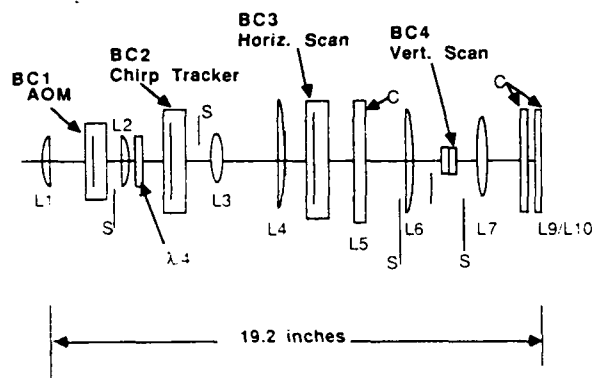


FIG. 3. Optical schematic diagram of the 1280 by 1024 resolution laser raster scanner prototype

by a write-beam from the LRS. An excitation voltage of 10 V rms at 10 kHz is applied across the LCLV. In the absence of write-beam illumination, most of the applied voltage appears across the photosensor. With illumination, the resistance of the photosensor drops and the voltage is gated to the liquid-crystal layer, thus spatially modulating the polarization of the xenon-arc beam. For detailed description and operation of the CdS-LCLV, see Refs. 1, 2, and 3.

VIII. THE PROJECTION OPTICS

The image projection system, shown in Fig. 2, consists of an arc lamp, ultraviolet and infrared filters, polarizing prism, and a telecentric projection lens. Light from the projection lamp is collimated, filtered, polarized, and directed (by the prism) to the read-side of the LCLV cell. The projection light beam then passes through the liquid-crystal layer of the LCLV and is reflected by the dielectric mirror back through the polarizing prism. The polarizing prism serves both as a polarizer and an analyzer in the transmission of optical information from the LCLV to the telecentric lens for projection onto the screen.

IX. PERFORMANCE

This prototype monochrome projection display system is capable of receiving input signals from a TV receiver, TV camera, computer data terminal, TV signal test gen-

erator, conforming to a modified 1075-line RS-343A high-resolution TV standard. Limiting resolution of more than 1300 TV lines has been measured using a TV test-generator input signal. Overall optical throughput efficiency of the laser raster scanner system is 2%.

X. SUMMARY

The goal of this work is to exploit the potential high-resolution and relatively high-speed display capabilities of the photoactivated LCLV. The use of Bragg cells with limiting resolution greater than 1300 TV lines at video rates has been demonstrated. With further improvements (mainly on the photoactivated LCLV, the Bragg cell components, and chirp drive electronics), higher resolution at TV rates can be realized. The design of a full-color projection display version of the current monochrome system is being pursued.

ACKNOWLEDGEMENTS

This effort was made possible with the initial funding support from an Internal Exploratory Development Program at Naval Ocean Systems Center, and subsequent support from NAVSEA, ONT, and NTSC. The authors express their thanks to Dr. Sherman Gee of ONT, Mr. P. Andrews of NAVSEA, Mr. D. Breglia of NTSC, and Dr. J. Silva, Dr. E. Cooper, Mr. A. D. Gomez, and Mr. P. Soltan of NOSC for encouragement and useful discussions. The authors thank Dr. E. Schimitschek and Dr. F. Hanson of NOSC for providing us with additional support on the first laser-light-valve display application of the solid-state laser.

REFERENCES

- ¹W. P. Bleha et al., SID International Symposium Digest of Technical Papers 4, 42 (1973).
- ²J. Greenberg et al., Proceedings of the SPIE 128, 253-266 (1977).
- ³J. Greenberg et al., IEEE Trans. Electron Dev. ED-2, No. 9 (1975).
- ⁴J. A. Trias, "Laser-Addressed Liquid Crystal Light Valve Display at Video Scan Rates," paper presented at ICALEO (International Conference on Application of Lasers and Electro-Optics), 1984.
- ⁵R. H. Johnson and R. M. Montgomery, "Optical Beam Deflection Using Acousto-Optic Wave Technology," SPIE 90 Acousto-Optics (1975), presented at the SPIE Symposium (August 1976).
- ⁶J. B. Merry and L. Bademian, "Acousto-Optic Laser Scanning," SPIE (1979), Vol. 169, Laser Printing.
- ⁷L. Bademian, "Acousto-Optic Laser Recording," Optical Engineering (Jan/Feb 1981), Vol. 20, No. 1.