

4

DTIC FILE COPY

CHEMICAL
RESEARCH,
DEVELOPMENT &
ENGINEERING
CENTER

CRDEC-TR-188

1,3-DIISONITROSOACETONE AND
4,4'-BIS(DIETHYLAMINO)BENZOPHENONE OXIME
AS METHANESULFONYL CHLORIDE VAPOR-SENSING COATINGS
FOR OPTICAL-BASED MICROSENSORS

AD-A224 163

Thaddeus J. Novak
RESEARCH DIRECTORATE

Vikki D. Henderson
John A. Parsons
GEO-CENTERS, INC.
Newton Centre, MA 02159

June 1990

DTIC
ELECTE
JUL 25 1990
S B D



U.S. ARMY
ARMAMENT
MUNITIONS
CHEMICAL COMMAND

Aberdeen Proving Ground, Maryland 21010-5423

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

90 07 23 104

Disclaimer

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorizing documents.

Distribution Statement

Approved for public release; distribution is unlimited.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE 1990 June	3. REPORT TYPE AND DATES COVERED Final, 86 Nov - 87 Oct	
4. TITLE AND SUBTITLE 1,3-Diisonitrosoacetone and 4,4'-Bis(Diethylamino)-benzophenone Oxime as Methanesulfonyl Chloride Vapor-Sensing Coatings for Optical-Based Microsensors		5. FUNDING NUMBERS PR-1C162706A553	
6. AUTHOR(S) Novak, Thaddeus, J. (CRDEC), Henderson, Vikki D., and Parsons, John A. (GEO-CENTERS, INC.)			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) CDR, CRDEC, ATTN: SMCCR-RSC-C, APG, MD 21010-5423 GEO-CENTERS, INC., NEWTON CENTRE, MA 02159		8. PERFORMING ORGANIZATION REPORT NUMBER CRDEC-TR-188	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES			
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.		12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) ↓ The chromogenic detector reagents 1,3-diisonitrosoacetone (DIA) and 4,4'-bis(diethylamino)benzophenone oxime (EMKO) have been studied as solid-state coatings for sensing methane-sulfonyl chloride vapor. The strength of the optical detection signals produced on contact of the coatings with methanesulfonyl chloride vapor are strongly affected by the composition of the solid reaction support; silica gel is the preferred support for coatings made with either reagent. When monitored with a fiber-optic spectrophotometer, coatings made with DIA and EMKO are capable of sensing methanesulfonyl chloride vapor down to the low parts per million level.) At 25 °C, the DIA coatings are stable for up to 5 days while the EMKO coatings are stable for <1 day.			
14. SUBJECT TERMS 4,4'-Bis(diethylamino)benzophenone oxime, Microsensor coating, Chromogenic, EMKO 1,3-Diisonitrosoacetone, Solid-state, DIA Methanesulfonyl chloride, Silica gel, Vapor detection. (JES)			15. NUMBER OF PAGES 17
			16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL

Blank

PREFACE

The work described in this report was authorized under Project No. 1C162706A553, CB Defense and General Investigation. This work was started in November 1986 and completed in October 1987. It is reported in laboratory notebooks 86-0006, 86-0209, and 87-0019.

The use of trade names or manufacturers' names in this report does not constitute an official endorsement of any commercial products. This report may not be cited for purposes of advertisement.

Reproduction of this document in whole or in part is prohibited except with permission of the Commander, U.S. Army Chemical Research, Development and Engineering Center, ATTN: SMCCR-SPS-T, Aberdeen Proving Ground, Maryland 21010-5423. However, the Defense Technical Information Center and the National Technical Information Service are authorized to reproduce the document for U.S. Government purposes.

This report has been approved for release to the public.



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

Blank

CONTENTS

	Page
1. INTRODUCTION.....	7
2. EXPERIMENTAL PROCEDURES.....	7
2.1 Materials.....	7
2.2 Equipment and Procedures.....	7
2.2.1 Preparation of Coatings.....	7
2.2.2 Gas-Solid Reaction Studies.....	8
2.2.3 Stability Studies.....	9
3. RESULTS AND DISCUSSION.....	9
4. CONCLUSIONS.....	15
LITERATURE CITED.....	17

List of Figures and Tables

Figures

1	Apparatus for Gas-Solid Reaction Studies.....	8
2	Effect of Composition of Solid Support on the Response of DIA Coatings Exposed to MSC Vapor.....	10
3	Effect of Composition of Solid Support on the Response of EMKO Coatings Exposed to MSC Vapor.....	10
4	Spectra from Reaction of DIA Coating on Silica Gel Support with MSC Vapor as a Function of Time.....	11
5	Spectra from Reaction of EMKO Coating on Silica Gel Support with MSC Vapor as a Function of Time.....	12
6	Spectra Showing Effect of Photochemical Decomposition of EMKO Coated on a Silica Gel Support as a Function of Time.....	13
7	Detection Profiles for Reaction of DIA Coating with Three Different Levels of MSC Vapor.....	14
8	Detection Profiles for Reaction of EMKO Coating with Three Different Levels of MSC Vapor.....	14

Table

Stability Studies of DIA and EMKO Coatings.....	15
---	----

1,3-DIISONITROSOACETONE AND 4,4'-BIS(DIETHYLAMINO)BENZOPHENONE OXIME
AS METHANESULFONYL CHLORIDE VAPOR-SENSING COATINGS
FOR OPTICAL-BASED MICROSENSORS

1. INTRODUCTION

Currently, there is interest in developing small, lightweight, portable devices for sensing minute quantities of chemical agent vapors. Fiber-optic waveguides recently adapted for use in chemical analyses¹ or similar types of optical-detection devices using vapor-sensing coatings may ultimately be developed as microsensors to satisfy this need.

Vapor-sensing coating materials for the optical-based microsensors can be chromogenic detector reagents of the "direct-acting" type; that is, they change color when they come in contact with the analyte. Two direct-acting chromogenic reagents are of special interest as candidate microsensor coatings because of their reported capability of detecting nerve agents at low vapor concentration levels. A crayon containing 1,3-diisonitrosoacetone (DIA) was reported² to be capable of detecting the nerve agent GB (isopropyl methylphosphonofluoridate) in air at a concentration of 1 $\mu\text{g/L}$ (ca. 0.2 ppm) after a 6-min exposure. A similar composition containing 4,4'-bis(diethylamino)benzophenone oxime, also known as Ethyl Michler's Ketone Oxime (EMKO), was reported³ to be capable of detecting the nerve agent GA (ethyl dimethylphosphoroamidocyanate) in air at a concentration of 44 $\mu\text{g/L}$ (ca. 6 ppm) in <10 s. Mechanisms of the reactions of DIA⁴ and EMKO⁵ that lead to the formation of colored products have also been reported. We report here results of studies that were carried out with methanesulfonyl chloride (MSC), a nerve agent simulant, to determine spectral properties of sensitive solid-state coatings made with DIA and EMKO for a starting point in studies with nerve agents and to identify essential characteristics of detection hardware that can use the coatings.

2. EXPERIMENTAL PROCEDURES

2.1 Materials.

1,3-Diisonitrosoacetone guanidinium salt was obtained from Polysciences, Inc. (Warrington, PA) and 4,4'-bis(diethylamino)benzophenone oxime was obtained from a custom synthesis carried out by HJ Laboratories (Columbus, OH). Methanesulfonyl chloride was obtained from Aldrich Chemical Company (Milwaukee, WI). Media (tlc) containing silica gel (Type 5539) and cellulose (Type 5552-7) were obtained from E. Merck AG [Darmstadt, Germany, E.M. Science (Cherry Hill, NJ)]. Alumina tlc media (Type 060408) was obtained from Fluka Chemical Corporation (Ronkonkoma, NY). Glass fiber support material (Type 8064) was obtained from Gelman, Inc. (Ann Arbor, MI).

2.2 Equipment and Procedures.

2.2.1 Preparation of Coatings.

The DIA and EMKO reagents were tested after they had been applied to solid supports. The DIA salt (10 mg/mL) was dissolved in water, and EMKO

(75 mg/mL) was dissolved in dichloromethane. Supports were coated by adding a 4- μ L drop of solution containing the candidate reagent to a piece of the support (1/2 by 1/2 in.) and allowing the solvent to evaporate.

2.2.2 Gas-Solid Reaction Studies.

A sketch of the apparatus used for the gas-solid reaction studies that includes a chemical vapor generator, a Teflon reaction chamber, and a fiber-optic spectrophotometer is shown in Figure 1. The chemical vapor generator⁶ supplied the required levels of MSC vapor. The gas-solid reaction involving the candidate coating and test vapor was carried out in the reaction chamber, and the color change that occurred in the coating was monitored with the fiber-optic spectrophotometer.

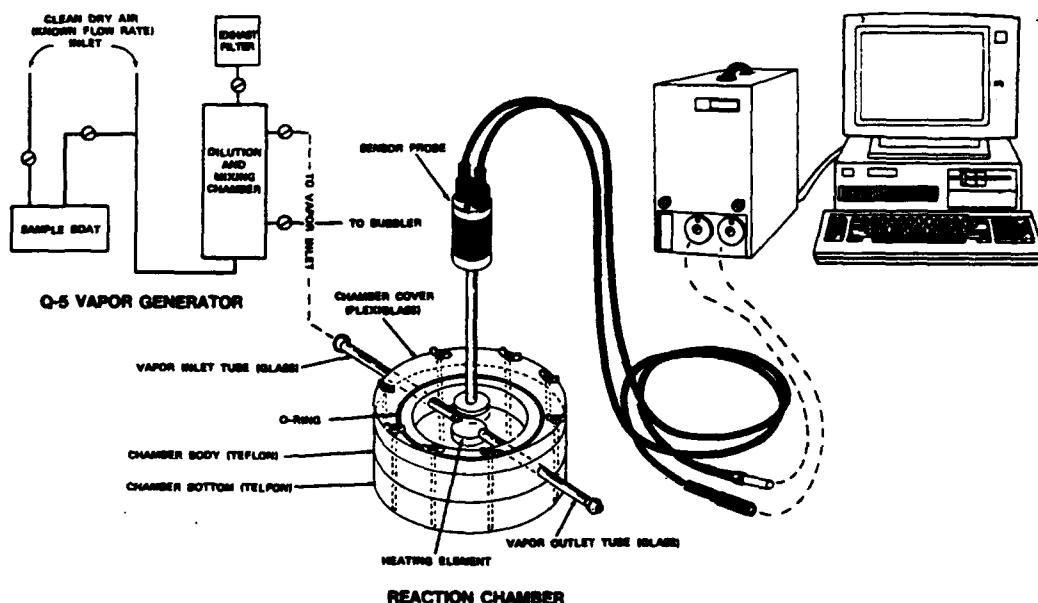


Figure 1. Apparatus for Gas-Solid Reaction Studies

The fiber-optic spectrophotometer (an Optical Waveguide Spectrum Analyzer Model 200) was from Guided Wave, Incorporated (Rancho Cordova, CA).⁷ A silicon detector and a six-to-one probe (Catalog No. WW100-1) were used. The reflectance tip was removed from the probe, and the end of the probe was positioned so that it was 5 mm directly above the portion of a solid support that contained the candidate coating. The probe was clamped, keeping it perpendicular to the surface of the solid support. Reflectance spectra of the coating were obtained by positioning the probe in this manner.

The required level of MSC vapor was obtained by regulating the flow rates of the vapor and dilution streams in the chemical vapor generator. Collecting the vapor in 2-methoxyethanol and assaying the solution spectrophotometrically at 510 nm using EMKO as the analytical reagent determined actual MSC concentrations.

The coated support was placed coated side up on the top surface of a metal heating element in the reaction chamber. The support was positioned so the coating was directly below the fiber-optic probe. The tests were carried out at room temperature (25-28 °C). Prior to an experiment, the fiber-optic spectrophotometer was adjusted to perform optimally, and the vapor generator was adjusted so the required concentration of MSC vapor was being generated. The vapor stream was vented until a reference spectrum of the coating was obtained. After the reference spectrum was obtained, the inlet and outlet valves of the reaction chamber were set so MSC vapor passed through the chamber. Reflectance spectra covering a preselected spectral region were then obtained with time.

2.2.3 Stability Studies.

Exposing coatings that had been aged at 25 °C to MSC vapor (ca. 4000 ppm) and visually determining when the extent of aging affected the chromogenic response determined the stability of the coatings on silica gel supports. A typical test was performed as follows. A piece of the aged coated support (1/2 by 1/2 in.) was attached to a microscope slide with cellophane tape. When the support was attached to the slide, care was taken to see that the coating was not covered. The slide was placed in a 250-cm³ jar so the top of the slide rested against the wall. Using a 10-μL syringe, a solution of MSC in dichloromethane (10 μL, 10% v/v) was injected along the inside wall of the jar. The jar was capped, and the coating was visually observed to determine the time required to produce a color change.

3. RESULTS AND DISCUSSION

Tests conducted by exposing a DIA or EMKO coating on four different types of solid supports to MSC vapor (20 ppm) showed that silica gel is the preferred reaction support (Figures 2 and 3). Each bar in the graphs represents the difference in the signal intensity obtained before and after exposure to MSC vapor. Compared with the next best support for each coating, the responses of the DIA and EMKO reagents coated on the silica gel support were about 10 times and 6 times as large, respectively. Consequently, silica gel was selected as the reaction support for the coatings that were studied in detail.

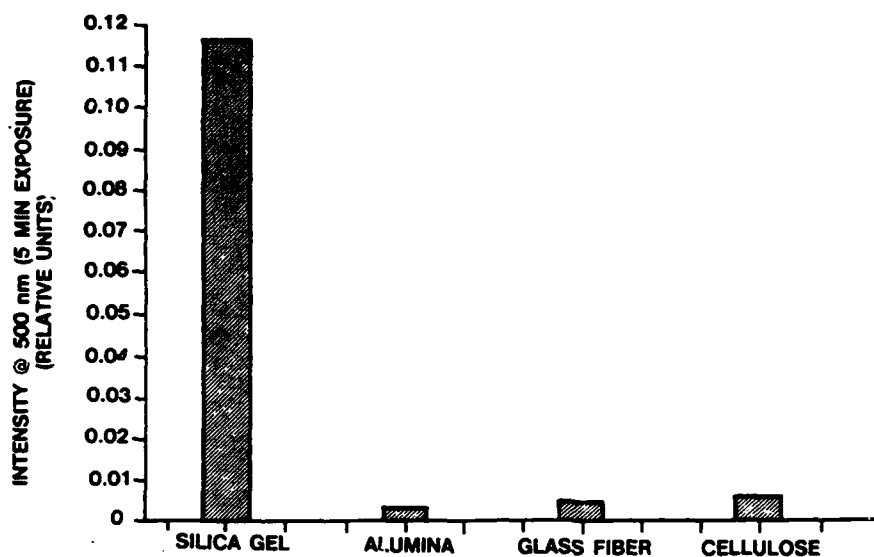


Figure 2. Effect of Composition of Solid Support on the Response of DIA Coatings Exposed to MSC Vapor

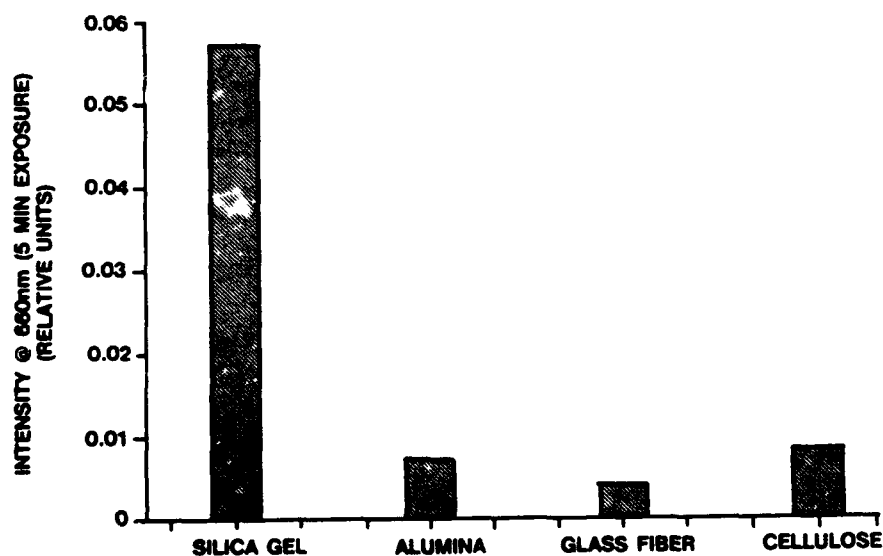


Figure 3. Effect of Composition of Solid Support on the Response of EMKO Coatings Exposed to MSC Vapor

Figures 4 and 5 contain the reflectance spectra obtained with time during the reactions of MSC vapor with DIA and EMKO coatings, respectively. The MSC vapor concentrations were 14 ppm for studies with DIA and 18.5 ppm for studies with EMKO. The DIA coating produced a single broad peak in the visible region of the spectrum with a reflectance maximum at 500 nm. The EMKO coating also produced a reflectance maximum near 500 nm but differed from the response of the DIA coating in that it also produced prominent shoulders near 550 and 660 nm.

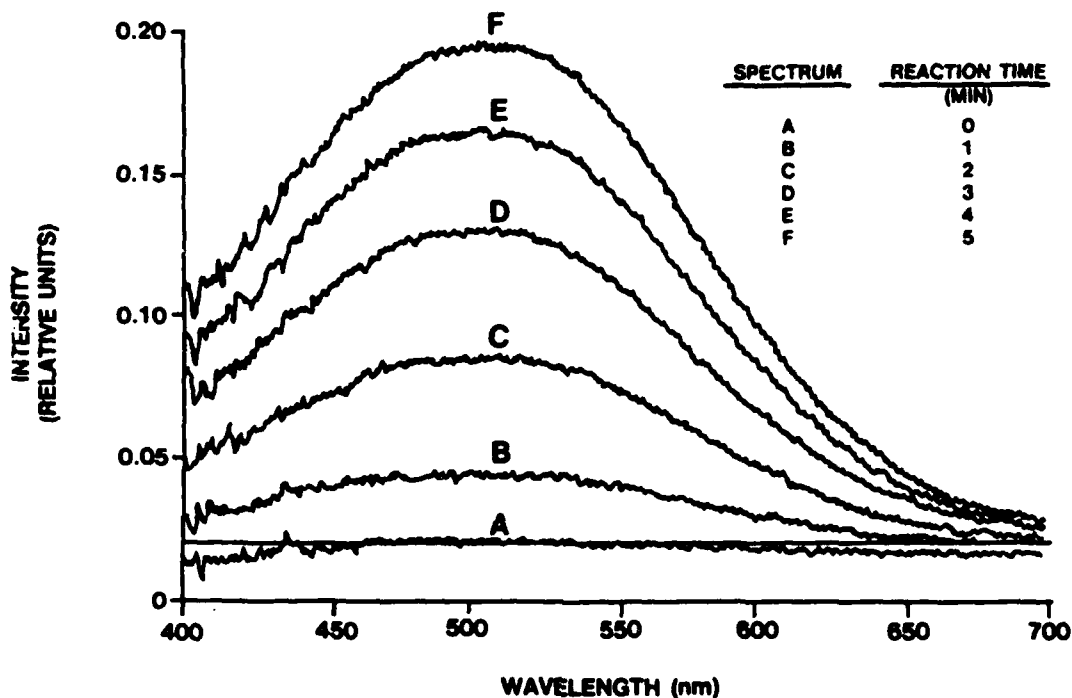


Figure 4. Spectra from Reaction of DIA Coating on Silica Gel Support with MSC Vapor as a Function of Time

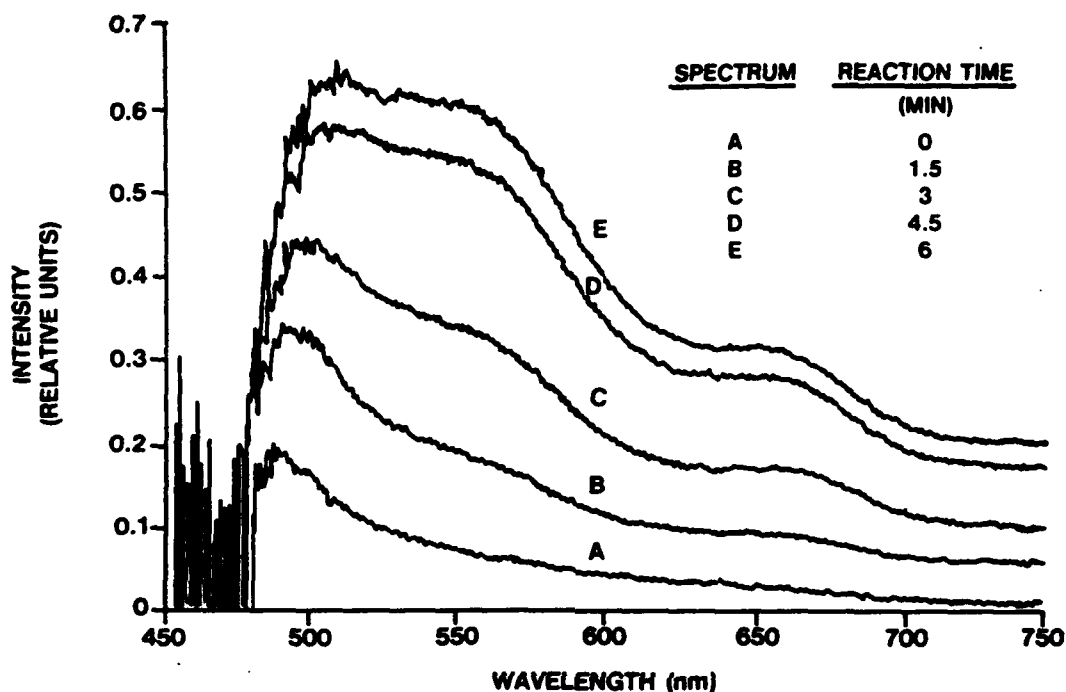


Figure 5. Spectra from Reaction of EMKO Coating on Silica Gel Support with MSC Vapor as a Function of Time.

The spectra of the DIA coating did not differ from that of the background (silica gel support) until it was exposed to MSC vapor; hence, the optimum wavelength for monitoring the coating is 500 nm, which is the reflectance maximum of the colored product. With EMKO, the optimum wavelength was more difficult to ascertain, because the coating degraded when it was illuminated with light from the fiber-optic probe. Reflectance spectra obtained as a function of time for the EMKO coating illuminated with light from the fiber-optic probe in the absence of MSC vapor are shown in Figure 6. The strongest increase in the intensity of reflectance occurred in the 450-550-nm range; but some increase occurred even up to 700 nm. Because the change in reflectance due to photodegradation of the coating was smallest in the higher wavelength region of the spectrum, 660 nm was judged to be the optimum wavelength to monitor the EMKO coating.

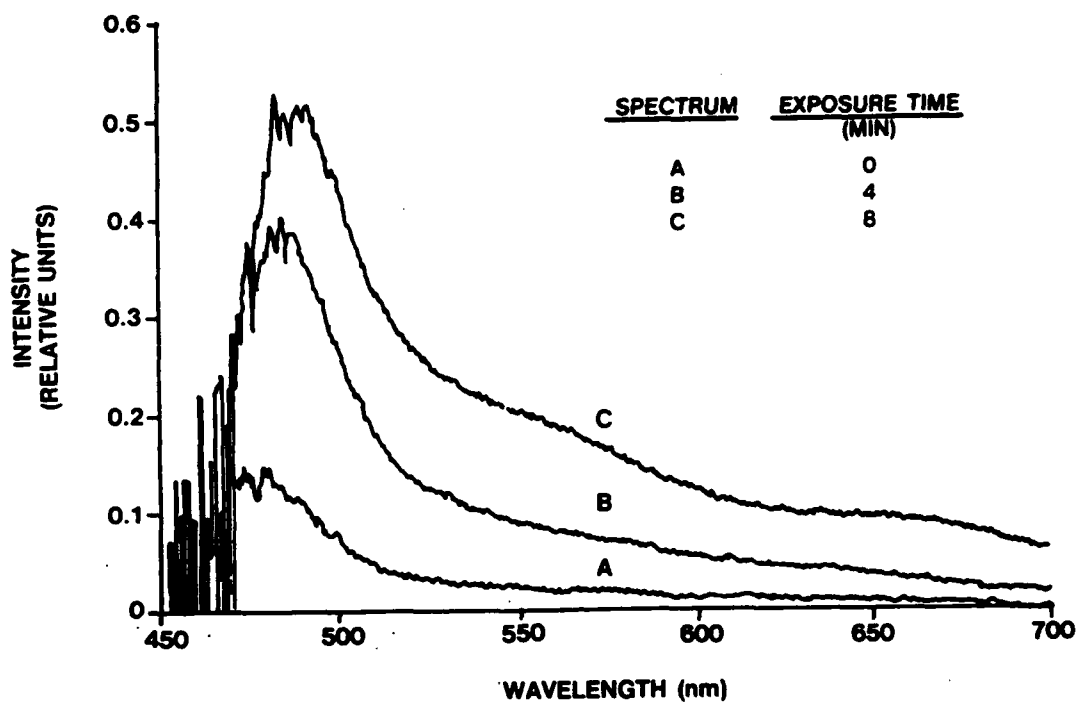


Figure 6. Spectra Showing Effect of Photochemical Decomposition of EMKO Coated on a Silica Gel Support as a Function of Time

After the optimum wavelengths for monitoring the responses of the coatings had been selected, detection profiles for the coatings in the presence of various concentrations of MSC vapor were determined. These results are shown for the DIA coating in Figure 7 and for the EMKO coating in Figure 8. The data in these figures indicate that both the DIA and EMKO coatings are capable of detecting MSC vapors in the low parts per million (ppm) range. However, the DIA coating has a significant advantage over the EMKO coating, because it gives a sharper change in the detection profile when the coating initially comes in contact with MSC vapor and the baseline (region of detection profile obtained prior to exposure to MSC vapor) contains much less noise. Thus, a lower detection limit for MSC and other analytes will probably be attainable with the DIA coating.

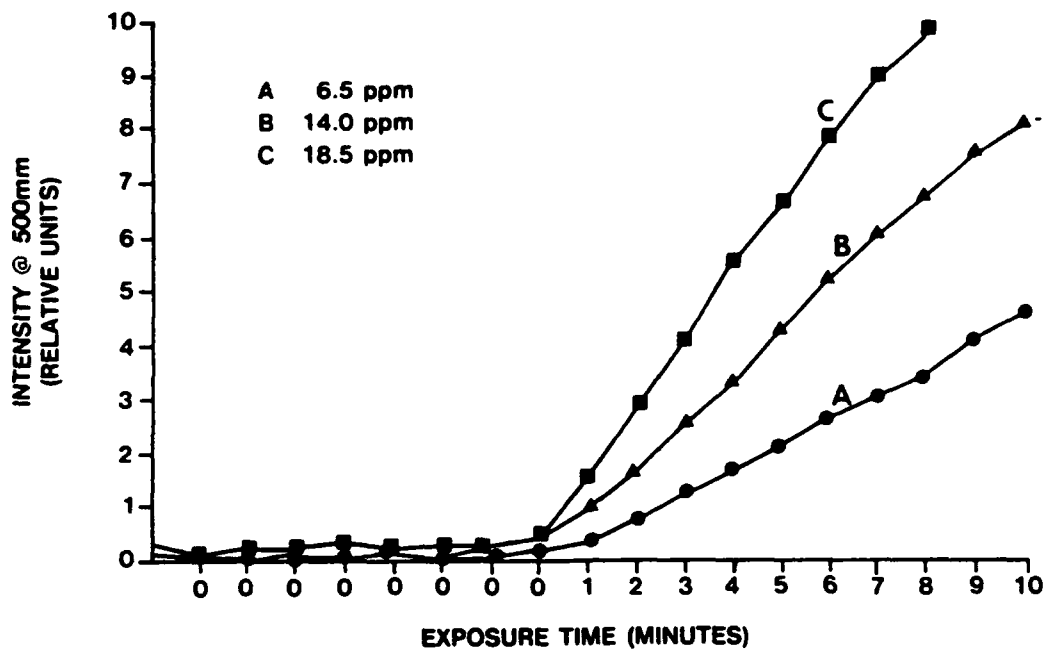


Figure 7. Detection Profiles for Reaction of DIA Coating with Three Different Levels of MSC Vapor

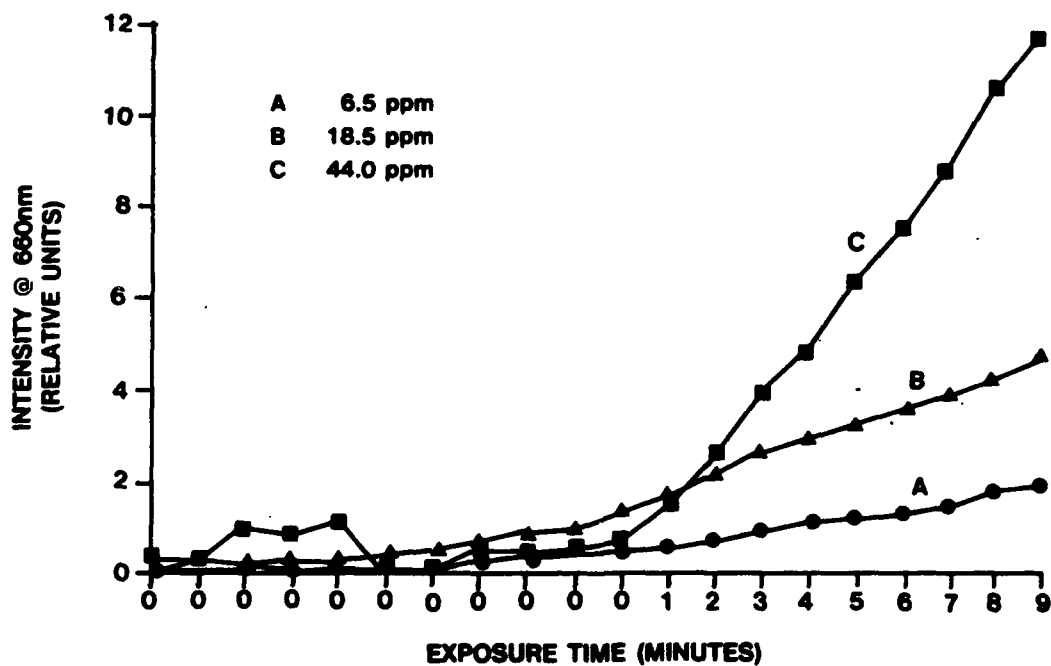


Figure 8. Detection Profiles for Reaction of EMKO Coating with Three Different Levels of MSC Vapor

The table contains results of stability studies carried out by visually monitoring the responses to MSC vapor (ca. 4000 ppm) of DIA and EMKO coatings that had been stored in the dark at 25 °C.

Table. Stability Studies of DIA and EMKO Coatings

COATING	AGING TIME	DETECTION RESPONSE
	(days)	(color change; response time)
DIA	0-5	colorless-->magenta; 45 s
	6	colorless-->magenta; 1 min
EMKO	0	bright yellow-->red; 3.5 min
	1	bright yellow-->red; 4 min
	2	dark yellow-->red; 15 min
	3	yellow brown-->red; 15 min

No change was observed in the response of DIA coatings stored up to 5 days in the dark. By comparison, EMKO coatings showed some deterioration in response time after being stored only 1 day and pronounced deterioration in the time and quality of the visual response after having been stored 2 days. In tests conducted with coatings that had been stored under fluorescent illumination (430 lx), DIA coatings performed the same as those aged in dark; whereas, EMKO coatings stored for less than 10 min showed significant degradation.

4. CONCLUSIONS

This study shows that the strength of the response of DIA and EMKO coatings to MSC vapor are strongly affected by the composition of the solid reaction support. Based on the strength of the detection signal produced during exposure of the coatings to MSC vapor, silica gel is the preferred support for coatings made with either reagent. Coatings made with DIA or EMKO are capable of sensing MSC vapor down to the low ppm level. However, only the DIA coating has sufficient stability (5 days at 25 °C) for use as a vapor-sensing coating for solid-state sensors. Because of the limited stability of the DIA reagent, provisions should be included in the design of the detection hardware to enable frequent replacement of the coated support. Also, the hardware should include provisions for monitoring the DIA coating at 500 nm.

Blank

LITERATURE CITED

1. Seitz, R.W., "Chemical Sensors Based on Fiber Optics," Anal. Chem. Vol. 56 (1), pp 16A-34A (1984).
2. Pfeil, R.W., Crayon for the Detection of G-Agents, U.S. Patent No. 2,929,791, 22 March 1960.
3. Kramer, D.N., and Morin, R.D., Detection of G-Agents, U.S. Patent No. 2,926,072, 23 February 1960.
4. Aginskiy, V.N., Pletnev, S.I., Lyamin, I.A., and Chebotarev, O.V., "Mechanism Involved in the Formation of a Colored Product Resulting from the Reaction of the Pipendinium Salt of Diisonitrosoacetone and Acetylating Agents," Zhurnal Vsesoyuznogo Khimicheskogo Obshchestva im. D.I. Mendeleeva Vol. 26, pp 227-229 (1980).
5. Porier, R.H., Morin, R.D., Pfeil, R.W., Bearse, A.E., Kramer, D.N., and Miller, F.M., "Beckman Rearrangement of Michler's Ketone Oxime in the Presence of Cyanide," J. Org. Chem. Vol. 27, pp 1547-1549 (1962).
6. Instruction Manual for the Installation, Operation, and Maintenance of Dilution Apparatus, Q5, Instruction Manual 136-300-52E, Edgewood Arsenal, Aberdeen Proving Ground, MD, 3 May 1976.
7. Schimer, R.E., and Gargus, A.G., "Remote Chemical Sensing Using Fiber Optics and UV-VIS-IR Spectroscopy," American Laboratory Vol. 18 (12), pp 30-39 (1986).