



VIAS BULLETIN

Approved for public release; distribution unlimited

①

OFFICE OF NAVAL RESEARCH EUROPEAN OFFICE Box 39, FPO New York 09510-0700 Phone (AV)235-4131 (Comm) 409-4131

MASB 45-89

7 September 1989

DTIC FILE COPY

High Performance Electroluminescent Memory Display

Background. Thin film electroluminescent (EL) devices with memory are very attractive for panel displays with high information content. Practical development of EL memory displays have been hampered by problems of instability and reproducibility. Professor I. Solomon of the Ecole Polytechnique in Palaiseau, France, and Dr. P. Thioulouse of the nearby Centre National d'Etudes des Télécommunications (CNET) Laboratoire in Bagnex, proposed a new thin film structure in 1986 which overcomes these problems. Prototype displays have since been developed. In this device, a photoconducting (PC) thin film of amorphous silicon is added to the usual sandwich structure for EL displays. The memory effect results from the optical coupling between the PC thin film and the EL active layer. In the *off* state, the PC layer is high impedance and thus the voltage drop across the EL layer is small. In the *on* state, the PC layer has a low impedance caused by the illumination from the EL film. The hysteretic switching of the PC film provides a memory effect which is controlled by the external bias. The PC film also improves the contrast ratio by providing a high impedance isolation of the EL film in the *off* state.

Technical Properties. The performance characteristics for the memory effect of the Thin-Film-Photo-Conductor-Electroluminescent (TFPCEL) device is shown in Figure 1.

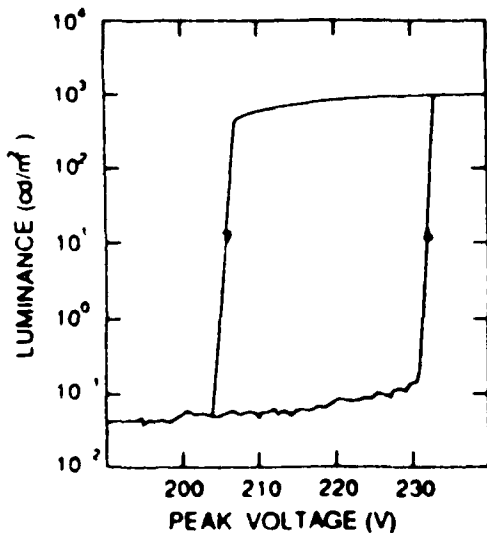


Figure 1. Actual hysteresis curve of an electroluminescent device with pixel memory. Operation in the dark with a 1 kHz sin-wave.

Phototype displays have been fabricated with a panel format of 640 by 400 pixels. The dimensions of the array are 195 by 122 mm-squared. The operational parameters for the display are summarized in Table 1.

	Typical EL screen	Normal L Option	High L Option
Mean luminance (cd/m ²)	25 ²	50	325
Typical power	17 W	1.6 W	11 W
Peak current per line	50 mA	0.5 mA	3 mA
Peak current per column	9 mA	70 A	0.5 mA
Switch voltage - line	220 V	45 V	45 V
Switch voltage - column	60 V	15 V	15 V

¹ Display surface: 195x122 mm²
² With circular polarizer
³ Estimated values

For additional information contact Dr. P. Thioulouse at the Centre National d'Etudes des Télécommunications Laboratoire, 196, rue Henri-Ravera, 92220 Bagnex, France. Telephone (33-1) 45 29 44 44.

ONREUR point of contact: Dr. Dean L. Mitchell, Liaison Scientist for Solid State Physics.

Distribution:
 Standard
 Aero/Avionics
 Electromagnetics

DTIC ELECTE
 MAR 27 1991
 S B D

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification _____	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

OFFICE OF NAVAL RESEARCH
EUROPEAN OFFICE BOX 39
FPO NEW YORK 09510-0700

MASBULLETIN

MASBULLETIN

MASBULLETIN