

AD-A236 035



DOCUMENTATION PAGE

1a. REP Unc		1b. RESTRICTIVE MARKINGS	
2a. SEC		3. DISTRIBUTION / AVAILABILITY OF REPORT Distribution unlimited	
2b. DECLASSIFICATION / DOWNGRADING SCHEDULE		5. MONITORING ORGANIZATION REPORT NUMBER(S)	
4. PERFORMING ORGANIZATION REPORT NUMBER(S) Technical Report No. 1		7a. NAME OF MONITORING ORGANIZATION Office of Naval Research	
6a. NAME OF PERFORMING ORGANIZATION Harvard University	6b. OFFICE SYMBOL (If applicable)	7b. ADDRESS (City, State, and ZIP Code) 800 N. Quincy Street Arlington, VA 22217-5000	
6c. ADDRESS (City, State, and ZIP Code) Department of Chemistry 12 Oxford Street Cambridge, MA 02138		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER N00014-91-J-1012	
8a. NAME OF FUNDING / SPONSORING ORGANIZATION Office of Naval Research	8b. OFFICE SYMBOL (If applicable) ONR	10. SOURCE OF FUNDING NUMBERS	
8c. ADDRESS (City, State, and ZIP Code) 800 N. Quincy Street Arlington, VA 22217-5000		PROGRAM ELEMENT NO.	PROJECT NO.
11. TITLE (Include Security Classification) Supersonic Pyrolysis Jets for Diamond Film Deposition		TASK NO.	WORK UNIT ACCESSION NO.
12. PERSONAL AUTHOR(S) Peter Chen		15. PAGE COUNT 11	
13a. TYPE OF REPORT Technical	13b. TIME COVERED 5/22/ FROM 10/1/90 TO 91	14. DATE OF REPORT (Year, Month, Day) 1991 May 22	
16. SUPPLEMENTARY NOTATION			
17. COSATI CODES		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number)	
FIELD	GROUP	SUB-GROUP	
19. ABSTRACT (Continue on reverse if necessary and identify by block number)			
<p>We have constructed and tested new higher-temperature ceramic (ZrO₂ and SiC) pyrolysis nozzles that can operate continuously at 1700°C for several hours. The two successful designs were used to generate intense (10¹⁶sec⁻¹) beams of hydrocarbon radicals and carbenes by thermal decomposition of appropriate precursors that were inaccessible with our previous Al₂O₃ designs. The new nozzle design makes possible quantitative sequential homolytic cleavage of a C-Br bond to generate a radical, or two C-Br bonds to generate a carbene. We generated a molecular beam of propadienylidene (l-C₃H₂) from 1,3-dibromopropyne in this fashion.</p>			
20. DISTRIBUTION / AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS		21. ABSTRACT SECURITY CLASSIFICATION Unclassified	
22a. NAME OF RESPONSIBLE INDIVIDUAL Dr. Harold E. Guard		22b. TELEPHONE (Include Area Code) (703) 696-4409	22c. OFFICE SYMBOL ONR

DTIC
SELECTED
MAY 30 1991
SEALED

OFFICE OF NAVAL RESEARCH

GRANT N00014-91-J-1012

R&T Code 413u004--01

Technical Report No. 1

Supersonic Pyrolysis Jets for Diamond Film Deposition



by

Peter Chen

Harvard University
Department of Chemistry
Cambridge, MA 02138

June 1, 1991

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

Reproduction in whole or in part is permitted for any purpose of the United States Government.

This document has been approved for public release and sale; its distribution is unlimited.

91 5 29 018

91-00661



TECHNICAL REPORT FOR GRANT #N00014-91-J-1012

Supersonic Pyrolysis Jets for Diamond Film Deposition

Peter Chen
Assistant Professor of Chemistry
Harvard University

May 12, 1991

Introduction

Recent progress in the production of high-intensity supersonic free jets of hydrocarbon radicals (e.g. CH_n , C_2H_n , C_3H_n), has made it possible to investigate the growth mechanism of diamond and diamond-like carbon by bombardment of a substrate with a well-characterized supersonic flow of defined radicals. This report details the first phase of the project, encompassing source design, and the engineering of specific radical precursors. Efficacy of both source and precursor is determined spectroscopically. Construction of a vacuum chamber in which the precursors and nozzles will be used to attempt deposition of diamond-like carbon or diamond itself from a free jet of radicals is underway. We expect the chamber to be working by the end of summer 1991. Progress until then consists of the following areas in which key methodological approaches are worked out.

Recent Progress in Nozzle Design

Our previous externally-heated, Al_2O_3 pyrolysis nozzles suffered from several limitations which would limit their usefulness in any deposition application: (i) A practical upper limit of 1500°C precluded complete pyrolysis for molecules for which the activation energy for reaction exceeded ≈ 50 kcal/mol, and (ii) the wirewound Al_2O_3 tube nozzles had relatively short lifetimes at the higher operating temperatures. The

lifetime was sufficient for some spectroscopic studies, but would limit other uses, such as deposition.

To circumvent these problems, we have constructed nozzles from electrically conducting ceramics that can be resistively heated directly. Heat transfer is no longer a problem, and the two materials chosen, stabilized ZrO_2 and recrystallized SiC, both have negative temperature coefficients of resistance, e.g. electrical resistance decreases with increasing temperature. This property ensures uniform temperature over the entire heated length of the nozzle. Schematics of the ZrO_2 and SiC nozzles are shown in Figures 1 and 2, respectively. These have achieved stable operation at $1700^\circ C$ (by optical pyrometry) for several hours. Total conversion of precursors for which direct homolysis of bonds as strong as 75 kcal/mol is required can be achieved with these new designs.

Recent Progress in Radical Precursors

A logical first choice for radicals is CH_3 . While CH_3 can be made pyrolytically from CH_3I , it is desirable to have a halogen-free source. Di-(*tert*-butyl)-peroxide, upon pyrolysis, produces CH_3 and acetone. In the process, we have found that, with the newer, higher-temperature nozzles, we could reduce acetone to CH_3 and CO. In all cases, bimolecular radical products could be suppressed and were not observed in the jet. This may be very useful for deposition on a substrate with which CO is unreactive.

Other likely precursors for high-density carbon films may be vinylidene-type carbenes that can do direct insertion reactions into surface bonds. Such insertion reactions would obviate the need for prior surface activation by H-abstraction. The proposed role of acetylene in diamond film growth may derive from the facile acetylene-vinylidene equilibrium at high temperatures. We have explored precursors to the kinetically-stable vinylidene carbene, propadienylidene [C_3H_2], as a potentially surface-reactive species. We have synthesized a large range of precursors, shown in Figure 3,

and assayed them by vacuum-uv photoionization mass spectroscopy of the pyrolysate. We found that one precursor, 1,3-dibromopropyne, that is converted exclusively to the carbene by two sequential C-Br bond homolyses. Photoionization mass spectra, without and with pyrolysis, are shown in Figure 4. Further work using this molecule for deposition is now planned.


FIGURE CAPTIONS

Figure 1. Schematic of ZrO_2 pyrolysis nozzle. Inner diameter of the nozzle is 1.0 mm, and the heated section between the electrodes is 10.0 mm in length. Maximum continuous operating temperature is 1750°C . Electrodes are platinum wetted onto the oxide surface.


Figure 2. Schematic of SiC pyrolysis nozzle. Inner diameter of the nozzle is 1.0 mm, and the heated section between the electrodes is 10.0 mm in length. Maximum continuous operating temperature is 1700°C . Electrodes are electric-discharge-machined from reaction-bonded SiC slugs and press-clamped onto the recrystallized SiC tube with a thin layer of graphite in between. The electrode material is a much better electrical conductor than the tube material, so the electrodes remain cool even when the tube is incandescent.

Figure 3. Potential pyrolytic precursors to propadienylidene [C_3H_2] synthesized since January 1991. 1,3-Dibromopropyne gave the best results upon pyrolysis.

Figure 4. 10.49 eV vacuum-uv photoionization mass spectra of unpyrolyzed and pyrolyzed 1,3-dibromopropyne, seeded in 2 atm helium carrier gas. Conversion to the carbene is quantitative with no detectable bimolecular reactions in the gas-phase. Estimated flux of the carbene is 10^{16} sec^{-1} during the gas pulse. The carbene is a multifunctional molecule which may give direct insertion into surface bonds,

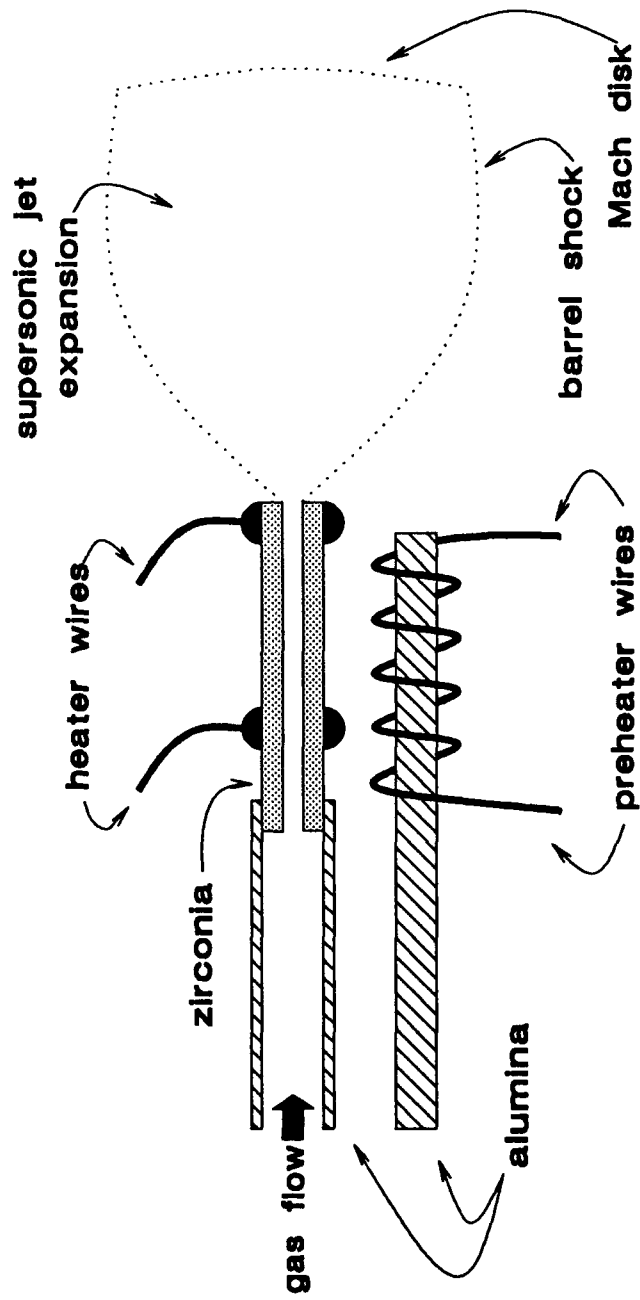












reaction-bonded silicon carbide
electrodes

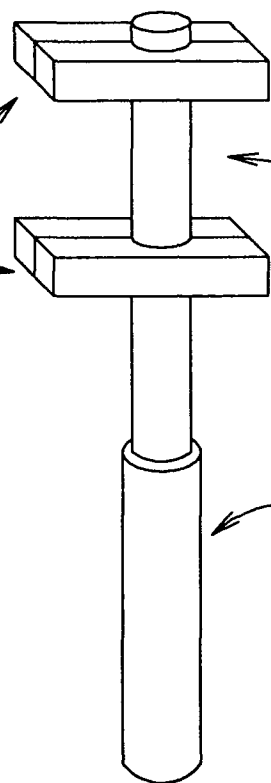


gas flow

alumina support/mount

recrystallized silicon carbide
tube nozzle



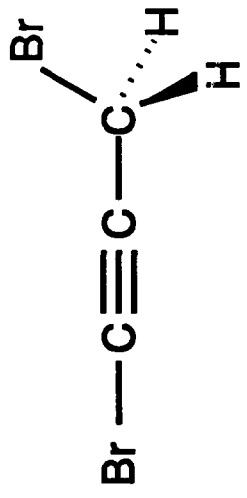

198

196 200


117 119

78

Heat off

benzene as a
mass calibrant


38

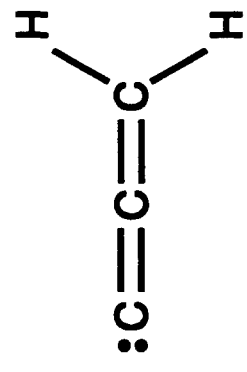

78

Heat on

mass

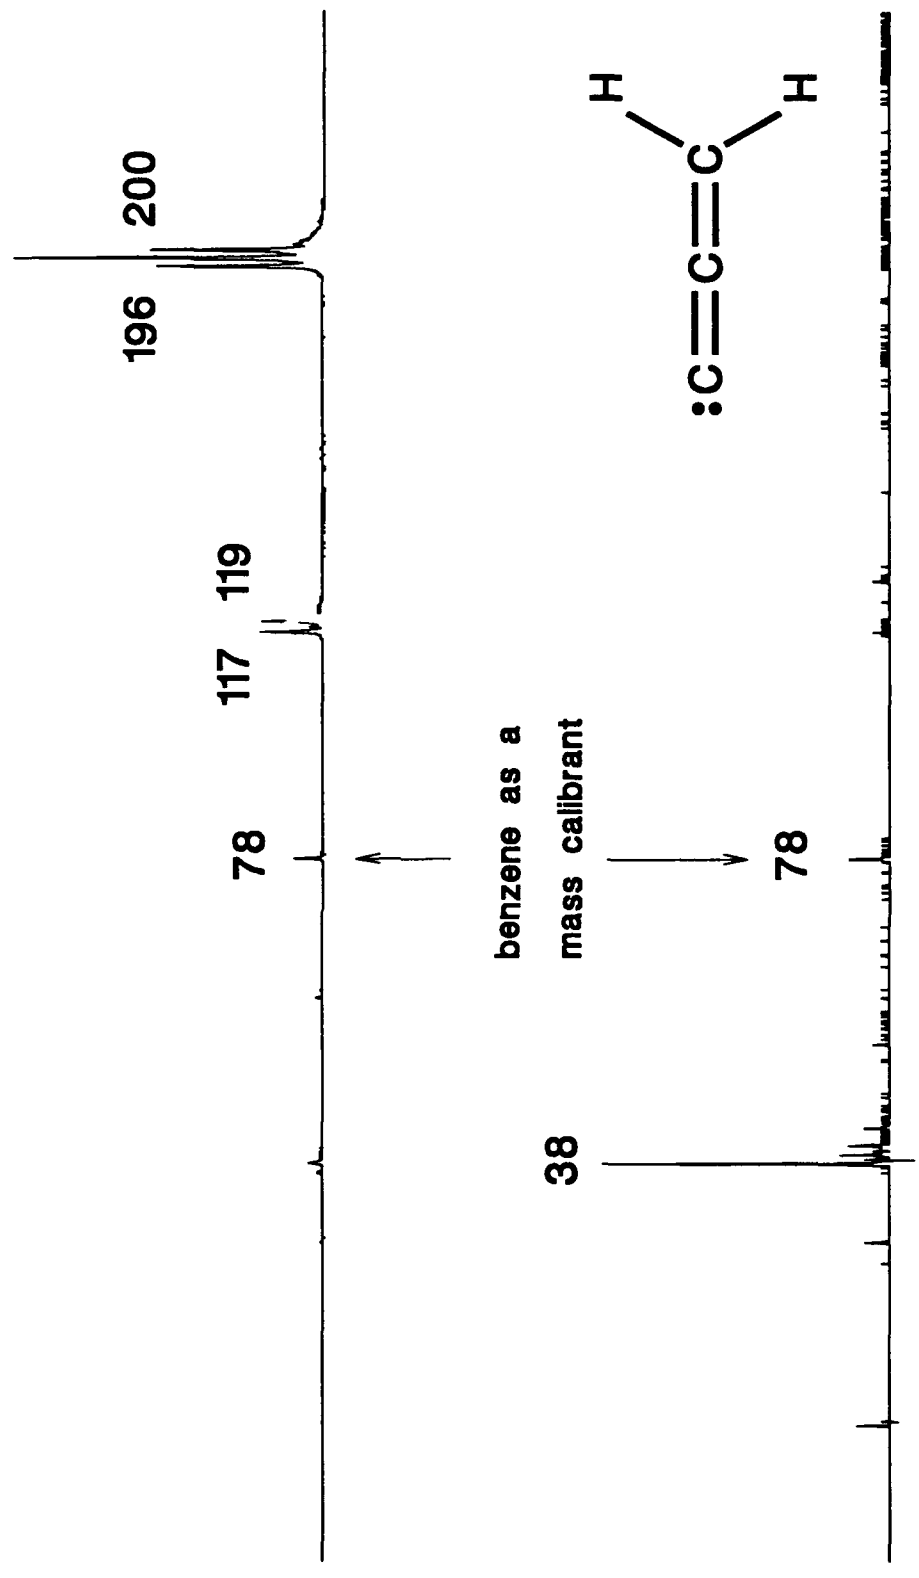

TECHNICAL REPORT DISTRIBUTION LIST - GENERAL

Office of Naval Research (2)*
Chemistry Division, Code 1113
800 North Quincy Street
Arlington, Virginia 22217-5000

Dr. Richard W. Drisko (1)
Naval Civil Engineering
Laboratory
Code L52
Port Hueneme, CA 93043

Dr. James S. Murday (1)
Chemistry Division, Code 6100
Naval Research Laboratory
Washington, D.C. 20375-5000

Dr. Harold H. Singerman (1)
David Taylor Research Center
Code 283
Annapolis, MD 21402-5067

Dr. Robert Green, Director (1)
Chemistry Division, Code 385
Naval Weapons Center
China Lake, CA 93555-6001

Chief of Naval Research (1)
Special Assistant for Marine
Corps Matters
Code 00MC
300 North Quincy Street
Arlington, VA 22217-5000

Dr. Eugene C. Fischer (1)
Code 2840
David Taylor Research Center
Annapolis, MD 21402-5067

Defense Technical Information
Center (2)
Building 5, Cameron Station
Alexandria, VA 22314

Dr. Elek Lindner (1)
Naval Ocean Systems Center
Code 52
San Diego, CA 92152-5000

Commanding Officer (1)
Naval Weapons Support Center
Dr. Bernard E. Douda
Crane, Indiana 47522-5050

* Number of copies to forward