

2

NAVAL AEROSPACE MEDICAL RESEARCH LABORATORY
NAVAL AIR STATION, PENSACOLA, FLORIDA 32508-5700

NAMRL Monograph 42

MICRO SAINT MODELING OF
PHYSIOLOGICAL RESPONSES AND HUMAN
PERFORMANCE IN THE HEAT

S. Shamma, R. Stanny, E.A. Molina,
and W.A. Morey

AD-A238 659



DTIC
ELECTE
JUL 23 1991
S B D

This document has been approved for public release; distribution is unlimited.

91-05577



91

05

Reviewed and approved 11 March 1991

J. A. Brady
J. A. BRADY, CAPT, MSC/USN
Commanding Officer



This work was supported by the U.S. Army Medical Research and Development Command under Contract/Intergovernmental No. 90MM0523 and monitored by the Naval Medical Research and Development Command under work unit 637.64A3M4637658995.AB088.

Trade names of materials and/or products of commercial or nongovernmental organizations are cited as needed for precision. These citations do not constitute official endorsement nor approval of the use of such commercial materials and/or products.

The views expressed in this article are those of the authors and do not reflect the official policy or position of the Department of the Army, Department of the Navy, Department of Defense, nor the U.S. Government.

Reproduction in whole or in part is permitted for any purpose of the United States Government.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE March 1991		3. REPORT TYPE AND DATES COVERED
4. TITLE AND SUBTITLE (U) Micro SAINT Modeling of Physiological Responses and Human Performance in the Heat			5. FUNDING NUMBERS C 90MM0523 WU 637.64A 3M4637648995. AB-088	
6. AUTHOR(S) S. Shamma ¹ , R. Stanny, E. A. Molina, and W. A. Morey				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Aerospace Medical Research Laboratory Naval Air Station Pensacola, Florida 32508-5700			8. PERFORMING ORGANIZATION REPORT NUMBER NAMRL Monograph 42	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Walter Reed Army Institute of Research Washington, DC 20307-5100 Naval Medical Research and Development Command National Naval Medical Center, Bldg. 1 Bethesda, MD 20814-5044			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES ¹ University of West Florida, Pensacola, FL.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) This report documents a Micro SAINT implementation of a heat-stress model developed by the U.S. Army Research Institute of Environmental Medicine. The model incorporates equations that relate deep-body temperature, heart rate, and sweat loss for clothed soldiers performing physical work in various environments. The Micro SAINT program might be used to help reduce casualties associated with extremes of environmental heat, to calculate appropriate work-rest cycles, and to estimate the drinking-water requirements associated with various levels of sweat loss.				
14. SUBJECT TERMS Modeling, Physiology, Environmental Stress, Heat Temperature			15. NUMBER OF PAGES 28	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	

CONTENTS

	<u>Page</u>
ABSTRACT	v
1. INTRODUCTION	1
2. MATHEMATICAL EQUATIONS	1
Equilibrium Rectal Temperature and Heart Rate Prediction	1
Sweat Loss Prediction	3
Work-rest Cycle Predictions	3
Climatic and Clothing Conditions	7
3. MICRO SAINT PROGRAMS FOR DEEP-BODY TEMPERATURE, HEART RATE, AND SWEAT LOSS	7
Input Parameters in the Model	7
Output Variables from the Model	8
Illustration of Using the Micro SAINT Program and Analysis of Output	10
4. CONCLUSION	16
REFERENCES	17
APPENDIX: Micro SAINT Diagram and Program Printouts	18



Accession For	
NTIS GRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification _____	
By _____	
Distribution/ _____	
Availability Codes	
Dist	Avail and/or Special
A-1	

ABSTRACT

We developed a Micro SAINT computational program that executes a series of predictive equations, developed by the U.S. Army Research Institute of Environmental Medicine, for deep-body temperature, heart rate, and sweat loss responses of clothed soldiers performing physical work at various environmental extremes. The user can employ the program by inserting input parameters in the scenario section of the MicroSAINT program.

The developed program could be used to help avoid casualties associated with environmental heat extremes, to predict appropriate work-rest cycles, or to predict water requirements due to sweat loss.

Acknowledgments

This work was sponsored by the Joint Working Group on Drug Dependent Degradation in Military Performance under U.S. Army Medical Research Development Command work unit 63764A 3M34637648995.AB-088 and conducted at the Naval Aerospace Medical Research Laboratory and the University of West Florida, Pensacola, Florida. The authors thank Leander A. Stroschein and Kent B. Fandolf for their useful discussions, and Commander R.P. Olafson, MC, USNR, for his support. The authors also thank Mrs. Jean Payne and Mrs. Nell Davis for their special efforts in the preparation of this report.

1. INTRODUCTION

For the last two decades, the U.S. Army Research Institute of Environmental Medicine (USARIEM) has been establishing a data base and developing a series of predictive equations for deep-body temperature, heart rate, and sweat-loss responses of clothed soldiers performing physical work at various environmental extremes. Predictive equations for rectal temperature, heart rate, and sweat loss as functions of physical work intensity, environmental conditions, and particular clothing ensembles have been published in the open literature (1-11).

In this report, we describe a Micro SAINT (12) computer model based on the USARIEM equations for deep-body temperature, heart rate, and sweat loss. The Micro SAINT program is written with a user friendly approach. The user may supply the input parameters in the scenario section of the program and obtain the results as output stored in Micro SAINT snapshot files. As such, the user may view the main program as a "black box" because input and output information are stored separately in the scenario and snapshot sections of the Micro SAINT program.

The following sections constitute a detailed summary of the USARIEM heat-stress model, the Micro SAINT model, and an illustration of how to use the Micro SAINT program. The Micro SAINT program is listed in the appendix and can be obtained from the authors in return for a 5 1/4 inch, double-sided, double-density disc and a self-addressed disc-mailing envelope.

2. MATHEMATICAL EQUATIONS

EQUILIBRIUM RECTAL TEMPERATURE AND HEART RATE PREDICTIONS

The general formula for predicting the final equilibrium rectal temperature (T_{ref}) suggested by Givoni and Goldman (1) and Pandolf et al; (6) is:

$$T_{ref}(^{\circ}\text{C}) = 36.75 + 0.004(M - W_{ex}) + 0.0011 H_{r+c} + 0.8 \text{Exp}[0.0047(E_{req} - E_{max})] \quad (1)$$

Equation 1 is comprised of three components: metabolic, dry heat exchange, and evaporative heat exchange. The metabolic component is

$$[37.75 + 0.004(M - W_{ex})]$$

in which

$$M = 1.5 W + 2.0 (W+L)(L/W)^2 + \eta(W+L)[1.5 V_w^2 + 0.35 G_w V] \quad (2)$$

as published by Pandolf et al. (5), and

$$W_{ex} = 0.098G(W+L)V_w \quad (3)$$

as published by Givoni and Goldman (1), where

M = metabolic rate (watts)

W_{ex} = external work (watts)
 W = nude body weight (kg)
 L = clothing and equipment weight (kg)
 η = terrain factor (defined in Table 1)
 V_w = walking velocity (m/s) and
 G = grade; (%)

The dry heat exchange component is

$$[0.001 H_{r+c}]$$

where

$$H_{r+c} = 6.45 A_d (T_{db} - \bar{T}_{sk}) / I_t$$

as given by Givoni and Goldman (1)

A_d = body surface area (m²)
 T_{db} = dry bulb temperature (°C)
 $\bar{T}_{sk}$ = average skin temperature (°C)
 I_t = total insulation including air layer (I_a) and intrinsic clothing (I_{cl})

The evaporative heat exchange component is

$$0.8 \exp [0.0047 (E_{req} - E_{max})]$$

as given by Givoni and Goldman [1] where

$$E_{req} = (M - W_{ex}) + H_{r+c}$$

and

$$E_{max} = 14.21 i_m / I_t A_{eff} (P_{sk} - \phi_a P_a)$$

where

i_m = permeability index (N.D.)
 A_{eff} = effective surface area for evaporation (m²)
 P_{sk} = water vapor pressure at the skin (mm Hg)
 ϕ_a = relative humidity (%) and
 P_a = saturated water vapor pressure of air at T_{db} (mm Hg)

The terrain factor η is determined from the following table according to the type of terrain:

TABLE 1. Terrain Types and Terrain Factors.

Black top	Dirt	Light brush	Hard, packed snow	Heavy brush	Swampy bay	Loose sand	Soft snow
Terrain number							
1	2	3	4	5	6	7	8
Terrain factor η							
1.0	1.1	1.2	1.3	1.5	1.8	2.1	1.3 + 0.08

The final equilibrium heart rate HR_f (beats/min) in a given cycle is given by (2).

$$HR_f = \begin{cases} 65 & I_{hr} < 25 \\ 65 + 0.35 (I_{hr} - 25) & 25 \leq I_{hr} \leq 225 \\ 135 + 45 [1 - \text{Exp}[-0.01(I_{hr} - 225)]] & I_{hr} > 225 \end{cases} \quad (4)$$

where

$$I_{hr} = 100(t_{rec.eq/b} - 36.76) + 0.4 W_{ex} \quad (5)$$

SWEAT LOSS PREDICTION

The general equation for predicting sweat loss response (Δm_{sw}) as a function of exercise, environment, and clothing interaction as proposed by Shapiro et al. (11) is

$$\Delta m_{sw}(\text{gm}^{-2}\text{h}^{-1}) = 27.9 E_{req} E_{max}^{-0.455} \quad (6)$$

where

Δm_{sw} = change in body weight from sweat loss.

This formula can be employed over a wide range of E_{req} (50 - 360, W m^{-2}) and E_{max} (20 - 525, W m^{-2}), and it is most applicable for predicting water requirements.

WORK-REST CYCLE PREDICTIONS

The physical work-rest cycle and the time patterns of rectal temperature and heart rate are given for three different conditions:

- (a) the time pattern for resting subjects under various heat stress conditions referred to as "resting" T_{ret} (resting rectal temperature at any time t) and "resting" heart rate $HR_{t(r)}$;
- (b) the elevation pattern for rectal temperature during physical work at the given climatic conditions referred to as "working" T_{ret} (rectal temperature at any time t after beginning physical work) and "working" heart rate $HR_{t(w)}$; and
- (c) the recovery rectal temperature after cessation of physical work referred to as "recovery" T_{ret} (rectal temperature at any time t after completion of physical work) and "recovery" heart rate $HR_{t(rec)}$.

The following governing equations have been presented and discussed in detail elsewhere (1).

Resting Cycle

Rectal Temperature at Rest (T_{ret}).

$$T_{ret} = T_{reo} + 0.1 \Delta T_{re} \exp[0.4^{t-0.5}] \quad (7)$$

where

T_{ret} = rectal temperature at any time t

T_{reo} = initial rectal temperature ($^{\circ}\text{C}$)

ΔT_{re} = difference between the new final equilibrium rectal temperature T_{ref} in the new environment and T_{reo}

t = time (h)

The exponential power factor, $t - 0.5$, allows a 30-min period for the initial lag in resting rectal temperature change when the elevation reaches about 0.1 of the total change.

Heart Rate at Rest ($HR_{t(r)}$).

$$HR_{t(r)} = 65 + (HR_f - 65)(1 - e^{-3t}) \quad (8)$$

where

HR_f = equilibrium heart rate

t = time in hours (h)

The heart rate at rest in comfortable conditions is assumed to be 65 beats/minute.

Working Cycle

Rectal Temperature at Work.

$$T_{ret} = \begin{cases} T_{reo} + 0.1 \Delta T_{re} \exp[0.4^{t-0.5}], & t \leq 0 \\ T_{reo} + \Delta T_{re} [1 - \exp\{-2 \cdot \exp(-0.17 \Delta T_{re} \hat{t})\}] & \end{cases} \quad (9)$$

(10)

where

$$\hat{t} = t - \frac{58}{M}$$

$$\Delta T_{re} = T_{re} - T_{reo}$$

Heart Rate at Work.

$$HR_{t(w)} = 65 + (HR_f - 65)[1 - 0.8 \text{ Exp } [-(6 - 0.03 (HR_f - 65)t]] \quad (11)$$

Recovery Cycle

Recovery Rectal Temperature T_{rst} .

$$T_{rst} = \begin{cases} T_{recwork} + 0.5 (T_{recov} - T_{recwork}), & t < t_{drec} \\ T_{rew} - (T_{rew} - T_{rer})[1 - \text{Exp}\{-\alpha(t - t_{drec})\}], & t > t_{drec} \end{cases} \quad (12)$$

where

$$T_{recov} = T_{reo} + (T_{ref} - T_{reo})[1 - \text{Exp}\{-2.0 \text{ Exp}(-0.17(T_{ref} - T_{reo})(t - \frac{58}{M}))\}]$$

T_{rew} = rectal temperature at the beginning of decrease ($\dot{C}$); T_{rew} is not necessarily equal to T_{re} at the end of work

T_{rer} = equilibrium resting rectal temperature ($\dot{C}$)

α = time constant of recovery

$$= 1.5 [1 - \text{Exp}\{-1.5 CP_{eff}\}]$$

$$t_{drec} = 0.25 \text{ Exp}\{-0.5 CP_{eff}\}$$

$$CP_{eff} = 0.27(\frac{im}{clo})[P_{sk} - \phi P_a] + (\frac{0.174}{clo})(36 - T_a) - 1.57$$

Heart Rate During Recovery.

$$HR_{t(rec)} = HR_w - (HR_w - HR_r)[1 - \text{Exp}(-kbt)] \quad (13)$$

where

HR_w = heart rate at the end of the work period

HR_r = equilibrium heart rate for resting at the given climatic and clothing conditions

Model: heat Network: 0 heat

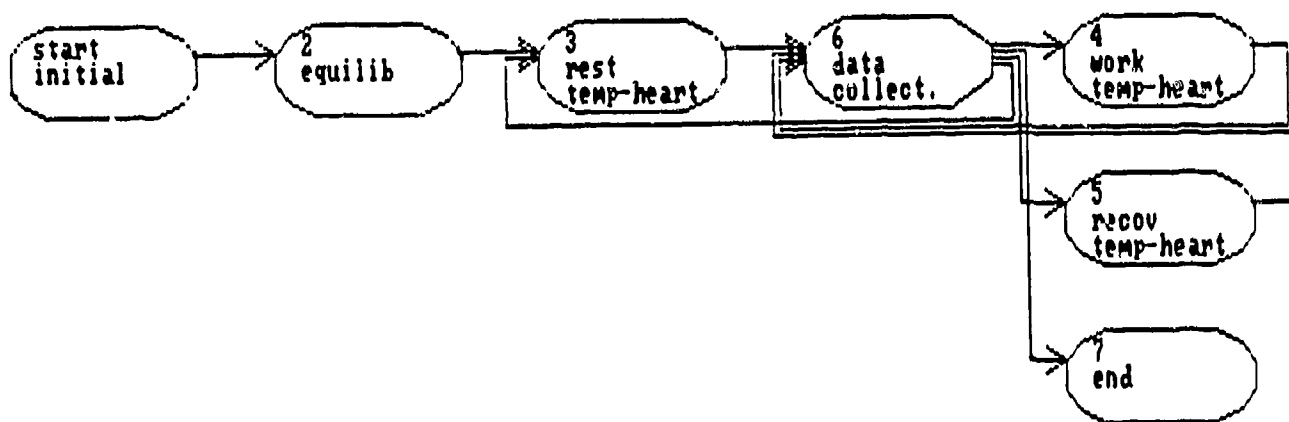


Figure 1. A Micro SAINT Network diagram printout.

$$k = 2 - 0.01(HR_w - HR_r),$$

$$b = 2.0 + 12[1 - \text{Expp}(-0.3CP_{eff})].$$

CLIMATIC AND CLOTHING CONDITIONS

The climatic/clothing conditions parameters, im and clo , are to be computed using

$$clo = c_1 V_{eff}^{-c_2}$$

and

$$\frac{im}{clo} = c_3 V_{eff}^{-c_4}$$

where

$$V_{eff} = V_{air} + 0.004(M - 105) \text{ m/s}$$

and c_1 , c_2 , c_3 and c_4 are taken from the following tables for different type of clothing.

TABLE 2. Constant Parameters for Different Type of Clothing.

Clothing type	c_1	c_2	c_3	c_4	closcnd
Shorts	0.57	0.3	1.2	0.3	1
Shorts and short-sleeved shirts	0.74	0.28	0.94	0.28	2
STD (standard fatigues)	0.99	0.25	0.75	0.25	3
STD + OG (STD + protective overgarments over the fatigues)	1.5	0.2	0.51	0.2	4

MICRO SAINT PROGRAMS FOR DEEP-BODY TEMPERATURE, HEART RATE, AND SWEAT LOSS

The Micro SAINT main computer program that models predictive equations for deep-body temperature, heart rate, and sweat loss of clothed soldiers performing physical work at various environmental extremes is listed in the appendix. The user is required to supply the input information in the scenario section in the program. The output consists of the predictive variables, and it is stored in the snapshot output files. We list here the input parameters for the model, the output, the output variables from the model, and an illustration of using the developed software.

INPUT PARAMETERS IN THE MODEL

The input parameters for the model are to be entered in the scenario section of the program as follows:

$$g = \text{grade of terrain (\%)}$$

w = nude body weight (kg)
 l = clothing and equipment weight (kg)
 v_m = walking velocity (m/s^{-1})
 a_d = body surface area (m^2)
 t_a = ambient temperature ($^{\circ}C$) in a homogenous environment
 p_a = saturated water vapor pressure of air at T_{db} (mmHg)
 t_{db} = dry bulb temperature ($^{\circ}C$)
 t_{sk} = average skin temperature ($^{\circ}C$)
 p_{sk} = water vapor pressure at the skin (mmHg)
 v_{air} = air speed (m/s)
 Δt = duration of time interval in hours for execution of problem variables
 t_{reo} = initial rectal temperature ($^{\circ}C$)
 ϕ_{ia} = relative humidity (%)
 a_{eff} = effective surface area for evaporation (m^2)
 t_{rest} = time duration in hours of the rest period
 t_{work} = time duration in hours of the work period
 $t_{terrain}$ = terrain number (Table 1) determining η as determined from the terrain table
 according to the type of terrain
 $t_{recovery}$ = time duration in hours of the recovery period
 $c_{loscond}$ = a parameter (Table 2) determining the corresponding values for c_1 , c_2 , c_3 , and c_4
 according to the different types of clothing

OUTPUT VARIABLES FROM THE MODEL

The following output parameters are executed and stored in the Micro SAINT snapshot files at the end of tasks 2, 3, 4, 5 and 6:

t_{total} = a time variable (h) with duration from beginning of rest cycle to end of recovery cycle.
 t = a time variable with (h) duration from beginning of a corresponding cycle to its end
 $t_{reccqib}$ = final equilibrium temperature = T_{ref}
 $t_{emprest}$ = equilibrium temperature for rest cycle
 h_{rrest} = equilibrium heart rate for rest cycle
 h_{rfr} = final equilibrium heart rate for heat acclimated individuals = HR_f
 $s_{wtlosrp}$ = sweat-loss response ($gm^{-2}h^{-1}$)
 h_{rtrest} = heart rate during rest cycle at time t
 $t_{recrest}$ = rectal temperature during rest cycle at time t

rectemp = rectal temperature for rest-work recovery cycles at total t
 hrtrate = heart rate for rest-work-recovery cycles at total t
 trecwork = rectal temperature during work cycle at time t
 hrtrwork = heart rate during work cycle at time t
 trecov = rectal temperature during recovery cycle at time t
 hrtrscov = heart rate during recovery at time t

The following is a listing of the snapshots for output variables executed at the end of tasks 2, 3, 4, 5, and 6; other parameters can be listed in the snapshots.

SNAPSHOTS OF EXECUTION

(1) Trigger:	End trigger	
(2) Task/Network:	2	equilib
(6) Snapshot file:	heateqlb	
Variables to store:		
(7) treceqlb		(8) swtlosrp
(9) heartfr		(10) hrrest
(11)		(12)
(1) Trigger:	End trigger	
(2) Task/Network:	3	rest temp-heart
(6) Snapshot file:	restth	
Variables to store:		
(7) t		(8) hrtrest
(9) trecrest		(10)
(11)		(12)
(1) Trigger:	End trigger	
(2) Task/Network:	4	work temp-heart
(6) Snapshot file:	workth	
Variables to store:		
(7) t		(8) hrtrwork
(9) trecwork		(10)
(11)		(12)
(1) Trigger:	End trigger	

(2) Task/Network: 5 recov temp-heart
 (6) Snapshot file: recovth

Variables to store:

(7) t (8) hrtrecov
 (9) trecov (10)
 (11) (12)

(1) Trigger: End trigger

(2) Task/Network: 6 data collect

(6) Snapshot file: sumheat

Variables to store:

(7) totalt (8) hrtrate
 (9) rectemp (10)
 (11) (12)

ILLUSTRATION OF USING MICRO SAINT PROGRAMS AND ANALYSIS OF OUTPUT

The following are input parameters for an example run:

SIMULATION SCENARIO

(1) Event Time: 0.00

(2) Expression: terrain = 1;

closcond = 1;

g = 6;

w = 80;

l = 8;

vm = 1.3;

ad = 1.8;

treo = 37.2;

pa = 20;

phia = .62;

tdb = 35;

tsk = 36;

```

vair = 0.515;
psk = 44;
trest = 1;
twork = 1;
trecovery = 3;
ta = 35;
adeff = .8;
delt = .1;

```

The terrain and the closcond numbers are to be chosen from Tables 1 and 2, respectively, to present the environmental conditions stated in the tables. The main program assigns the terrain factor η and the climatic and closing conditions parameters automatically.

The corresponding output results from the snapshot taken at the end of task 2 are:

"clock"	"treceqlb"	"swtlostrp"	"Heartfr"	"hrrest"	"Trigger:"	"Jobs:"
0.000000	39.457581	789.714111	158.153024	83.903366	"End"	"2"

The corresponding output results from the snapshots taken at the end of tasks 3, 4, 5, and 6 are plotted, using Micro SAINT utilities, in Figs. 2, 3, 4, and 5, respectively.

Figure 2 represents the rectal temperature and heart rate in a rest cycle for 1 h duration. Figures 3 and 4 represent the temperature and heart rate during the work and recovery cycles, respectively.

Figure 5 represents the temperature and heart rate for the three cycles; it indicates:

- 1) Rectal temperature exhibits a slow decrease during the rest cycle while heart rate exhibits moderate increase.
- 2) Rectal temperature and heart rate show large increases during the working cycle.
- 3) Heart rate reaches the resting equilibrium condition at a faster rate during the recovery cycle while the rectal temperature reaches the resting equilibrium condition at a slower rate.

For given environmental conditions, one can run the program for a prescribed duration for the rest and work cycles in order to determine the maximum time before the temperature and heart rate reach their maximum allowable conditions.

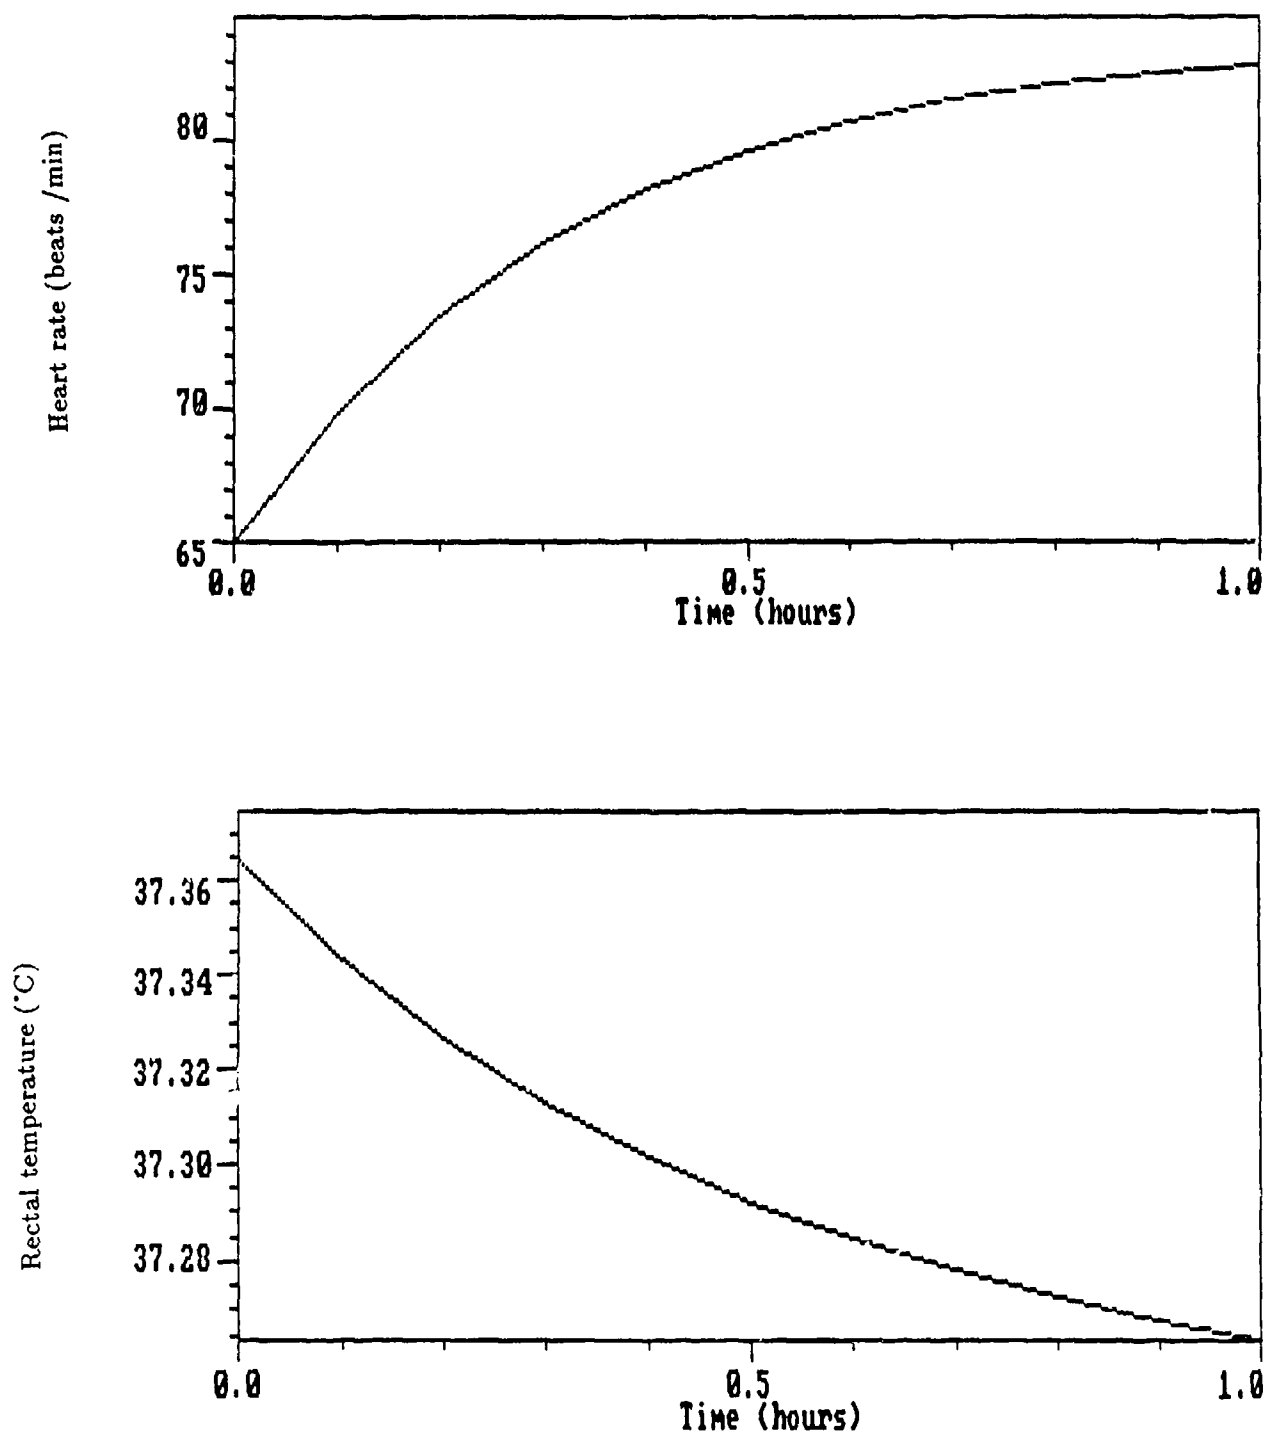


Figure 2. Heart rate and rectal temperature during rest cycle.

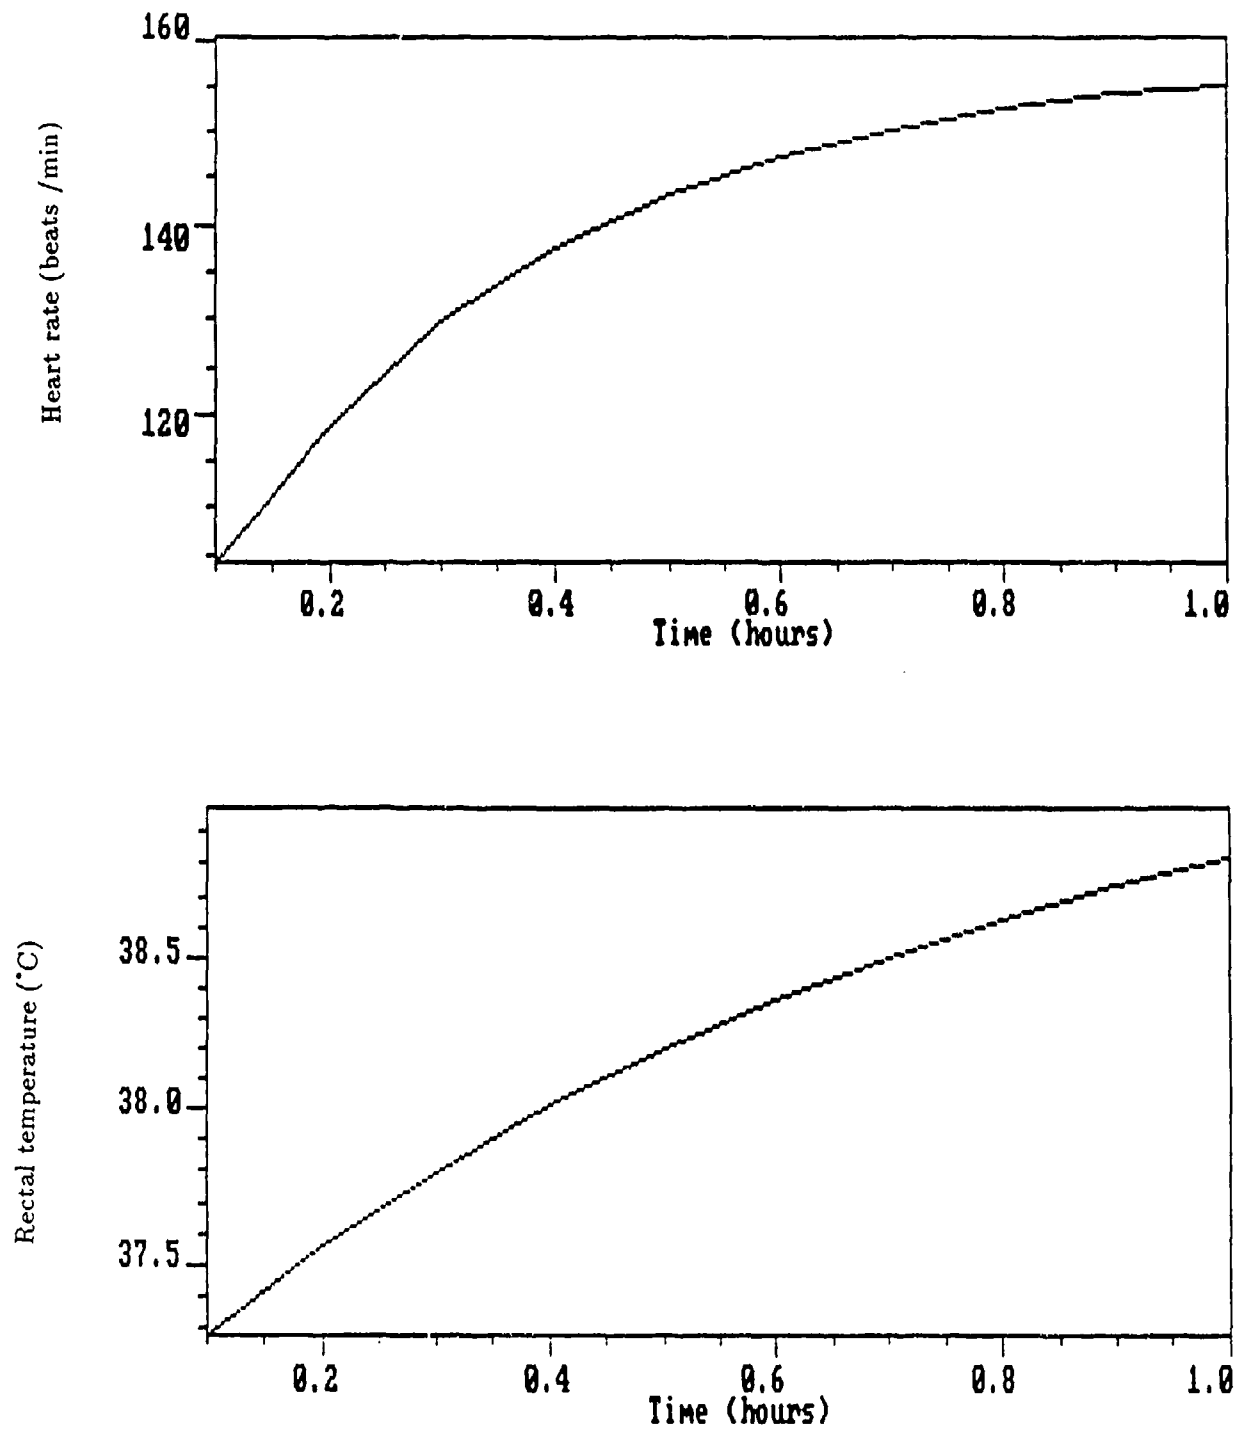


Figure 3. Heart rate and rectal temperature during work cycle.

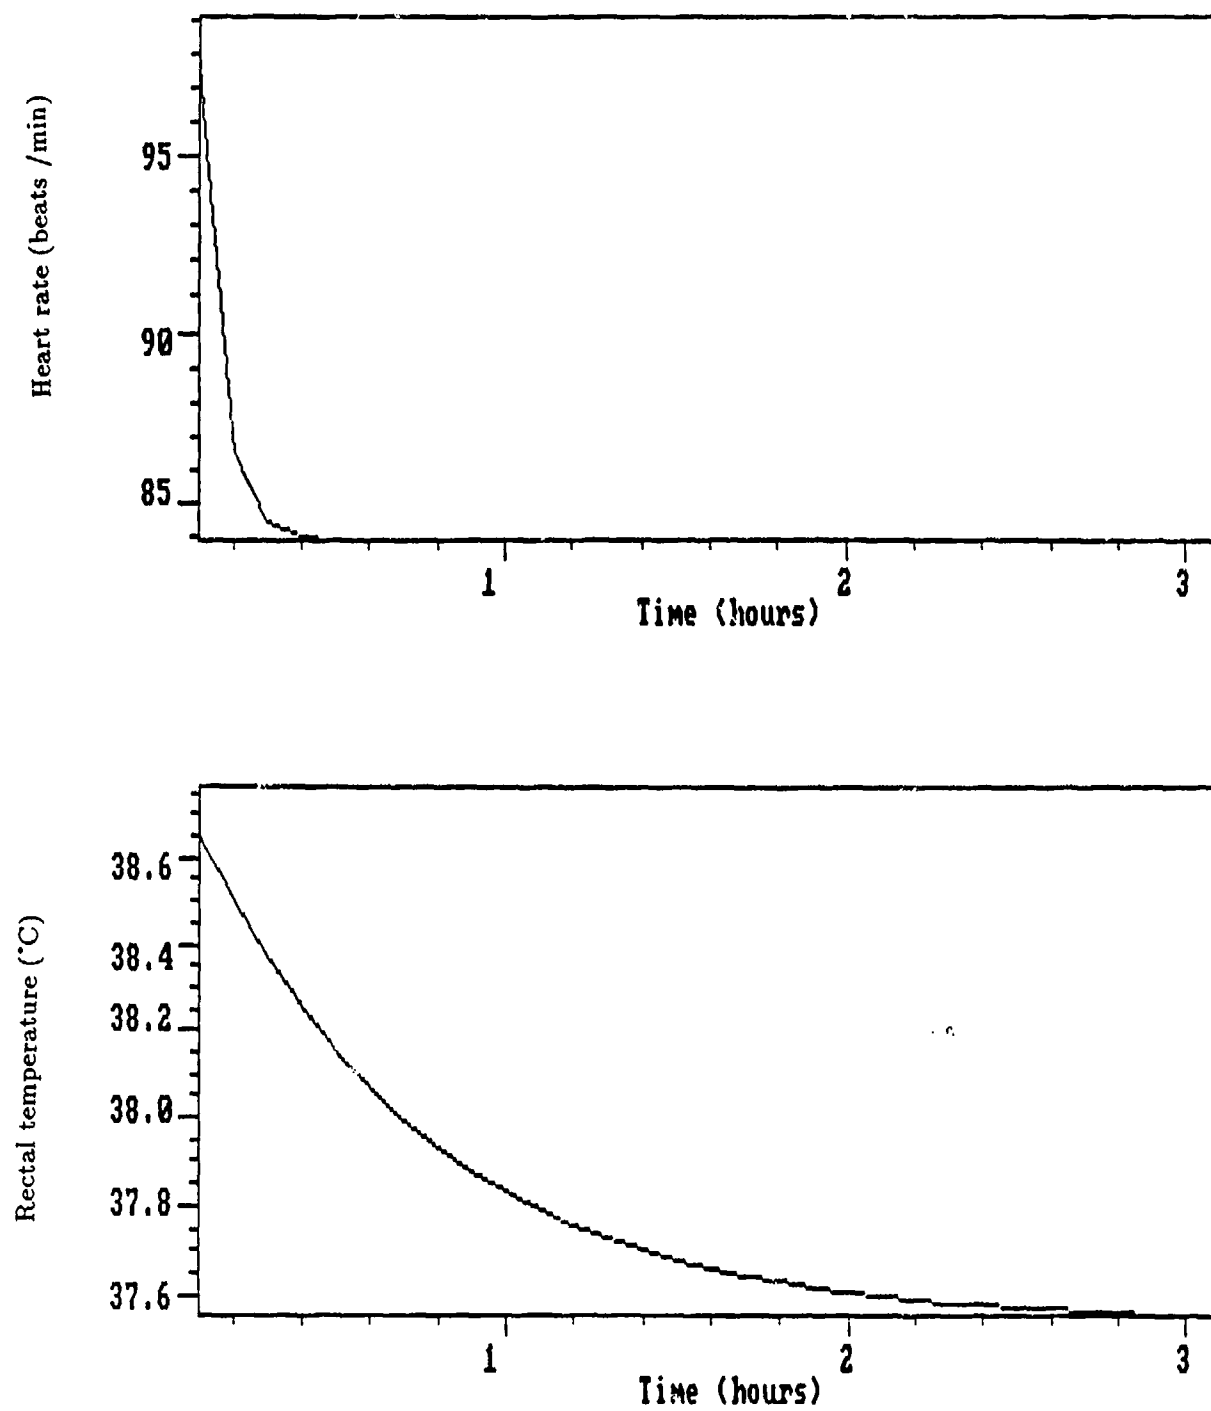


Figure 4. Heart rate and rectal temperature during recovery cycle.

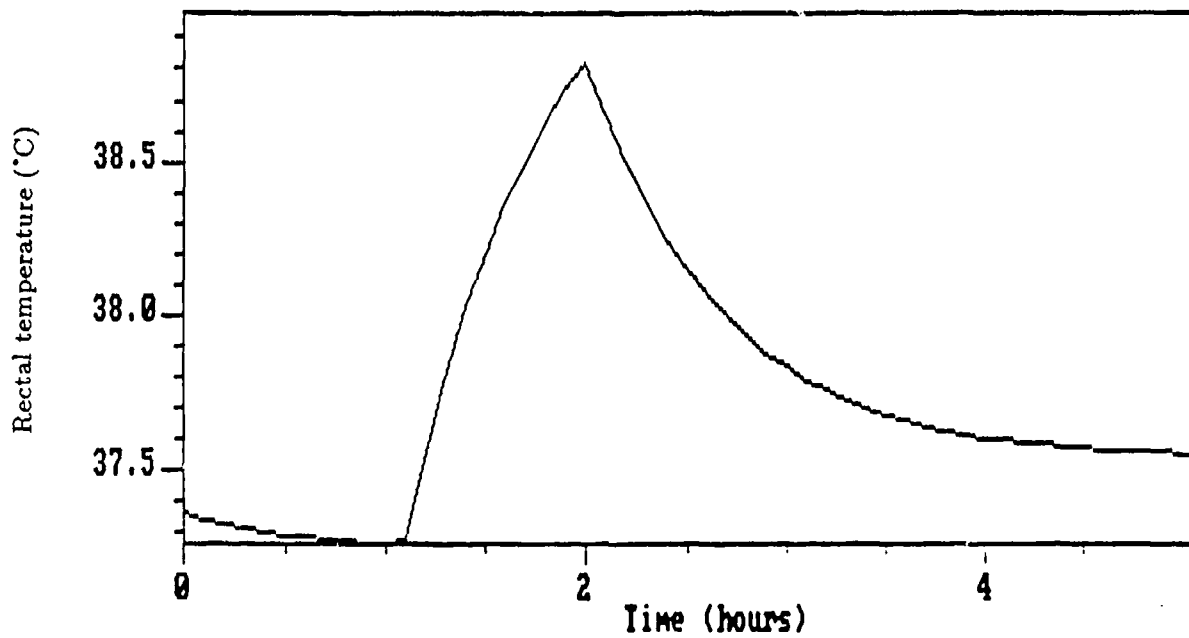
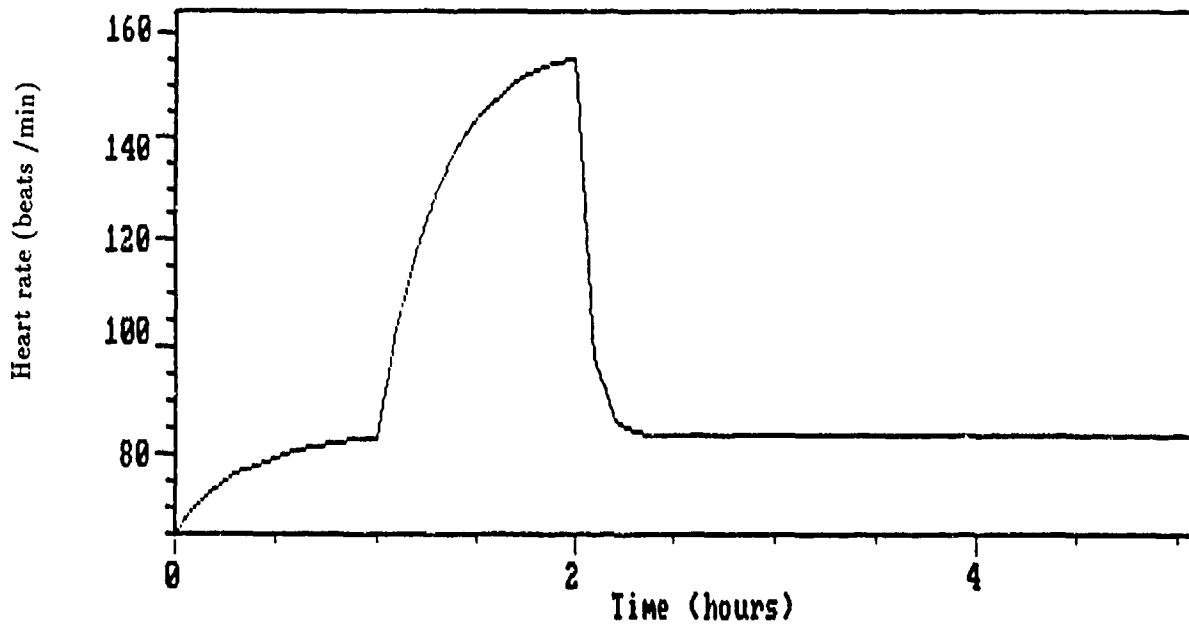


Figure 5. Heart rate and rectal temperature during rest, work, and recovery cycles.

4. CONCLUSION

We developed a Micro SAINT computer program for a series of predictive equations developed by the U.S. Army Research Institute of Environmental Medicine, (ARIEM), for deep-body temperature, heart rate, and sweat loss responses of clothed soldiers performing physical work at various environmental extremes. The user can employ this program by inserting input parameters in the scenario section of the Micro SAINT program.

This computational module could be used to help reduce casualties associated with environmental heat extremes and to predict appropriate work-rest cycles and water requirements equivalent to sweat loss.

5. REFERENCES

1. Givoni, B. and Goldman, R.F., "Predicting Rectal Temperature Response to Work, Environment, and Clothing." Journal of Applied Physiology, Vol. 32, pp. 812-822, 1972.
2. Givoni, B. and Goldman, R.F., "Predicting Heart Rate Response to Work, Environment, and Clothing." Journal of Applied Physiology, Vol. 34, pp. 201-204, 1973.
3. Givoni, B. and Goldman, R.F., "Predicting Effect of Heat Acclimatization on Heart Rate and Rectal Temperature." Journal of Applied Physiology, Vol. 35, pp. 875-879, 1973.
4. Goldman, R.F., "CW Protective Clothing: The Nature of Its Performance Degradation and Some Partial Solutions." Handbook of the Thirteenth Commonwealth Defence Conference on Operational Clothing and Combat Equipment, pp. 66-68, 1981.
5. Pandolf, K.B., Givoni, B., and Goldman, R.F., "Predicting Energy Expenditure with Loads While Standing or Walking Very Slowly." Journal of Applied Physiology, Vol. 43, pp. 577-581, 1977.
6. Pandolf, K.B., Stroschein, L.A., Drolet, L.L., Gonzalez, R.R., and Sawka, M.N., "Prediction Modeling of Physiological Responses and Human Performance in Heat." Computers in Biology and Medicine, Vol. 16, No. 5, pp. 319-329, 1986.
7. Sawka, M.N., Toner, M.M., Francesconi, R.P., and Pandolf, K.B., "Hypohydration and Exercise: Effects of Heat Acclimation, Gender and Environment." Journal of Applied Physiology, Vol. 55, pp. 1147-1153, 1983.
8. Sawka, M.N., Francesconi, R.P., Pimental, N.A., and Pandolf, K.B., "Hydration and Vascular Fluid Shifts During Exercise in the Heat." Journal of Applied Physiology, Vol. 56, pp. 91-96, 1984.
9. Shapiro, Y., Pandolf, K.B., and Goldman, R.F., "Sex Differences in Acclimation to a Hot-Dry Environment." Ergonomics, Vol. 23, pp. 635-642, 1980.
10. Shapiro, Y., Pandolf, K.B., Avellini, B.A., Pimental, N.A., and Goldman, R.F., "Heat Balance and Transfer in Men and Women Exercising in Hot-Dry and Hot-Wet Conditions." Ergonomics, Vol. 24, pp. 375-386, 1981.
11. Shapiro, Y., Pandolf, K.B., and Goldman, R.F., "Predicting Sweat Loss Response to Exercise, Environment and Clothing." European Journal of Applied Physiology, Vol. 48, pp. 83-91, 1982.
12. Micro SAINT User's Guide, Micro Analysis and Design, Inc., Boulder, CO, 1987.

APPENDIX

MICRO SAINT NETWORK AND PROGRAM PRINTOUTS

TASK NETWORK

Network Number: 0

(1) Name: heat (2) Type: Network
 (3) Upper Network:
 (4) Release Condition: 1;
 (5) First Sub-job: start initial
 (6) Sub-jobs (each can be task or network):

Number:	Name:	Type:
start	initial	Task
2	equilib	Task
3	rest temp-heart	Task
4	work temp-heart	Task
5	recov temp-heart	Task
6	data collect.	Task
7	end	Task

Task Number: start

(1) Name: initial (2) Type: Task
 (3) Upper Network: 0 heat
 (4) Release Condition: 1;
 (5) Time Distribution Type: Normal
 (6) Mean Time: 0;
 (7) Standard Deviation: 0;
 (8) Task's Beginning Effect:
 (9) Task's Ending Effect: exp=2.71;t=0;totalt=0;t3=0;tcount=0;
 (10) Decision Type: Single choice
 Following Task/Network: Probability Of Taking
 Number: Name: This Path:

(11) 2	equili	(12) 1;
(13)		(14)
(15)		(16)
(17)		(18)
(19)		(20)
(21)		(22)
(23)		(24)

Task Number: 2

(1) Name: equilib (2) Type: Task
 (3) Upper Network: 0 heat
 (4) Release Condition: 1;
 (5) Time Distribution Type: Normal
 (6) Mean Time: 0;
 (7) Standard Deviation: 0;
 (8) Task's Beginning Effect:
 (9) Task's Ending Effect: if terrain == 1 then eta=1.0;
 if terrain == 2 then eta=1.1;
 if terrain == 3 then eta=1.2;
 if terrain == 4 then eta=1.3;
 if terrain == 5 then eta=1.5;
 if terrain == 6 then eta=1.8;
 if terrain == 7 then eta=2.1;
 if terrain == 8 then eta=1.38;
 m=1.5*w+20*(w+1)*(1/w)^2+eta*(w+1)*(1.5*vm*vm+0.35*vm*g);
 mrest=1.5*w+20*(w+1)*(1/w)^2;wexrest=0;
 wex=0.098*g*(w+1)*vm;
 veff=vair+.004*(m-105);
 veffrest=vair+.004*(mrest-105);
 if closcond == 1 then clo=0.57*veff^((-1)*0.3);
 if closcond==1 then clorest=0.57*veffrest^((-1)*.3);
 if closcond == 1 then imperclo=1.2*veff^.3;
 if closcond==1 then imclorst=1.2*veffrest^.3;
 if closcond == 2 then clo=.74*veff^((-1)*0.28);
 if closcond==2 then clorest=.74*veffrest^((-1)*.28);
 if closcond == 2 then imperclo=.94*veff^.28;
 if closcond==2 then imclorst=.94*veffrest^.28;


```

if closcond == 3 then clo=0.99*veff^((-1)*.25);
if closcond==3 then clorest=.99*veff^((-1)*.25);
if closcond == 3 then imperclo=0.75*veff^.25;
if closcond==3 then imclorst=.75*veffrest^.25;
if closcond == 4 then clo=1.5*veff^((-1)*.2);
if closcond==4 then clorest=1.5*veffrest^.2;
if closcond == 4 then imperclo=.51*veff^.2;
if closcond==4 then imclorst=.51*veffrest^.2;
itrest=clorest;it=clo;
im=imperclo*clo;imrest=imclorst*clorest;
hrpc=6.45*ad*(tdb-tsk)/it;hrpcrest=6.45*ad*(tdb-tsk)/itrest;
dryhtexg=0.0011*hrpc;
ereq=(m-wex)+hrpc;
ereqrest=(mrest-wexrest);
emax=14.21*(im/it)*adef*(psk-phia*pa);
emaxrest=14.21*(imrest/itrest)*adef*(psk-phia*pa);
evaphtex=.8*exp^(0.0047*(ereq-emax));
evaprest=.8*exp^(0.0047*(ereqrest-emaxrest));
treceqlb=36.75+0.004*(m-wex)+0.0011*hrpc+evaphtex;
temprest=36.75+0.004*(mrest-wexrest)+.0011*hrpcrest+evaprest;
swtlosrp=27.9*ereq*emax^((-1)*0.455);
ihr=100*(treceqlb-36.75)+.4*wex;
if ihr <=225 & ihr >= 25 then heartfr=65+0.35*(ihr-25);
if ihr > 225 then heartfr=135+45*(1-exp^((-0.01)*(ihr-225)));
if ihr < 25 then heartfr=65;
ihrrest=100*(temprest-36.75)+.4*wexrest;
if ihrrest <= 225 & ihrrest>= 25 then hrrest=65+0.35*
(ihrrest-25);
if ihrrest > 225 then hrrest=135+45*(1-exp^((-0.01)*
(ihrrest-225)));
if ihrrest < 25 then hrrest=65;

```

(10) Decision Type: Single choice

Following Task/Network:		Probability Of Taking
Number:	Name:	This Path:
(11) 3	rest t	(12) 1;
(13)		(14)
(15)		(16)
(17)		(18)
(19)		(20)
(21)		(22)
(23)		(24)

Task Number: 3

(1) Name: rest temp-heart	(2) Type: Task
(3) Upper Network: 0 heat	
(4) Release Condition: 1;	
(5) Time Distribution Type: Normal	
(6) Mean Time: 0;	
(7) Standard Deviation: 0;	
(8) Task's Beginning Effect:	
(9) Task's Ending Effect:	

```

trecrest=treo+(temprest-treo)*0.1*exp^(0.4*(t-0.5));
hrtrest=65+(hrrest-65)*(1-exp^((-1)*3*t));
if t >= trest then treow=trecrest; if t >= trest then tcount=0;
rectemp=trecrest;hrtrate=hrtrest;

```

(10) Decision Type: Single choice

Following Task/Network:		Probability Of Taking
Number:	Name:	This Path:
(11) 6	data c	(12) 1;
(13)		(14)
(15)		(16)
(17)		(18)
(19)		(20)
(21)		(22)
(23)		(24)

Task Number: 4

(1) Name: work temp-heart (2) Type: Task
(3) Upper Network: 0 heat
(4) Release Condition: 1;
(5) Time Distribution Type: Normal
(6) Mean Time: 0;
(7) Standard Deviation: 0;
(8) Task's Beginning Effect:
(9) Task's Ending Effect:
tref=treceg; hrf=heartfr; t2=(t-(58/m));
if t2 > 0 then trecwork=treow+(tref-treow)*(1-exp^((-1)*2*exp^((-1)*
.17*(tref-treow))*(t-(58/m))));
hrtrwork=65+(hrf-65)*(1-.8*exp^((-1)*(6-0.03*(hrf-65)
)*t));
if t2 <= 0 then trecwork= treow+(temprest-treow)*.1*exp^(.4*(t3-.5));
if t >= twork then tcount=0 ;if tcount==0 then t1=twork+delt;
if t >= twork then trew=trecwork;
rectemp=trecwork; hrtrate=hrtrwork;
(10) Decision Type: Single choice
Following Task/Network: Probability Of Taking
Number: Name: This Path:
(11) 6 data c (12) 1;
(13) (14)
(15) (16)
(17) (18)
(19) (20)
(21) (22)
(23) (24)

Task Number: 5

(1) Name: recov temp-heart (2) Type: Task
(3) Upper Network: 0 heat
(4) Release Condition: 1;
(5) Time Distribution Type: Normal
(6) Mean Time: 0;
(7) Standard Deviation: 0;
(8) Task's Beginning Effect:
(9) Task's Ending Effect: hrr=hrrest;
k=2-.01*(hrtrwork-hrr);
cpeff=.27*imclorst*(psk-phia*pa)+(.174/clorest)*(36-ta)-1.57;
b=2+12*(1-exp^((-1)*.3*cpeff));
tdrec=.25*exp^((-1)*.5*cpeff);
alpha=1.5*(1-exp^((-1)*1.5*cpeff));
trer=temprest;
if t < tdrec then trecov=treow+(tref-treow)*(1-exp^((-1)*2*exp^
((-1)*.17*(tref-treow))*(t1-(58/m))));
t1=t1+delt;
if t < tdrec then trecov =trecwork+.5*(trecov-trecwork);
if t < tdrec | trecov >=trew then trew=trecov;
if t >=tdrec then trecov=trew-(trew-trer)*(1-exp^((-1)*alpha*
(t-tdrec)));
hrtrecov=hrtrwork-(hrtrwork-hrr)*(1-exp^((-1)*k*b*t));
rectemp=trecov; hrtrate=hrtrecov;
(10) Decision Type: Single choice
Following Task/Network: Probability Of Taking
Number: Name: This Path:
(11) 6 data c (12) 1;
(13) (14)
(15) (16)
(17) (18)
(19) (20)
(21) (22)
(23) (24)

Task Number: 6

(1) Name: data collect. 21 (2) Type: Task

```

(3) Upper Network: 0 heat
(4) Release Condition: 1;
(5) Time Distribution Type: Normal
(6) Mean Time: 0;
(7) Standard Deviation: 0;
(8) Task's Beginning Effect:
(9) Task's Ending Effect: tcount=tcount+delt;t=tcount;
if t3 <= trest then flag=1;
if t3 > trest & t3 <= trest+twor then flag=2;
if t3 > trest+twor & t3 <= trest+twor+trecovery then flag=3;
if t3 > trest+twor+trecovery then flag=4;
t3=t3+delt;totalt=t3-delt;
(10) Decision Type: Tactical
    Following Task/Network:      Tactical Expression:
        Number:      Name:
(11) 3      rest t  (12) flag==1;
(13) 4      wor t  (14) flag==2;
(15) 5      recov (16) flag==3;
(17) 7      end   (18) flag==4;
(19)      (20)
(21)      (22)
(23)      (24)

```

```

Task Number: 7
(1) Name: end (2) Type: Task
(3) Upper Network: 0 heat
(4) Release Condition: 1;
(5) Time Distribution Type: Normal
(6) Mean Time: 0;
(7) Standard Deviation: 0;
(8) Task's Beginning Effect:
(9) Task's Ending Effect:
(10) Decision Type: Last task
    Following Task/Network:      Probability Of Taking
        Number:      Name:      This Path:
(11)      (12)
(13)      (14)
(15)      (16)
(17)      (18)
(19)      (20)
(21)      (22)
(23)      (24)

```

Other Related NAMRL Publications

Shamma, S., Molina, E.A., and Stanny, R.R. Micro SAINT Programs for Numerical Methods of Integration and Differential Equations, NAMRL Monograph 39, Naval Aerospace Medical Research Laboratory, Pensacola, FL, September 1989. (AD A218 097)