


AD-A240 037



Research and Development Technical Report
SLCET-TR-91-22

Performance Characterization of Magnesium/Manganese Dioxide Batteries

Louis Jarvis

Electronics Technology and Devices Laboratory

July 1991

DISTRIBUTION STATEMENT
Approved for public release.
Distribution is unlimited.

91-09467



U. S. ARMY LABORATORY COMMAND
Electronics Technology and Devices Laboratory
Fort Monmouth, NJ 07703-5601

DTIC
ELECTE
SEP 04 1991
S B D

91 09467

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The citation of trade names and names of manufacturers in this report is not to be construed as official Government indorsement or approval of commercial products or services referenced herein.

REPORT DOCUMENTATION PAGEForm Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE July 1991	3. REPORT TYPE AND DATES COVERED Technical Report: Sep 90 to Feb 91	
4. TITLE AND SUBTITLE PERFORMANCE CHARACTERIZATION OF MAGNESIUM/MANGANESE DIOXIDE BATTERIES			5. FUNDING NUMBERS PE: 612705 PR: H94 WU: 00	
6. AUTHOR(S) Louis Jarvis				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) US Army Laboratory Command (LABCOM) Electronics Technology and Devices Laboratory (ETDL) ATTN: SLCET-PB Fort Monmouth, NJ 07703-5601			8. PERFORMING ORGANIZATION REPORT NUMBER SLCET-TR-91-22	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The effects of storage and temperature on the performance of magnesium/manganese dioxide batteries produced by two different manufacturers was studied. The producers are not necessarily suppliers to the U.S. Army; however, a performance characterization of the two battery types was desired. Both batteries performed extremely poorly at -17°C (0°F), losing over 70 percent capacity, compared with performance at 21°C (70°F) and above. After partial usage, and storage, both battery types lost as much as 25 hours of service. Overall, no appreciable difference existed between the batteries of the two manufacturers.				
14. SUBJECT TERMS magnesium/manganese dioxide batteries; magnesium corrosion; primary battery; storability			15. NUMBER OF PAGES 13	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UL	

CONTENTS

	Page
INTRODUCTION.....	1
PREVIOUS INVESTIGATIONS.....	1
APPROACH.....	1
EXPERIMENTAL PROCEDURE.....	2
DISCUSSION AND RESULTS.....	3
CONCLUSIONS.....	7
REFERENCES.....	8

FIGURES

1. Discharge schematic.....	2
2. Effects of discharge temperature upon BHARAT battery continuous performance (AN/PRC-77 simulation).....	4
3. Continuous discharge performance comparison (AN/PRC-77 simulation).....	4
4. Effects of intermittent usage (four weeks storage, AN/PRC-77 simulation).....	5
5. Intermittent discharge comparison (four weeks storage, AN/PRC-77 simulation).....	6

TABLES

1. Effects of discharge temperature on average service life (continuous discharge).....	3
2. Effects of intermittent usage on service loss (four weeks of storage following partial discharge).....	5
3. BHARAT battery weights and dimensions.....	7



Unannounced Justification	
By _____	
Distribution/	
Availability Codes	
Dist A-1	Avail and/or Special

INTRODUCTION

The BHARAT Electronics Company, India, contacted the Power Sources Division, ETDL, LABCOM, concerning its version of the magnesium BA-4386 battery. From the battery test data supplied by BHARAT, their magnesium battery appeared to outperform the present magnesium BA-4386 battery employed by the U.S. Army.

The Army's interest in an improved magnesium battery is twofold. First, to date, there is only one manufacturer of the BA-4386/U battery. However, if another company had the capability of manufacturing this battery competitively, the unit cost would be kept low, and magnesium battery technology growth would be stimulated. Competition would also help to provide the Army with sufficient units of magnesium batteries. Second, the Army is presently involved in research work directed towards a magnesium battery replacement for the lithium/sulfur dioxide battery (especially for training exercises). Novel battery technologies, if any, used by BHARAT Electronics in its magnesium battery, could probably be employed in magnesium battery research.

PREVIOUS INVESTIGATIONS

In earlier work¹ in 1986, the storability and temperature discharge characteristics of magnesium/manganese dioxide and lithium/sulfur dioxide batteries were investigated. The investigation enhanced the long-studied phenomenon of magnesium battery anode corrosion during storage, following partial usage. Results proved that the military magnesium battery (BA-4386) lost up to 66 percent of original capacity during storage. Testing also confirmed the highly temperature-dependent magnesium battery performance.

During more recent work,⁴ the effects of cathode moisture content upon magnesium battery performance were investigated. Results proved that additional cathode water enhanced battery performance during continuous and intermittent discharge. This is credited to a decrease in the "drying out" effect of the cathode, which, following partial usage, occurs during storage.

APPROACH

The investigation was made to characterize the performance of the BHARAT magnesium battery, with respect to temperature and storability. The BHARAT magnesium battery is identical in size, form, and function to the magnesium BA-4386 battery already employed by the Army. Test results are tabulated and compared with previous magnesium battery performance data.¹

EXPERIMENTAL PROCEDURE

Ten magnesium batteries were obtained from BHARAT Electronics. Prior to electrical testing, the dimensions and weights of the batteries were recorded. Following electrical testing, the dimensions were remeasured and compared with initial values and battery specifications.

Electrical testing simulated AN/PRC-77 radio usage, which is the main application of the BA-4386 battery. The discharge scenario was identical to that used during earlier magnesium battery testing¹. The discharge regime consisted of two minutes at 14.2 ohms (transmit mode) followed by 18 minutes at 291 ohms (receive mode). The schematic of the discharge circuit is displayed in Fig. 1.

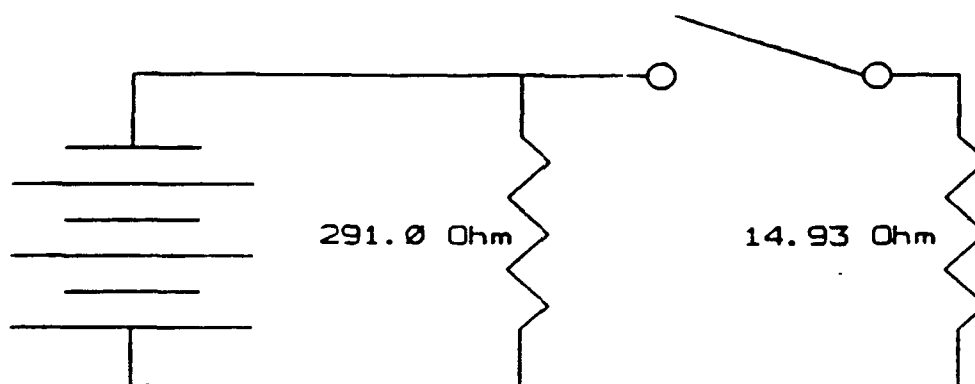


Figure 1. Discharge schematic.

With the discharge switch closed, the radio transmit mode is simulated. The two parallel resistors produce a resistive load of 14.2 ohms. Radio-receive mode is simulated when the test circuit switch is open. Testing was performed at -17.8, 4.4, 21.1, and 43.3 degrees Celsius. This process was performed either continuously or intermittently. Cycling was controlled by a Xanadu Controls Universal Programmable Timer. Voltage/time data were recorded on a Gould Chart Recorder, Model SC282. During discharge, battery environmental temperature was controlled with a Blue M Environmental Chamber, Model 1004-3B.

Intermittent battery testing was performed as described here. The discharge regime consisted of 8 hours of AN/PRC-77 simulation, followed by 16 hours of room temperature (21°-27°C) storage. Initially, this simulation was carried out for one day (at -17.8°C), two days (at 4.4°C), four days (at 21.1°C), or three days (at 43.3°C). The four noted temperatures are the conditions the batteries experienced during each daily 8 hour discharge. Next, all batteries were stored at room temperature for four weeks. The discharge regime (8 hours radio simulation followed by 16 hours rest) was continued to battery end voltage. Battery performance was measured to a 10-volt cutoff under the transmit (14.2 ohm) mode.

DISCUSSION AND RESULTS

Performance characteristics of the BHARAT magnesium battery are similar to magnesium batteries tested earlier.¹ After partial usage, delivered capacity is highly dependent upon discharge temperature and storage.

The effects of discharge temperature upon BHARAT battery performance during continuous usage (Table 1 and Fig. 2) are typical of the present magnesium/manganese dioxide battery system. Below 21.1°C, the detrimental effect of discharge temperature is 21.9 times greater than at higher temperatures.

Table 1. Effects of discharge temperature on average service life (continuous discharge).

Discharge Temperature (°C)	BHARAT Battery Average Service (Hrs)	Rayovac Battery ¹ Average Service (Hrs)
-17.8	20.1	18.5
4.4	44.4	45.4
21.1	70.4	65.9
43.3	71.7	68.5

Performance comparison of the two types of magnesium batteries (Fig. 3) demonstrates slight variations between them. Overall, when compared with Rayovac's performance, BHARAT battery performance is no more than 8.6 percent greater.

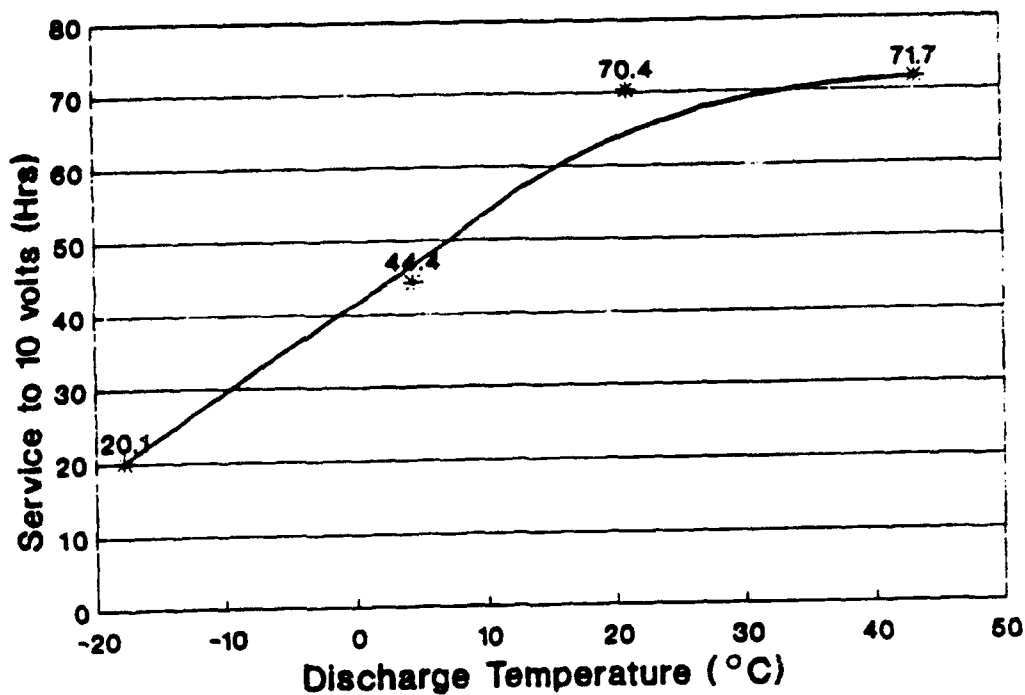


Figure 2. Effects of discharge temperature upon BHARAT battery continuous performance (AN/PRC-77 simulation).

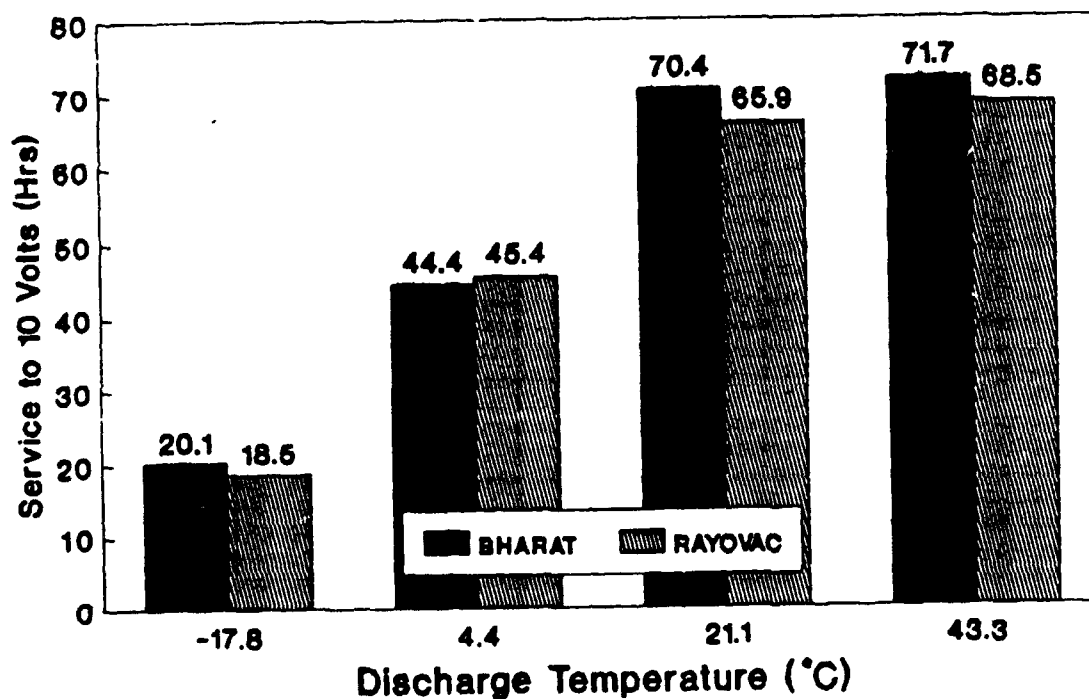


Figure 3. Continuous discharge performance comparison (AN/PRC-77 simulation).

The effect of intermittent usage on BHARAT battery performance (Table 2 and Fig. 4) is similar to that of earlier testing of the Rayovac battery.¹ Following the removal of the protective magnesium hydroxide (MgOH) anode film, the anode is unprotected during initial discharge. The film does not re-form to its original passivity^{2,3}; therefore, anode corrosion begins, thus reducing available battery capacity.

Table 2. Effects of intermittent usage on service loss (four weeks of storage following partial discharge).

Discharge Temperature (°C)	BHARAT Battery		Rayovac Battery	
	Intermittent Service (Hrs)	Service Lost (Hrs)	Intermittent Service (Hrs) ¹	Service Lost (Hrs)
-17.8	8.7	11.3	6.2	12.3
4.4	18.0	26.4	19.4	26.0
21.1	44.0	26.4	47.5	18.4
43.3	45.2	26.5	43.5	25.1

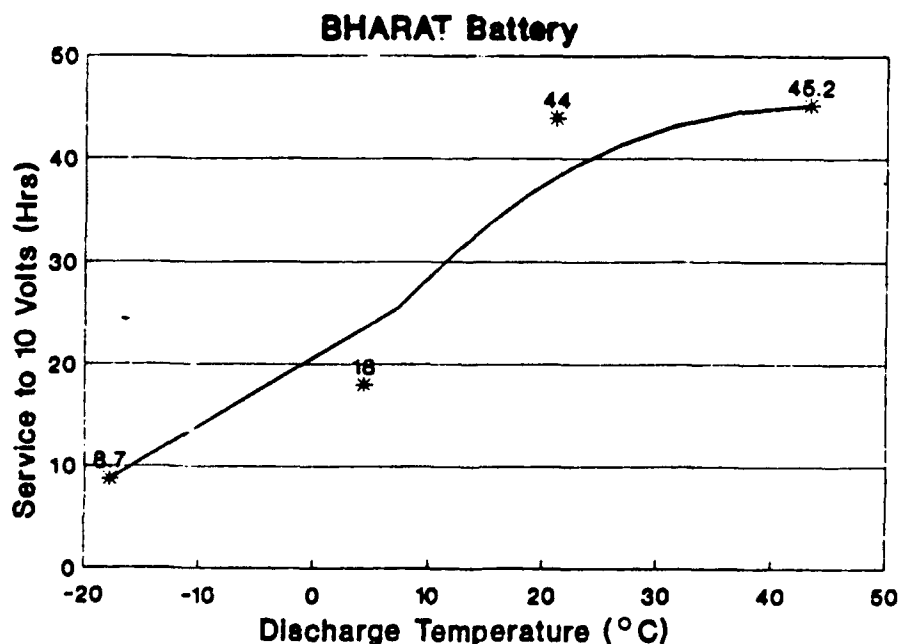


Figure 4. Effects of intermittent usage (four weeks storage, AN/PRC-77 simulation).

Intermittent performance comparison (Fig. 5) show insubstantial performance differences between the two battery types. Only -17.8°C is the performance differential between the two battery types substantial (40.3 percent). Throughout the remaining temperature profile, battery performance differential is no greater than 7.4 percent.

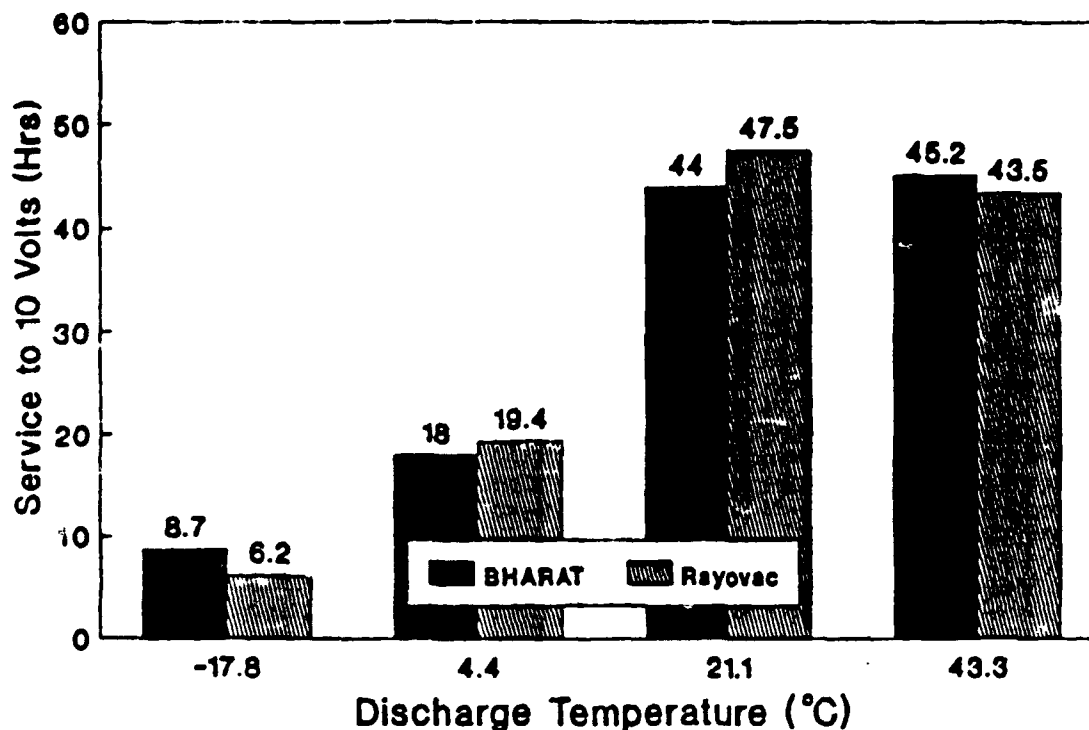


Figure 5. Intermittent discharge comparison (four weeks storage, AN/PRC-77 simulation).

Each of the ten BHARAT batteries was within the weight requirement (Table 3), as noted in the magnesium BA-4386 battery specification (MIL-B-55252). Dimensionally, battery lengths measured greater than the allowable maximum value. Initially, the length of nine batteries exceeded the limit; after discharge, the length of the ten batteries exceeded the limit.

After discharge, post-mortem analyses of the batteries revealed that the individual cells "bulged." This swelling was caused by the formation of MgOH, a by-product of anode corrosion, between the anode and cathode, and resulted in an outward force on the cans; eventually, the stress caused them to bulge.

Table 3. BHARAT Battery Weights and Dimensions

Battery Number	Weight (kg)	Initial Dimensions (mm)				Final Dimensions (mm)		
1	1.195	89.22	53.78	241.5*		89.69	55.22	244.0*
2	1.182	89.18	53.86	241.5*		89.21	53.92	242.0*
3	1.193	89.79	52.96	241.5*		89.54	52.74	243.5*
4	1.185	89.15	53.41	241.5*		89.15	53.55	241.5*
5	1.206	89.52	53.35	241.5*		89.35	53.33	241.5*
6	1.196	89.63	53.76	241.5*		89.62	53.80	242.0*
7	1.185	89.39	53.72	241.0		89.36	53.54	242.0*
8	1.203	89.82	53.86	241.5*		89.71	53.92	242.5*
9	1.201	89.12	53.13	241.0		89.15	53.50	242.5*
10	1.184	89.99	53.20	241.5*		89.80	53.23	242.0*
MIL-B55252 Specification (Maximum)	1.361	92.08	53.98	241.3		92.08	53.98	241.3

*Dimension Exceeded Specification Limit.

CONCLUSIONS

Performance characteristics of the BHARAT batteries are similar to those of the Rayovac batteries. Delivered capacity of the two battery types decreased with decreasing discharge temperature. After partial usage, both battery types underwent anode corrosion during storage. This reduced the available capacity substantially.

Overall, continuous and intermittent battery performance of the two manufacturers is similar. (See Figs. 3 and 5.) Based solely on performance, no appreciable advantage is achieved from utilization of the BHARAT magnesium battery.

REFERENCES

1. G. DiMasi, L. Jarvis, M. Brundage, T. Atwater, "Comparison Electrical Testing of the BA-4386/U Magnesium and the BA-5590 Lithium Batteries," LABCOM Technical Report, SLCET-TR-86-13 (1986).
2. G.S. Lozer and R.J. Ryan, "Magnesium Primary Cells," 16th Power Sources Symposium (1962).
3. D. Linden, in Handbook of Batteries and Fuel Cells, (McGraw-Hill, New York, 1984), pp. 6,7.
4. L. Jarvis, "The Beneficial Effect of Increased Cathode Water Content on Mg/MnO₂ Battery Performance," J. Power Sources 32, 271-276 (1990).

ELECTRONICS TECHNOLOGY AND DEVICES LABORATORY
MANDATORY DISTRIBUTION LIST
CONTRACT OR IN-HOUSE TECHNICAL REPORTS

1 Nov 90
Page 1 of 2

Defense Technical Information Center*

ATTN: DTIC-FDAC

Cameron Station (Bldg 5)
Alexandria, VA 22304-6145

(*Note: Two copies for DTIC will
be sent from STINFO Office.)

Director

US Army Material Systems Analysis Actv

ATTN: DRXS-MP

001 Aberdeen Proving Ground, MD 21005

Commander, AMC

ATTN: AMCDE-SC

5001 Eisenhower Ave.

001 Alexandria, VA 22333-0001

Commander, LABCOM

ATTN: AMSLC-CG, CD, CS (In turn)

2800 Powder Mill Road

001 Adelphi, Md 20783-1145

Commander, LABCOM

ATTN: AMSLC-CT

2800 Powder Mill Road

001 Adelphi, MD 20783-1145

Commander,

US Army Laboratory Command

Fort Monmouth, NJ 07703-5601

1 - SLCET-DD

2 - SLCET-DT (M. Howard)

1 - SLCET-DB

35 - Originaling Office

Commander, CECOM

R&D Technical Library

Fort Monmouth, NJ 07703-5703

1 - ASQNC-ELC-IS-L-R (Tech Library)

3 - ASQNC-ELC-IS-L-R (STINFO)

Advisory Group on Electron Devices

201 Varick Street, 9th Floor

002 New York, NY 10014-4877

ELECTRONICS TECHNOLOGY AND DEVICES LABORATORY
SUPPLEMENTAL CONTRACT DISTRIBUTION LIST
(ELECTIVE)

1 Nov 90
Page 2 of 2

001	Director Naval Research Laboratory ATTN: CODE 2627 Washington, DC 20375-5000	001	Cdr, Atmospheric Sciences Lab LABCOM ATTN: SLCAS-SY-S White Sands Missile Range, NM 88002
001	Cdr, PM JTFUSION ATTN: JTF 1500 Planning Research Drive McLean, VA 22102	001	Cdr, Harry Diamond Laboratories ATTN: SLCHD-CO, TD (In turn) 2800 Powder Mill Road Adelphi, MD 20783-1145
001	Rome Air Development Center ATTN: Documents Library (TILD) Griffiss AFB, NY 13441		
001	Deputy for Science & Technology Office, Asst Sec Army (R&D) Washington, DC 20310		
001	HQDA (DAMA-ARZ-D/Dr. F.D. Verderame) Washington, DC 20310		
001	Dir, Electronic Warfare/Reconnaissance Surveillance and Target Acquisition Ctr ATTN: AMSEL-EW-D Fort Monmouth, NJ 07703-5000		
001	Dir, Reconnaissance Surveillance and Target Acquisition Systems Directorate ATTN: AMSEL-EW-DR Fort Monmouth, NJ 07703-5000		
001	Cdr, Marine Corps Liaison Office ATTN: AMSEL-LN-MC Fort Monmouth, NJ 07703-5000		
001	Dir, US Army Signals Warfare Ctr ATTN: AMSEL-SW-OS Vint Hill Farms Station Warrenton, VA 22186-5100		
001	Dir, Night Vision & Electro-Optics Ctr CECOM ATTN: AMSEL-NV-D Fort Belvoir, VA 22060-5677		