

REPORT D'C

AD-A240 081

Form Approved

OMB No. 0704-0188

2

1. Instructions published for this section require
completeness and inclusion of the data needed, and
include information, including suggestions for
formatting, dated 1974, Washington, DC 20303.



2. Reviewing instructions for this section require
completeness and inclusion of the data needed, and
include information, including suggestions for
formatting, dated 1974, Washington, DC 20303.

1. AGENCY USE ONLY (Leave blank)

2. REPORT DATE

08/06/91

3. REPORT TYPE AND DATES COVERED

POP Test (06/91)

4. TITLE AND SUBTITLE

Performance Oriented Packaging Testing of Container,
Shipping and Storage, Mk 3 Mods 0, 1, 2, 3 for Packing
Group II Solid Hazardous Materials

5. FUNDING NUMBERS

6. AUTHOR(S)

James M. Dwyer

7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)

Naval Weapons Station Earle
Test and Evaluation Division (Code 403)
Colts Neck, NJ 07722-5000

8. PERFORMING ORGANIZATION
REPORT NUMBER

DODPOPHM/USA/DOD/
NADTR91017

9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)

Naval Weapons Support Center (Code PM-4)
Crane, IN 47522-5000

10. SPONSORING/MONITORING
AGENCY REPORT NUMBER

Same as above

11. SUPPLEMENTARY NOTES

N/A

12a. DISTRIBUTION AVAILABILITY STATEMENT

12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

Qualification tests were performed to determine whether the in-service Mk 3 Mod 0 Shipping and Storage Container could be utilized to contain properly dunnaged solid type hazardous materials weighing up to a gross weight of 48.5 kg (107 pounds). The tests were conducted in accordance with Performance Oriented Packaging (POP) requirements specified by the United Nations Recommendations on the Transportation of Dangerous Goods and the Department of Transportation's Title 49 CFR and the Final Rulings published in the Federal Register, Vol. 55 on 21 Dec 90. The container has conformed to the POP performance requirements; i.e., the container successfully retained its contents throughout the specified tests.

In addition, due to their similarities in size and weight, this test is considered representative of qualification testing for the Mk 3 Mods 1, 2, 3 Shipping and Storage Container as per the variation in the Federal Register (21 Feb 91) and page 52724, para 178.601h of the Final Rulings specified in the Department of Transportation's Performance Oriented Packaging Standards in the Federal Register, Vol. 55.

14. SUBJECT TERMS

POP Test of Mk 3 Mods 0, 1, 2, 3 Shipping and Storage Container

15. NUMBER OF PAGES

6

16. PRICE CODE

17. SECURITY CLASSIFICATION
OF REPORT

UNCLASSIFIED

18. SECURITY CLASSIFICATION
OF THIS PAGE

UL


19. SECURITY CLASSIFICATION
OF ABSTRACT

UL

20. LIMITATION OF ABSTRACT

UL

DISCLAIMER NOTICE

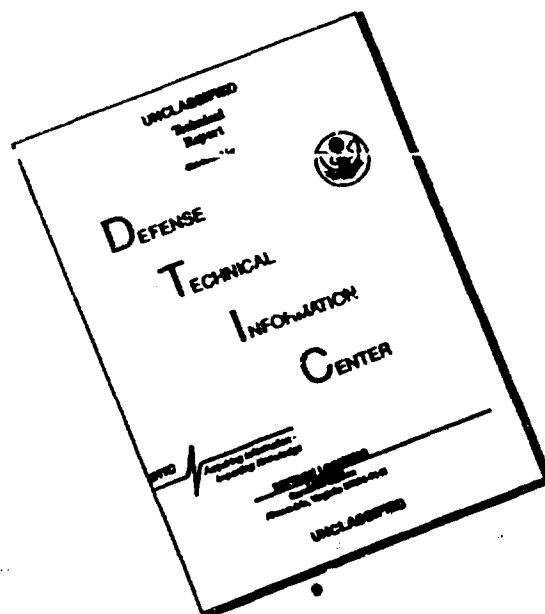

THIS DOCUMENT IS BEST
QUALITY AVAILABLE. THE COPY
FURNISHED TO DTIC CONTAINED
A SIGNIFICANT NUMBER OF
PAGES WHICH DO NOT
REPRODUCE LEGIBLY.

DODPOPHM/USA/DOD/NADTR91017

PERFORMANCE ORIENTED PACKAGING TESTING
OF
CONTAINER, SHIPPING AND STORAGE, MK 3 MODS 0, 1, 2, 3
FOR PACKING GROUP II SOLID HAZARDOUS MATERIALS

Author:
James M. Dwyer
Mechanical Engineering Technician



Performing Activity:
Naval Weapons Station Earle
Colts Neck, New Jersey 07722-5000

6 August 1991

FINAL

DISTRIBUTION UNLIMITED

Sponsoring Organization:
Naval Weapons Support Center
Code PM-4
Crane, Indiana 47522-5000

1. TITLE	2. DATE
3. AUTHOR	4. ORIGIN
5. DISTRIBUTION	6. AVAILABILITY
7. SPECIAL	8. OTHER

A-1

91-07437



91 8 09 027

INTRODUCTION

The Mk 3 Mod 0 Shipping and Storage Container tested, contained a simulated load of 43.9 kg (97 pounds) of sand representing the worst case of loading. Overall weight of the container was 48.5 kg (107 pounds). This Performance Oriented Packaging (POP) test was performed to ascertain whether this standard container (Packing Group II) would meet the requirements as specified by the United Nations Recommendation on the Transportation of Dangerous Goods Document, ST/SG/AC.10/1, Revision 6, Chapters 4 and 9. A base level vibration test was also conducted in accordance with the final rulings specified in the Department of Transportation's Performance Oriented Packaging Standards in the Federal Register Volume 55. Due to unavailability, the number of containers used was less than the number required by the UN recommendation. This has been approved by the Under Secretary of Defense, Memorandum for the Joint Logistics Commanders dated 22 February 1990.

The objectives of these tests were to minimize the risk of personnel or environmental exposure to the hazards associated with the contents in the advent of a transportation or handling accident.

In addition, due to their similarities in size and weight, this test is considered representative of qualification testing for the Mk 3 Mods 1, 2, 3 Shipping and Storage Container as per the variation in the Federal Register (21 February 1991) and page 52724, paragraph 178.601h of the Final Rulings specified in the Department of Transportation's Performance Oriented Packaging Standards in the Federal Register, Volume 55.

TESTS PERFORMED

1. Base Level Vibration Test

This test was performed in accordance with paragraph 178.608 of the Performance Oriented Packaging Standards, Final Ruling, published in the Federal Register, Vol. 55, No. 246, December 21, 1990. Three sample containers were placed on the repetitive shock platform. The containers were restrained during vibration in all but the vertical direction. The frequency of the platform was increased until the container left the platform 1/16 of an inch at some instant during each cycle. Test time was 1 hour at a frequency of 3.5 Hz.

2. Stacking Test

This test was performed in accordance with ST/SG/AC.10/1, chapter 9, paragraph 9.7.6. Two containers were used for this test. Each container was subjected to a force applied to its top surface equivalent to the total weight of identical packages stacked to a height of 3 meters (10 feet) (including the test sample). A weight of 856 pounds was stacked on each sample container. The test was performed for 24 hours. After the allowed time, the weight was removed and the containers examined.

3. Drop Test

This test was performed in accordance with ST/SG/AC.10/1, chapter 9, paragraph 9.7.3. Five containers were used throughout the test. Five drops were performed from a height of 1.2 meters (4 feet), impacting the following surfaces:

- a. Flat bottom
- b. Flat top
- c. Flat on long side
- d. Flat on short side
- e. One corner

All tests were performed at an ambient temperature of $+70 \pm 20$ °F.

PASS/FAIL (UN CRITERIA)

1. Base Level Vibration Test (HM-181 CRITERIA)

The criteria for passing the base level vibration test is outlined in paragraph 178.608 of the Title 49 CFR Final Ruling and states the following: "immediately following the period of vibration, each package shall be removed from the platform, turned on its side and observed for any evidence of leakage. Rupture or leakage from any of the packages constitutes failure of the test."

2. Stacking Test (UN CRITERIA)

The criteria for passing the drop test is outlined in paragraph 9.7.6.3 of ST/SG/AC.10/1 and states the following: "... no test sample should leak. No test sample should show any deterioration which could adversely affect transport safety or any distortion liable to reduce its strength or cause instability in stacks of packages."

3. Drop Test (UN CRITERIA)

The criteria for passing the drop test is outlined in paragraph 9.7.3.5 of ST/SG/AC.10/1 and states the following: "Where a packaging for solids undergoes a drop test and its upper face strikes the target, the test sample passes the test if the entire contents are retained by an inner packaging or inner receptacle; e.g., a plastic bag, even if the closure is no longer sift-proof. A slight discharge from the closure(s) upon impact should not be considered to be a failure of the packaging provided that no further leakage occurs."

TEST RESULTS

1. Base Level Vibration Test

Satisfactory.

2. Stacking Test

Satisfactory.

3. Drop Test

Satisfactory.

DISCUSSION

1. Base Level Vibration Test

Immediately after the vibration test was completed, each container was removed from the platform, turned on its side and observed for any evidence of leakage. There was no leakage to the containers as a result of this test.

2. Stacking Test

Each container was visibly checked after the 24-hour period was over. There was no leakage, distortion, or deterioration to any of the containers as a result of this test.

3. Drop Test

After each drop, the containers were inspected for any damage which would be a cause for rejection. Final inspection indicated damage was minimal with only minor denting noted. The containers remained intact and functional upon completion of the tests.

REFERENCE MATERIAL

A. United Nation's "Recommendation on the Transportation of Dangerous Goods." ST/SG/AC.10/1. Revision 6

B. Title 49 CFR 107, et al., Performance Oriented Packaging Standard; Changes to Classification, Hazard Communication, Packaging and Handling Requirements Based on UN Standards and Agency Initiative: Final Rule, Federal Register, Vol. 55, No. 246 of December 21, 1990.

DISTRIBUTION LIST

Defense Technical Information Center (2 copies)

ATTN: DTIC/FDA

Bldg. 5, Cameron Station

Alexandria, VA 22304-6145

Headquarters, Military Traffic Management Command (2 copies)

ATTN: MT-SS, James Gibson

5611 Columbia Pike

Falls Church, VA 22041-5050

TEST DATA SHEET

DATA SHEET:	
Container: Mk 3 Mods 0, 1, 2, 3 Shipping and Storage Container	
Type: 4A1	Container P/N or NSN: NSN 1305-01-003-2461
Specification Number: Drawing 328874	Material: Steel
Gross Weight: 48.5 kg (107 pounds)	Dimensions: 18.24" L x 9.00" W x 12.89" H
Closure (Method/Type): Catch Clamping	Tare Weight: 6.8 kg (15 pounds)
Additional Description: Also as part of test, 92 pounds of sand was used.	
PRODUCT: See table	
Name: See table	NSN(s): See table
United Nations Number: See table	
United Nations Packing Group: II	
Physical State (Solid, Liquid, or Gas): Solid	
Vapor Pressure (Liquids Only): N/A At 50 °C: N/A At 55 °C: N/A	
Consistency/Viscosity: N/A	Density/Specific Gravity: N/A
Amount Per Container: See table	Flash Point: N/A
Net Weight: See table	
TEST PRODUCT:	
Name: Sand	Physical State: Solid
Consistency: N/A	
Density/Specific Gravity: N/A	
Test Pressure (Liquids Only): N/A	
Amount Per Container: N/A	Net Weight: 41.7 kg (92 pounds)

TABLE 1
Mk 3 Mod 1, 2, 3 Shipping and Storage Container

HALC	NSN	Type	Packing Drawing	UN Code	UN Number	#/ Cntr	Weight (lb)
B515	1310-00-678-9990	ct, 40mm Blank Saluting	328874 329484 329494 564203 564212	1.3C	0327	67	
A862	1305-01-003-2461	ct, 20mm Linked	328874 329494 564203 564212	1.2E	0321	97	
	1305-00-1-003-2461	ct, 20mm Linked	328874 329494 564203 564212	1.4C	0339	97	

**MK 3 MODS 0, 1, 2, 3
SHIPPING AND STORAGE CONTAINER
POP MARKING**

UN 4A1/Y48/S//USA/DOD/NAD**

**** YEAR LAST PACKED OR MANUFACTURED**

Encl (2)