



2

TECHNICAL REPORT RD-SS-91-10

THE RELEVANCE OF THE De BROGLIE VELOCITY
($V_1 = h/2md_1$) TO SHOCK LOADING INDUCED
REACTIONS IN LEAD AZIDE

James P. Billingsley
James M. Oliver
System Simulation and Development
Research, Development, and Engineering Center

DTIC
ELECTE
FEB 12 1992
S D D

September 1991



U.S. ARMY MISSILE COMMAND

Redstone Arsenal, Alabama 35898-5000

Approved for public release; distribution is unlimited.

D2 2 11 017

92-03389



DESTRUCTION NOTICE

FOR CLASSIFIED DOCUMENTS, FOLLOW THE PROCEDURES IN DoD 5200.22-M, INDUSTRIAL SECURITY MANUAL, SECTION II-19 OR DoD 5200.1-R, INFORMATION SECURITY PROGRAM REGULATION, CHAPTER IX. FOR UNCLASSIFIED, LIMITED DOCUMENTS, DESTROY BY ANY METHOD THAT WILL PREVENT DISCLOSURE OF CONTENTS OR RECONSTRUCTION OF THE DOCUMENT.

DISCLAIMER

THE FINDINGS IN THIS REPORT ARE NOT TO BE CONSTRUED AS AN OFFICIAL DEPARTMENT OF THE ARMY POSITION UNLESS SO DESIGNATED BY OTHER AUTHORIZED DOCUMENTS.

TRADE NAMES

USE OF TRADE NAMES OR MANUFACTURERS IN THIS REPORT DOES NOT CONSTITUTE AN OFFICIAL ENDORSEMENT OR APPROVAL OF THE USE OF SUCH COMMERCIAL HARDWARE OR SOFTWARE.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

Form Approved
OMB No 0704 0188
Exp Date Jun 30, 1986

1a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED			1b. RESTRICTIVE MARKINGS	
2a. SECURITY CLASSIFICATION AUTHORITY			3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release; distribution is unlimited.	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE				
4. PERFORMING ORGANIZATION REPORT NUMBER(S) TR-RD-SS-91-10			5. MONITORING ORGANIZATION REPORT NUMBER(S)	
6a. NAME OF PERFORMING ORGANIZATION Sys. Sim. and Dev. Res., Dev., and Eng. Center		6b. OFFICE SYMBOL (If applicable) AMSMI-RD-SS		7a. NAME OF MONITORING ORGANIZATION
6c. ADDRESS (City, State, and ZIP Code) Commander, U. S. Army Missile Command ATTN: AMSMI-RD-SS Redstone Arsenal, AL 35898-5252			7b. ADDRESS (City, State, and ZIP Code)	
8a. NAME OF FUNDING / SPONSORING ORGANIZATION		8b. OFFICE SYMBOL (If applicable)		9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER
8c. ADDRESS (City, State, and ZIP Code)			10. SOURCE OF FUNDING NUMBERS	
			PROGRAM ELEMENT NO	PROJECT NO
			TASK NO.	WORK UNIT ACCESSION NO
11. TITLE (Include Security Classification) The Relevance of the De Broglie Velocity ($V_1 = h/2md_1$) to Shock Loading Induced Reactions in Lead Azide				
12. PERSONAL AUTHOR(S) Billingsley, James P. and Oliver, James M.				
13a. TYPE OF REPORT Final		13b. TIME COVERED FROM <u>Apr 90</u> TO <u>Apr 91</u>		14. DATE OF REPORT (Year, Month, Day) September 1991
15. PAGE COUNT 30				
16. SUPPLEMENTARY NOTATION				
17. COSATI CODES			18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) De Broglie Velocity Detonation Particle Velocity Shock Induced Reaction Lead Azide	
FIELD	GROUP	SUB-GROUP		
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Available experimental shock induced reactive pressure levels for dextrinated and single crystal lead azide are compared to predicted Pv_1 magnitudes. $Pv_1 = \rho_0 C_L V_1$ where $V_1 = h/(2md_1)$ is the De Broglie velocity. The comparison is favorable and it is suggested that particle motion instability near V_1 magnitudes (the " V_1 Effect") is responsible for the observed reactions in these marginally stable materials. Similar comparative analyses for other primary energetic materials are needed to further evaluate the " V_1 Effect" on these substances.				
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT ☒ UNCLASSIFIED/UNLIMITED ☐ SAME AS RPT. ☐ DTIC USERS			21. ABSTRACT SECURITY CLASSIFICATION UNCLASSIFIED	
22a. NAME OF RESPONSIBLE INDIVIDUAL Dr. James P. Billingsley			22b. TELEPHONE (Include Area Code) (205) 876-5210	22c. OFFICE SYMBOL AMSMI-RD-SS-AA

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	1
II. THE De BROGLIE PARTICLE VELOCITY, $V_1 = h/(2md_1)$	2
III. FITZGERALD'S PARTICLE VELOCITY STABILITY CRITERIA ...	3
IV. EXPERIMENTAL REACTIVE SHOCK PRESSURES AND COMPARISON WITH Pv_1 PREDICTIONS	4
A. Dextrinated Lead Azide (DLA)	4
B. Single Crystal Lead Azide (S. C. P_bN_6)	6
V. CONCLUSIONS	9
VI. RECOMMENDATIONS	9
REFERENCES	15

Accession For	
NTIS CRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	



I. INTRODUCTION

Reference 1 contained information which indicated that there may be a correlation between experimentally observed Hugoniot Elastic Limit (HEL)/Elastic Plastic Shock Phenomena (EPSP) and the De Broglie velocity, V_1 (Section II). Since the publication of Reference 1, the shock physics literature has been searched for additional examples where the De Broglie influence is evident or suspected.

Data have been found which indicate that certain energetic materials can respond to V_1 magnitude particle velocities in dramatic manner. That is, particle velocities on the order of V_1 produce lattice disturbances sufficient to initiate unstable chemical reactions or atomic rearrangement of a marginally stable substance.

Lead azide (PbN_6), both in mixed and Single Crystal (S. C.) forms, exhibits this characteristic. Comparative documentation of this statement for lead azide is contained in Section IV of this report.

The importance of V_1 magnitude particle velocities with regard to initiating detonation in primary or sensitive explosives is not a new idea. It was suggested by Fitzgerald [2] in 1969. He showed that V_1 and the explosive material critical particle velocities from drop tests compared reasonably well. The present report compares V_1 effect predictions with experimental data in cases where the dynamic loading was applied by metal plate impact.

II. THE De BROGLIE PARTICLE VELOCITY, $V_1 = H/(2MD_1)$

Fitzgerald [3, Chpts 1 and 3] delineated the importance of the De Broglie momentum: wave-length particle velocity, V_1 , with regard to impacted solid material behavior. The De Broglie velocity, V_1 , is:

$$V_1 = \frac{h}{2md_1} = \frac{h}{m\lambda_1} \quad (1)$$

Where:

V_1 = Limiting particle velocity which can occur without permanent lattice distortion (plastic flow); or the limit particle propagation velocity in a stationary lattice
Units are cm/sec or km/sec [1].

h = Planck's Constant
= $6.6262 \times 10^{-27}(\text{gram})(\text{cm}^2)/\text{sec}$

m = Mass of one atom, grams

d_1 = Closest distance between the atoms in a crystal lattice, or the atomic spacing in a slip direction, units are cm or angstroms, $\text{\AA}$, ($1 \text{\AA} = 10^{-8}\text{cm}$).

λ_1 = $2d_1$ = wave length associated with the momentum, mV_1 . It is the shortest wave length possible in an undistorted lattice or stationary lattice, cm or $\text{\AA}$.

Table 1 lists longitudinal elastic wave velocity, C_L , information for the materials considered in this report. Also shown in Table 1 is the elastic wave pressure, P_{v1} , corresponding to the wave velocity, C_L , and the particle velocity, V_1 . This is given by:

$$P_{v1} = \rho_0 C_L V_1 \quad (2)$$

where ρ_0 is the material density (grams/cc).

III. FITZGERALD'S PARTICLE VELOCITY STABILITY CRITERIA

Fitzgerald, utilizing his concept of reversed lattice motion [3, Chapter 3], shows states with particle velocities ranging from approximately $0.50 V_1$ to $0.75 V_1$ are unstable. Velocities can jump to values higher than V_1 . Particle velocities in the immediate region around V_1 appear to be stable. In addition, Fitzgerald also showed $2V_1$ was an important unstable velocity where excessive distortion would occur.

Thus, there are three important velocity ranges/values:

1. $0.50 V_1$ to $0.75 V_1$; unstable state, velocities may jump to a magnitude greater than V_1 .
2. V_1 vicinity; apparently a stable state.
3. V_1 to $2V_1$; unstable, particle velocities in this region will approach V_1 under "long-term" operating conditions. Ample time is necessary to allow particle momentum sharing with a sufficient number of lattice masses [3, pp. 72 - 74]. This, by definition, is a relaxation time.

Since interest is in characterization of responses of those cases in which the particle velocity, U_p , is of the same magnitude as V_1 , we have examined published experimental shock data for that dynamic regime. We have partitioned responses into four, not necessarily exclusive, categories. They are in order of severity.

1. No permanent change in structure and/or properties.
2. Some alteration of properties.
3. Classic HEL/EPSP behavior.
4. Significant alteration of structure to include detonation.

Some examples of particle velocity effects in categories 1, 2, and 3 are under investigation and will be documented as time and circumstances permit. Single examples of " V_1 Effects" (including those in Reference 1 and the present report) are not conclusive proof that the " V_1 Effect" is the "root cause" of the phenomena. However, as more suspected " V_1 Effects" examples are documented, the probability of fortuitous circumstances or mere chance occurrence is decreased.

In materials with marginally stable cohesiveness, the lattice perturbation from " V_1 Effects" may be sufficient to upset the rather precarious atomic arrangement and violent rearrangement (detonation) occurs. Certain so called primary (or very sensitive) explosives fall into this category. The present report provides some " V_1 Effect" comparative evidence for lead azide which is a foremost primary explosive [5].

"Suspected V_1 effect" phenomena examples are not necessarily easy to document. The following information is needed.

ITEM	REMARKS
1. m or m_{AV} and d_1 or d_{1AV}	To compute V_1 , for elements and certain compounds, this may not be difficult, but complex compounds or complex lattice structures may pose a debatable judgemental problem.

- | | | |
|----|---|---|
| 2. | Shock velocity, U_s , or elastic wave velocity, C_L , as a function of particle velocity, U_p . | To compute Pv_1 . |
| 3. | Experimental shock induced reactive information as a function of U_p , U_s , and P_s . | To compare with the V_1 and Pv_1 predictions. |

The above information should be for the same material (same composition; same density, ρ_0 ; same manufacturing history, etc.) or credibility will suffer. It is difficult to assemble this information for the same consistent material. Examples of this difficulty are evident in Section IV.

IV. EXPERIMENTAL REACTIVE SHOCK PRESSURES AND COMPARISON WITH Pv_1 PREDICTIONS

A. Dextrinated Lead Azide (DLA)

DLA is a mixture of lead azide and dextrin. Dextrination of lead azide provides handling and safety benefits [5, Vol. 2, Chpt. 1]. Reference 4 contains systematic experimental shock data for dextrinated lead azide (DLA) mixtures. The shock loading was accomplished via plate impact and exploding foil impact. Table 1 of Reference 4 lists shock pressure (P_s) data as a function of travel distance (T) in the DLA specimen ($\rho_0 = 3.41$ g/cc). This information is plotted in Figure 1 of the present report. Note that for $P_s \leq 4.0$ kbars, the pressure remains relatively constant with travel distance (or time).

However, for $P_s \geq 6.0$ kbars, the pressure remains practically constant for a short distance and then increases rather abruptly in a step function fashion. This rapid pressure increase is an indication that detonation has begun. Consequently, the critical shock pressure to cause detonation via plate impact lies between 4.0 and 6.0 kbars. This critical pressure region for DLA with $\rho_0 = 3.41$ g/cc is also plotted in Figure 2. It contains experimental shock induced firing stimulus data for DLA as a function of material density (ρ_0) [6]. These results were acquired via Small Scale Gap Testing (SSGT). The SSGT results for $\rho_0 = 3.41$ g/cc indicate an ignition at 3.0 kbars. This is approximately the impulse pressure necessary for a 50 percent detonation probability for DLA which was estimated using steel ball-drop test results [19]. This pressure was 2.8×10^9 dyne/cm² which is 2.80 kbars.

Also shown in Figures 1 and 2 are Pv_1 indicators where V_1 was computed via Equation 1 with the following atomic mass and interatomic distances:

- a. Nitrogen atom, m_n , and the average distance between atoms ($d_{1N-N} = 1.18$ Å) in an azide group ([7] for S. C. $\alpha - PbN_6$).
- b. Nitrogen atom, m_n , and the shortest distance between the N_3 azide ion groups ([8, p. 985]; N5 atom; azide II to N10 atom, azide IV). This distance is $d_{1A-A} = 2.95$ Å.

Table 1 contains numerical values for V_1 and P_{V_1} . The elastic wave velocity (C_{11} , employed to compare P_{V_1}) was 1.223 km/sec which is given in Reference 4 for DLA ($\rho_0 = 3.41$ g/cc). The interatomic distances are for the $\alpha - \text{PbN}_6$ crystal since DLA is composed of small lead azide crystals surrounded by dextrin [5, Vol. 2, p. 29].

The nitrogen atom mass and interatomic distances were employed to compute V_1 since it is the destabilized N_3 azide ion groups which will recombine to form N_2 gas in an exothermic reaction [5, Vol.1, pp. 195 and 452].



Now according to Garner [9]:

"Sufficient energy is set free to activate three or four neighboring N_6 groups if this energy were all available for this purpose. A chain reaction is thus a possibility."

Garner [9] also says that actually two or three adjacent N_6 ion groups would have to decompose simultaneously (within 10^{-13} sec) to produce a self-sustaining detonation wave. This would be an explosion nuclei, or the beginning of a "hot spot."

Note also the remarks of Soderquist [10] in regard to sensitiveness and decomposition of copper (II) azide, $\text{Cu}(\text{N}_3)_2$. He suggests that N_2 gas will be released and will propagate rapidly in the channels or voids in the atomic lattice. He also says that the N - N distances in the N_3 azides ($d_1 \approx 1.18 \text{ \AA}$) are close to the observed distances ($1.10 \text{ \AA}$) for dinitrogen gas (N_2).

This probably accounts for the sensitivity of PbN_6 and CuN_6 since the " V_1 Effect" would only have to perturb the azide atoms a small amount ($\leq 0.10 \text{ \AA}$) to destabilize the precarious arrangement.

In Figure 1, P_{V_1} , for V_1 where $d_{1\text{N-N}} = 1.18 \text{ \AA}$ was employed, is 5.0 kbars which lies between the 4.0 and 6.0 kbar critical limits established by plate impact testing. P_v , for V_1 where $d_{1\text{A-A}} = 2.95 \text{ \AA}$ is 2.0 kbars and is somewhat less than this 4.0 to 6.0 kbar critical region. However, this P_{V_1} value (2.0 kbars) is comparable to the SSGT result (3.0 kbars) for a 50 percent probability of ignition.

Considering the differences in the experimental testing and the judgmental V_1 computations, the P_{V_1} predictions and the experimental results exhibit reasonable agreement.

It is worth noting that if the lead atom mass m_{Pb} , and distances ($d_{1\text{Pb-Pb}}$), are utilized for P_{V_1} predictions, then V_1 is exceptionally small and P_{V_1} is much less than 1.0 kbar. Perhaps this is an explanation of the extreme sensitivity of lead azide which is occasionally mentioned. However, DLA ($\rho_0 = 3.41$ g/cc) was not this sensitive, so that " V_1 Effects," based on lead atom parameters were considered unlikely for this density. However, the dextrin's presence could negate this extreme sensitivity so that lead atom motion cannot be entirely ruled out.

B. Single Crystal Lead Azide (S. C. P_bN_6)

Reference 8 states that there are four polymorphic forms of lead azide. These are designated as the α , β , γ , and δ forms. Crystal structure investigations of $\alpha - P_bN_6$ are documented in References 7 and 8. Although only two elements are present, the lattice structure is rather complex.

Chaudhri [11] performed a shock induced initiation study of S. C. $\beta - P_bN_6$ via the impact of thin steel plates. Four significant data points from this investigation for different impact velocities, V_I , are as follows:

$V_I \geq 105$ m/s, detonation always occurred.

$V_I = 95$ m/s, initiation of fast reaction.

$V_I = 90$ m/s, initiation did not occur.

$V_I \leq 75$ m/s, detonation never occurred.

The initial pressure, P_s , at the impact interface is given by:

$$P_s = \left(\frac{\rho_1 w_1 \rho_2 w_2}{\rho_1 w_1 + \rho_2 w_2} \right) V_I \quad (4)$$

This is written in Reference 11 notation where the Index 1 refers to $\beta - P_bN_6$ and the Index 2 refers to the steel plate. Numerical values are as follows:

$\rho_1 = 4.93$ g/cc = S. C. $\beta - P_bN_6$ density.

$w_1 = 2.00$ km/sec = wave front velocity
in S. C. $\beta - P_bN_6$.

$\rho_2 = 7.84$ g/cc = steel density.

$w_2 = 5.85$ km/sec = wave front velocity
in steel.

Also at the contact interface:

$$P_s = \rho_1 w_1 U_{p1} = \rho_2 w_2 U_{p2} \quad (5)$$

So that:

$$U_{p1} = \frac{P_s}{\rho_1 w_1} = \text{particle velocity in S. C. } \beta - P_bN_6 \quad (6)$$

$$U_{p2} = \frac{P_s}{\rho_2 w_2} = \text{particle velocity in steel.} \quad (7)$$

In addition, the sum of the particle velocities at the contact interface is equal to V_1 , which can serve as a check on the computations.

$$V_1 = U_{p1} + U_{p2} \quad (8)$$

Table 2 contains numerical values of the impact pressures and particle velocities for the four impact conditions listed above. The pressures are also listed below.

$$V_1 = 105 \text{ m/s, } P_s = 8.5 \text{ kbars.}$$

$$V_1 = 95 \text{ m/s, } P_s = 7.7 \text{ kbars.}$$

$$V_1 = 90 \text{ m/s, } P_s = 7.3 \text{ kbars.}$$

$$V_1 = 75 \text{ m/s, } P_s = 6.1 \text{ kbars.}$$

Indicator symbols for these P_s values are shown in Figure 2 on the dotted line for S. C. $\beta - \text{PbN}_6$ ($\rho_0 = 4.93 \text{ g/cc}$).

V_1 and Pv_1 were not computed for S. C. $\beta - \text{PbN}_6$ since the authors were unable to locate a source for the interatomic distances (which are probably similar to those found for $\alpha - \text{PbN}_6$). Also there is some uncertainty about what value of w_1 to utilize in the S. C. $\beta - \text{PbN}_6$ Pv_1 computations.

Chaudhri and Field [12, p. 308] say that the longitudinal wave velocity for S. C. $\beta - \text{PbN}_6$ varies from 1.85 to 2.45 km/sec. As noted above, Chaudhri [11] suggests a wave velocity (w_1) equal to 2.00 km/sec for S. C. $\beta - \text{PbN}_6$. However, this value of w_1 yields $P_s = 8.5$ kbars for $V_1 = 105 \text{ m/sec}$. This differs from the 9.5 kbars mentioned for $V_1 = 105 \text{ m/sec}$ which may have merely been suggested as an approximate impact pressure for this condition. If $w_1 = 2.25 \text{ km/sec}$, then $P_s = 9.4$ kbars.

Rather than speculate to some extent on both V_1 and C_L (or w_1), Pv_1 for S. C. $\beta - \text{PbN}_6$ was not computed. However, Pv_1 was computed for $\alpha - \text{PbN}_6$. The V_1 values are the same as discussed in Part A of this section, since they are based on $\alpha - \text{PbN}_6$ nitrogen bond length data from References 7 and 8. The elastic wave front velocity (C_L or w_1) for S. C. $\alpha - \text{PbN}_6$ was determined from Young's modulus ($E_{<100>}$) information contained in Reference 13.

The elastic wave front velocity (C_L) in S. C. $\alpha - \text{PbN}_6$ is:

$$\begin{aligned} C_L &= \sqrt{\frac{E_{<100>}}{\rho_0}} = 1.856 \text{ km/sec} \\ &= \text{velocity in } <100> \text{ direction} \end{aligned} \quad (9)$$

$$\begin{aligned} E_{<100>} &= 1.62 * 10^{10} \text{ Newtons/(meter)}^2 \\ &= 16.2 * 10^{10} \left(\frac{\text{g}}{\text{cc}} \right) \left(\frac{\text{cm}}{\text{sec}} \right)^2 \\ &= \text{Young's modulus from tensile tests in } <100> \text{ direction.} \end{aligned} \quad (10)$$

This C_L value for S. C. $\alpha - \text{PbN}_6$ appears reasonable in view of the wave velocities discussed above for S. C. $\beta - \text{PbN}_6$.

The P_{v1} values (4.2 and 10.5 kbars) for S. C. $\alpha - \text{PbN}_6$ bracket the experimental critical P_s magnitudes (6.1 to 8.5 kbars) for S. C. $\beta - \text{PbN}_6$. This is still true if the experimental values should be increased about a kilobar since C_L may be about 2.25 km/sec instead of 2.00 km/sec as discussed above. The critical particle velocities in the S. C. $\beta - \text{PbN}_6$ are obviously close to V_1 magnitudes so that instability due to a perturbing V_1 effect is feasible.

Fox [13] indicates that shock pressures of approximately one kilobar ($\sigma_{CR} \approx 1.0$ kbar) are sufficient to cause an explosive reaction in S. C. $\alpha - \text{PbN}_6$. These results were obtained for very small crystals (length ≈ 1 mm) via a microtensile testing machine described in Reference 14. From Figure 2 of Reference 13, the maximum tensile stress as a function of strain rate for fresh lead azide is $14.0 \cdot 10^7$ n/m² or 1.4 kbars. This point ($\sigma_{CR} = 1.4$ kbars) is shown in Figure 2 on the S. C. $\alpha - \text{PbN}_6$ indicator line. Its magnitude is obviously much less than the P_{v1} predictions (based on nitrogen parameters) and plate impact experimental results [11] for S. C. $\beta - \text{PbN}_6$.

Consequently, it is recommended that plate impact testing of S. C. $\alpha - \text{PbN}_6$ crystals be performed in a manner similar to that for S. C. $\beta - \text{PbN}_6$ [11]. Larger S. C. $\alpha - \text{PbN}_6$ should be employed than utilized by Fox [13]. In Reference 8, it is noted that S. C. $\alpha - \text{PbN}_6$ was available in prism form which was 3 mm thick, 5 mm wide, and 8 mm long. This is much larger than the tensile test specimen [13] which were only about 1.0 mm long. In Reference 7, it is noted that their work was made possible by an advancement in growing lead azide crystals which is documented in Reference 15. If possible, it is recommended that these relatively large, stable $\alpha - \text{PbN}_6$ crystals be tested via flat plate impact for comparison with the S. C. $\beta - \text{PbN}_6$ results reported in Reference 11 and the present P_{v1} predictions.

V. CONCLUSIONS

From the comparative analysis presented in Section IV, it is apparent that the plate impact and SSGT induced shock pressures (or particle velocities), sufficient to cause detonation in lead azide, are very close to feasible Pv_1 pressures (or V_1 magnitude particle velocities). Consequently, it is possible that the De Broglie/Fitzgerald " V_1 Effect" is a factor in lead azide detonation phenomena. Additional Pv_1 , V_1 comparisons with other azides (AgN_3 and CuN_6) and primary explosives are required to provide a more definite conclusion. These comparisons will be made and documented when appropriate experimental results are available.

The present document is Number 4 in a series of reports [1, 16, and 17] whose primary purpose is to suggest that certain critical particle velocities could be a "root cause" of low pressure level shock induced reactions observed in solid materials. That is, particle velocity criteria as discussed in these reports are believed to provide a unified explanation for certain shock induced reactions and phenomena. As far as probable primary causes of detonation are concerned, it is obvious from Chaudhri's introductory remarks in Reference 18, that new ideas and concepts, albeit perhaps unusual or even bizarre, merit attention and exploration.

VI. RECOMMENDATIONS

As noted in Section II, the importance of methodical and consistent testing cannot be over emphasized. The following testing recommendations have been made in prior sections.

1. Plate impact testing of S. C. $\alpha - PbN_6$ to determine critical reaction pressure levels (or particle velocity).
2. Plate impact testing of additional azides and primary explosives to determine critical reaction pressure levels (or particle velocity).

If this information is currently available, its documentation is unknown to the authors.

TABLE 1. Tabulation of V_1 and Pv_1 for PbN_6 .

MATERIAL	m grams * 10^{-23}	d_1 Å (10^{-8} cm)	V_1 km sec	ρ_0 grams cm ³	C_L km sec	Pv_1 kbars
$\alpha - PbN_6$ (SINGLE CRYSTAL)	2.3259 (nitrogen atom)	1.179 (N - N)	0.1208	4.705	1.856	10.55
	2.3259 (nitrogen atom)	2.950 (A - A)	0.0483	4.705	1.856	4.22
Dextrinated Lead Azide (DLA)	2.3259 (nitrogen atom)	1.179 (N - N)	0.1208	3.41	1.223	5.04
	2.3259 (nitrogen atom)	2.950 (A - A)	0.0483	3.41	1.223	2.01

$$P_{v_1} = \rho_0 C_L V_1 = \left(\frac{g}{cm^3} \right) \left(\frac{cm}{\mu sec} \right) \left(\frac{cm}{\mu sec} \right) = \text{mbars}$$

$$P(\text{kbars}) = 10^3 P(\text{mbars})$$

$$1 \text{ kbar} = 14,504 \text{ lbs/in}^2 = 10^8 \text{ Newtons/meter}^2$$

TABLE 2. Particle Velocities and Shock Pressures for Steel Plate Impact
on S. C. β - P_bN_6 Experiments [11].

V_1	U_{p1} (P_bN_6)	U_{p2} (STEEL)	P_s	REMARKS
$\frac{km}{sec}$	$\frac{km}{sec}$	$\frac{km}{sec}$	kbars	~
0.105	0.0864	0.0188	8.52	ALWAYS DETONATION ABOVE THIS V_1 .
0.095	0.0782	0.0168	7.71	FAST REACTION, [11], FIG. 2.
0.090	0.0740	0.0160	7.30	NO REACTION, [11], FIG. 3.
0.075	0.0617	0.0133	6.09	ALWAYS NO DETONATION- BELOW THIS V_1 .

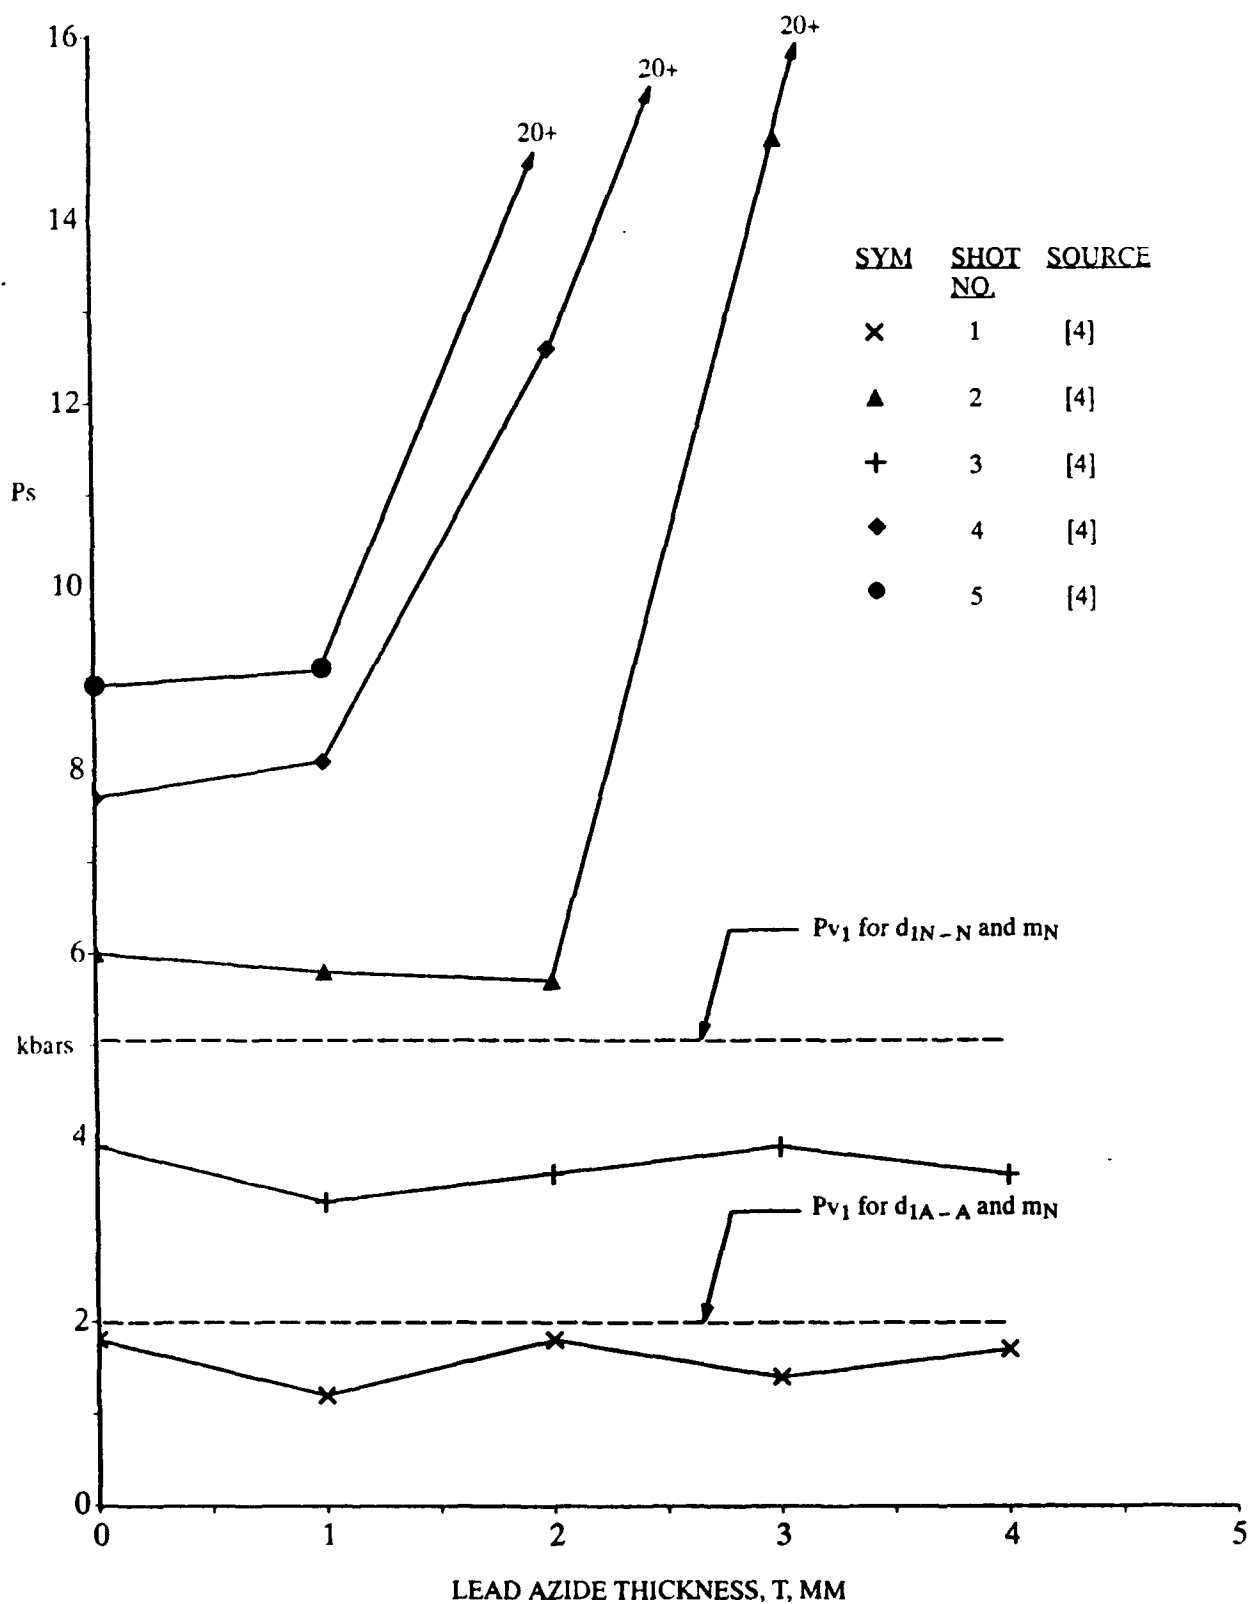


Figure 1. Stress Amplitude Versus Travel Distance for Dextrinated Lead Azide, $\rho_0 = 3.41 \text{ g/cc}$.

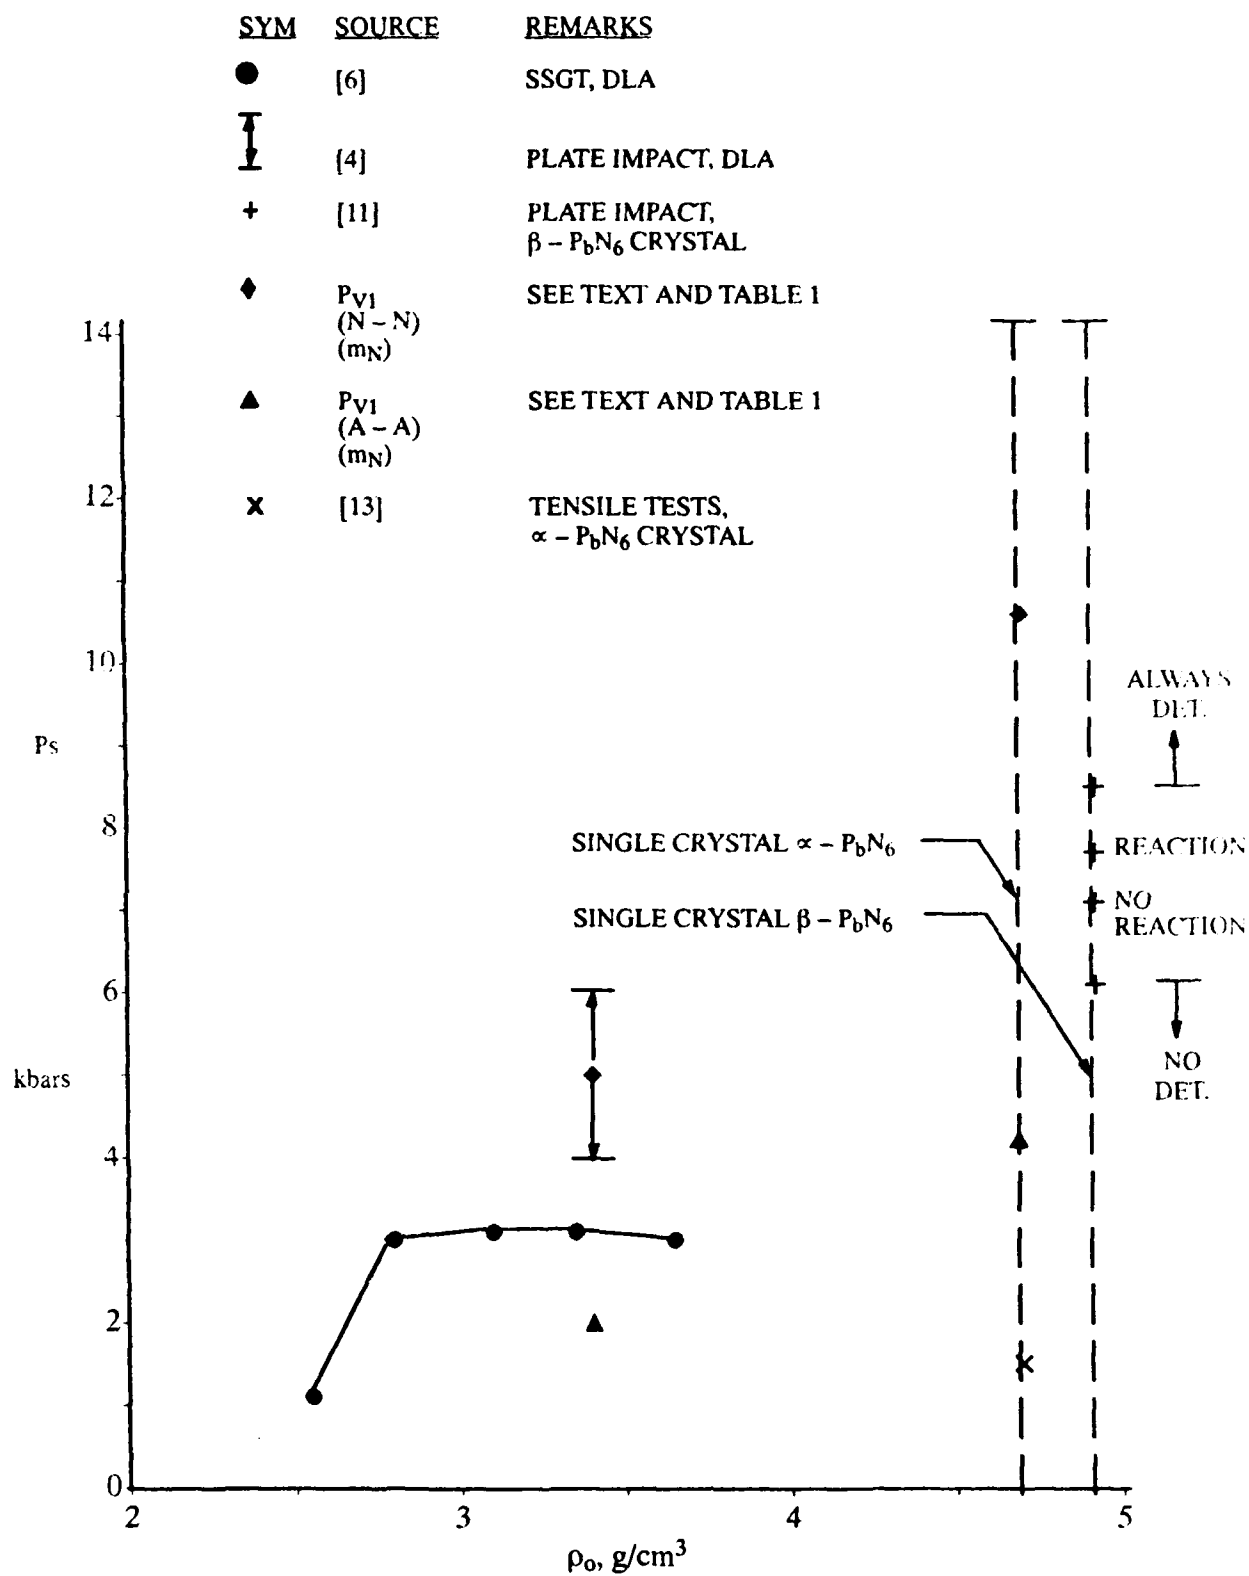


Figure 2. P_{V1} Comparison with Test Results for Lead Azide.

REFERENCES

1. Billingsley, J. P., and Oliver, J. M., "The Relevance of the De Broglie Relation to the Hugoniot Elastic Limit (HEL) of Shock Loaded Solid Materials," MICOM Technical Report RD-SS-90-4, March 1990; Aeroballistics Analysis Branch; Systems Simulation and Development Directorate; Research, Development, and Engineering Center; U. S. Army Missile Command; Redstone Arsenal, AL 35898.
2. Fitzgerald, E. R., "Detonation in Crystalline Solids," Journal of Physics and Chemistry of Solids, Vol. 30, 1969, pp. 2771 - 2787.
3. Fitzgerald, E. R., Particle Waves and Deformation of Crystalline Solids, Interscience Publishers, a Division of John Wiley and Sons, Inc., New York, 1966.
4. Davies, F. W. and Zimmerschied, A. B., Borgardt, F. G., and Avrami, Louis, "The Hugoniot and Shock Ignition Threshold of Lead Azide," Journal of Chemical Physics, Vol. 64, No. 6, 15 March, 1976, pp. 2295-2302.
5. Energetic Materials, Ed. by H. D. Fair and R. F. Walker, Vol. I, Physics and Chemistry of the Inorganic Azides, Vol. II, Technology of the Inorganic Azides, Plenum Press, New York, 1977.
6. Ayres, J. N., Montesi, L. J., and Bauer, R. J., "Small Scale Gap Test (SSGT) Data Compilation: 1959-1972 Vol. 1, Unclassified Explosives," NOLTR-73-132. Vol. I, October 26, 1973. Naval Ordnance Laboratory, White Oak, Silver Spring, MD 20910.
7. Choi, C. S., Prince, E., and Garrett, W. L., "Refinement of α - Lead Azide by Neutron Diffraction," ACTA Cryst., Vol. B33, 1977, pp. 3536-3537.
8. Choi, C. S. and Boutin, H. P., "Neutron Diffraction Study of α - $Pb(N_3)_2$," ACTA Cryst., Vol. B25, 1969, pp. 982-987.
9. Garner, W. E., "Detonation or Explosion Arising out of Thermal Decomposition," Transactions of the Faraday Society, Vol. 34, 1938, pp. 985-989.
10. Soderquist, R. "Studies on Explosives, 2, on the Sensitivity and Decomposition of Some High-Reactive Metal Azides, Especially Copper (II) Azide," Paper in the symposium on Chemical Problems Connected with the Stability of Explosives, Ed. by J. Hansson, Stockholm, 22-23 May, 1967.
11. Chaudhri, M. M., "Shock Initiation of Fast Decomposition in Crystalline Solids," Combustion and Flame, Vol. 19, August-December, 1972, pp. 419-425.
12. Chaudhri, M. M. and Field, J. E., "Deflagation in Single Crystals of Lead Azide," Paper in Fifth Symposium (International) on Detonation, 18-21 August, 1970, Published as ACR-184 by the Office of Naval Research, pp. 301-310.
13. Fox, P. G., "The Explosive Sensitivity of Metal Azides to Impact," Journal of Solid State Chemistry, Vol. 2, 1970, pp. 491-502.
14. Marsh, D. M., "Micro-Tensile Testing Machine," Journal of Scientific Instruments, Vol. 38, June, 1961, pp. 229-234.

15. Garrett, W. L., "The Growth of Large Lead Azide Crystals," Material Research Bulletin, Vol. 7, 1972, pp. 949-954.
16. Billingsley, J. P. and Adams, C. L., "Applications of Crystal Lattice Disintegration Criteria to Compute Minimum Shock Induced Reactive Conditions in Solid Explosive Materials," MICOM Technical Report RD-SS-88-10. Aeroballistics Analysis Branch; Systems Simulation and Development Directorate; Research, Development, and Engineering Center, U. S. Army Missile Command, Redstone Arsenal, AL 35898, March, 1989.
17. Billingsley, J. P., "Further Applications of a Crystal Lattice Disintegration Criterion to Predict Shock Induced Reactive Conditions in Solid Materials" MICOM Technical Report RD-SS-91-7 (July 1991), Aeroballistics Analysis Functional Area; Systems Simulation and Development Directorate; Research, Development, and Engineering Center, U. S. Army Missile Command, Redstone Arsenal, AL 35898.
18. Chaudhri, M. M., "The Initiation of Fast Decomposition in Solid Explosives by Fracture Plastic Flow, Friction, and Collapsing Voids," Paper in Vol II, Proceedings of the Ninth Symposium (International) on Detonation, 28 August to 1 September, 1989, pp. 331-339. Published as OCNR - 113291-7 by the Office of the Chief of Naval Research, Arlington, VA. 22217-5000.
19. Hollies, N. R. S., Legge, N. R. and Morrison, J. L., "The Sensitivity of Initiator Explosives to Mechanical Impact," Canadian Journal of Chemistry, Vol. 31, 1953, pp. 746-754.

DISTRIBUTION LIST

	<u>Copies</u>
AMSMI-RD, ATTN: Mr. Walter Jennings	2
AMSMI-RD-CS-R	15
AMSMI-RD-CS-T	5
AMSMI-GC-IP, Mr. Fred H. Bush	1
U.S. Army Materiel System Analysis Activity ATTN: AMXSY-MP (Herbert Cohen) Aberdeen Proving Ground, MD 21005	1
IIT Research Institute ATTN: GACIAC 10 W. 35th Street Chicago, IL 60616	3
Sandia National Laboratories ATTN: Dr. D. D. Bloomquist P. O. Box 5800 Division 1252 Albuquerque, NM 87185	3
Los Alamos National Laboratory ATTN: Dr. Steven A. Sheffield Group M-9 Mail Stop P-952 Los Alamos, NM 87545	3
Terminal Ballistics Division SLCBR-TB, Dr. A. Mark Aberdeen Proving Ground, MD 21005-5066	3
Explosives Effects Branch ATTN: SLCBR-TB-EE, Dr. R. Frey/Dr. V. M. Boyle Aberdeen Proving Ground, MD 21005-5066	3
Los Alamos National Laboratory ATTN: Dr. I. E. Lindstrom Group WX-5 Mail Stop G-780 Box 1663 Los Alamos, NM 87545	3
Dr. Thomas J. Ahrens Division of Geological and Planetary Sciences California Institute of Technology Pasadena, CA 91125	3

Copies

Baldini Resource Associates, Inc.
10 Barry Lane
Newton, NJ 07860

3

Dr. Manfred Held
MBB Verteidigungssysteme
Postfach 1340
8898 Schroben Hausen, Germany

3

ATTN: Dr. Ted Nicholas
WRDC-MLLN
Wright-Patterson AFB, OH 45433

3

Naval Surface Weapons Center
ATTN: R12, Dr. J. M. Short
White Oak
Silver Spring, MD 20903-5000

3

Naval Surface Warfare Center
ATTN: Mr. Tom Wasmund
Code G-13
Dahlgren, VA 22448

3

Eglin Air Force Base
ATTN: 3246 Test Wing/TZLV, Mr. Bill Dyess
Eglin AFB, FL 32542-5000

3

Mr. J. W. Watt
4068 Adams Drive
Silver Spring, MD 20902

3

Eglin Air Force Base
ATTN: AD/ALJW, Dr. Joe Foster
Eglin AFB, FL 32542-5000

3

TASC
ATTN: Mr. Charles E. Clucus
907 Mar-Walt Drive
Fort Walton Beach, FL 32548

2

UAH Research Institute
ATTN: Mr. C. L. Adams
Dr. B. Z. Jenkins
Huntsville, AL 35816

5

1

	<u>Copies</u>
Johns Hopkins University ATTN: Professor E. R. Fitzgerald 127 Latrobe Hall 34th and Charles Street Baltimore, MD 21218	10
University of Illinois Department of Aeronautical Engineering ATTN: Professor R. A. Strehlow Urbana, IL 61801	3
One Daniel Burnham Court ATTN: Dr. S. W. Yuan Apartment 1222 San Francisco, CA 94109	2
Los Alamos National Laboratory Dr. James P. Ritchie, Group Leader, Detonation Theory and Applications P. O. Box 1663 M. S. B214 Los Alamos, NM 87545	3
Sandia National Laboratories Dr. Mark B. Boslough, Member Technical Staff Shock Wave and Explosion Physics P. O. Box 5800, Div. 1153 Albuquerque, NM 87185	3
Ms. Brigitta Dobratz 543 Todd Loop Los Alamos, NM 87544	2
Dr. W. C. Davis, President Energetic Dynamics 693 4th Street Los Alamos, NM 87544	2
Mr. James Dahm Safety Consulting Engineers, Inc. 5240 Pearl Street Rosemont, IL 60018	2
Sandia National Laboratory ATTN: Dr. G. I. Kerley P. O. Box 5800 Division 1533 Albuquerque, NM 87185	3

	<u>Copies</u>
Lawrence Livermore National Laboratory ATTN: Dr. M. Van Thiel P. O. Box 808, L-299 Livermore, CA 94550	3
Lawrence Livermore National Laboratory ATTN: Dr. Richard J. Wasley P. O. Box 808 Livermore, CA 94550	3
Commander, U. S. ARDEC SMCAR-AEE-W(W) ATTN: Mr. B. Fishburn Picatinny Arsenal, NJ 07806-5000	3
Commander, U. S. ARDEC SMCAR-CCH-V ATTN: Mr. Floyd Hildebrant Picatinny Arsenal, NJ 07806-5000	3
Dr. Michael R. Edwards Royal Military College of Science Department of Mechanical and Civil Engineering Shrivenham, Swindon, Wilts SN68LA, United Kingdom	1
Office of Weapons Safety ATTN: Dr. Charles Karnes Science Advisor D. P. 22 U. S. Department of Energy Washington, D. C. 20545	3
Sandia National Laboratory ATTN: R. A. Graham P. O. Box 5800 ORG, 1153 Albuquerque, NM 87185	3
Denver Research Institute University of Denver ATTN: Mr. Larry Brown Denver, CO 80208	3
Director, U. S. Army Ballistic Research Laboratory ATTN: Dr. John H. Suckling SLCBR-VL-V Aberdeen Proving Ground, MD 21005-5066	3

	<u>Copies</u>
Director, U. S. Army Ballistic Research Laboratory ATTN: Dr. T. N. Wright SLCBB-TB Aberdeen Proving Ground, MD 21005-5066	3
Argonne National Laboratory Technical Information Services Report Unit BLDG. 203 Argonne, IL 60439	3
Department of Mechanical and Aerospace Engineering ATTN: Dr. Yukie Horie North Carolina State University Raleigh, NC 27695	2
Department of Mathematics ATTN: Dr. Julian Wu North Carolina State University Raleigh, NC 27695	2
Director, U. S. Army Research Office SLCRO-MS, Dr. Kailasan Iyer Dr. Michel Cistan P. O. Box 12211 Research Triangle Park, NC 27709-2211	2
Los Alamos National Laboratory ATTN: Dr. Jerry Wackerle P. O. Box 1663 Mail Stop P952 Los Alamos, NM 87545	3
Department of Physics ATTN: Dr. G. E. Duvall Washington State University Pullman, WA 99164-2814	3
Dr. Y. M. Gupta Shock Dynamics Laboratory Department of Physics Washington State University Pullman, WA 99164-2814	3

	<u>Copies</u>
Mr. H. C. Rodean Lawrence Livermore National Laboratory Mail Code 262 P. O. Box 808 Livermore, CA 94550	3
University of Texas at Austin Dept. of Aerospace Engineering and Engineering Mechanics ATTN: Dr. J. C. Westkaemper Dr. C. H. Yew Dr. E. A. Ripperger W. R. Woolrich Labs Austin, TX 78712-1085	3
Mr. Henry W. Bach SMCCR-MUC Chemical Research, Development, and Engineering Center Aberdeen Proving Ground, MD 21010-5423	3
Dr. M. M. Chaudhri/Dr. J. E. Field Cavendish Laboratory University of Cambridge Madingley Road Cambridge CB30HE England	3
Dr. Henry Eyring Department of Chemistry University of Utah Salt Lake City, UT	3
Dr. Franklin Walker Interplay 18 Shadow Lake Road Danville, CA 94526	2
Dr. James Thoreen Air Force Ament Laboratory AFATL/MN Eglin AFB, FL 32542-5000	3
Dr. Allen J. Tullis IIT Research Institute 10 W. 35th Street Chicago, IL 60616	2
Mr. B. G. Craig 56 Hidden Cove Valparaiso, FL 32580	2

	<u>Copies</u>
Dr. Phillip M. Howe Los Alamos National Laboratory P. O. Box 1663 ATAC, K574 Los Alamos, NM 87545	3
Dr. Michael Cowperswaite SRI International 333 Ravenswood Menlo Park, CA 94025	3
Kaman Sciences Corp. ATTN: Dr. James Wilbeck/Mr. T. S. Pendergrass P. O. Box 2486 Huntsville, AL 35804-2486	3
Dr. Julius Roth Consultant 308 Canyon Drive Portola Valley, CA 94025	2
Dr. Ruth Doherty Naval Surface Warfare Center Bldg. 30, Rm. 110 Silver Springs, MD 20904	3
Dr. B. D. Lambourn Atomic Weapons Establishment Aldermaston (AWE) Reading, RG74PR England	3
Dr. Pers - Anders Persson Center for Explosive Technology Research Campus Station Socorro, NM 87801	3
Dr. Claude Fauquignon Institute Saint-Louis (ISL) 12, Rue De l'Industrie Saint Lous 68301, France	3
Naval Research Laboratory Dynamics of Solids Branch Condensed Material and Radiation Sciences Division ATTN: Andrew E. Williams Washington, D. C. 20375-5000	3
Rudolph L. Zadnik Potomac Research, Inc. Alexandria, VA 22312-2707	3

Commander U. S. Ballistics Research Laboratory SLCBL-VL-L (ATTN: Mr. Ron Hendry) Aberdeen Proving Ground, MD 21005	3
Gencorp Aerojet Dr. Joe Carleone Mr. Roy Iketani Mr. Richard West P. O. Box 296 1100 West Hollyvale Street Azusa, CA 91702	3
Dwight J. Jones/W. B. Thomas Thiokol P. O. Box 400006 Huntsville, AL 35815-1506	3
Dr. M. H. Rice Systems Science and Software P. O. Box 1620 La Jolla, CA 92038	2
Los Alamos National Laboratory ATTN: Dr. J. M. walsh Dr. R. G. McQueen Dr. S. P. Marsh Dr. J. W. Taylor P. O. Box 1663 Los Alamos, NM 87545	4
Paul A. Urtiew Lawrence Livermore National Laboratory P. O. Box 808, L-282 Livermore, CA 94550	1
Craig M. Tarver Lawrence Livermore National Laboratory P. O. Box 808, L-282 Livermore, CA 94550	1
LeRoy G. Green Lawrence Livermore National Laboratory P. O. Box 808, L-282 Livermore, CA 94550	1
John W. Kury Lawrence Livermore National Laboratory P. O. Box 808, L-282 Livermore, CA 94550	1

	<u>Copies</u>
Edward L. Lee Lawrence Livermore National Laboratory P. O. Box 808, L-282 Livermore, CA 94550	1
Donald L. Onellas Lawrence Livermore National Laboratory P. O. Box 808, L-282 Livermore, CA 94550	1
Arnold Karo Lawrence Livermore National Laboratory P. O. Box 808, L-325 Livermore, CA 94550	1
Walter Herrmann Sandia National Laboratories P. O. Box 5800, Div. 1500 Albuquerque, NM 87185	1
Dennis B. Hayes Sandia National Laboratories P. O. Box 5800, Div. 1530 Albuquerque, NM 87185-5800	1
C. S. Coffey Naval Surface Warfare Center 10901 New Hampshire Ave. Silver Springs, MD 20903-5000	1
Richard Bardo Naval Surface Warfare Center 10901 New Hampshire Ave. Silver Spring, MD 20903-5000	1
Charles Dickinson Naval Surface Warfare Center 10901 New Hampshire Ave. Silver Spring, MD 20903-5000	1
Sigmund J. Jacobs Advanced Technology and Research 1208 Ruppert Road Silver Spring, MD 20903-5000	1
Donna Price Advanced Technology and Research 10901 New Hampshire Ave. Silver Spring, MD 20903-5000	1

Copies

John Starkenberg
U. S. Army Ballistic Research Laboratory
Aberdeen Proving Ground, MD 21005-5066

1

Richard C. Harrison
U. S. Army Ballistic Research Laboratory
SLCBLR-TM-EE
Aberdeen Proving Ground, MD 21005

1

Douglas E. Kooker
U. S. Army Ballistic Research Laboratory
Aberdeen Proving Ground, MD 21005-5066

1

Sam Lambrakos
Naval Research Laboratory
4555 Overlook Ave., S.W.
Washington, DC 20375

1

William E. Deal
Los Alamos National Laboratory
P. O. Box 1663, MS P915
Los Alamos, NM 87545

1

Charles A. Forest
Los Alamos National Laboratory
P. O. Box 1663, MS P952
Los Alamos, NM 87545

1

Charles E. Morris
Los Alamos National Laboratory
P. O. Box 1663, MS J970
Los Alamos, NM 87545

1

Pei Chi Chou
Dyna East Corporation
3201 Arch Street
Philadelphia, PA 19014

2

Murray Kornhauser
3C Systems, Inc.
620 Argyle Rd.
Wynnewood, PA 19096

2

Julius W. Enig
Enig Associates, Inc.
11120 New Hampshire Ave.
Silver Spring, MD 20904

2

	<u>Copies</u>
Graeme A. Leiper ICI Explosives Nobels Explosives Co., Ltd. Stevenson, Ayshire, KA20 3LN UK	2
Hugh R. James Atomic Weapons Establishment Foulness Island, Southend on Sea Essex, SS3 9XE UK	2
Henry H. P. Moulard Institut Saint-Louis (ISL) 12, Rue De l'Industrie Saint Louis 68300 France	2
Algot Persson Swedish Detonic Research Foundation Box 32058, S-12611 Stockholm, Sweden	2
Sandia National Laboratories Thermochemical and Physical Division 1534, ATTN: Dr. J. E. Dunn Dr. D. E. Grady Albuquerque, NM 87185	2
Sandia National Laboratories Computational Physics and Mechanical Division 15 31 ATTN: Dr. J. W. Swegle Albuquerque, NM 87185	1
Sandia National Laboratory ATTN: Dr. L. M. Barker Albuquerque, NM 87185	1
RAFAEL ATTN: Dr. Y. Partom Dr. Z. Rosenberg P. O. Box 2250 Haifa, 31021, Israel	2
A. Garn Butcher Hercules Inc. P. O. Box 98 Magna, UT 84037	2

Copies

David Mann
U. S. Army Research Office
P. O. Box 1221
Research Triangle Park, NC 27709

3

Mr. Tom Cole
USA SDC
CSSD-SL-L
P. O. Box 1500
Huntsville. AL 35807-3801

3

AMSMI-RD-W

Dr. Wharton

3

AMSMI-RD-PR

Dr. Stephens/Mr. R. W. Milton

3

AMSMI-RD-WC,

Dr. J. S. Bennett
Dr. Miles Holloman

3

AMSMI-RD-SS,

Dr. Grider
Mr. Davis

1

1

AMSMI-RD-SS-SE,

Mr. Grabney
Mr. Jordan
Mr. Waddle

1

1

1

AMSMI-RD-SS-AA,

Dr. Billingsley
Mr. Head
Dr. Oliver
Mr. Ward
Ms. Crow
Ms. Cornelius

10

1

1

1

1

1

1

AMSMI-RD-ST-CM,

Mr. Parker
Mr. Howard

1

1

AMSMI-RD-ST-WF,

Mr. Schexnayder
Ms. Kraft
Mr. Lovelace
Mr. Lienau
Mr. Hill
Mr. Cornelius
Mr. MacDonald
Mr. Howard

1

1

1

1

1

1

1

1

AMSMI-RD-PR,

Dr. O. E. Ayers

1

AMSMI-RD-PR-T,

Mr. L. B. Thorn

1

AMSMI-RD-PR-S,

Dr. J. A. Murfree

1

AMSMI-RD-PR-M,

Mr. Kelly McGuire

1