

1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525

Form Approved
OMB No. 0704-0188

1. AGENCY USE ONLY (Leave blank)

15MAY92

technical; 01JUN91 to 31MAY92

C: N00014-90-J-1148

R&T Code: 4132016

1148-92-08

10.	SPONSORING / MONITORING AGENCY REPORT NUMBER
-----	---

DTIC
ELECTE
JUN 16 1992
DISTRIBUTION CODE

12b. ☐ TR	UTION CODE
----------------------------------	------------

Extensive studies have been made on poled Nonlinear Optical (NLO) guest-host systems. The limited solubility of the NLO species in a host matrix and the thermal relaxation of the induced nonlinear optical activity of the poled polymeric films are major disadvantages. Side chain polymers have attracted attention since a large number of NLO molecules may be covalently attached to the polymer chain and the problem of phase segregation of the NLO component is alleviated. In this article, we present the second and third order NLO properties of a new class of guest-host system which possess excellent doping features and photoreactive characteristics.

10

16. PRICE CODE

20. LIMITATION OF ABSTRACT
UL

OFFICE OF NAVAL RESEARCH

GRANT N00014-90-J-1148

R&T Code 4132016

Technical Report No. 92-08

Nonlinear Optical Properties of New Dye Doped
Photocrosslinkable Polymers

by

S. Tripathy, L. Li, B.K. Mandal, J.Y. Lee and J.
Kumar

to be published in
Advances in New Materials Contemporary Topics in Polymer Science 7
J.C. Salamone and J.S. Riffle, Eds.
Plenum, New York

University of Massachusetts Lowell
Department of Chemistry
Lowell, Massachusetts

May 14, 1992

Reproduction in whole or in part is permitted for any purpose of the
United States Government

This document has been approved for public release and sale; its
distribution is unlimited.



Accession For	
NTIS	CRA&I ☒
DTIC	TAB ☐
Unannounced	☐
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

92 6 12 062

92-15435



NONLINEAR OPTICAL PROPERTIES OF NEW DYE DOPED PHOTOCROSSLINKABLE POLYMERS

S. Tripathy, L. Li[†], B. K. Mandal, J. Y. Lee and J. Kumar[†]

Departments of Chemistry and [†]Physics
University of Lowell
Lowell, Massachusetts 01854

INTRODUCTION

Polymeric materials are playing an increasingly important role in electronic and photonic applications¹⁻⁴. This includes application in active devices utilizing optical effects attributable to the nonlinear polarization of the medium. A number of applications such as frequency mixing, second harmonic generation, optical bistability, optical parametric amplification and oscillation, electrooptic and all optical switching and modulation etc. have been proposed.

There is a separation of charges in a nonlinear optical (NLO) medium under the application of an electric field. For weak electric fields, the applied electric vector, E , induces a polarization, P , in the material which is linearly dependent on the electric field. $P_{\text{linear}} = \chi^{(1)} E$, where $\chi^{(1)}$ is the susceptibility tensor. The net polarization in the medium under the influence of several fields is a linear superposition of the effects of the same fields acting independently. At high intensities the optical fields can interact with each other through the higher order terms in the polarization vector. P can now be expanded as $\chi^{(1)} E + \chi^{(2)} E^* E + \chi^{(3)} E^* E^* E + \dots$. The nonlinear susceptibilities, $\chi^{(2)}$, $\chi^{(3)}$, etc., of the medium represent the magnitudes of the higher order interactions with the applied fields. These properties are dictated by features at the molecular level; including electronic and molecular structure and the nature of the overall molecular packing.

Extensive studies have been made on poled NLO guest-host systems⁵⁻⁷. The limited solubility of the NLO species in a host matrix and the thermal relaxation of the induced nonlinear optical activity of the poled polymeric films are major disadvantages. Side chain polymers have attracted attention since a large number of NLO molecules may be covalently attached to the polymer chain and the problem of phase segregation of the NLO component is alleviated⁸. In this article, we present the second and third order NLO properties of a new class of guest-host system which possess excellent doping features and photoreactive characteristics.

MATERIALS REQUIREMENTS

For second order NLO properties, a noncentrosymmetric organization is essential. This is not necessary for third order NLO properties. In addition to large optical nonlinearity of the material, the ease of processing is also important from the standpoint of device fabrication. Strong electron donor and acceptor groups in a π -conjugated structure has been used to promote intramolecular charge transfer, which is important for large second order hyperpolarizability. These molecular systems can be incorporated into a host polymer for effective processing. Noncentrosymmetric alignment of the NLO species in the guest-host systems can be introduced by electric field induced poling⁹. Third order nonlinear susceptibility of guest-host systems incorporating the conjugated molecules is also of current interest because of the possibility of making low loss guided wave devices from these materials. The origin of large third order nonlinearity lies in the extended π -conjugation effect³.

Design of nonlinear optical polymers based on the guest-host approach calls for molecular structures that, in addition to large molecular hyperpolarizability, will also be compatible with the host polymer. Any phase segregation of the NLO species will adversely effect the optical quality of the polymeric film. Transparency at the wavelength of operation is also desired. For second order application the NLO species are poled, resulting in a net polarization for the medium. In the poling process, a noncentrosymmetric organization is produced. In addition, the alignment yields the largest second order nonlinear coefficient in the direction of the poling field. Largest component of the molecular hyperpolarizability is usually along the molecular axis.

MATERIALS AND METHODS

Within the scheme of a guest-host system, suitable combinations of guest and host molecules have led to higher NLO concentrations and more stable NLO response. Copolymers such as styrene acrylonitrile (SAN) have been found to be better hosts compared to conventional glassy homopolymers such as polystyrene (PS) or polymethyl methacrylate (PMMA)¹⁰. Higher concentrations of polar dyes could be incorporated prior to phase segregation and the poled organization possessed greater temporal and thermal stability (Figure 1).

In our laboratory, a new route to achieve a stable crosslinked NLO polymer system by photochemical reaction has been developed. This class of guest-host systems has been designed from first principal to be compatible leading to extremely high levels of dye loading without phase segregation. Large third and second order nonlinear susceptibilities have been measured for the guest-host unpoled and poled crosslinked systems, respectively. Approaches to fabrication of nonlinear optical devices have also been developed which takes advantage of the excellent processability and photocrosslinking behavior of the polymers¹¹.

A donor-acceptor substituted azo dye was selected as the basic NLO species. These dyes have been reported to possess some of the largest molecular hyperpolarizabilities¹². The NLO dye was functionalized at two sites using photoreactive chromophores.

Cinnamoyl ($\text{C}_6\text{H}_5\text{-CH=CH-CO-}$) and styryl-acryloyl ($\text{C}_6\text{H}_5\text{-CH=CH-CH=CH-CO-}$) groups were selected as the desired photoreactive groups. The phenyl rings may be further suitably derivatized to modify the spectral features, photosensitivity and photoselectivity. An example of this type of NLO molecules is 2,2'-bis(cinnamoyloxy) -4-diethylamino-4'-nitroazobenzene (CNNB-R) (Figure 2). Clearly, many other variations in structure may be introduced to carry out spectral tuning, optimization of the NLO properties, conformational features and the overall stability of the molecule¹³.

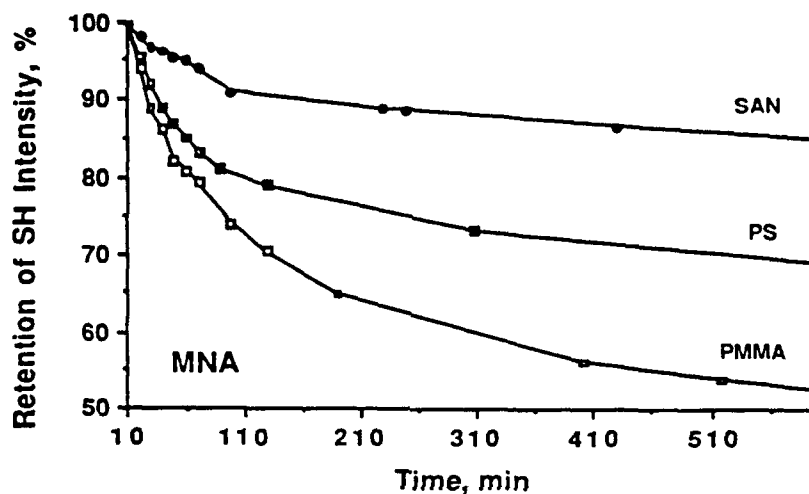


Figure 1. Temporal behavior of 2-methyl-4-nitroaniline (MNA) molecules in homo- and copolymers.

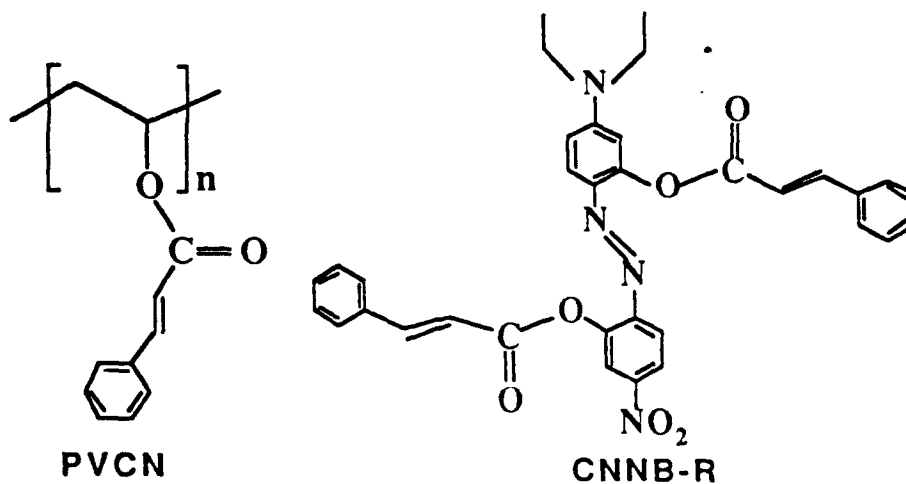


Figure 2. Structures of new photocrosslinkable guest-host system.

The desired host polymer should contain a large number of the same photoreactive group. It should have excellent film forming properties and preferably be glassy with a moderately high T_g to facilitate processing at not too high a temperature. Its overall compatibility with the guests should be helped by the presence of similar functional groups, but is not assured.

The simplest and commercially available polymer polyvinylcinnamate (PVCN) was chosen as a candidate host polymer (Figure 2). This polymer is synthesized by esterification of polyvinyl alcohol with cinnamoyl chloride¹⁴. A PVCN with a large degree of derivatization (>70%) is appropriate for effective solid state photoreaction process. Compatibility of this polymer among other parameters will be dominated by the interaction of the photoreactive groups with similar groups in the guest. The polymer backbone is relatively flexible and the guest dye has an articulated structure.

For third order nonlinear application, however, it is the concentration of the NLO dye that is of paramount importance, not the orientational aspects. The third order response is typically dependent on the extent and nature of electronic conjugation. Polydiacetylene, for example, shows very high $\chi^{(3)}$ because of the delocalized electronic structure along the π -conjugated polymer chains¹⁵. The large dye molecules possess quite reasonable molecular hyperpolarizability. A high concentration of these dyes without a concomitant deterioration of linear optical properties can lead to useful bulk third order NLO coefficients.

Processing

Thin films may be prepared by spin coating from a solution of PVCN and CNNB-R in toluene/chlorobenzene (1:3 v/v) mixture. 100 parts of PVCN and 0, 10, 20, 30, 40, 50 parts of CNNB-R by weight were made into a saturated solution. The solutions were filtered through a 1 μ m membrane filter and then spun on glass or quartz plates at 3000 rpm, resulting in film of thickness from 0.5 - 1 μ m as measured by ellipsometry. Films were dried at 60° - 70° C in a vacuum oven overnight.

Linear Spectroscopy

Thin films spin coated on quartz plates are used for UV-visible spectroscopy. The absorbance from the films at the characteristic wavelength at which the dye absorbs scales linearly with dye concentration, establishing a homogeneous distribution. UV-visible spectrum further establishes the desired wavelength for most effective photocrosslinking¹⁶. A small concentration (<1%) of conventional sensitizer such as coumarin or thiazoline dye can also be used to effectively shift the crosslinking radiation to longer wavelengths. Practically, any wavelength light from UV to mid visible is adequate for crosslinking in conjunction with an appropriate sensitizer.

The optical constant such as refractive index, and the thickness of a film are determined by ellipsometry. For polymer thin films the reflection ellipsometry technique is commonly used¹⁷. This technique is especially useful in the wavelength regions where the materials are strongly absorbing so that the transmission measurements are precluded.

The thickness and the refractive index of the polymer film can also be measured more precisely by optical waveguiding techniques. The planar wave guide technique in which the light is confined in one direction only is widely used for this purpose¹⁸. Table 1 summarizes some of the linear optical properties of photoreactive polymer films.

Poling and Photocrosslinking

Corona poling technique in the wire to plane geometry as well as parallel electrode poling techniques have been used to pole these classes of polymers in film form. Poling is carried out prior to crosslinking to align the NLO units and possibly pre-orient the photoreactive groups for photo-induced solid state reaction.

The poling temperature was set about 70° C, which is 10° C below T_g of the uncrosslinked guest-host system. UV irradiation from a mercury lamp at 254 nm, producing an intensity of 2 mW/cm² on the film surface was used for crosslinking. The optimum exposure time was established from the UV-visible spectra of the doped polymer films.

Photocrosslinking may be carried out by exposure to UV radiation. Crosslinks are formed by 2 + 2 photodimerization between an excited cinnamoyl group with another in the ground state. It is expected that a sufficient number of these pairs will belong to the same or different molecules to form a crosslinked network. The intermolecular crosslinking reaction between the photosensitive chromophores is represented in Figure 3.

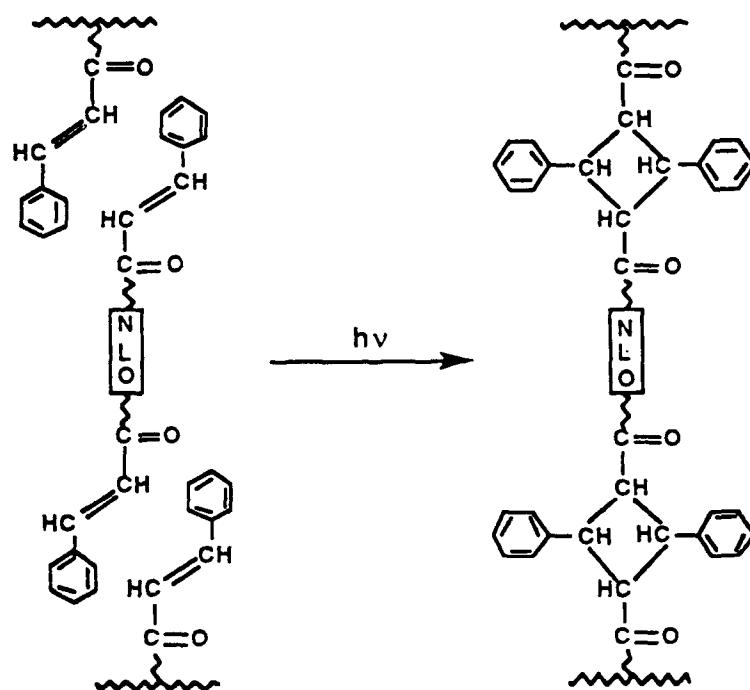


Figure 3. One of the photocrosslinking mechanisms in guest-host system.

Second Order Properties

The second order nonlinear susceptibility of the polymer has been measured by comparing the second harmonic intensity from the polymer films with that of Y-cut crystal quartz. The stability of the second harmonic signal with time after poling and crosslinking have been observed with PVCN doped with 20 % by weight of CNNB-R (Figure 4). The results clearly indicate that the poled and crosslinked polymer is quite stable in its second harmonic signal, while the polymer film which has not been crosslinked during the poling process shows substantial decay in SHG signal with time. The same UV cured polymer shows no decay in SHG intensity upon heating at 80°-85°C for long periods of time. Linear electrooptic coefficient of doped poled and crosslinked films have been measured. Second order coefficient, d_{33} , of up to 30 pm/V have been measured for these guest-host systems. The results of some of these measurements are summarized in Table 1.

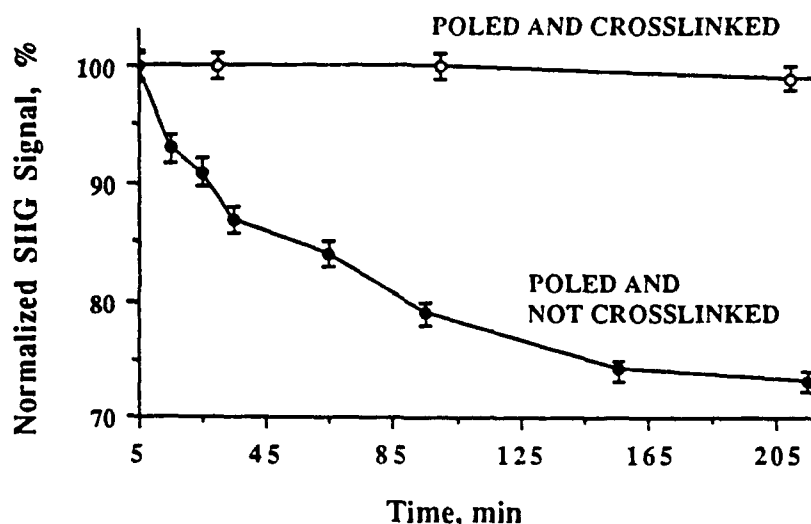


Figure 4. Stable NLO behavior of photocrosslinkable guest-host system.

Table 1. Properties of photocrosslinkable guest-host system.

PVCN/CNNB-R (%)	(10%)	(20%)
Thickness (μm)	0.5	0.5
Abs. max (nm)	520	520
T_g ($^{\circ}\text{C}$) ^a	84.3	81.0
Refractive index		
λ (μm)		
0.532	1.632	1.634
0.632	1.677	1.685
1.000	1.613	1.625
d_{33} (pm/V)		
1.063 μm	11.5	21.5
1.540 μm	3.7	5.1

^aObtained from DSC (DuPont 2910 differential scanning calorimeter), 10°C/min (midpoint). T_m of PVCN is 88.1°C.

Thermal Properties

Thermal analysis techniques were used to investigate thermal stability and relaxation behavior in the crosslinked and uncrosslinked samples. To measure T_g and ΔC_p at T_g upon photocrosslinking, a DSC set up has been used. DSC curves of PVCN and PVCN/20 % CNNB-R after different periods of crosslinking radiation are shown in Figure 5. As seen in Figure 6, UV-radiation does not lead to a large increase in T_g . UV exposure results in to extensive crosslinking and increase in the beam penetration depth. In the thin films unreacted sample material is decreased. As the material is completely crosslinked the medium loses the glass rubber transition.

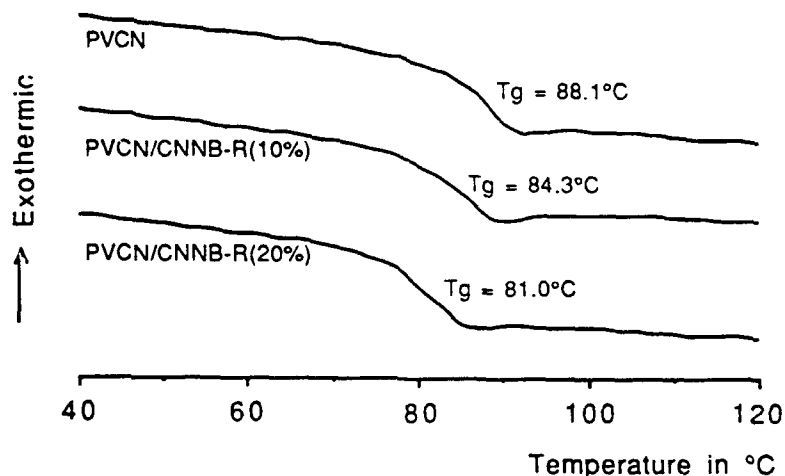


Figure 5. DSC curves of PVCN and PVCN doped with CNNB-R.

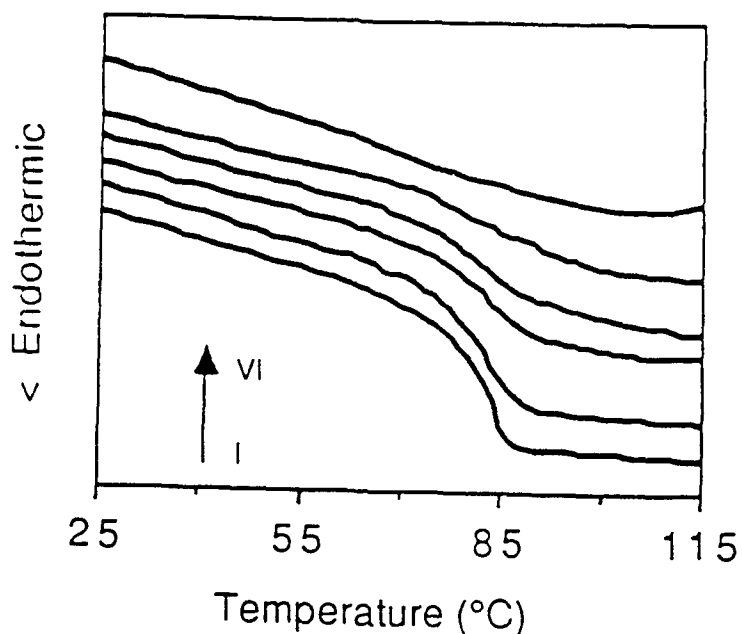


Figure 6. DSC curves of PVCN films doped with 10% CNNB-R. Crosslinking was performed by UV radiation at wavelength 254 nm; I=0, II=1, III=3, IV=5, V=10, VI=30 min respectively.

Third-order nonlinear optical properties

Third-order nonlinear optical properties (namely, quadratic electrooptic coefficient) of this polymeric system at different dye concentrations have been measured using a modified Michelson interferometer¹⁹ at 633nm. For this measurement, the polymer film was spin-coated from the filtered solution on an indium-tin-oxide (ITO) coated glass plate where the ITO layer was used as an electrode. A gold layer of 500Å thickness was thermally evaporated onto the polymer film to form the second electrode. The experimental set-up of this modified Michelson interferometer is schematically shown in (Figure 7).

A HeNe laser beam is split into a sample beam and a reference beam. The sample beam propagates via the ITO coated glass and the polymer film, and is then reflected back by the gold electrode. An AC-modulating field (about 5 kHz) was applied across the polymer film. A detector was employed to measure the modulations at two half-intensity points of a selected interference fringe at 2ω , noted as $I_{2\omega}^+$ and $I_{2\omega}^-$. Then the quadratic electrooptic (E-O) coefficient, S_{1133} , as a measure of the third order optical nonlinearity is given by:

$$S_{1133} = (1/\pi n^3) [(I_{2\omega}^+ - I_{2\omega}^-)/(I_{\max} - I_{\min})] (\lambda d/V_m^2)$$

where n is the refractive index, λ is the laser wavelength, d is the thickness of the film, V_m is the modulating voltage, and $I_{\max}$ and $I_{\min}$ are the maximum and minimum intensities of the selected fringe, respectively.

The measured quadratic E-O coefficient as a function of dye concentration is shown in Figure 8. An approximately linear relationship exists between them, which indicates no aggregation in this dye doped polymer system. The quadratic E-O coefficients in this system are large compared with those of our former systems²⁰ based on azomethine dyes and those reported recently by Kuzyk et al²¹ at the same dye concentrations.

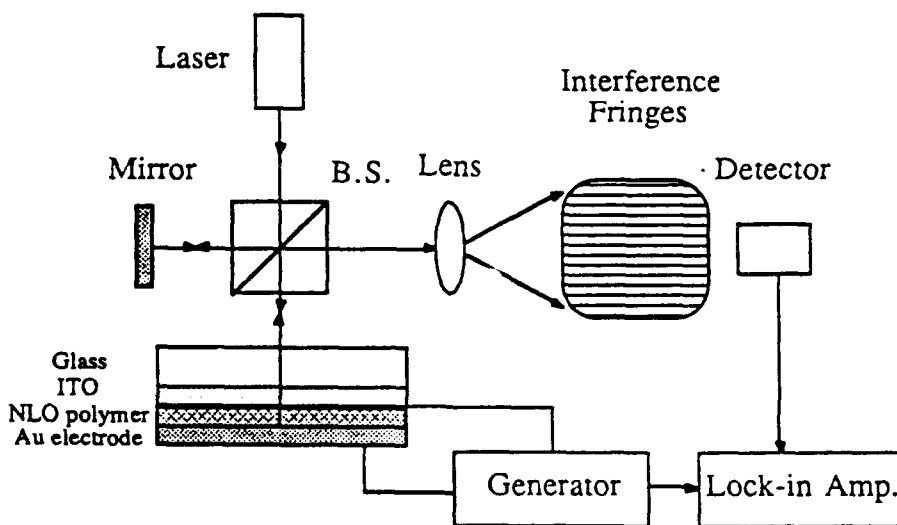


Figure 7. Experimental set-up for the measurement of quadratic electrooptic coefficient.

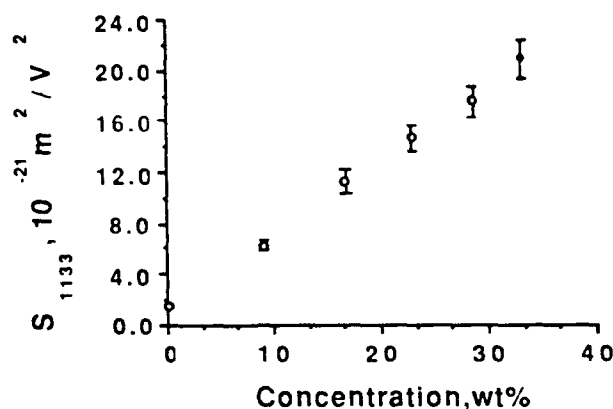


Figure 8. Effect of quadratic E-O coefficient with the concentration on the NLO dye.

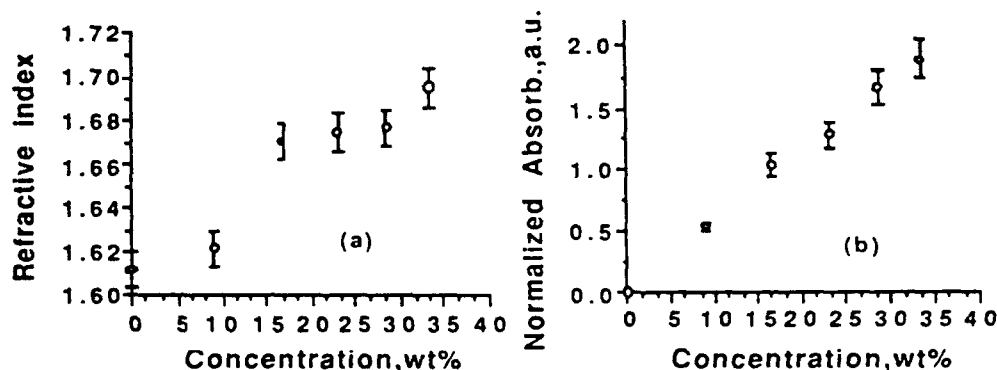


Figure 9. Linear optical properties of dye doped polymer film. (a) Change in refractive index with increasing dye concentration. (b) Change in normalized absorbance with increasing dye concentration.

In addition to the quadratic E-O coefficient measurement, the linear optical properties of those films were measured using an ellipsometer and a UV-visible spectrophotometer. The measured refractive index (at 633 nm) and normalized peak absorbance of those films are also approximately linear with the dye concentration (up to 33 wt%), which are shown in Figures 9a and 9b, respectively. These results also show that no phase segregation occurred in this dye doped polymer system for dye concentration up to 33 wt%.

ACKNOWLEDGEMENT

Partial support from the Office of Naval Research is gratefully acknowledged.

REFERENCES

1. "Nonlinear Optical Properties of Organic and Polymeric Materials", D. J. Williams, ed., ACS Symp. Ser. No. 233, ACS, Washington, D.C. (1983).

2. H. Gibbs, "Optical Bistability", Academic Press, New York (1987).
3. "Nonlinear Optical and Electroactive Polymers", P. N. Prasad and D. R. Ulrich, eds., Plenum, New York (1988).
4. "Nonlinear Optical Properties of Organic Materials III", G. Khanarian, ed., SPIE, San Diego, California (1990).
5. K. D. Singer, J. E. Sohn and S. J. Lalama, Appl. Phys. Lett., 49(5), 248 (1986)
6. S. Matsumoto, K. Kubodera, T. Kurihara and T. Kaino, Appl. Phys. Lett., 51, 1 (1987).
7. H. L. Hampsch, J. Yang, G. K. Wong and J. M. Torkelson, Macromolecules, 23, 3640 (1990).
8. K. D. Singer, M. G. Kuzyk, W. R. Holland, J. E. Sohn, S. J. Lalama, R. B. Comizzoli, H. E. Katz and M. L. Schiling, Appl. Phys. Lett., 52, 1800 (1988).
9. M. A. Mortazavi, A. Knoesen, S. T. Kowel, B. G. Higgins and A. Dienes, J. Opt. Soc. Am., B (6), 733 (1989).
10. B. K. Mandal, Y. M. Chen, R. J. Jeng, T. Takahashi, J. C. Huang, J. Kumar and S. Tripathy, Eur. Polym. J., May (1991).
11. P. Miller, J. Y. Lee, R. J. Jeng, W. H. Kim, B. K. Mandal, S. Tripathy and J. Kumar, submitted to Appl. Phys. A.
12. K. D. Singer, M. G. Kuzyk and J. E. Sohn, J. Opt. Soc. Am. B (4), 968 (1987).
13. B. K. Mandal, Y. M. Chen, J. Y. Lee, J. Kumar and S. Tripathy, Appl. Phys. Lett. 58 (22) 3 June (1991).
14. A. Reiser, "Photoreactive Polymers", John Wiley & Sons, New York (1989).
15. P. A. Chollet, F. Kajzor and J. Messier, "Nonlinear Optics of Organics and Semiconductors", T. Kobayashi, ed., Springer-Verlag, Berlin (1989).
16. B. K. Mandal, J. Y. Lee, X. F. Zhu, Y. M. Chen, E. Prakeenavincha, J. Kumar and S. Tripathy, Synth. Met. 43 (1-2) 2803, June 7 (1991).
17. R. M. A. Azzam and N. M. Bashara, "Ellipsometry and Polarized Light", North-Holland, New York (1986).
18. R. Ulrich and R. Tonge, Appl. Opt., 12, 2901 (1973).
19. X. F. Zhu, Y. Chen, B. K. Mandal, R. J. Jeng, J. Kumar and S. Tripathy, Opt. Commun. (submitted).
20. J. Kumar, A. K. Jain, M. Cazeca, J. Ahn, R. S. Kumar and S. K. Tripathy, SPIE, 1147, 177 (1989).
21. M. G. Kuzyk, J. E. Sohn and C. W. Dirk, J. Opt. Soc. Am. B (6), 842, (1990).

Office of Naval Research (2)
Chemistry Division, Code 1113
800 North Quincy Street
Arlington, VA 22217-5000

Dr. James S. Murday (1)
Chemistry Division, Code 6100
Naval Research Laboratory
Washington, DC 20375-5000

Dr. Robert Green, Dir. (1)
Chemistry Division, Code 385
Naval Weapons Center
Weapons Division
China Lake, CA 93555-6001

Defense Technical Information Center (2)
Building 5, Cameron Station
Alexandria, VA 22314

Dr. Bernard E. Douda (1)
Crane Division
Naval Surface Warfare Center
Crane, IN 47522-5000

Dr. Richard W. Drisko (1)
Naval Civil Engineering Laboratory
Code L52
Port Hueneme, CA 93043

Dr. Harold H. Singerman (1)
Naval Surface Warfare Center
Carderock Division Detachment
Annapolis, MD 21402-1198

Dr. Eugene C. Fischer (1)
Code 2840
Naval Surface Warfare Center
Carderock Division Detachment
Annapolis, MD 21402-1198

Dr. Elek Lindner (1)
Naval Command,
Control and Ocean Surveillance Center
RDT&E Division
San Diego, CA 92152-5000