

AD-A261 160



MISCELLANEOUS PAPER HL-92-5

2



US Army Corps  
of Engineers



## RIPRAP RESISTANCE TESTS FROM A LARGE TEST CHANNEL

by

Stephen T. Maynard

Hydraulics Laboratory

DEPARTMENT OF THE ARMY  
Waterways Experiment Station, Corps of Engineers  
3909 Halls Ferry Road, Vicksburg, Mississippi 39180-6199



DTIC  
ELECTE  
MAR 05 1993  
S E D

December 1992

Final Report

Approved For Public Release; Distribution Is Unlimited

93-04685



2808

Prepared for DEPARTMENT OF THE ARMY  
US Army Corps of Engineers  
Washington, DC 20314-1000

Under Civil Works Investigation Work Unit 32541

93

3

4

055

HYDRAULICS



LABORATORY

Destroy this report when no longer needed. Do not return  
it to the originator.

The findings in this report are not to be construed as an official  
Department of the Army position unless so designated  
by other authorized documents.

The contents of this report are not to be used for  
advertising, publication, or promotional purposes.  
Citation of trade names does not constitute an  
official endorsement or approval of the use of  
such commercial products.

| REPORT DOCUMENTATION PAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                          |                                                                             | Form Approved<br>OMB No. 0704-0188 |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-----------------------------------------------------------------------------|------------------------------------|--|
| Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.                 |                                                          |                                                                             |                                    |  |
| 1. AGENCY USE ONLY (Leave blank)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 2. REPORT DATE<br>December 1992                          | 3. REPORT TYPE AND DATES COVERED<br>Final report                            |                                    |  |
| 4. TITLE AND SUBTITLE<br><br>Riprap Resistance Tests from a Large Test Channel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                          | 5. FUNDING NUMBERS<br><br>WU 32541                                          |                                    |  |
| 6. AUTHOR(S)<br><br>Stephen T. Maynard                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                          |                                                                             |                                    |  |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)<br><br>USAE Waterways Experiment Station, Hydraulics Laboratory, 3909 Halls Ferry Road, Vicksburg, MS 39180-6199                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                          | 8. PERFORMING ORGANIZATION REPORT NUMBER<br><br>Miscellaneous Paper HL-92-5 |                                    |  |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)<br><br>US Army Corps of Engineers, Washington, DC 20314-1000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                          | 10. SPONSORING/MONITORING AGENCY REPORT NUMBER                              |                                    |  |
| 11. SUPPLEMENTARY NOTES<br><br>Available from National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                          |                                                                             |                                    |  |
| 12a. DISTRIBUTION/AVAILABILITY STATEMENT<br><br>Approved for public release; distribution is unlimited.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                          | 12b. DISTRIBUTION CODE                                                      |                                    |  |
| 13. ABSTRACT (Maximum 200 words)<br>Results from resistance tests conducted in a large test channel are in agreement with previous tests in rectangular tilting flumes. Flow resistance for riprap is best described by the Strickler equation, which can be derived from the power law equation for velocity profiles. The coefficient in Strickler's equation from the large test channel was 2.4 percent greater than from the rectangular tilting flumes. Results from this study suggest that the logarithmic equation is not valid for intermediate scale roughness. Riprap placed to simulate underwater placement had an n value 13 percent greater than riprap placed in dry conditions, where the rock surface is much smoother. |                                                          |                                                                             |                                    |  |
| 14. SUBJECT TERMS<br>Manning/Strickler equation      Resistance equations<br>Resistance coefficients      Riprap                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                          |                                                                             | 15. NUMBER OF PAGES<br>26          |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                          |                                                                             | 16. PRICE CODE                     |  |
| 17. SECURITY CLASSIFICATION OF REPORT<br>UNCLASSIFIED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 18. SECURITY CLASSIFICATION OF THIS PAGE<br>UNCLASSIFIED | 19. SECURITY CLASSIFICATION OF ABSTRACT                                     | 20. LIMITATION OF ABSTRACT         |  |

## PREFACE

The study described herein was performed at the US Army Engineer Waterways Experiment Station (WES) during February-April 1991 for the Headquarters, US Army Corps of Engineers (HQUSACE), as part of the Civil Works Research and Development Program. Funds were allocated under Civil Works Investigation Work Unit 32541, "Riprap Design and Cost Reduction: Studies in Near Prototype Size Laboratory Channel," under HQUSACE Program Monitor Mr. Thomas Munsey. This study was accomplished under the direction of Messrs. F. A. Herrmann, Jr., Director of the Hydraulics Laboratory (HL); R. A. Sager, Assistant Director, HL; and G. A. Pickering, Chief of the Hydraulic Structures Division (HSD), HL. The tests were conducted by Dr. S. T. Maynard, project engineer, and Mr. D. M. White, Spillways and Channels Branch (SCB), HSD, under the direct supervision of Mr. N. R. Oswalt, Chief, SCB. This report was written by Dr. Maynard and edited by Mrs. M. C. Gay, Information Technology Laboratory, WES.

At the time of publication of this report, Director of WES was Dr. Robert W. Whalin. Commander was COL Leonard G. Hassell, EN.

|                     |                                            |
|---------------------|--------------------------------------------|
| Accession For       |                                            |
| NTIS CRA&I          | <input checked="checked" type="checkbox"/> |
| DTIC TAB            | <input type="checkbox"/>                   |
| Unannounced         | <input type="checkbox"/>                   |
| Justification ..... |                                            |
| By .....            |                                            |
| Distribution /      |                                            |
| Availability Codes  |                                            |
| Dist                | Avail and/or Special                       |
| A-1                 |                                            |

DTIC QUALITY INSPECTED 1

## CONTENTS

|                                                                        | <u>Page</u> |
|------------------------------------------------------------------------|-------------|
| PREFACE.....                                                           | 1           |
| CONVERSION FACTORS, NON-SI TO SI (METRIC)<br>UNITS OF MEASUREMENT..... | 3           |
| PART I: INTRODUCTION.....                                              | 4           |
| Background.....                                                        | 4           |
| Purpose and Scope.....                                                 | 5           |
| PART II: EXPERIMENTAL INVESTIGATION.....                               | 6           |
| PART III: ANALYSIS AND RESULTS.....                                    | 7           |
| PART IV: CONCLUSIONS AND RECOMMENDATIONS.....                          | 9           |
| TABLES 1-3                                                             |             |
| PLATES 1-12                                                            |             |

CONVERSION FACTORS, NON-SI TO SI (METRIC)  
UNITS OF MEASUREMENT

Non-SI units of measurement used in this report can be converted to SI  
(metric) units as follows:

| <u>Multiply</u> | <u>By</u>  | <u>To Obtain</u> |
|-----------------|------------|------------------|
| cubic feet      | 0.02831685 | cubic metres     |
| degrees (angle) | 0.01745329 | radians          |
| feet            | 0.3048     | metres           |
| inches          | 2.54       | centimetres      |

## RIPRAP RESISTANCE TESTS FROM A LARGE TEST CHANNEL

### PART I: INTRODUCTION

#### Background

1. Resistance of flow over riprap boundaries is an important part of channel design and is used in determining water-surface elevations and velocities. A previous study\* dealing with the flow resistance of riprap used data from several rectangular tilting flumes in which the riprap was placed on the bottom of the flume. Results from that study showed that flow resistance for relative depth  $d/D_{90}$  with values from 3 to 30 is best described by a power law rather than the commonly used logarithmic function. Here  $d$  is depth and  $D_{90}$  is the particle size of which 90 percent is finer by weight. Strickler's equation\*\* was derived from the power law equation and resulted in the following, using particle size  $D_{90}$  in feet

$$n = 0.0360 D_{90}^{1/6} \quad (1)$$

and using particle size  $D_{50}$  in feet

$$n = 0.0380 D_{50}^{1/6} \quad (2)$$

where

$n$  - Manning roughness coefficient

$D_{50}$  - particle size of which 50 percent is finer by weight

---

\* Steve T. Maynard. 1991. "Flow Resistance of Riprap," Journal of Hydraulic Engineering, American Society of Civil Engineers, Vol 117, No. 6, pp 687-696.

\*\* A. Strickler. 1923. "Contributions to the Question Concerning a Formula for Speed and the Roughness Numbers for Rivers, Channels and Culverts" ("Beitrage zur Frage der Geschwindigkeitformel und der Rauigkeitszahlen fur Strome, Kanule und Geschlossene Leitungen"), Mitteilungen des Amtes fur Wasserwirtschaft, No. 16, Bern, Switzerland, pp 12-13 (in German).

Equations 1 and 2 are based on data from wide rectangular flumes having essentially two-dimensional flow.

#### Purpose and Scope

2. The objective of this study is to develop techniques for estimating flow resistance over riprap boundaries. The scope of this report is to compare flow resistance data collected in the trapezoidal channel in the Riprap Test Facility (RTF) at the US Army Engineer Waterways Experiment Station to the results of the data analysis from the rectangular tilting flume study.

## PART II: EXPERIMENTAL INVESTIGATION

3. The RTF (Plate 1) is a large outdoor test channel having a 780-ft\* length, four bendways, and a discharge range of 0 to 200 cfs. Two constant-speed pumps, C1 and C2, provide discharges of 52 and 49 cfs, respectively. Two variable-speed pumps, V1 and V2, provide maximum discharges of 42.5 and 48 cfs, respectively. The initial 203 ft of the RTF (Plate 2) was used in this study, which is a straight reach having a trapezoidal section with 12-ft bottom width. The channel has 1V:2H side slopes on both sides to sta 1+71 followed by an 8-ft-long transition on the left descending bank to a side slope of 1V:1.5H. The first 20 ft of the channel is covered with 6- to 12-in.-diam riprap to dissipate turbulence of flow leaving the pump discharge flume. The remainder of the straight reach was covered with riprap having the gradation shown in Plate 3. Plastic tubing was placed beneath the riprap at sta 0+47, 0+76, 1+05, 1+34, and 1+63 and was connected to a stilling well. The sensing end of the tube terminated at the channel center line. The channel cross section was surveyed at 11 sections and results are shown in Table 1. The elevations of the five survey points on the channel bottom were averaged at each cross section and are plotted in Plate 4. A least squares fit of the average bottom elevation data resulted in a bottom slope of 0.00289 ft/ft from sta 0+47 to 1+71.

4. Vertical velocity profiles were determined at sta 0+47, 1+05, and 1+63 to determine if the velocity profile was fully developed at sta 0+47, which was 27 ft from the large change in boundary roughness at sta 0+20. If the profile was not fully developed, data from sta 0+47 might be in error. Profiles were measured at the channel center line and 2 ft from each side of the center line. Results are shown in Plates 5-7 and 8-10 for discharges of 52 and 76 cfs, respectively. The velocity profile at sta 0+47 is not significantly different from those of the downstream stations, which means that data from sta 0+47 can be used in the analysis.

---

\* A table of factors for converting non-SI units of measurement to metric (SI) units is found on page 3.

### PART III: ANALYSIS AND RESULTS

5. Water-surface elevations were measured for nine tests as shown in Table 2 and plotted in Plates 11 and 12. Note that the 75- and 76-cfs profiles exhibit a marked drop in water surface between sta 1+34 and 1+63. This is likely an effect of the downstream transition that was not significant at the lower discharges. Comparisons of observed versus computed water-surface elevations will not use sta 1+63 data for 75 and 76 cfs. All other profiles are typical backwater curves. Tests 1-8 represent dry-placed riprap having a relatively even surface. Test 9 was conducted with the riprap roughened to simulate the rougher surface typical of riprap placed underwater.

6. The cross-section data in Table 1 were used in the HEC-2 water-surface profile computation. For discharges other than 75 and 76 cfs, the observed water-surface elevation at sta 1+63 was used as the downstream starting water-surface elevation in the computations. For discharges of 75 and 76 cfs, the observed water-surface elevation at sta 1+34 was used as the downstream starting water-surface elevation. The  $n$  value that resulted in the best agreement between observed and computed water-surface elevation is shown in Table 2 along with the corresponding computed water-surface elevations. The average  $n$  value for Tests 1-8 was 0.0272. Using  $D_{90} = 1.93 \text{ in.}/12 = 0.161 \text{ ft}$  from Plate 3 and the Strickler equation\* results in

$$n = 0.0369 D_{90}^{1/6} \quad (3)$$

Using  $D_{50} = 1.4 \text{ in.}/12 = 0.117 \text{ ft}$  results in

$$n = 0.0389 D_{50}^{1/6} \quad (4)$$

The coefficients in Equations 3 and 4 are about 2.4 percent greater than Equations 1 and 2 from Maynard.

7. The logarithmic equation for flow resistance is

---

\* Strickler, op. cit.

$$\left(\frac{8}{f}\right)^{1/2} = 5.75 \log\left(\frac{aR}{K_s}\right) \quad (5)$$

where

a = channel shape factor given by Hey\*

R = hydraulic radius

K<sub>s</sub> = equivalent sand grain roughness

and f is the Darcy friction factor defined as

$$f = \frac{8gRS}{V^2} \quad (6)$$

where

g = acceleration due to gravity

S = channel slope

V = channel velocity

The previous study found that the logarithmic equation (5) is not valid for intermediate scale roughness having  $3 \leq R/D_{90} \leq 10$ . The data in Table 3 were used to determine the least squares logarithmic equation

$$\left(\frac{8}{f}\right)^{1/2} = 4.20 \log\left(\frac{R}{D_{90}}\right) + 6.29 \quad (7)$$

As in the previous study, Student's t-test shows that the slope of Equation 7 of 4.20 is statistically different from the commonly accepted value of 5.75. Because of this difference, this study suggests that the logarithmic equations are not valid over the range of data used herein having  $4.5 \leq R/D_{90} \leq 8.2$ .

8. Comparison of results from Test 9 with the roughened riprap to Test 2 with the dry-placed riprap (Table 2) shows a  $(0.0306-0.0270)/0.0270 = 13$  percent increase in n for the roughened riprap that was intended to simulate riprap placed underwater.

---

\* R. D. Hey. 1979. "Flow Resistance in Gravel-bed Rivers," Journal of the Hydraulics Division, American Society of Civil Engineers, Vol 105, No. HY4, pp 365-379.

#### PART IV: CONCLUSIONS AND RECOMMENDATIONS

9. Results from resistance tests in the RTF are in agreement with results from tests in the rectangular tilting flumes.\* The coefficient in Strickler's equation\*\* from the RTF was 2.4 percent greater than the coefficient for the rectangular tilting flume.\* Results from this study, similar to the previous study,\* suggest that the logarithmic equation is not valid for intermediate scale roughness.

10. Riprap placed to simulate underwater placement had an  $n$  value 13 percent greater than riprap placed in dry conditions, where the rock surface is much smoother.

---

\* Maynard, op. cit.

\*\* Strickler, op. cit.

Table 1  
Measured Cross Sections

| <u>Station 0+30</u>   |                  | <u>Station 0+47</u>   |                  | <u>Station 0+61.5</u> |                  |
|-----------------------|------------------|-----------------------|------------------|-----------------------|------------------|
| <u>X</u>              | <u>Elevation</u> | <u>X</u>              | <u>Elevation</u> | <u>X</u>              | <u>Elevation</u> |
| 6.40                  | 101.91           | 6.41                  | 101.98           | 6.35                  | 101.83           |
| 8.22                  | 101.05           | 8.25                  | 101.17           | 8.18                  | 101.01           |
| 10.00                 | 100.19           | 10.00                 | 100.21           | 10.00                 | 100.19           |
| 13.00                 | 100.09           | 13.05                 | 100.10           | 13.00                 | 100.04           |
| 16.00                 | 100.09           | 16.10                 | 100.11           | 16.00                 | 100.08           |
| 19.00                 | 100.15           | 19.15                 | 100.07           | 19.00                 | 100.14           |
| 21.75                 | 100.20           | 22.20                 | 100.24           | 21.80                 | 100.22           |
| 23.60                 | 100.95           | 23.98                 | 101.16           | 23.62                 | 101.06           |
| 25.39                 | 101.85           | 25.83                 | 101.92           | 25.47                 | 101.81           |
| <u>Station 0+76</u>   |                  | <u>Station 0+90.5</u> |                  | <u>Station 1+05</u>   |                  |
| <u>X</u>              | <u>Elevation</u> | <u>X</u>              | <u>Elevation</u> | <u>X</u>              | <u>Elevation</u> |
| 6.39                  | 101.87           | 6.38                  | 101.79           | 6.38                  | 101.78           |
| 8.19                  | 101.00           | 8.19                  | 100.94           | 8.20                  | 100.95           |
| 10.00                 | 100.14           | 10.00                 | 100.09           | 10.00                 | 100.08           |
| 13.00                 | 100.03           | 13.00                 | 99.94            | 13.00                 | 100.00           |
| 16.00                 | 99.99            | 16.00                 | 99.96            | 16.00                 | 99.93            |
| 19.00                 | 100.02           | 19.00                 | 100.00           | 19.00                 | 100.00           |
| 22.00                 | 100.07           | 21.80                 | 99.99            | 22.00                 | 100.08           |
| 23.82                 | 100.90           | 23.59                 | 100.80           | 23.80                 | 100.95           |
| 25.59                 | 101.83           | 25.39                 | 101.75           | 25.63                 | 101.76           |
| <u>Station 1+19.5</u> |                  | <u>Station 1+34</u>   |                  | <u>Station 1+48.5</u> |                  |
| <u>X</u>              | <u>Elevation</u> | <u>X</u>              | <u>Elevation</u> | <u>X</u>              | <u>Elevation</u> |
| 6.39                  | 101.77           | 6.43                  | 101.75           | 6.35                  | 101.59           |
| 8.18                  | 100.88           | 8.23                  | 100.87           | 8.13                  | 100.68           |
| 10.00                 | 100.04           | 10.00                 | 99.94            | 10.00                 | 99.96            |
| 13.00                 | 99.93            | 13.00                 | 99.83            | 13.00                 | 99.80            |
| 16.00                 | 99.88            | 16.00                 | 99.80            | 16.00                 | 99.79            |
| 19.00                 | 99.87            | 19.00                 | 99.80            | 19.00                 | 99.82            |
| 22.00                 | 99.97            | 21.80                 | 99.91            | 21.75                 | 99.87            |
| 23.79                 | 100.87           | 23.65                 | 100.68           | 23.56                 | 100.73           |
| 25.59                 | 101.74           | 25.48                 | 101.47           | 25.32                 | 101.68           |
| <u>Station 1+63</u>   |                  | <u>Station 1+71</u>   |                  |                       |                  |
| <u>X</u>              | <u>Elevation</u> | <u>X</u>              | <u>Elevation</u> |                       |                  |
| 6.39                  | 101.64           | 6.41                  | 101.68           |                       |                  |
| 8.16                  | 100.70           | 8.19                  | 100.78           |                       |                  |
| 10.00                 | 99.92            | 10.00                 | 99.92            |                       |                  |
| 13.00                 | 99.79            | 13.00                 | 99.75            |                       |                  |
| 16.00                 | 99.77            | 16.00                 | 99.75            |                       |                  |
| 19.00                 | 99.80            | 19.00                 | 99.74            |                       |                  |
| 22.00                 | 99.89            | 22.00                 | 99.82            |                       |                  |
| 23.79                 | 100.78           | 23.80                 | 100.69           |                       |                  |
| 25.63                 | 101.58           | 25.61                 | 101.55           |                       |                  |

Note: Elevations are referenced to an arbitrary datum.  
X - distance from left descending side of channel, feet.

Table 2

Observed Versus Computed Water-Surface Elevations


| Test No. | Discharge cfs | Best n | Pumps  | Water-Surface Elevation* at Sta |         |         |         |         |
|----------|---------------|--------|--------|---------------------------------|---------|---------|---------|---------|
|          |               |        |        | 0+47                            | 0+76    | 1+05    | 1+34    | 1+63    |
| 1        | 52.0          | 0.0278 | C1     | 101.480                         | 101.421 | 101.368 | 101.326 | 101.281 |
|          |               |        |        | 101.480                         | 101.420 | 101.360 | 101.330 | 101.280 |
| 2        | 48.0          | 0.0270 | V2     | 101.394                         | 101.342 | 101.286 | 101.246 | 101.199 |
|          |               |        |        | 101.390                         | 101.340 | 101.280 | 101.250 | 101.200 |
| 3        | 49.0          | 0.0272 | C2     | 101.423                         | 101.361 | 101.310 | 101.271 | 101.227 |
|          |               |        |        | 101.420                         | 101.370 | 101.300 | 101.270 | 101.230 |
| 4        | 42.5          | 0.0268 | V1     | 101.299                         | 101.236 | 101.183 | 101.143 | 101.098 |
|          |               |        |        | 101.300                         | 101.240 | 101.180 | 101.150 | 101.100 |
| 5        | 25.0          | 0.0277 | V2     | 100.998                         | 100.929 | 100.872 | 100.830 | 100.788 |
|          |               |        |        | 101.000                         | 100.930 | 100.870 | 100.830 | 100.790 |
| 6        | 25.0          | 0.0273 | V1     | 100.987                         | 100.918 | 100.861 | 100.818 | 100.776 |
|          |               |        |        | 100.990                         | 100.920 | 100.860 | 100.820 | 100.780 |
| 7        | 76.0          | 0.0268 | C1, V2 | 101.797                         | 101.740 | 101.688 | 101.660 | 101.566 |
|          |               |        |        | 101.790                         | 101.750 | 101.690 | 101.660 | —       |
| 8        | 75.0          | 0.0272 | C2, V1 | 101.783                         | 101.727 | 101.678 | 101.643 | 101.548 |
|          |               |        |        | 101.780                         | 101.730 | 101.670 | 101.640 | —       |
| 9        | 48.0          | 0.0306 | V2     | 101.441                         | 101.358 | 101.295 | 101.241 | 101.175 |
|          | Disturbed     |        |        | 101.430                         | 101.370 | 101.290 | 101.240 | 101.180 |

\* Elevations are referenced to an arbitrary datum. The first row of data for each test gives the observed elevations, and the second row gives the computed elevations


Table 3  
Derived Data

| Test<br>No. | Depth*<br>ft | Hydraulic<br>Radius<br>R, ft | $\frac{R}{D_{90}}$ | n<br>(from<br>Table 2) | $\left(\frac{g}{f}\right)^{1/2}$ |
|-------------|--------------|------------------------------|--------------------|------------------------|----------------------------------|
| 1           | 1.35         | 1.10                         | 6.84               | 0.0278                 | 9.57                             |
| 2           | 1.27         | 1.04                         | 6.47               | 0.0270                 | 9.76                             |
| 3           | 1.29         | 1.06                         | 6.59               | 0.0272                 | 9.72                             |
| 4           | 1.16         | 0.97                         | 6.03               | 0.0268                 | 9.72                             |
| 5           | 0.85         | 0.74                         | 4.60               | 0.0277                 | 8.99                             |
| 6           | 0.84         | 0.73                         | 4.54               | 0.0273                 | 9.10                             |
| 7           | 1.67         | 1.31                         | 8.15               | 0.0268                 | 10.22                            |
| 8           | 1.66         | 1.31                         | 8.15               | 0.0272                 | 10.07                            |
| 9           | 1.28         | 1.05                         | 6.53               | 0.0306                 | —                                |

\* Water-surface elevation - average bottom elevation at sta 1+05.

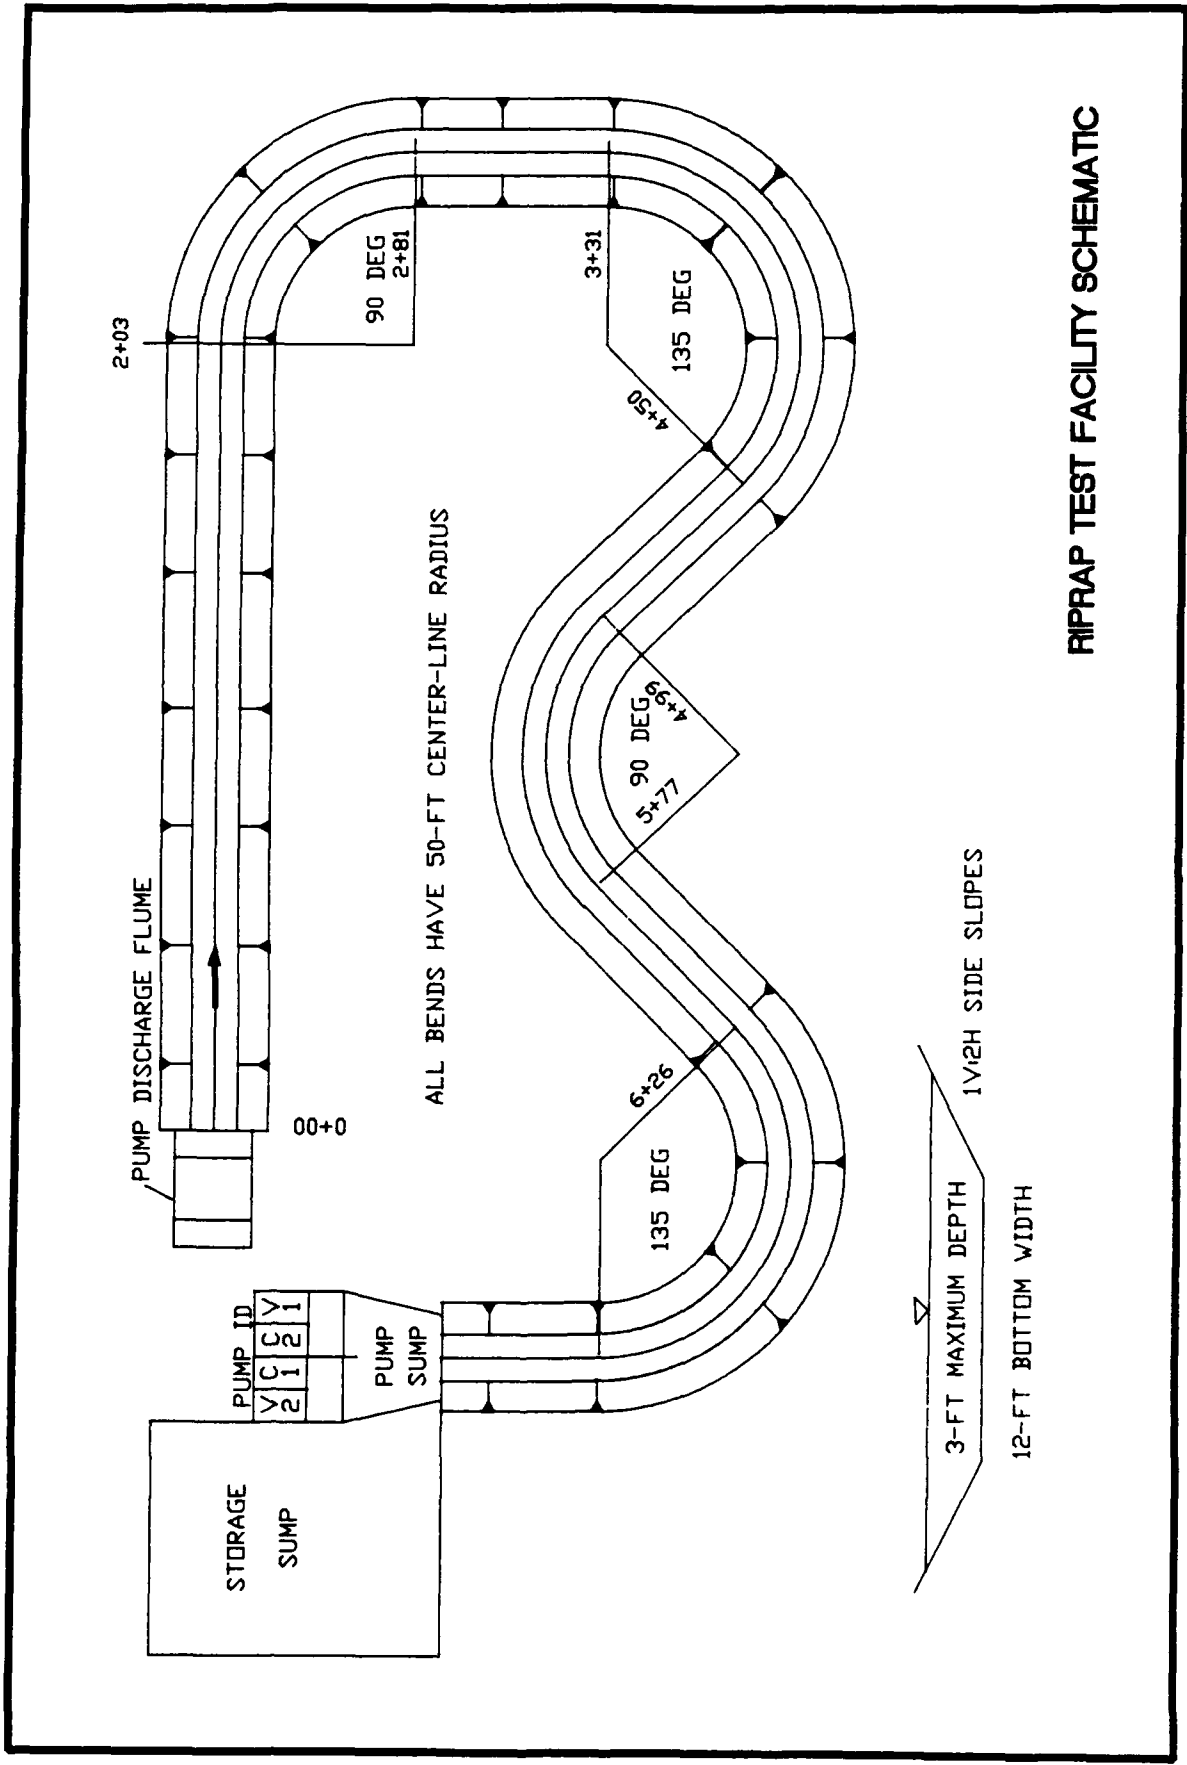


RIPRAP TEST FACILITY SCHEMATIC

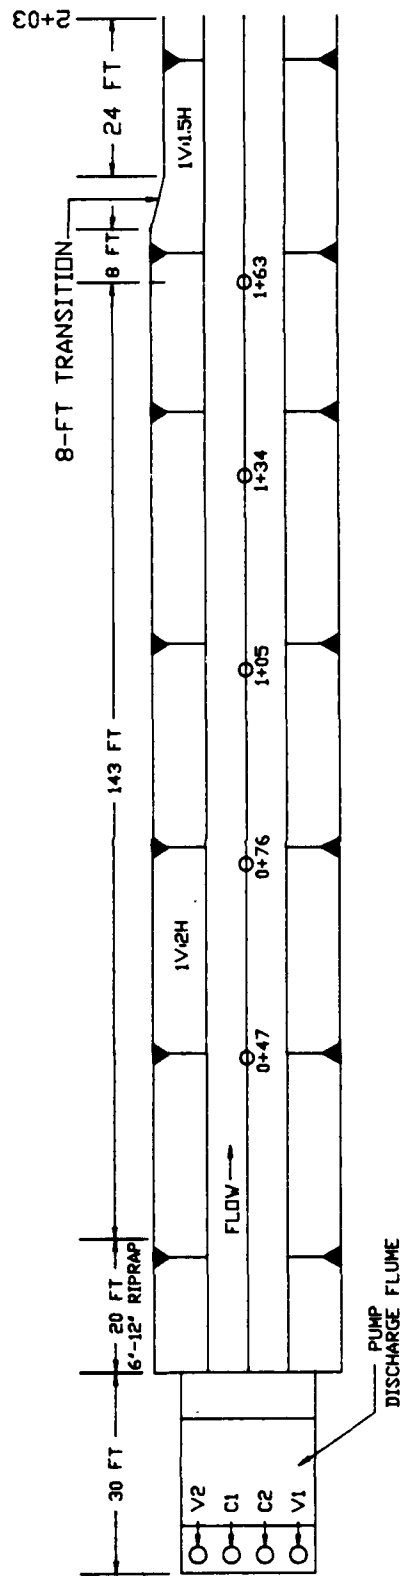


LEGEND:

○ WATER-SURFACE MEASUREMENT

RESISTANCE STUDY LAYOUT

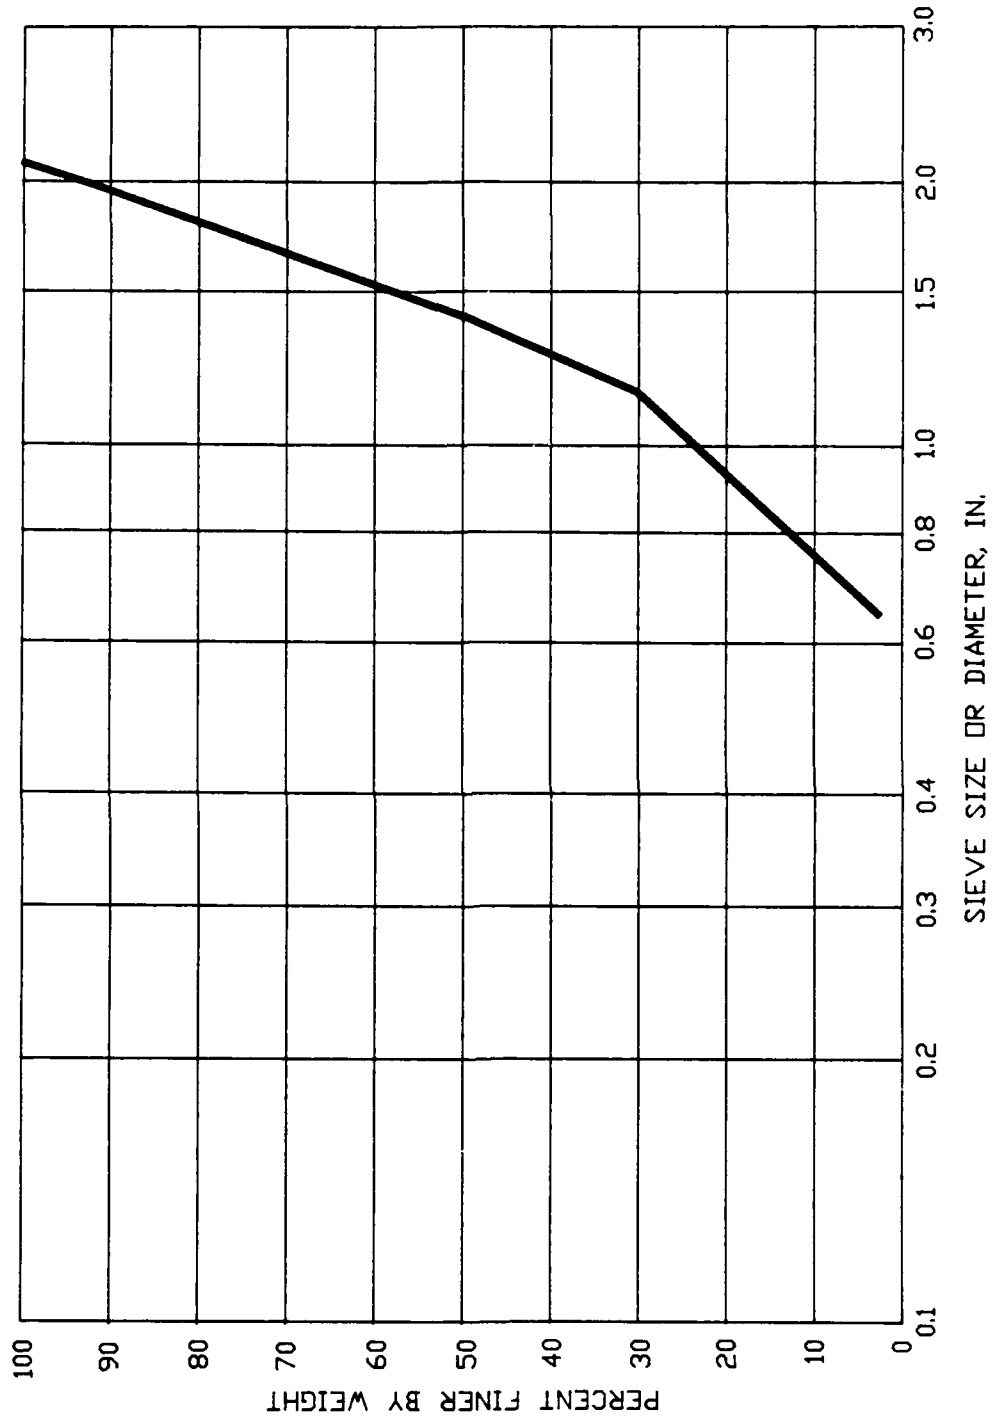


**RIPRAP GRADATION 1**

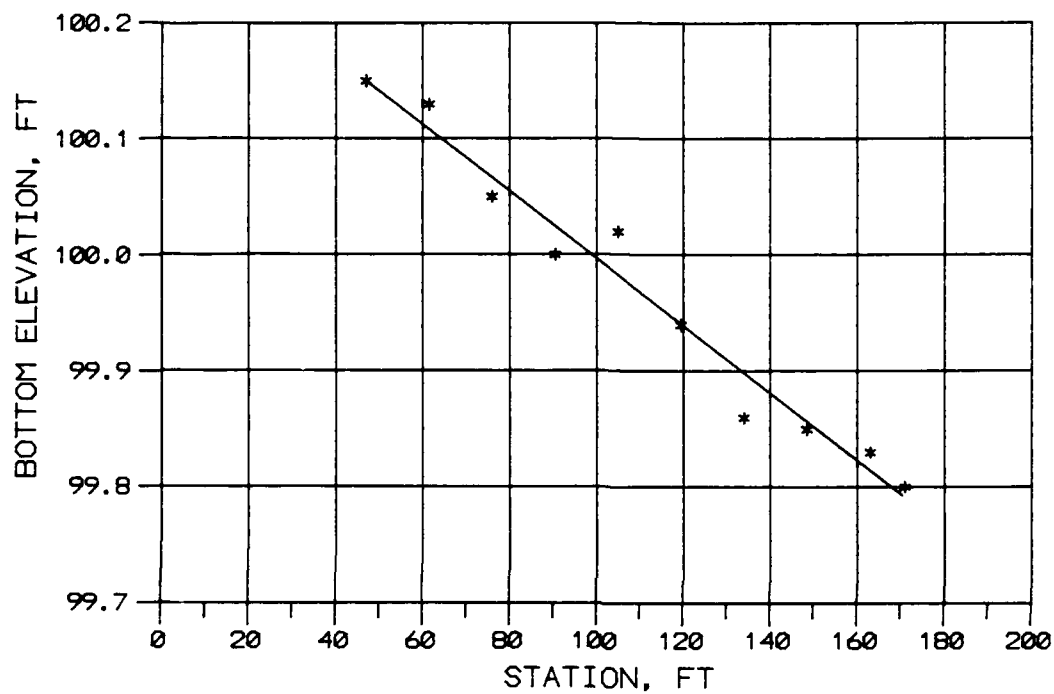

NOTE: ELEVATIONS ARE REFERENCED TO  
AN ARBITRARY DATUM

BOTTOM SLOPE = 0.00289 FT/FT

CHANNEL BOTTOM SLOPE

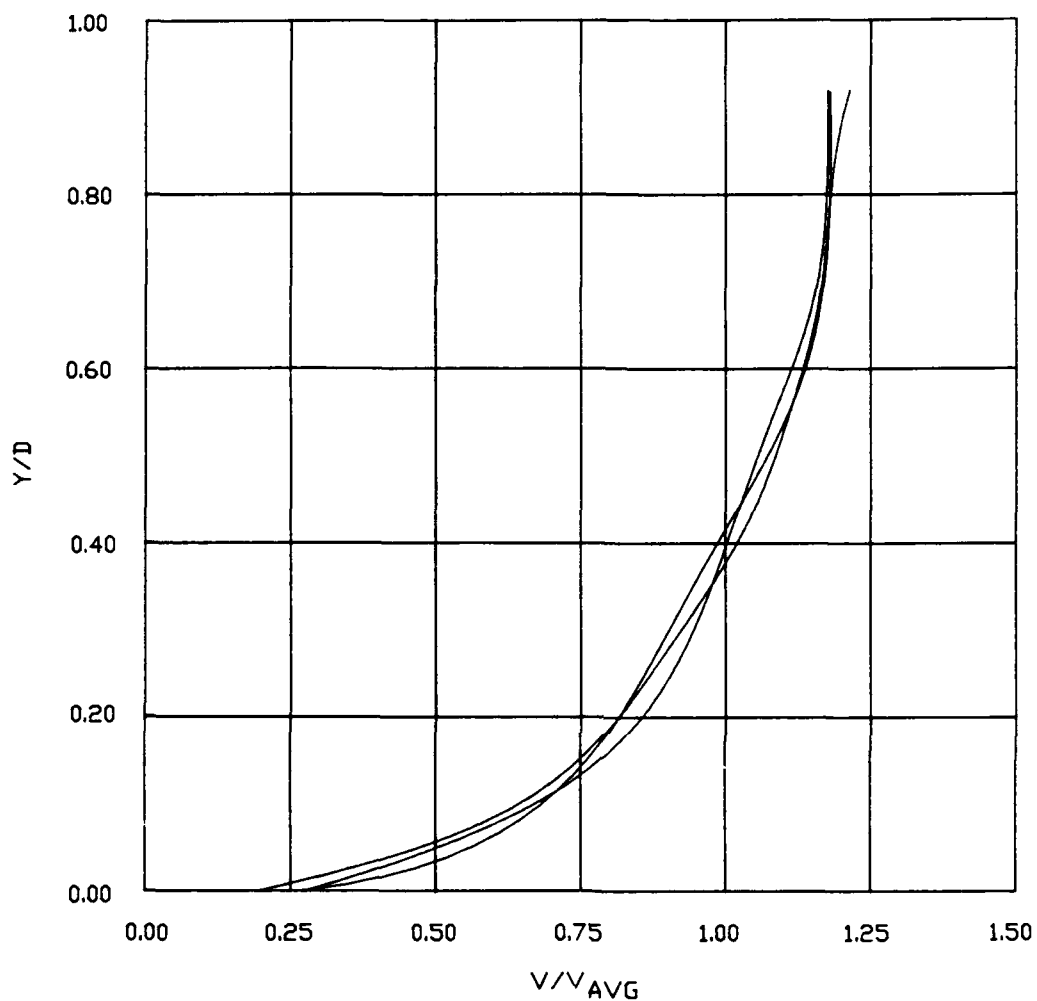

LEGEND:

Y = DISTANCE ABOVE BOTTOM

D = DEPTH

V = VELOCITY AT Y


$V_{AVG}$  = DEPTH-AVERAGED VELOCITY

NOTE:

VELOCITY PROFILES AT  
CHANNEL CENTER LINE AND  
2 FT ON EACH SIDE. CURVES  
NOT LABELED DUE TO SIMILARITY

**DIMENSIONLESS VELOCITY  
PROFILES**

DISCHARGE 52 CFS  
STATION 1+05

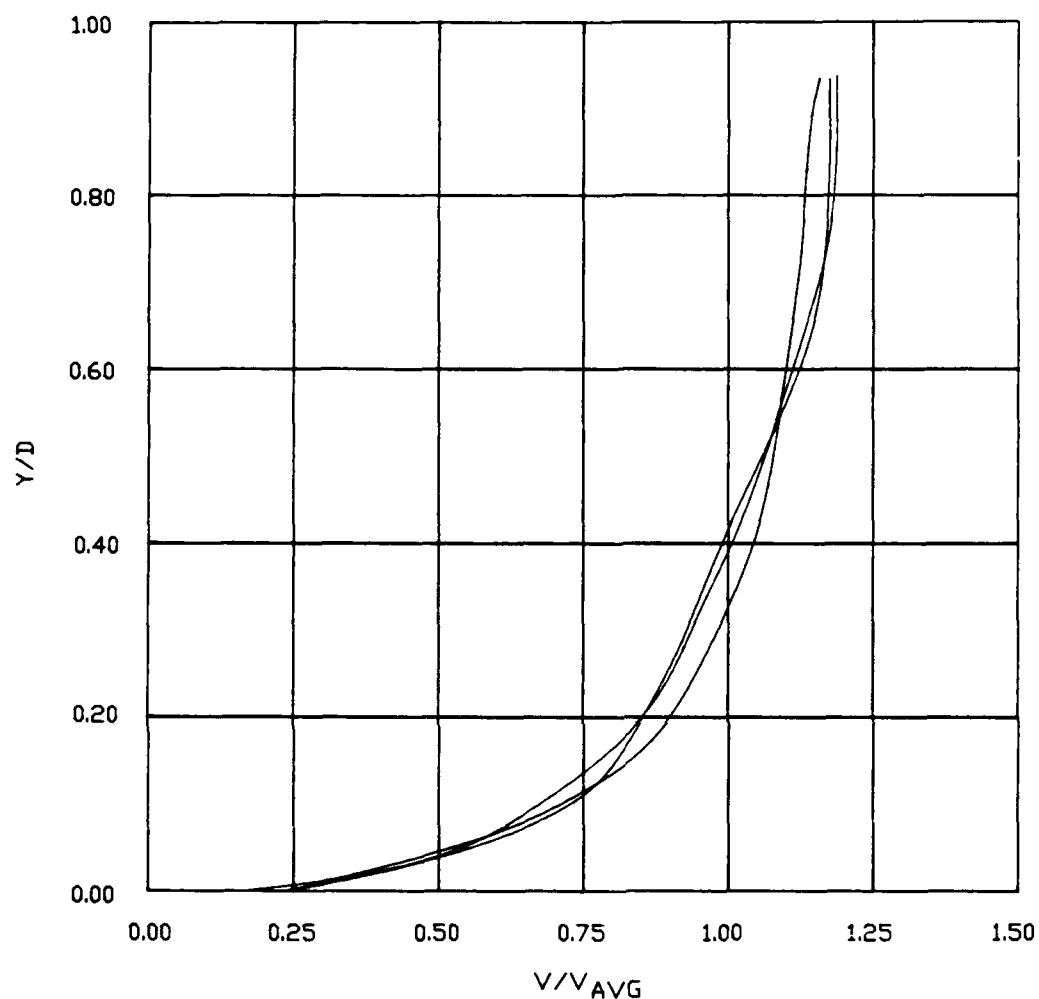

LEGEND:


Y = DISTANCE ABOVE BOTTOM  
 D = DEPTH  
 V = VELOCITY AT Y  
 V<sub>AVG</sub> = DEPTH-AVERAGED VELOCITY

NOTE:

VELOCITY PROFILES AT  
 CHANNEL CENTER LINE AND  
 2 FT ON EACH SIDE. CURVES  
 NOT LABELED DUE TO SIMILARITY

**DIMENSIONLESS VELOCITY  
 PROFILES**

DISCHARGE 76 CFS  
 STATION 0+47

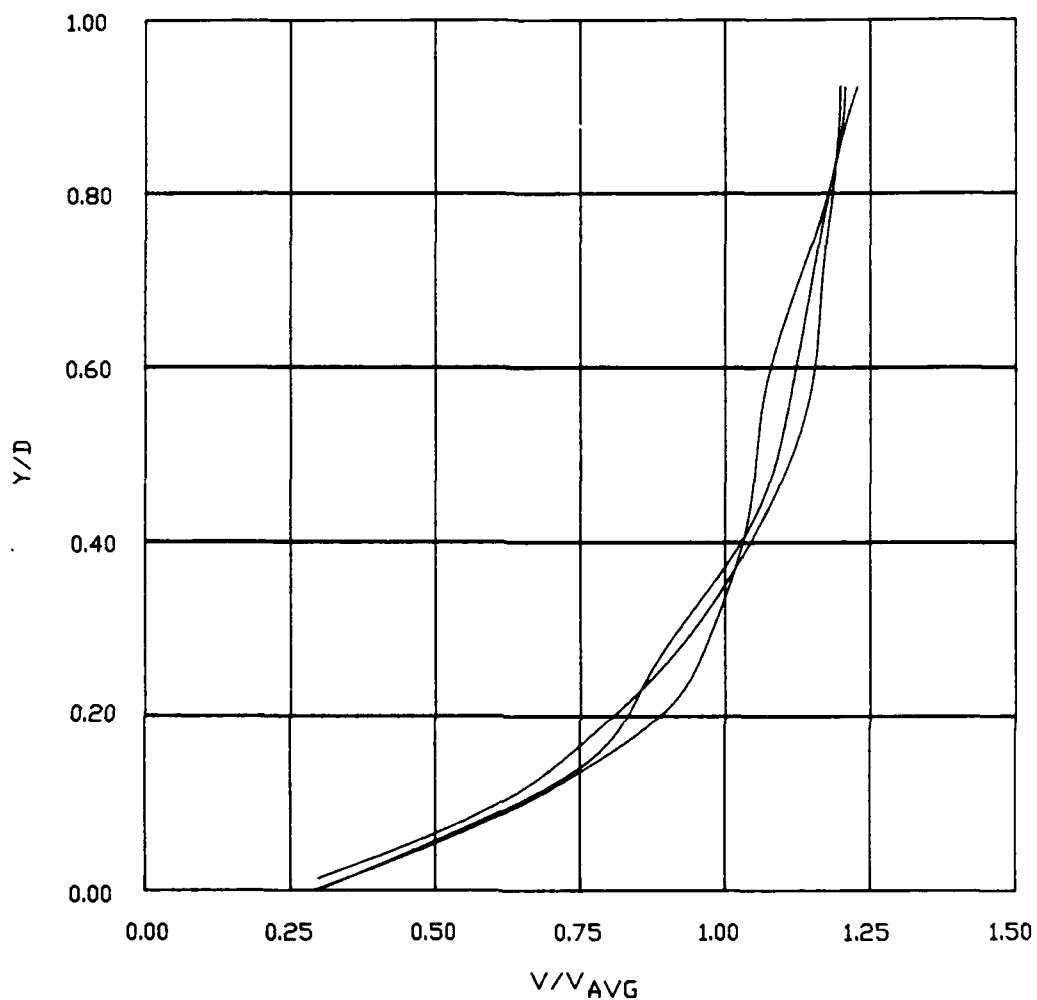

LEGEND:

Y = DISTANCE ABOVE BOTTOM

D = DEPTH

V = VELOCITY AT Y


V<sub>AVG</sub> = DEPTH-AVERAGED VELOCITY

NOTE:

VELOCITY PROFILES AT  
CHANNEL CENTER LINE AND  
2 FT ON EACH SIDE. CURVES  
NOT LABELED DUE TO SIMILARITY

**DIMENSIONLESS VELOCITY  
PROFILES**

DISCHARGE 52 CFS  
STATION 1+63

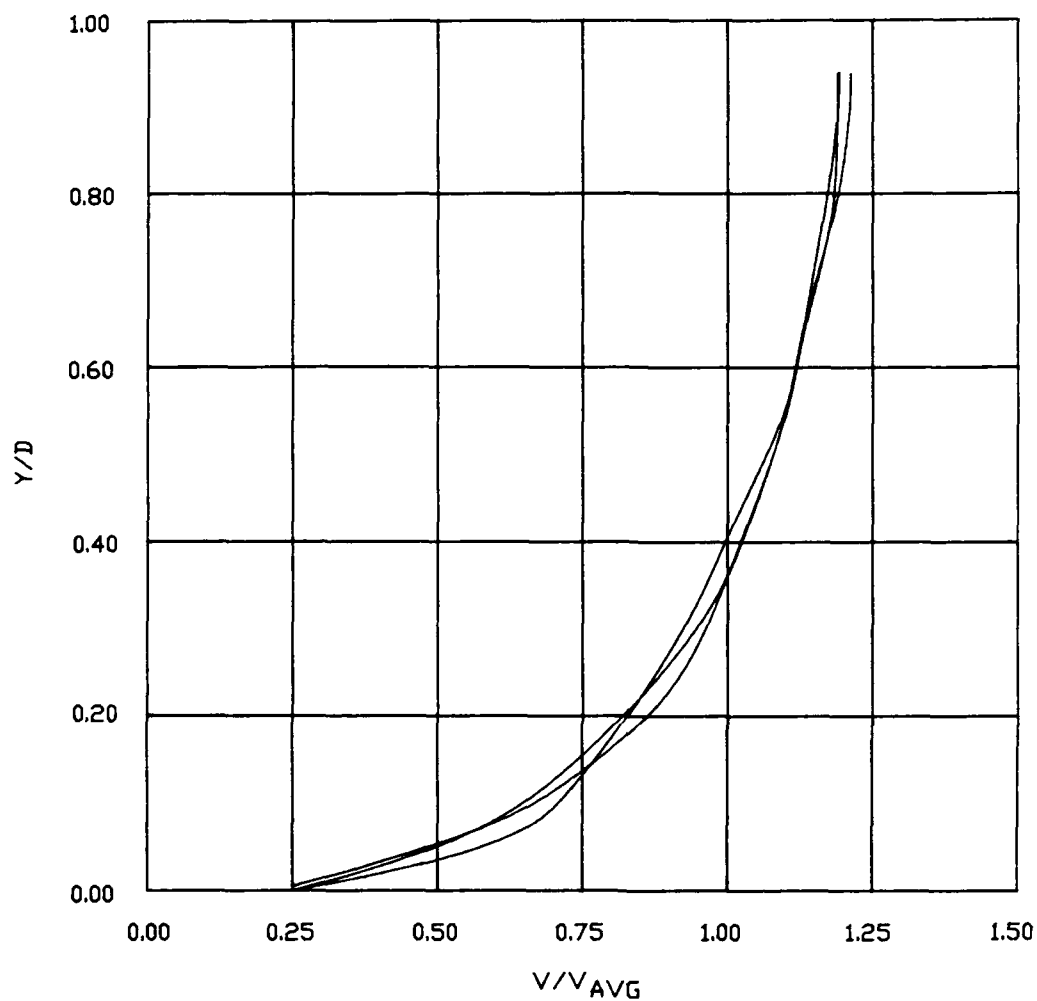

LEGEND:

Y = DISTANCE ABOVE BOTTOM

D = DEPTH

V = VELOCITY AT Y


$V_{AVG}$  = DEPTH-AVERAGED VELOCITY

NOTE:

VELOCITY PROFILES AT  
CHANNEL CENTER LINE AND  
2 FT ON EACH SIDE. CURVES  
NOT LABELED DUE TO SIMILARITY

**DIMENSIONLESS VELOCITY  
PROFILES**

DISCHARGE 76 CFS  
STATION 1+63

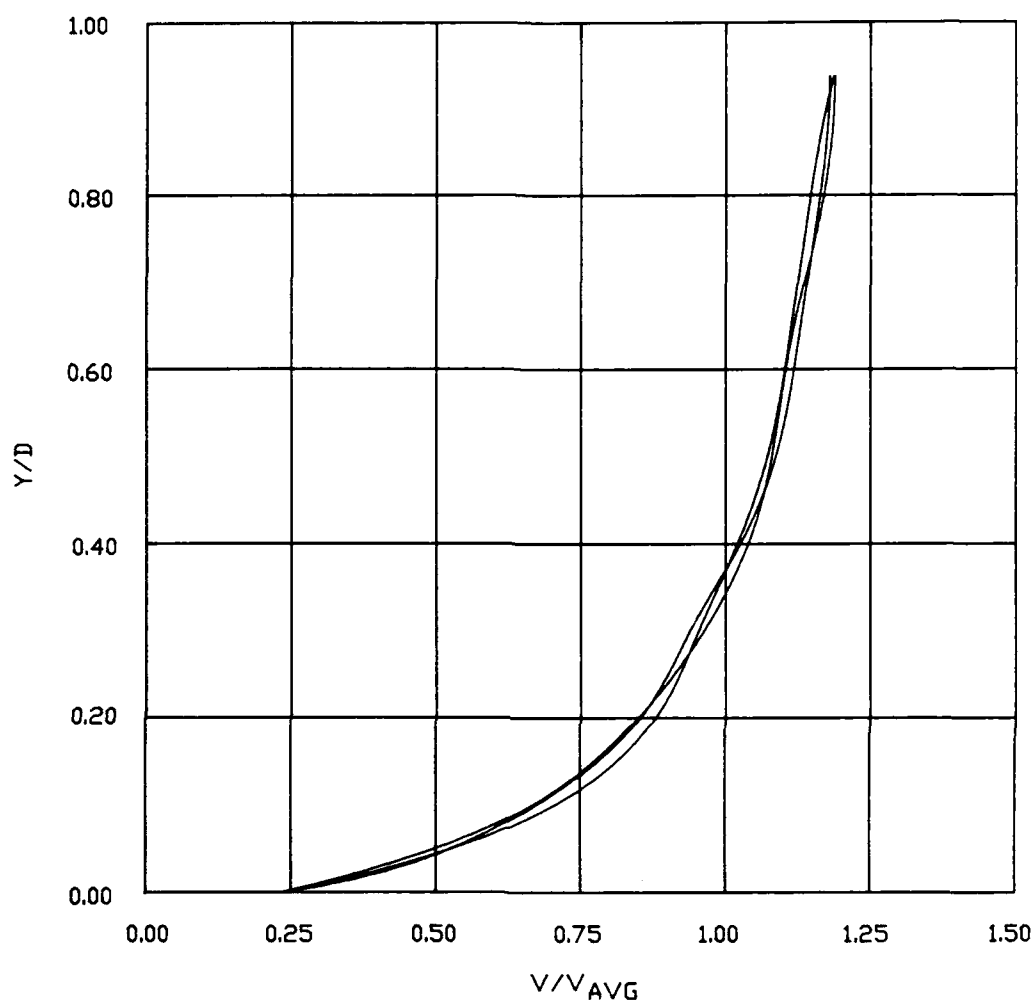

LEGEND:

$Y$  = DISTANCE ABOVE BOTTOM

$D$  = DEPTH

$V$  = VELOCITY AT  $Y$


$V_{AVG}$  = DEPTH-AVERAGED VELOCITY

NOTE:

VELOCITY PROFILES AT  
CHANNEL CENTER LINE AND  
2 FT ON EACH SIDE. CURVES  
NOT LABELED DUE TO SIMILARITY

**DIMENSIONLESS VELOCITY  
PROFILES**

DISCHARGE 76 CFS  
STATION 1+05

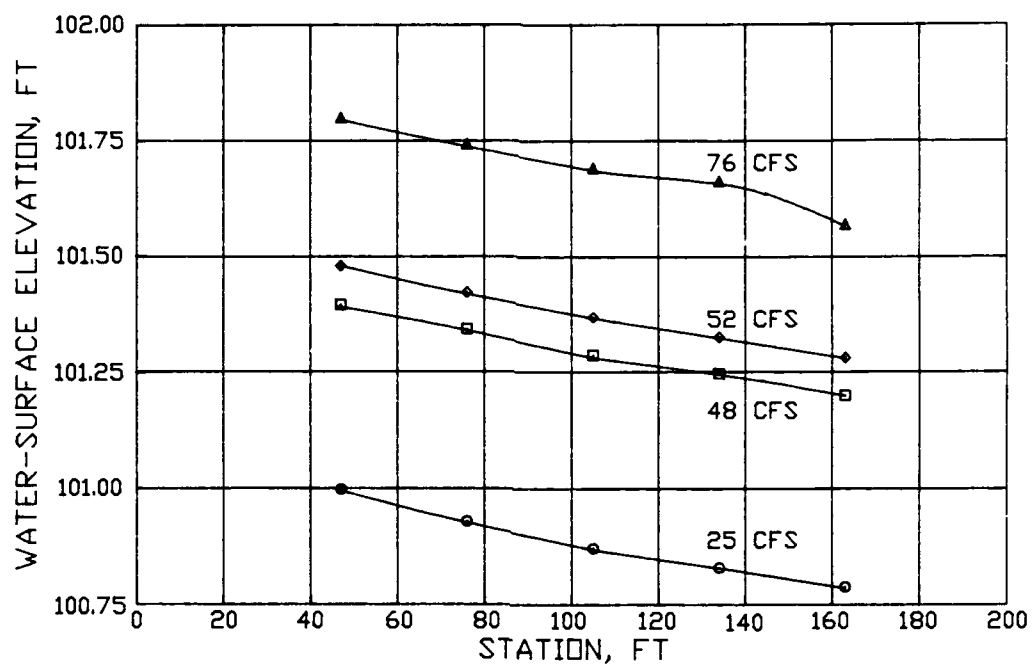


NOTE: 25-CFS WATER-SURFACE PROFILE

TAKEN WITH PUMP V2

ELEVATIONS ARE REFERENCED TO  
AN ARBITRARY DATUM

**WATER-SURFACE PROFILES**  
DISCHARGE 25, 48, 52, AND 76 CFS

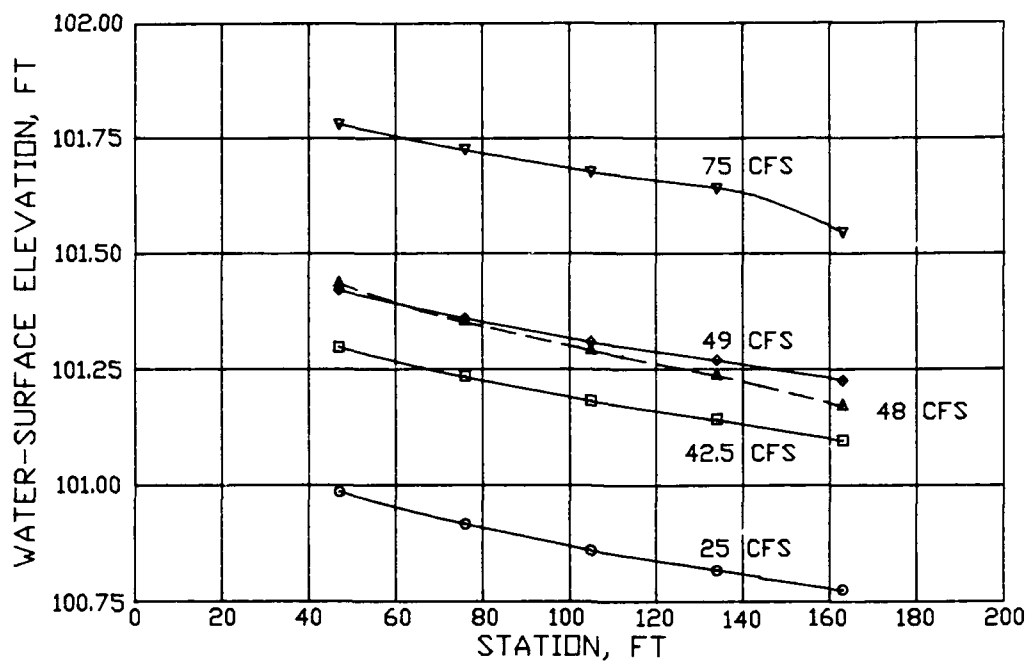

NOTE: 25-CFS WATER-SURFACE PROFILE  
 TAKEN WITH PUMP V1.  
 48-CFS WATER-SURFACE PROFILE  
 TAKEN WITH RIPRAP SURFACE ROUGHENED  
 TO SIMULATE UNDERWATER PLACEMENT.  
 ELEVATIONS ARE REFERENCED TO  
 AN ARBITRARY DATUM

### WATER-SURFACE PROFILES

DISCHARGE 25, 42.5, 48, 49, AND 75 CFS

**Waterways Experiment Station Cataloging-In-Publication Data**

Maynard, Stephen T.

Riprap resistance tests from a large test channel / by Stephen T. Maynard ; prepared for Department of the Army, US Army Corps of Engineers.

26 p. : ill. ; 28 cm. -- (Miscellaneous paper; HL-92-5)

Includes bibliographical references.

1. Frictional resistance (Hydrodynamics) 2. Channels (Hydraulic engineering) -- Testing. 3. Flumes -- Testing. 4. Hydrodynamics -- Mathematics. I. United States. Army. Corps of Engineers. II. U.S. Army Engineer Waterways Experiment Station. III. Title. IV. Series: Miscellaneous paper (U.S. Army Engineer Waterways Experiment Station) HL-92-5.

TA7 W34m no.HL-92-5