


AD-A263 102



FASTC-ID(RS)T-0307-92

2

FOREIGN AEROSPACE SCIENCE AND TECHNOLOGY CENTER



CONSTRUCTION AND OPERATION OF A GAS TRANSPORT CO₂ LASER

by

I. Gutu, M.V. Udrea, et al.



DTIC
ELECTE
APR 14 1993

D

Approved for public release;
Distribution unlimited.

93-07710



1078

93 4 13 048

HUMAN TRANSLATION

FASTC-ID(RS)T-0307-92 2 April 1993

MICROFICHE NR: **93C000240**

CONSTRUCTION AND OPERATION OF A GAS TRANSPORT
CO₂ LASER

By: I. Gutu, M.V. Udrea, et al.

English pages: 6

Source: Zhongguo Jiguang, Vol. 12, No. 9, 1985;
pp. 518-520

Country of origin: China

Translated by: SCITRAN
F33657-84-D-0165

Requester: FASTC/TATD/Bruce Armstrong

Approved for public release; Distribution unlimited.

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN AEROSPACE SCIENCE AND TECHNOLOGY CENTER.

PREPARED BY

TRANSLATION DIVISION
FOREIGN AEROSPACE SCIENCE AND
TECHNOLOGY CENTER
WPAFB, OHIO

GRAPHICS DISCLAIMER

All figures, graphics, tables, equations, etc. merged into this translation were extracted from the best quality copy available.

Accession For	
NTIS CRA&I	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution /	
Availability Codes	
Dist	Availability for Special
A-1	

1

FASTC-ID(RS) T-0307-92

Construction and operation of a gas transport CO₂ laser

I. Gutu, M. V. Udrea, D. Dumitras, V. Draganescu,

(Central Institute of Physics, Bucharest, Romania)

Wang Zheen, Zha Hongkui, Cheng Zhaogu

(Shanghai Institute of Optics and Fine Mechanics, Academia Sinica)

Translation from Chinese Journal of Lasers. Vol. 12, No. 9, 1985. pp518-520.

Translated by:

SCITRAN

1482 East Valley Road

Santa Barbara, CA 93150

Construction and operation of a gas transport CO₂ laser¹

I. Gutu, M. V. Udrea, D. Dumitras, V. Draganescu,

(Central Institute of Physics, Bucharest, Romania)

Wang Zheen, Zha Hongkui, Cheng Zhaogu

(Shanghai Institute of Optics and Fine Mechanics, Academia Sinica)

/518

Abstract: The construction and operation of a CO₂ gas transport laser with cylindrical geometry is presented. This work aims at small size and light weight gas transport laser at high output level. This has been accomplished by a single metallic cylinder for electric discharge, recirculation and the cooling of the gas mixture. More than 1kW laser power was obtained from a laser of the length of 1.45m, diameter 0.54m and cca weight 180 kg. Typical parameters were: pressure 40 Torr, CO₂:N₂: He = 1:8:11, discharge current 8 A, efficiency 12%, and laser spot 28 × 22mm².

1. Introduction

Gas transport lasers have high power output. But the lasers are bulky, heavy, and complicated in structure. They are not convenient to use in many application areas. In the previous article^[1,2], we have discussed the feasibility of constructing small size, light weight gas transport lasers using single metallic cylinder containing recirculating cooling system and discharging system. This article describes the structure and performance parameters of this type of gas transport lasers.

2. Experiment setup

Fig. 1 and Fig. 2 are the cross sectional diagrams perpendicular and along the axis.

The laser chamber consists of water cooled stainless steel cylinder, which is 1400 mm long and 460 mm wide. There are two rectangular openings, 180 × 1300 mm². Two rectangular plates, 2 and 11, are used to cover the openings. On one plate is installed electrode assembly. On the other plate is installed 10 copper plate as heat exchanger. Air recirculation system consists of 6 two-blade fans. The fan has diameter 325mm, width 30mm, and gap 100 mm. These fans are mounted on a long axis. This axis is turned by a DC motor through a vacuum axial sealing.

The mixed gases flow to the discharge area through the passage between cylinder inner wall and metallic plate, number 13. The mixed gases are cooled by the side wall of the cylinder, 8 heat exchangers (number 5 in the diagram) of length 1300mm, and 10 copper tubes of diameter 12mm.

The electrodes assembly contains these three parts: two sets of separately arranged anodes of total length 1220mm (number 6 in the diagram), one copper tube cathode which is 10mm in

¹Received Aug. 23, 1984.

diameter and 1290mm in length (number 8), and an auxiliary electrode (number 7). Fig. 3 shows the cross sectional diagram of one set of the anode assembly ($610 \times 120 \times 30 \text{ mm}^3$).

/519

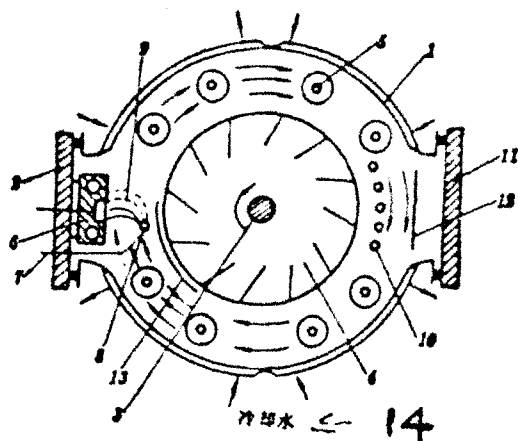


Fig. 1 Cross sectional diagram perpendicular to the axis of gas transport CO₂ laser. 1 - stainless steel cylinder, 2 - metallic plate supporting electrode assembly, 3 - axis of rotation, 4 - fan, 5 - heat exchanger, 6 - Anode, 7 - auxiliary electrode, 8 - cathode, 9 - discharge area, 10 - auxiliary exchanger, 11 - metallic plate, 12 - metallic flow guiding plate, 13 - metallic thin plate, 14 - cooling water.

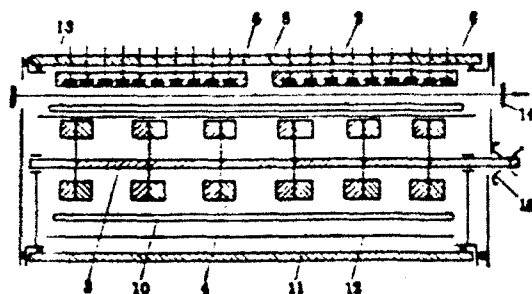


Fig. 2 Cross sectional diagram along the axis. 1 ~ 13 - same as in Fig. 1, 14 - exit mirror, 15 - vacuum axial sealing driver.

Each anode assembly has 30 anode strips. The surface area of each of these strips is $40 \times 15 \text{ mm}^2$. The anodized aluminum plate (number 8) cools anode through ceramic plate. Anodized aluminum plate (number 8) cools anode through ceramic plate. Sealing is accomplished by the mixture of Al_2O_3 and sodium fluosilicate. Glass (number 6), ceramics (number 7) and epoxy resin (number 5) are used to provide good insulation for the anode. This assembly type of anode structure is convenient to make and easy to use. Each anode strip uses $2.5 \text{ k}\Omega$ resistor to limit current.

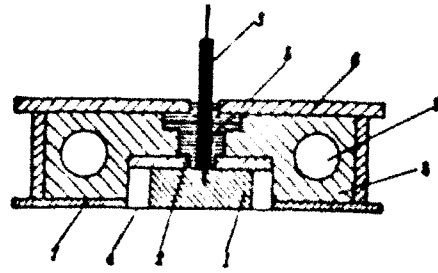


Fig. 3 Anode structural diagram. 1 - anode strip, 2 - ceramic plate, 3 - wire lead, 4 - aluminum oxide powder, 5 - epoxy resin, 6 - glass plate, 7 - ceramic plate, 8 - anodized aluminum plate, 9 - cooling passage.

The auxiliary discharge system consists of 60 copper wires of diameter 1mm. Each copper wire corresponds to one anode strip. After discharging on contact, the copper wires are used as preparatory ionization source. Each copper wire uses 0.8 M Ω resistor to limit current. The branch current is 1.5 mA.

The resonance chamber consists of two mirrors; one is a gold plated copper mirror with diameter 50 mm and radius of curvature 5 m; the other is a GaAs plane mirror, whose light penetration rate is 23% and the effective light passing diameter ϕ is 35 mm. These chamber mirrors are mounted on two metallic plates separately. They are fixed by four struts to provide mechanical stability.

The gas leaking rate of the laser is less than 1 Torr/24 hour period.

3. Experimental results

The gas mixture flow characteristics for two different fan rotation rates (i.e. 1400 r.p.m and 1800 r.p.m) are shown in Fig. 4. The flow speed is measured at different positions along the light axis.

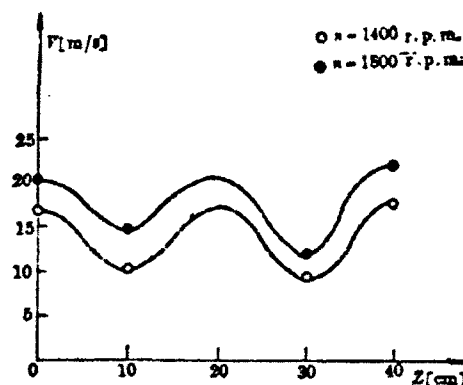


Fig. 4 Gas flow speed distribution along the discharging region. (Z=0 corresponds to the center of the cylinder)

The measured flow speed indicates that at the 1800 r.p.m rotation rate, the largest flow speed (at a position just ahead the fan blade) is $V_{\max} = 25$ m/s, the smallest flow speed (in between the two fans) is $V_{\min} = 15$ m/s, and the average speed approximates 20 m/s or equivalent to 3000 m³/hour volume flow rate. In order to improve the uniformness of the flow, several secondary aerodynamic designs have been tried but the structure was made too complicated.

Other details about the gas circulation system are discussed in Ref [2].

Fig. 5 shows the laser power curves corresponding to different fan speeds. When the rotation rate is increased from 1200 r.p.m to 1600 r.p.m, the laser power is increased by 60%.

At high rotation rate, the laser power increases nearly linearly with the discharge current. At low rotation rate, there is a saturation tendency. Fig. 6 shows typical curves corresponding to two different gas mixture pressures.

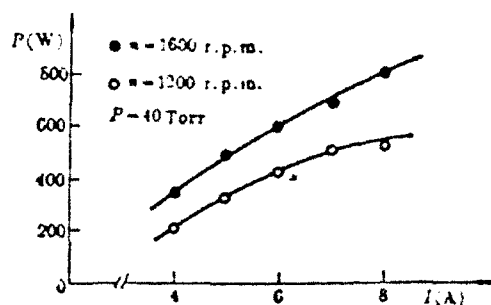


Fig. 5 The relationship between the laser power and the discharging current under two different flow rate. (P=40 Torr, CO₂:N₂:He=1:8:11, R=5m)

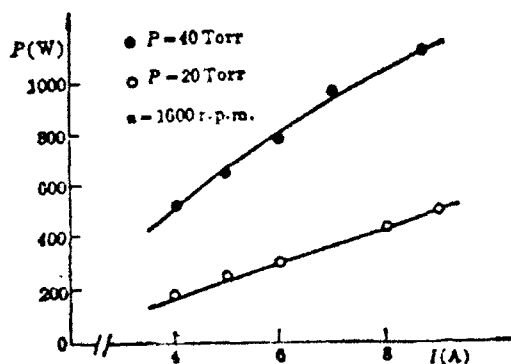


Fig. 6 The relationship between the laser power and the discharging current under two different gas pressures. (N=1600 r.p.m., CO₂:N₂:He=1:8:11, B=5m (copper reflection mirror), light spot sizes 28 × 22 mm², sealed operation)

The output power is 1100 W under the conditions that the gas mixture ratios are CO₂:N₂:He=1:8:11, that the gas pressure is at 40 Torr, that the fan rotation rate is at 1600 r.p.m,

that the working voltage is at 1050 V, and that the discharging current is 8.5 A. The electricity-light conversion efficiency is 12%. The laser light spot is $28 \times 22 \text{ mm}^2$ in size.

The curves shown in the figure also indicate that the working pressure has a big influence on the output power. When the pressure increases from 20 Torr to 40 Torr, the output power more than doubles.

We acknowledge valuable help in technical issue from Mrs. F. Grigore, D. Mirea, V. Olteanu, and S. Toby.

References

- [1] I. Gutu et al., Rev. Roum. Phys., 1978, 23, No. 5, 447.
- [2] V. Draganescu et al., Rev. Roum. Phys., to be published.

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION -----	MICROFICHE -----
B085 DIA/RTS-2FI	1
C509 BALLOC509 BALLISTIC RES LAB	1
C510 R&T LABS/AVEADCOM	1
C513 ARRADCOM	1
C535 AVRADCOM/TSARCOM	1
C539 TRASANA	1
Q592 FSTC	4
Q619 MSIC REDSTONE	1
Q008 NTIC	1
Q043 AFMIC-IS	1
E051 HQ USAF/INET	1
E404 AEDC/DOF	1
E408 AFWL	1
E410 ASDTC/IN	1
E411 ASD/FTD/TTIA	1
E429 SD/IND	1
P005 DOE/ISA/DDI	1
P050 CIA/OCR/ADD/SD	2
1051 AFIT/LDE	1
P090 NSA/CDB	1
2206 FSL	1

Microfiche Nbr: FTD93C000240
FTD-ID(RS)T-0307-92