

AD-A264 476



2

ARMY RESEARCH LABORATORY



Control System Analyses for the Driver Gas Fill System of the BRL 1/6th Scale LB/TS Test Facility

Duane T. Hove
Gregory P. Mason

ARL-CR-46


April 1993

prepared by

Sparta, Inc.
3828 Carson Street, Suite 102
Torrance, California 90503

under contract

DAAA15-90-D-1002



APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

03 5 1 0 0 3

93-11013



NOTICES

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute indorsement of any commercial product.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE April 1993	3. REPORT TYPE AND DATES COVERED Final, Aug 90-Feb 92		
4. TITLE AND SUBTITLE Control System Analyses for the Driver Gas Fill System of the BRL 1/6th Scale LB/TS Test Facility		5. FUNDING NUMBERS C: DAAA15-90-D-1002 Task 1		
6. AUTHOR(S) Duane T. Hove and Gregory P. Mason				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Sparta, Inc. 3828 Carson St., Suite 102 Torrance, CA 90503		8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-OP-CI-B (Tech Lib) Aberdeen Proving Ground, MD 21005-5066		10. SPONSORING / MONITORING AGENCY REPORT NUMBER ARL-CR-46		
11. SUPPLEMENTARY NOTES Contracting Officer Representative is Mr. Richard Pearson; Alternate Contracting Officer Representative is Mr. Klaus Opalka, Nuclear/Directed Energy Division, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD 21005-5066. Contract No.: DAAA15-90-D-1002; Delivery Order 0001.				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) This report covers the design of an automatic control system for the gas supply of a blast simulator facility. The control system regulates the output temperature of a heat exchanger used to evaporate liquid nitrogen and heat the resulting gas to high temperature. An analytical model is developed for the two phase flow through the heat exchanger. A design is developed for the valves used in the control system. The properties of the valves in the design and the analytical model of the flow are used to analyze the dynamics of the control system.				
14. SUBJECT TERMS heat exchange; control theory; cryogenics; blast simulation; liquid nitrogen; shock tubes			15. NUMBER OF PAGES 42	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK.

TABLE OF CONTENTS

	<u>Page</u>
FOREWORD	v
PREFACE	vii
1. INTRODUCTION	1
1.1 Objectives	1
1.2 Requirements	1
1.3 Scope	1
2. GAS SUPPLY SYSTEM DESCRIPTION	3
2.1 Layout	3
2.2 Control Valves	3
3. THERMAL HYDRAULIC ANALYSIS	5
3.1 Model	5
3.2 Calculations	7
4. CONTROL SYSTEM ANALYSIS	18
4.1 Model	18
4.2 Calculations	21
5. COST ESTIMATE	24
6. SUMMARY	28
6.1 Conclusions	28
6.2 Recommendations	28
7. REFERENCES	29
NOMENCLATURE	31
DISTRIBUTION LIST	33

INTENTIONALLY LEFT BLANK.

FOREWORD

This report is submitted to the Ballistics Research Laboratory in partial fulfillment of Delivery Order 0001 of Contract No: DAAA15-90-D-1002.

The BRL Project Officer is Mr. Richard Pearson. The SPARTA Program Manager is Mr. Gregory Mason. Mr. Daniel Nowlan performed the elegant control system dynamic analysis and Dr. Irving Osofsky provided valuable technical advice.

ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED

Accession For	
NTIS	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

INTENTIONALLY LEFT BLANK.

PREFACE

On 30 September 1992, the U.S. Army Ballistic Research Laboratory (BRL) was deactivated and subsequently became part of the U.S. Army Research Laboratory (ARL) on 1 October 1992.

INTENTIONALLY LEFT BLANK.

1. INTRODUCTION

The US Army Ballistic Research Laboratory (BRL) is currently modifying an existing shock tube located at the Aberdeen Proving Grounds to demonstrate Large Blast/Thermal Simulator technologies and to provide high fidelity air blast environments for nuclear effects testing. This facility will be the first large shock tube to use heated driver gas to achieve desired air blast waveforms in the test section. The driver gas must be heated and the driver quickly pressurized to minimize heat loss to the driver walls; this required innovative solutions to pumping hot gas.

Under BRL sponsorship SPARTA developed and demonstrated a driver filling method which pumps liquid nitrogen (LN) through a previously heated Pebble Bed Heater (PBH) thereby vaporizing the liquid and raising its temperature to the desired value in one pass (Figure 1). A bypass system allows precise control of the output gas temperature by selectively mixing LN with the heated gas exiting the Pebble Bed Heater. This approach has the advantages that: pumping a liquid is more efficient than pumping a gas (if indeed pumping a hot gas can be done at all), the LN pump is much smaller and much more robust than a gas compressor system and the constant displacement pump mass flow rate is independent of back pressure.

SPARTA installed a 22 ton Pebble Bed Heater working unit at BRL and successfully demonstrated its performance (Reference 1). Manually operated valves were used to route the liquid nitrogen to the Pebble Bed Heater in these initial tests. However, an automatic control system is preferable to manual operation for safety, precise gas temperature control and efficiency of operation.

1.1 Objectives

The objectives of the present study were to design an automatic control system which meets established requirements, analyze its performance, prepare drawings and provide a system cost estimate.

1.2 Requirements

Four driver gas design conditions were established by BRL (Table 1). The driver filling strategy is to pump a constant temperature gas (at or above the design temperature) until the driver gas reaches the design pressure (Reference 2). During the filling process, the PBH back pressure will rise from ambient to the peak value approximately linearly (depending on the magnitude of the heat loss to the walls).

1.3 Scope

Valves and valve properties were selected from vendor supplied information. Appropriate valve settings were established based on a thermal hydraulic model which considered pressure drops in the primary and bypass paths. Control system response was established based on analytical models of the valve/actuator motion. Cost estimates were based on vendor quotes and engineering estimates by experienced personnel.

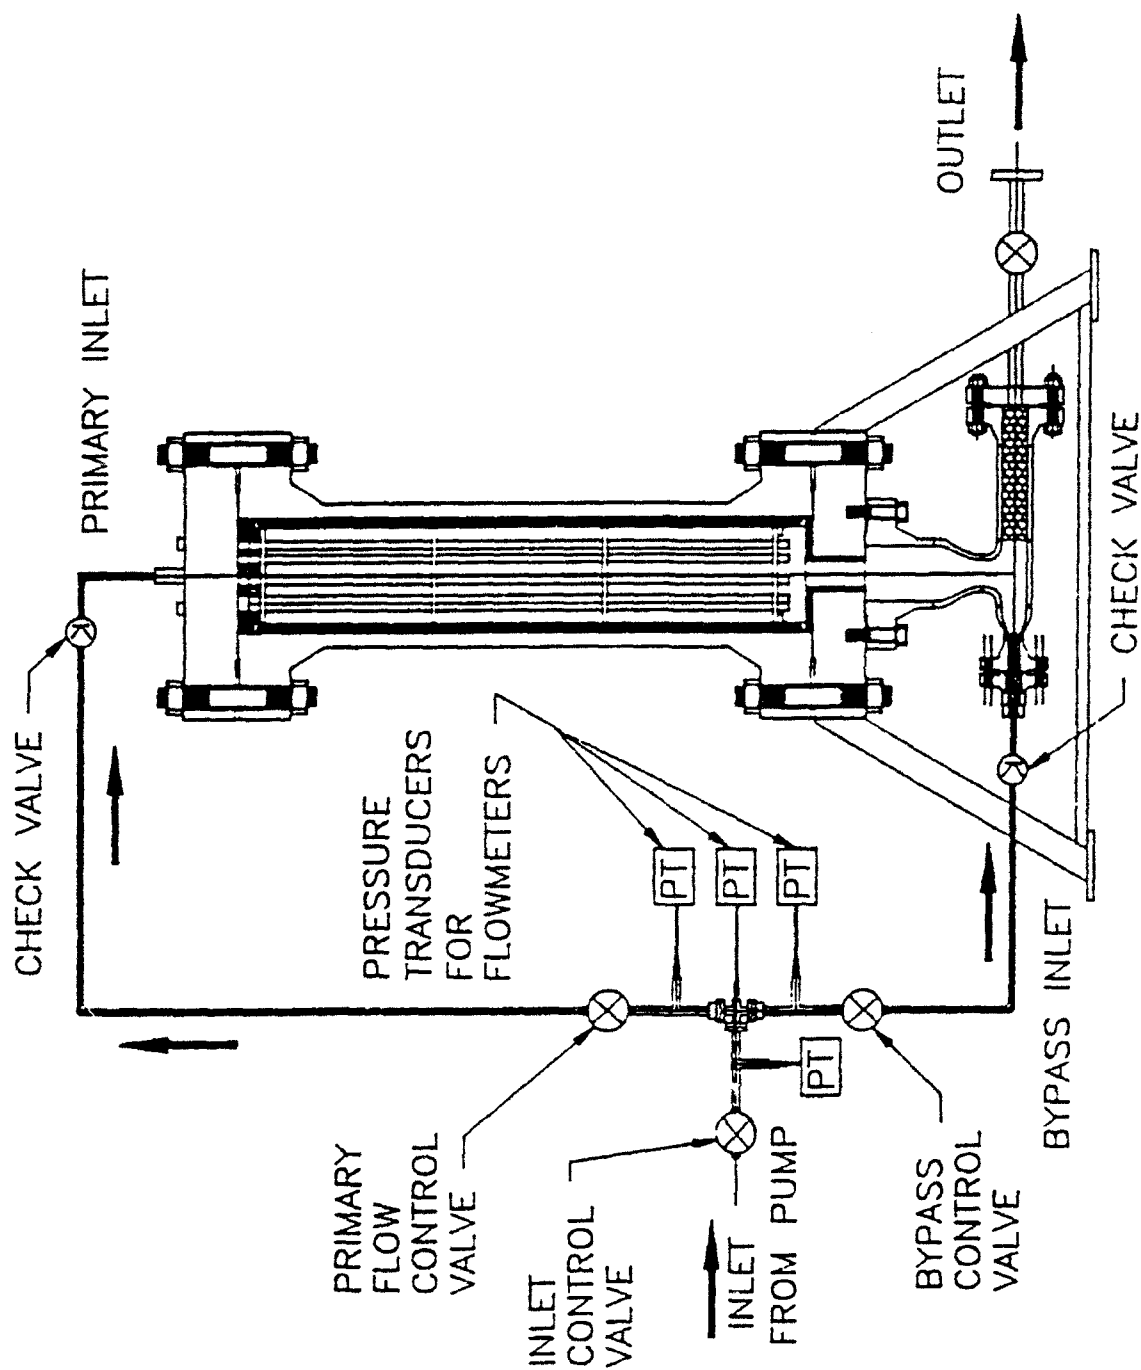


Figure 1. Pebble bed heater schematic.

2. GAS SUPPLY CONTROL SYSTEM DESCRIPTION

The control system analysis starts with a control system layout and performance characteristics of the specific valves used to direct the flow to the PBH and the bypass system.

2.1 Control System Layout

Liquid nitrogen is pumped from a tank through a series of pipes and valves to the Pebble Bed Heater. Numerous diagnostic measurements, exhaust valves, check valves and control valves are used to control the fluid flow as indicated in Figure 2 which is taken from Reference 3. The PBH control valves denoted as V7 and V8 are of specific interest to this study.

The PBH controls perform the functions of regulating the outlet temperature of the PBH mixer to a specified setpoint. The PBH operates by receiving LN from the high pressure pumping system and branching the LN flow into two subsystems, the primary pebble-bed and the bypass thermal mixer. Precise control of valves 7 and 8 in the primary and bypass lines is required to produce a stable outlet temperature of the PBH.

2.2 Control Valves

Globe valves have been selected for the PBH valves because of their rugged construction, cryogenic rating and high capacity. Valve position control is achieved by the use of a closed feedback control loop to the actuators using the outlet temperature of the mixer as the feedback sensor point. Valtek Mark One valves and Linear Spring actuators were chosen to develop valve performance characteristics and establish cost estimates (Reference 4).

TABLE 1 DRIVER GAS DESIGN CONDITIONS

CASE NUMBER	MAXIMUM BACK PRESSURE (MPa)	MAXIMUM BACK PRESSURE (ATM)	GAS TEMPERATURE (K)	GAS TEMPERATURE (R)
1	12.8	129	663	1193
2	7.8	79	468	842
3	2.9	29	361	650
4	0.98	10	288	518

3. THERMAL HYDRAULIC ANALYSIS

Engineering procedures were developed from analytical models based on conservation of fluid momentum and energy. All Pebble Bed Heater thermal hydraulic processes are relatively slow so transients are not important.

3.1 Model

The relationship defining the temperature of the nitrogen gas leaving the thermal mixer is

$$\dot{m}_T(C_p T + h_v) = \dot{m}_7(C_p T_{PB} + h_v) + \dot{m}_8 C_p T_{LN} \quad \text{EQ (1)}$$

Conservation of mass gives

$$\dot{m}_T = \dot{m}_7 + \dot{m}_8 \quad \text{EQ (2)}$$

Substituting (2) into (1) and solving for temperature gives

$$T = T_{PB} - \frac{\dot{m}_8}{\dot{m}_T} (T_{PB} - T_{LN} + \frac{h_v}{C_p}) \quad \text{EQ (3)}$$

For convenience we define a reference temperature

$$T_R = T_{PB} - T_{LN} + \frac{h_v}{C_p} \quad \text{EQ (4)}$$

Both $\dot{m}_7$ and $\dot{m}_8$ are a function of time during the operation of the PBH due to changing back pressure and, near the end of the run, changing PBH exit temperature. Control valves located on the primary PBH supply line (V7) and the mixer bypass supply line (V8) are assumed identical with respect to flow capability.

The mass flow rates are determined by equating the pressure drops in the primary and bypass legs. In the primary system the pressure drops are due to the pipes, valve 7, the elbows and the PBH; in the bypass system the pressure drops are due to the pipes and valve 8. Following Reference 5 we have for the primary leg

Pipes

$$DEL P1 = \frac{\rho U_7^2}{2} f_p \frac{L}{D} = C1 U_7^2 \quad \text{EQ (5)}$$

Elbows

$$DEL P2 = N \frac{\rho U_7^2}{2} f_{90} = C2 U_7^2 \quad \text{EQ (6)}$$

Valve

$$DEL P3 = \left[\frac{\rho U_7 A L_7}{CV x} \right]^2 = C3 \left(\frac{x}{L_7} \right)^{-2} U_7^2 \quad \text{EQ (7)}$$

Pebble Bed Heater

$$DEL P4 = \frac{\rho U_{PB}^2}{2} f_{PB} = C4 U_{PB}^2 \quad \text{EQ (8)}$$

Here the pressure drop constant was selected such that the pressure drop equalled 20 psi based on BRL measurements on the existing PBH.

For the bypass leg

Pipes

$$DEL P5 = \frac{\rho U_8^2}{2} f_P \frac{L_8}{D} = C1 U_8^2 \quad \text{EQ (9)}$$

and

Valve

$$DEL P6 = \left[\frac{\rho U_8 A L_8}{CV x} \right]^2 = C3 \left(\frac{x}{L_8} \right)^{-2} U_8^2 \quad \text{EQ (10)}$$

Summing pressure drops

$$U_7^2 [C1 + C2 + C3 \left(\frac{x}{L_7} \right)^{-2} + C4] = U_8^2 [C5 + C6 \left(\frac{x}{L_8} \right)^{-2}] \quad \text{EQ (11)}$$

Equation 11 can be rewritten as

$$U_7^2 C7(x) = U_8^2 C8(x) \quad \text{EQ (12)}$$

and therefore

$$\frac{U_8}{U_7} = \left(\frac{C7}{C8} \right)^{1/2} \quad \text{EQ (13)}$$

where it is understood that the terms C7 and C8 are functions of x.

Since the liquid nitrogen is essentially incompressible, Equation 3 can be rewritten as

$$T = T_{PB} - \frac{U_8}{(U_7 + U_8)} T_R = T_{PB} - \left(1 + \left(\frac{C8}{C7} \right)^{1/2} \right)^{-1} T_R \quad \text{EQ(14)}$$

which gives the output gas temperature as a function of valve position. Setting the output temperature at the desired or set point control temperature

$$T = T_c$$

and performing a bit of algebra, there results

$$\left(\frac{x}{L} \right)_7 = \left[\frac{C3}{\left(\left(\frac{T_R}{T_{PB} - T_c} - 1 \right)^2 (C5 + C6 \left(\frac{x}{L} \right)^{-2}) - (C1 + C2 + C4) \right)} \right]^{1/2} \quad \text{EQ (15)}$$

3.2 Calculations

Sample calculations are made to indicate nominal valve settings and their sensitivities. The basic procedure is to set one valve (e.g., V7) at a single setting and control the PBH output temperature with the other valve (V8). It is desirable that the valves be operated in mid range, if possible, simply to avoid fine settings and/or slamming into the stops unnecessarily. The design test conditions are addressed first at their peak back pressures. Then the effect of back pressure is considered.

3.2.1 Design Test Conditions

A broad range of PBH output temperatures are achievable if the PBH is heated to 2000 °R (1110 °K). The peak design temperature of 1193 °R (663 °K) is achieved with a secondary valve relative opening of 0.2 to 0.5 as the primary valve relative opening ranges from 0.25 to 1.0 (Figure 3).

BRL PBH OPERATION MIXER OUTLET TEMPERATURE

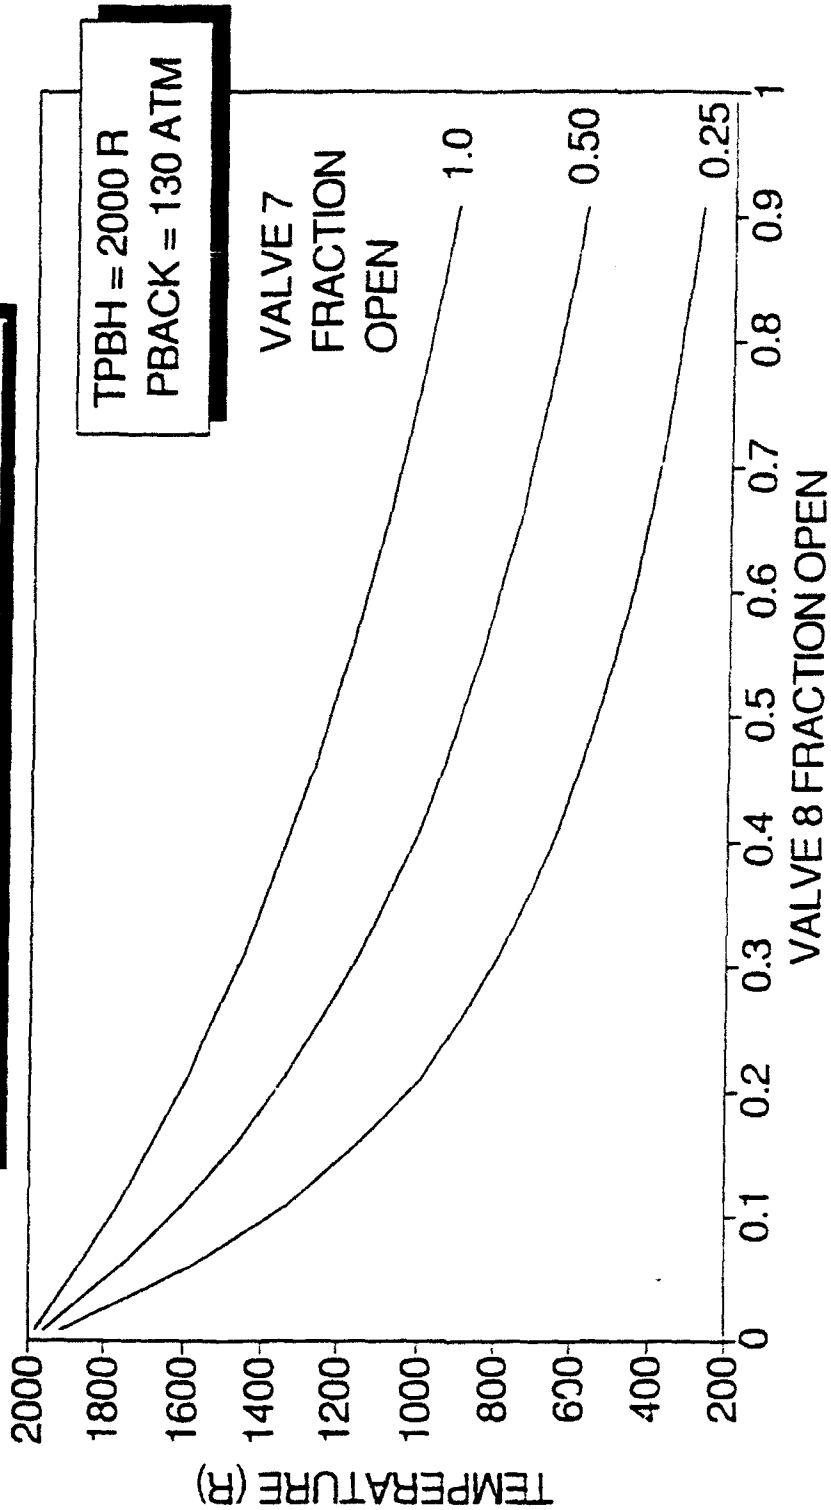


Figure 3. BRL PBH operation mixer outlet temperature.

Considering each design case individually, the sensitivity to outlet temperature is established by calculating the required valve settings for the nominal design condition and for the next lowest outlet design condition (Figures 4 to 7). Initial bed temperatures were picked based on enthalpy scaling from present test results (i.e., thermal energy required is proportional to the mass and temperature of gas required). However, while technically feasible to operate at PBH temperatures near the desired outlet temperature for the lower pressures, a minimum bed overheat of 500 °R was evolved by trial and error to insure robust valve control (see for example, Figure 8 compared to Figure 6 and Figure 9 compared to Figure 7).

3.2.2 Effect of Back Pressure

All of the pressure drop mechanisms considered except the PBH assumed that the nitrogen was liquid; therefore, only the PBH pressure drop will be a function of back pressure. We have

$$DELP4 = f(Re) \frac{\rho}{2} U_{PB}^2 \quad \text{EQ (16)}$$

The Reynolds number range considered is about 10 to 1000 and according to Reference 5, the pressure drop across a porous media is not a strong function of Reynolds number in this range. Further, the mass flow is constant and the nitrogen gas phase follows the perfect gas law which results in

$$DELP4 \sim \frac{T}{P} \quad \text{EQ (17)}$$

Thus, at a given bed temperature, the pressure drop is inversely proportional to the back pressure. Figures 10 and 11 indicate valve setting combinations required at a lower back pressure for each of the elevated design temperature conditions. While there is some effect (e.g., the required V8 relative opening is lowered about 0.1 for a 70 percent V7 opening), the required valve positions are well within the operating capability of the gas supply system and the long pumping cycle (order of minutes) allows plenty of time for the automatic control system to adjust.

BRL PBH OPERATION REQUIRED VALVE OPENING

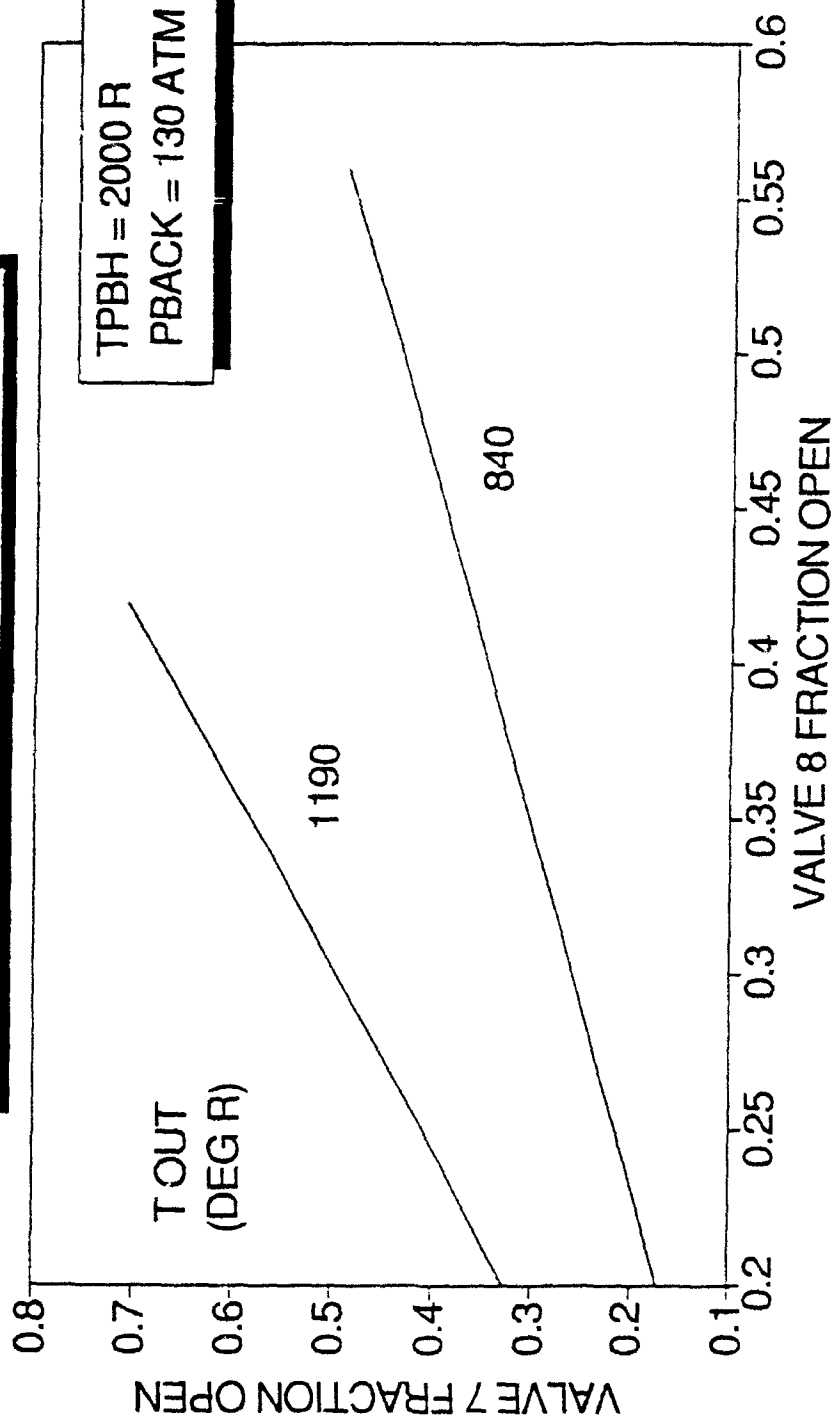


Figure 4. BRL PBH operation required valve opening, TPBH = 2000 R, PBACK = 130 ATM.

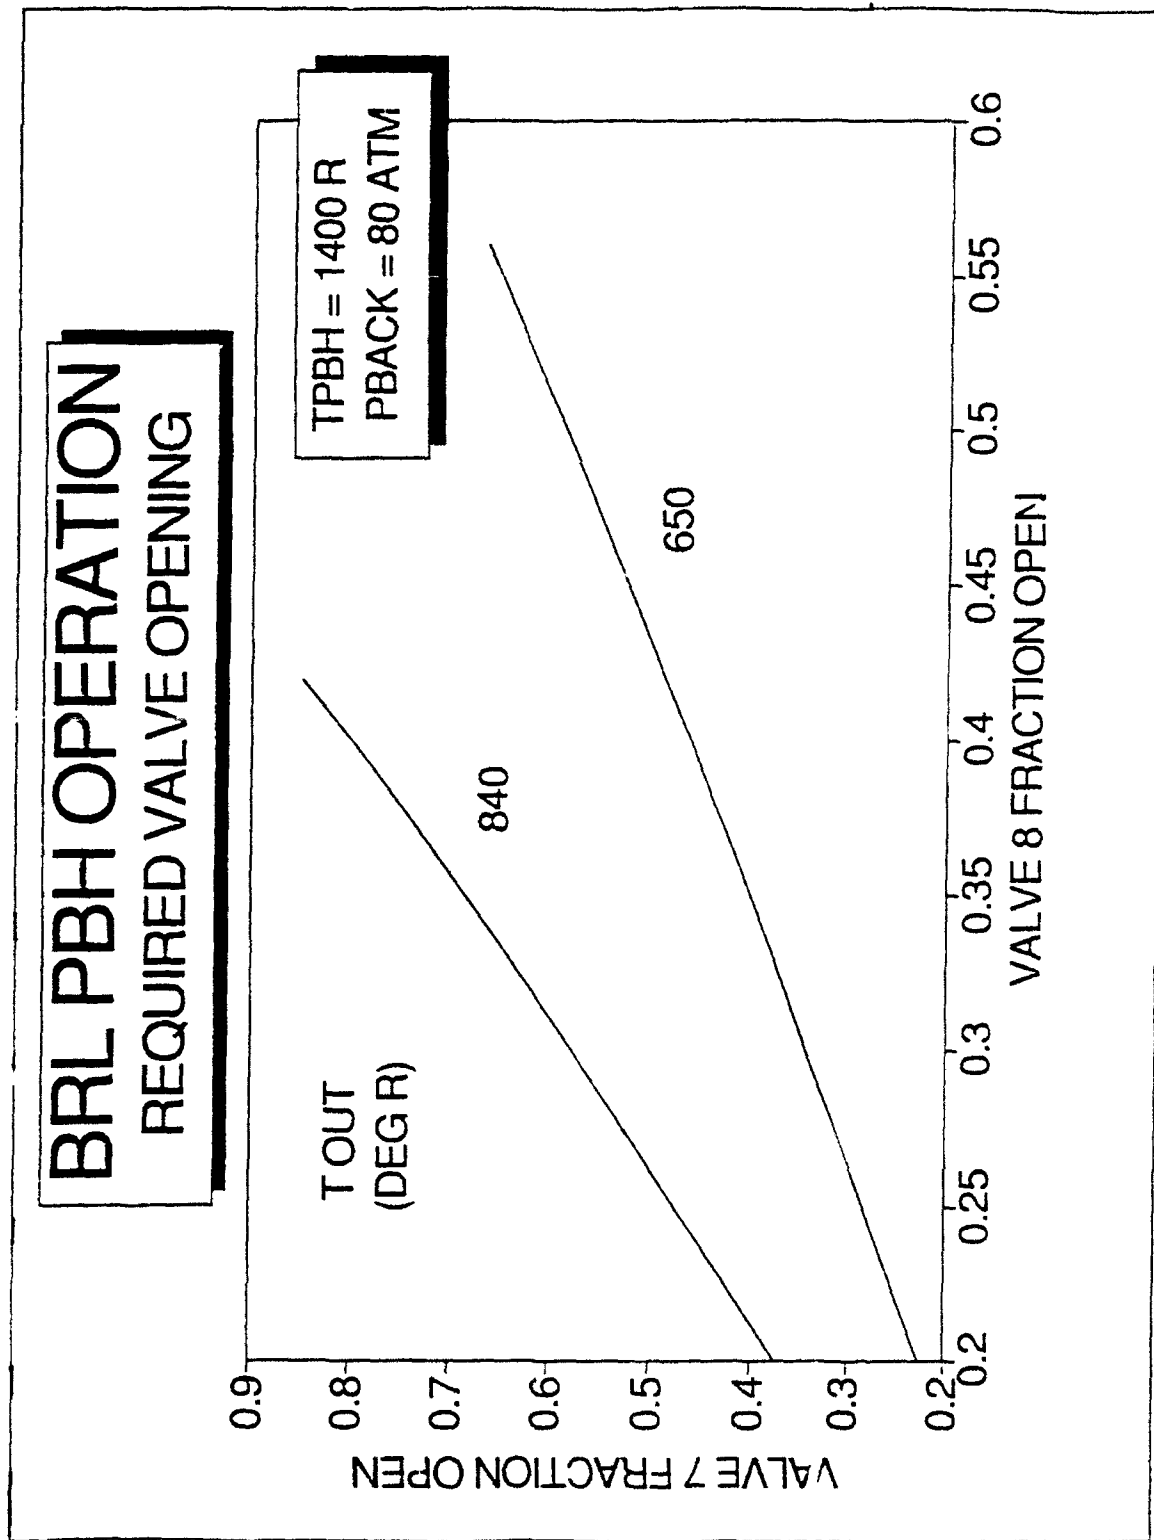


Figure 5. BRL PBH operation required valve opening, TPBH = 1400 R, PBACK = 80 ATM.

BRL PBH OPERATION REQUIRED VALVE OPENING

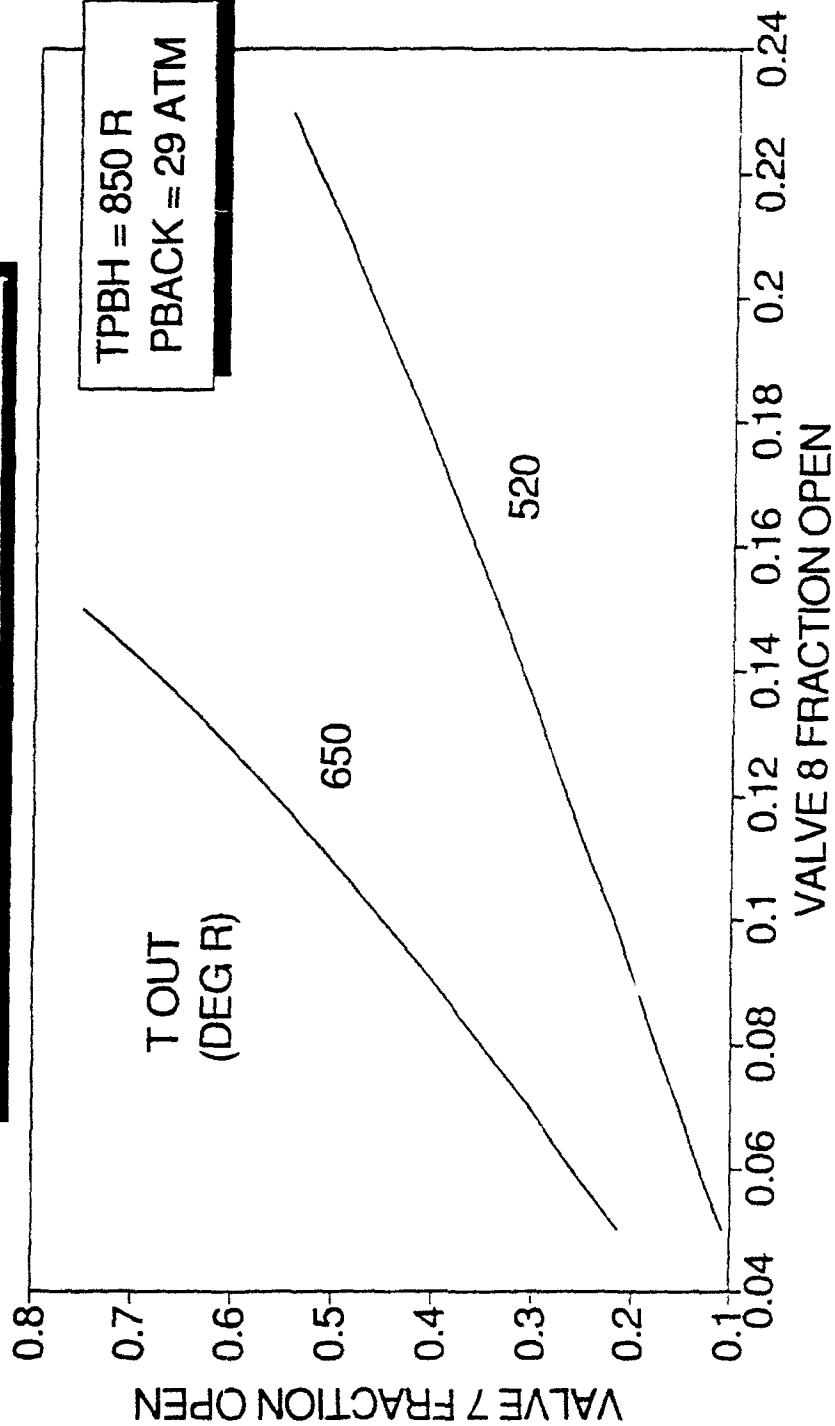


Figure 6. BRL PBH operation required valve opening, TPBH = 850 R, PBACK = 29 ATM.

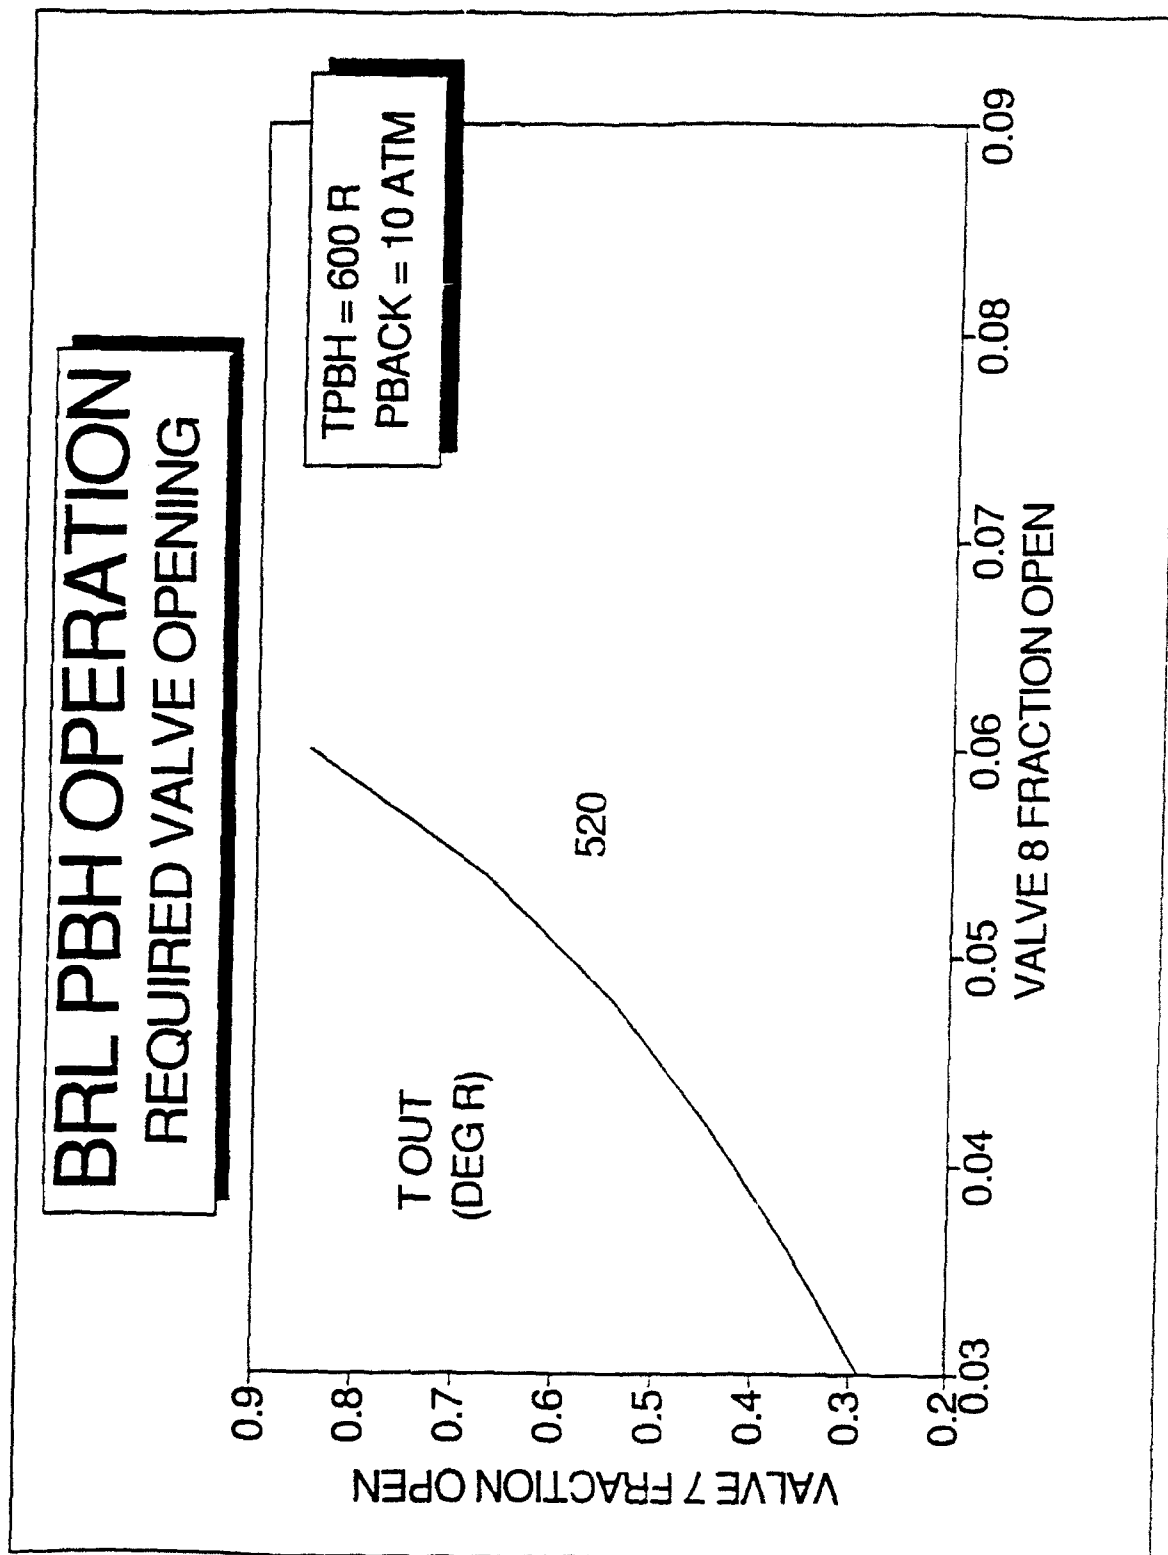


Figure 7. BRL PBH operation required valve opening, TPBH = 600 R, PBACK = 10 ATM.

BRL PBH OPERATION REQUIRED VALVE OPENING

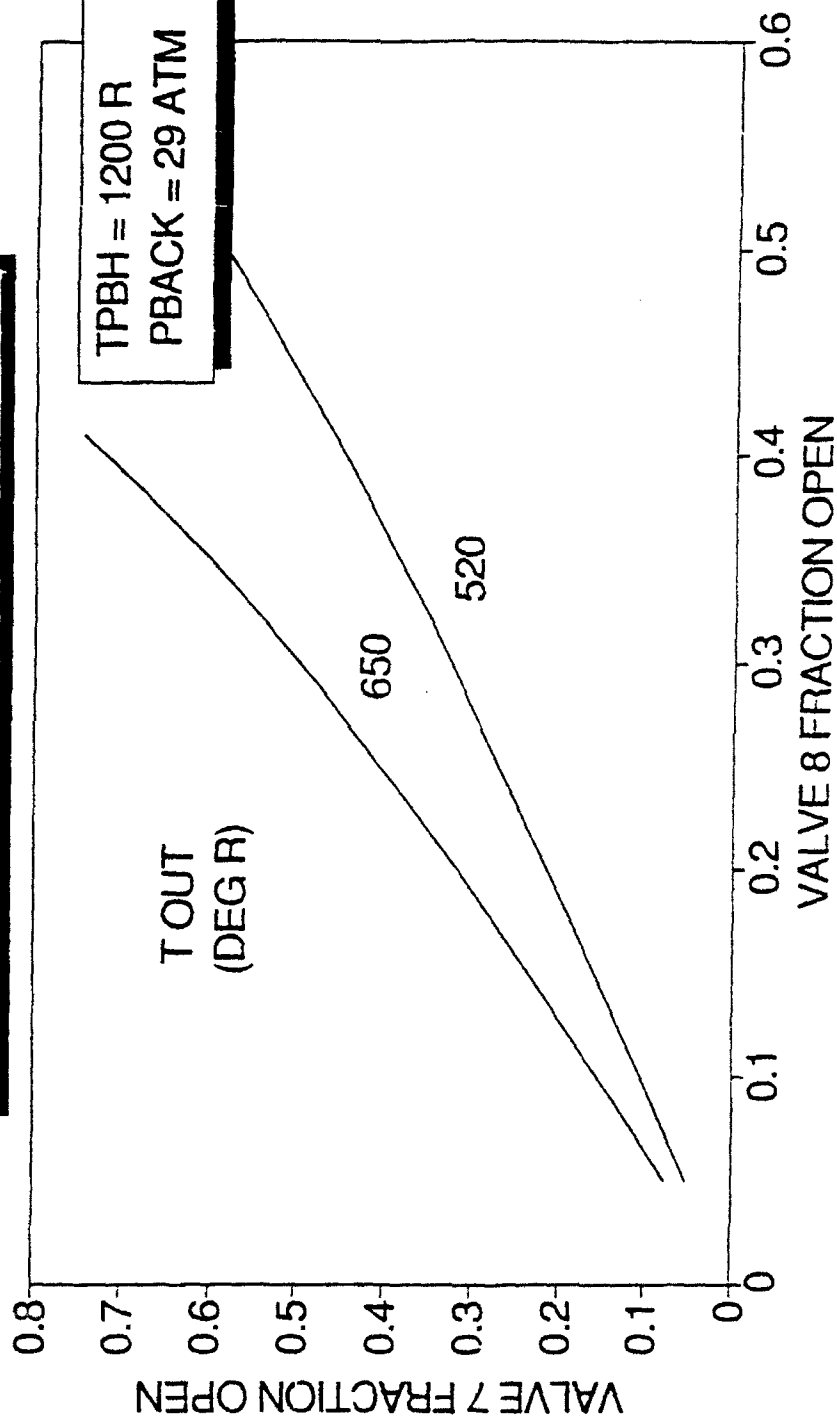


Figure 8. BRL PBH operation required valve opening, TPBH = 1200 R, PBACK = 29 ATM.

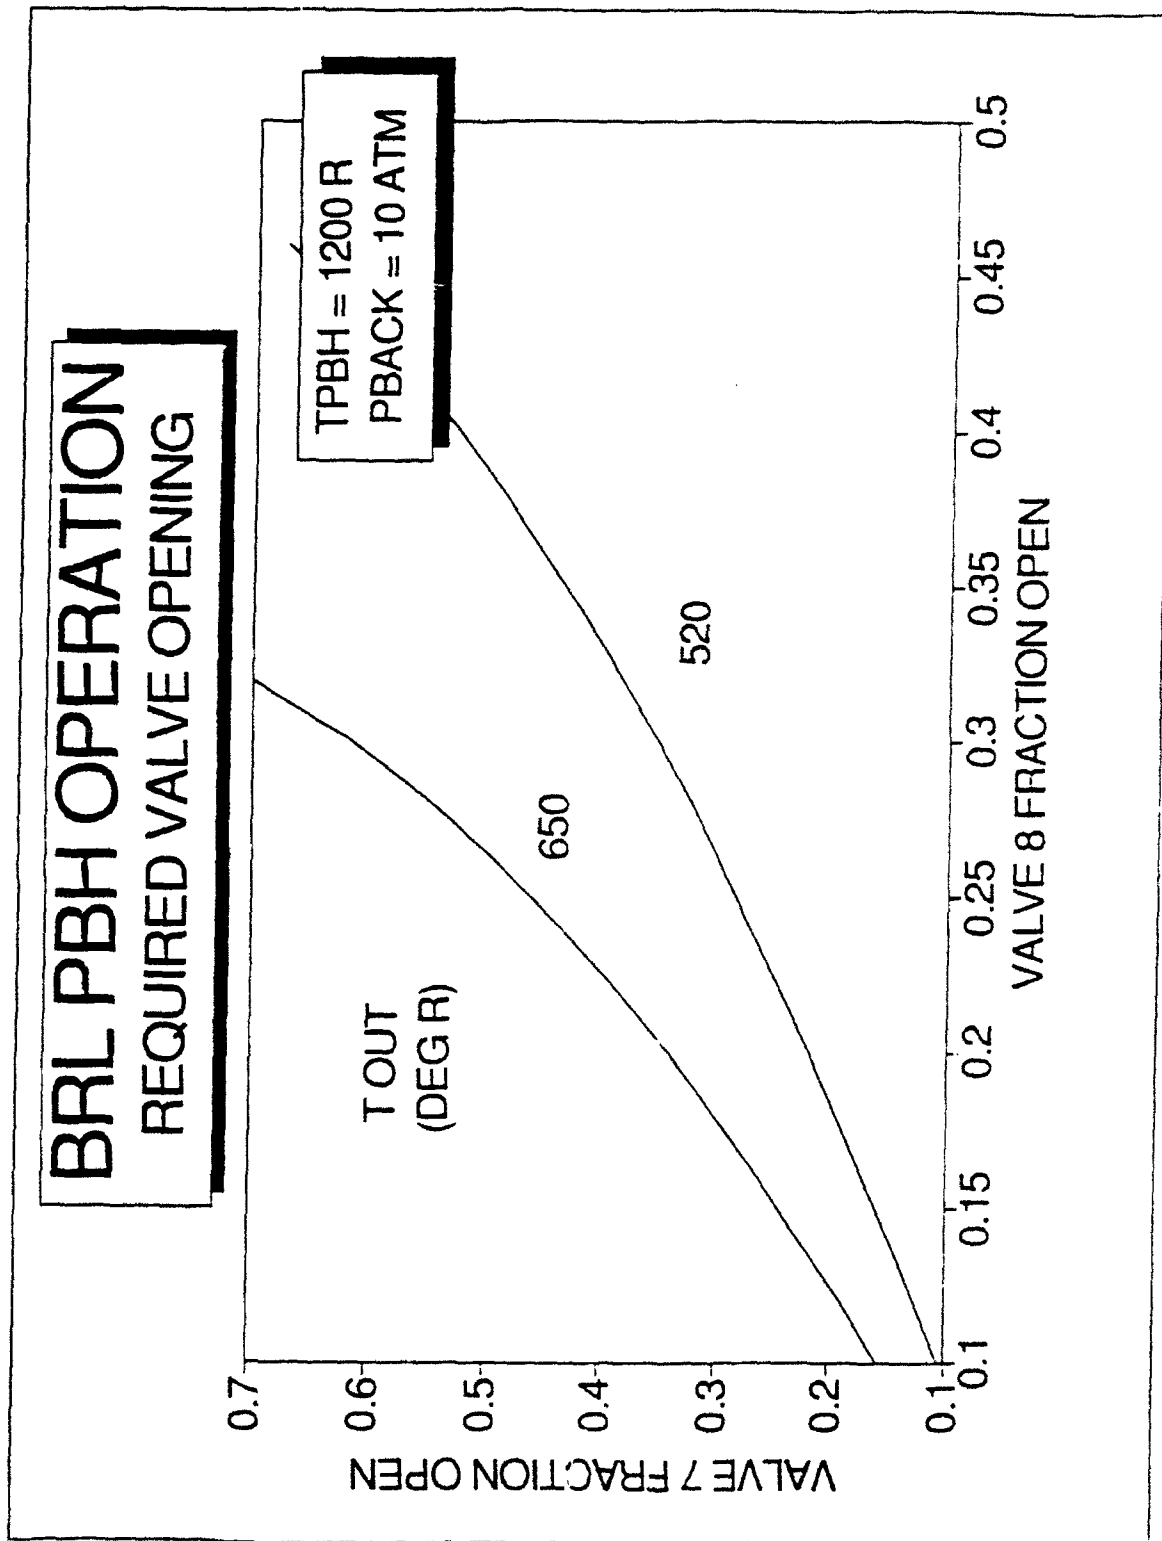


Figure 9. BRL PBH operation required valve opening, $TPBH = 1200 R$, $PBACK = 10 ATM$.

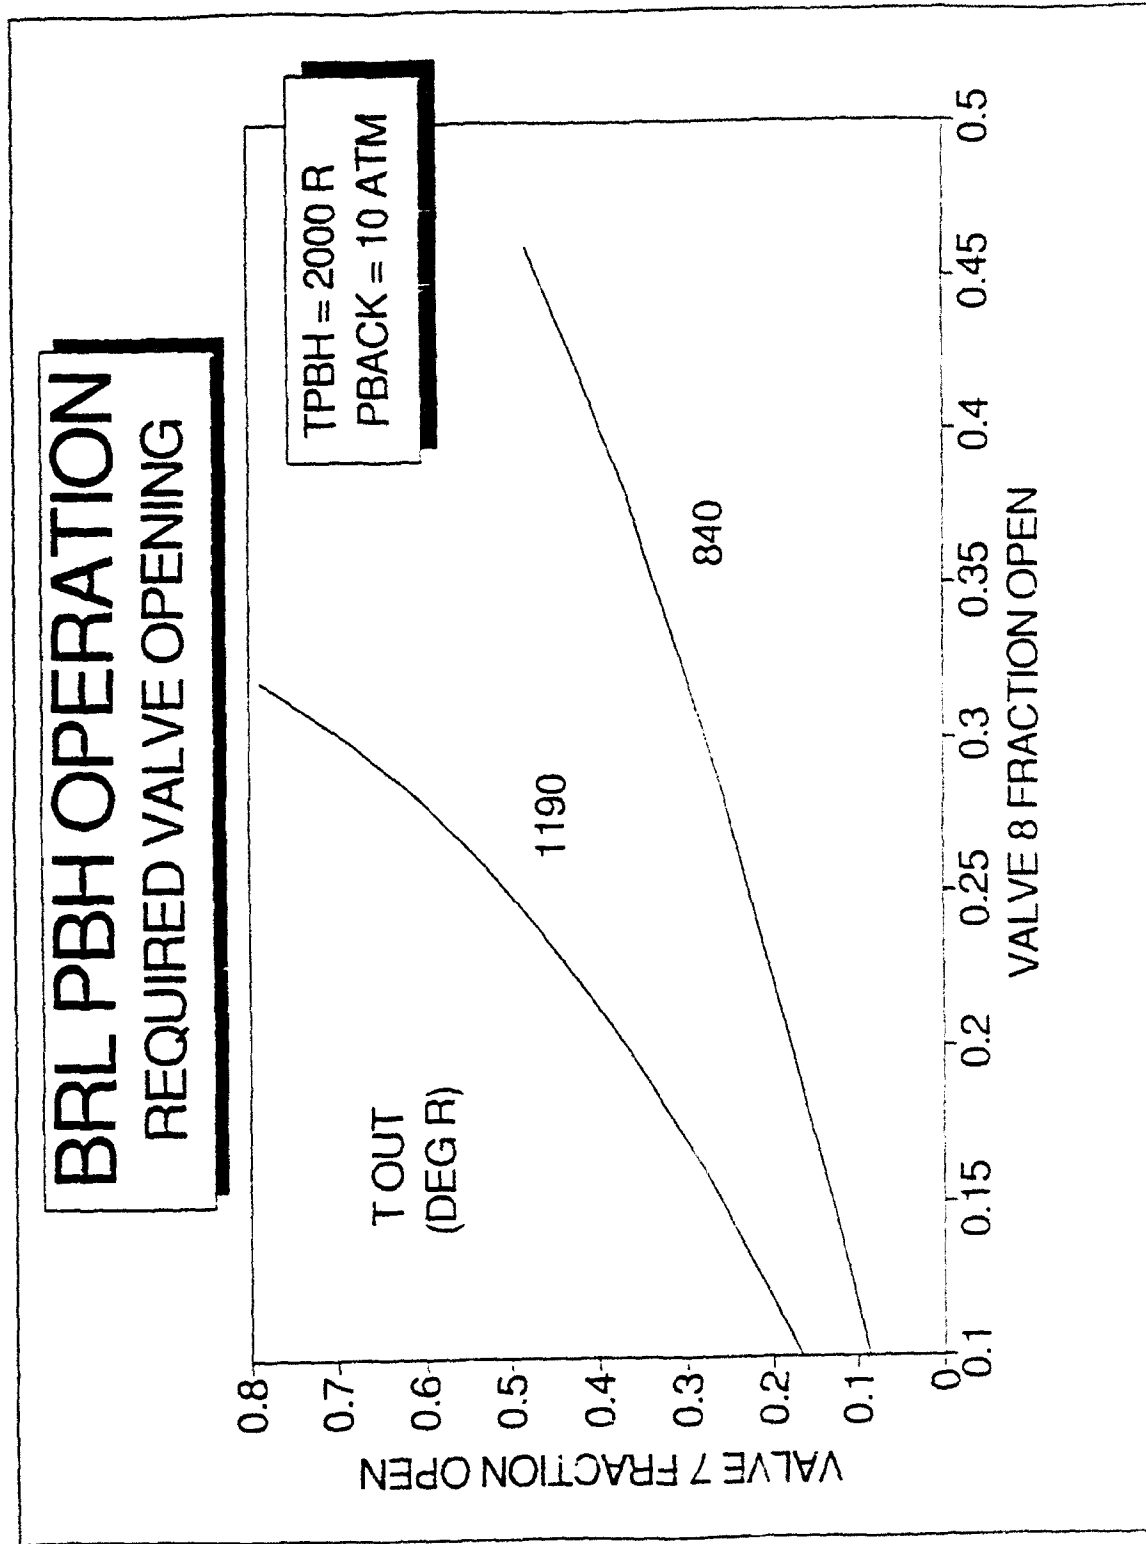


Figure 10. BRL PBH operation required valve opening, TPBH = 2000 R, PBACK = 10 ATM.

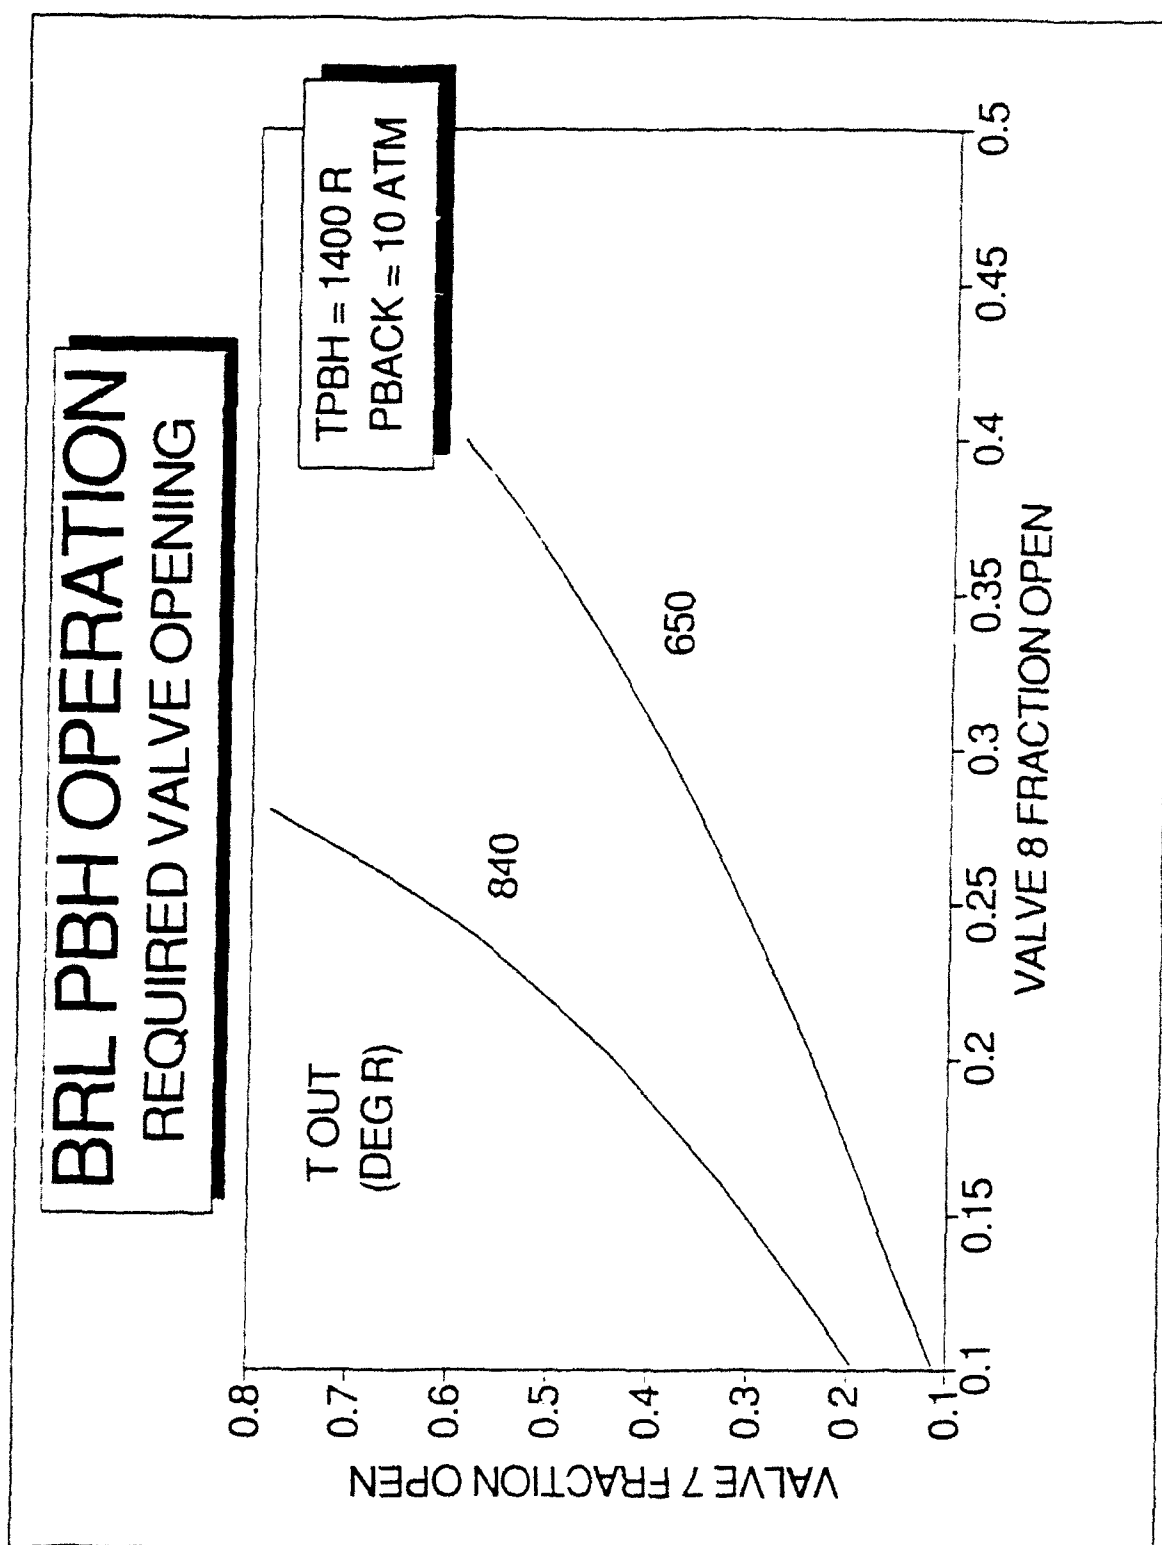


Figure 11. BRL PBH operation required valve opening, TPBH = 1400 R, PBACK = 10 ATM.

4. CONTROL SYSTEM DYNAMIC ANALYSIS

A dynamic model of the valve operation and control system was developed to assess automatic valve performance.

4.1 Model

Once the primary valve has been set, the mass flow rate through the bypass valve is

$$\dot{m}_b = MFR \frac{x(t)}{L} \quad \text{EQ (18)}$$

where MFR = mass flowrate with the valve fully open (back pressure dependent).

The valve seat is positioned by a spring loaded pneumatically actuated piston. Modern globe valves are fast acting and highly damped so the actuator is modeled as a damped spring mass system. The force balance equation for the pneumatic actuator is

$$m\ddot{x} + f\dot{x} + kx = F(t) \quad \text{EQ (19)}$$

Defining a valve position forcing function as

$$X_r(t) = \frac{F(t)}{k} \quad \text{EQ (20)}$$

and defining the following constants

$$\omega_n = \sqrt{\frac{k}{m}} \quad \text{EQ (21)}$$

$$\zeta = \frac{f}{2\sqrt{km}} \quad \text{EQ (22)}$$

Equation 19 becomes

$$\ddot{x} + 2\zeta\omega_n\dot{x} + \omega_n^2 x = X_r(t) \omega_n^2 \quad \text{EQ (23)}$$

The Laplace transform of EQ 23 is

$$x(s) = \frac{X_r(s) \omega_n^2 + (s + 2\zeta\omega_n)x(0)}{s^2 + 2\zeta\omega_n s + \omega_n^2} = \left(X_r(s) + \frac{(s + 2\zeta\omega_n)x(0)}{\omega_n^2} \right) G(s) \quad \text{EQ (24)}$$

where $X_r(s)$ is the transformed valve position forcing function, $x(0)$ is the valve actuator initial position determined from Figures 4 to 7 and

$$G(s) = \frac{\omega_n^2}{s^2 + 2\zeta\omega_n s + \omega_n^2} \quad \text{EQ (25)}$$

Since pumping time (minutes) is long compared to the valve response time (~ seconds) and valve damping is high, a proportional control system was selected. Setting the actuator forcing function proportional to the difference between the measured output temperature and the control or setpoint temperature

$$X_r = K (T - T_c) \quad \text{EQ (26)}$$

Substituting (EQ 18) into (EQ 3) gives

$$T = T_{PB} - \frac{MFR}{\dot{m}_T L} T_R x(t) \quad \text{EQ (27)}$$

Taking the Laplace transforms of (EQ 26) and (EQ 27) and combining with (EQ 24) gives

$$T(s) = T_{PB}(s) - \left(\frac{MFR}{\dot{m}_T L} T_R \right) G(s) \left[K(T(s) - T_c(s)) + \frac{(s + 2\zeta\omega_n)x(0)}{\omega_n^2} \right] \quad \text{EQ (28)}$$

or

$$T(s) = T_{PB}(s) + K_1 G(s) \left[T_c(s) - T(s) - \frac{(s + 2\zeta\omega_n)x(0)}{K\omega_n^2} \right] \quad \text{EQ (29)}$$

where the nondimensional

$$K_1 = K \frac{MFR}{\dot{m}_T L} T_R \quad \text{EQ (30)}$$

Solving for $T(s)$ in (EQ 29) gives

$$T(s) = \frac{T_{PB}(s) + K_1 G(s) T_c(s)}{1 + K_1 G(s)} - \frac{K_1 (s + 2\zeta\omega_n) x(0) G(s)}{K\omega_n^2 (1 + K_1 G(s))} \quad \text{EQ (31)}$$

Because T_c (the setpoint temperature) is a constant value, the Laplace transform is

$$T_c(s) = \frac{T_c}{s} \quad \text{EQ (32)}$$

The temperature of the outlet gas of the PBH (primary flow), T_{PB} , entering the thermal mixer can also be considered a constant because

1. This temperature will be maintained at a nearly constant value until the pebble-bed temperature at the end (bottom) of the pebble-bed starts dropping. This typically would occur when approximately 80 % of the process flow has been used.
2. During the last 20% of the flow period, the gas temperature at the outlet will decrease slowly compared to the response rate of the control valves.

Thus, the Laplace transform of T_{PB} is

$$T_{PB}(s) = \frac{T_{PB}}{s} \quad \text{EQ (33)}$$

Substituting (EQ 32) and (EQ 33) into (EQ 31) gives

$$T(s) = \frac{1}{s} \left(\frac{T_{PB} + K_1 T_c G(s)}{1 + K_1 G(s)} \right) - \frac{K_1 (s + 2\zeta\omega_n) x(0) G(s)}{K\omega_n^2 (1 + K_1 G(s))} \quad \text{EQ (34)}$$

and taking the inverse transform of (EQ 34) gives

$$T(t) = \frac{T_{PB} + K_1 T_c}{1 + K_1} + \left[\frac{K_1 (T_{PB} - T_c)}{1 + K_1} - \frac{K_1}{K} x(0) \right] * e^{-\zeta\omega_n t} \left(\cos(\omega_n t \sqrt{1 + K_1 - \zeta^2}) + \frac{\zeta}{\sqrt{1 + K_1 - \zeta^2}} \sin(\omega_n t \sqrt{1 + K_1 - \zeta^2}) \right) \quad \text{EQ (35)}$$

High gain ($K_1 \gg 1$) is required to result in the steady state value of T approaching T_c . Inspection of EQ 35 indicates that for T_{PB} of the order of 2000°R and T_c of the order of 1000 °R, K_1 must be of the order of 50 to achieve controlled mixed gas temperatures within 5 percent of the desired temperature T_c .

The resulting solution for valve position (from EQ 27) becomes

$$\frac{x(t)}{L} = \frac{\dot{m}_T}{MFR T_R} \frac{K_1 (T_{PB} - T_c)}{1 + K_1} * \left[1 - \left(1 - K_2 \frac{x(0)}{L} \right) e^{-\omega_n \zeta t} \left(\cos(\omega_n t \sqrt{1 + K_1 - \zeta^2}) + \frac{\zeta}{\sqrt{1 + K_1 - \zeta^2}} \sin(\omega_n t \sqrt{1 + K_1 - \zeta^2}) \right) \right] \text{EQ (36)}$$

where the nondimensional

$$K_2 = \frac{L}{K} \frac{1 + K_1}{T_{PB} - T_c}$$

4.2 Calculations

Example calculations were made to demonstrate valve performance using the following characteristics from Valtek literature:

$$\begin{aligned} \omega_n &= \text{spring cylinder actuator natural frequency} \approx 2.5 \text{ cps} \\ \zeta &= \text{damping ratio} \approx 0.7 \end{aligned}$$

Selecting an initial position of the primary valve as 70 percent open, the peak design condition of 2000 °R and 129 atm back pressure, an initial valve position of half open and a K_1 of 50, the setpoint temperature is achieved in less than a quarter of a second (Figure 13). Note that the valve motion is minimal due to the excellent choice of initial position; Figure 14 provides a better view of the motion by changing the scale of the ordinate.

PEBBLE BED HEATER VALVE RESPONSE

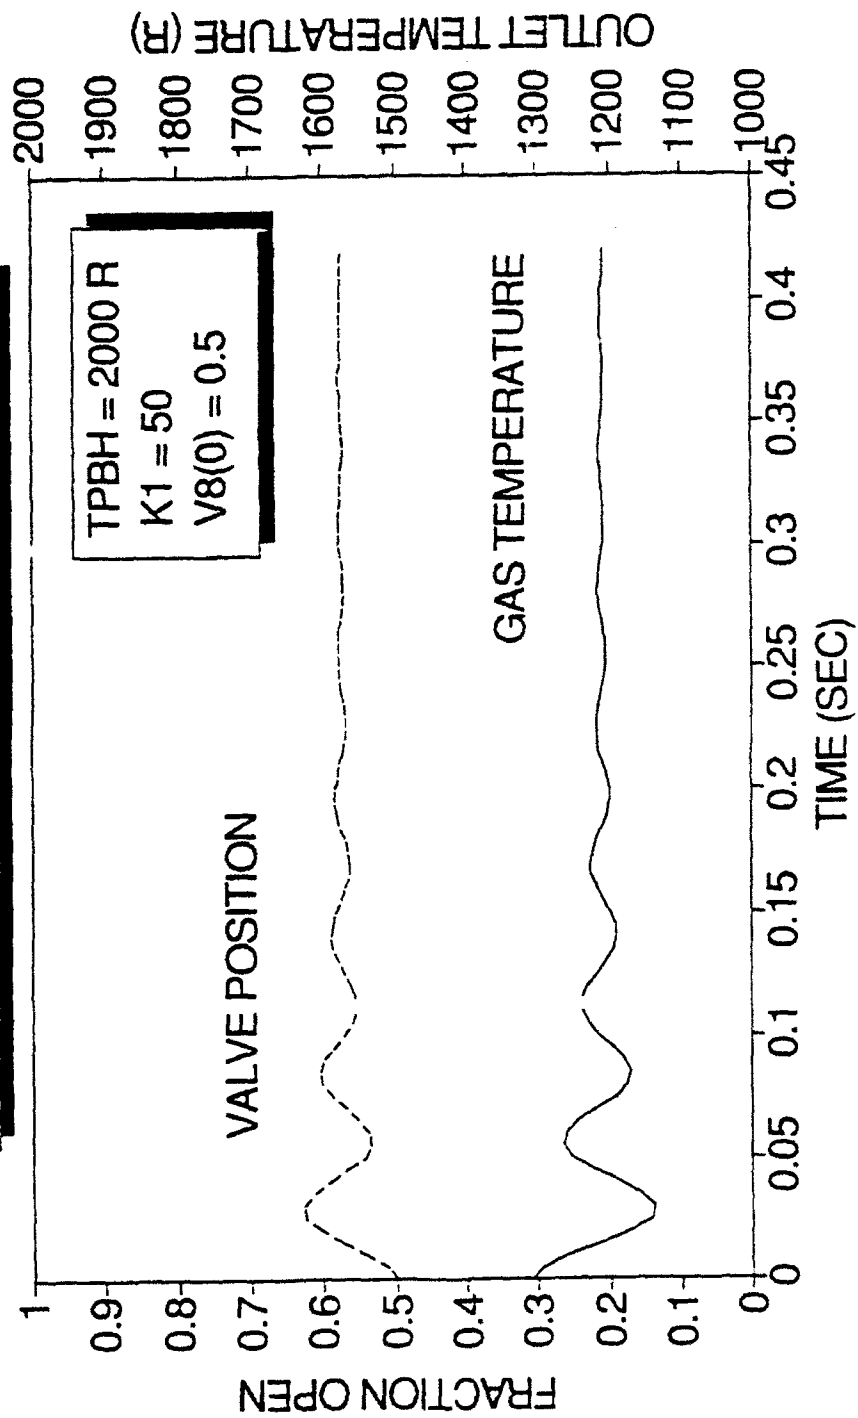


Figure 13. Pebble bed heater valve response.

PEBBLE BED HEATER VALVE RESPONSE

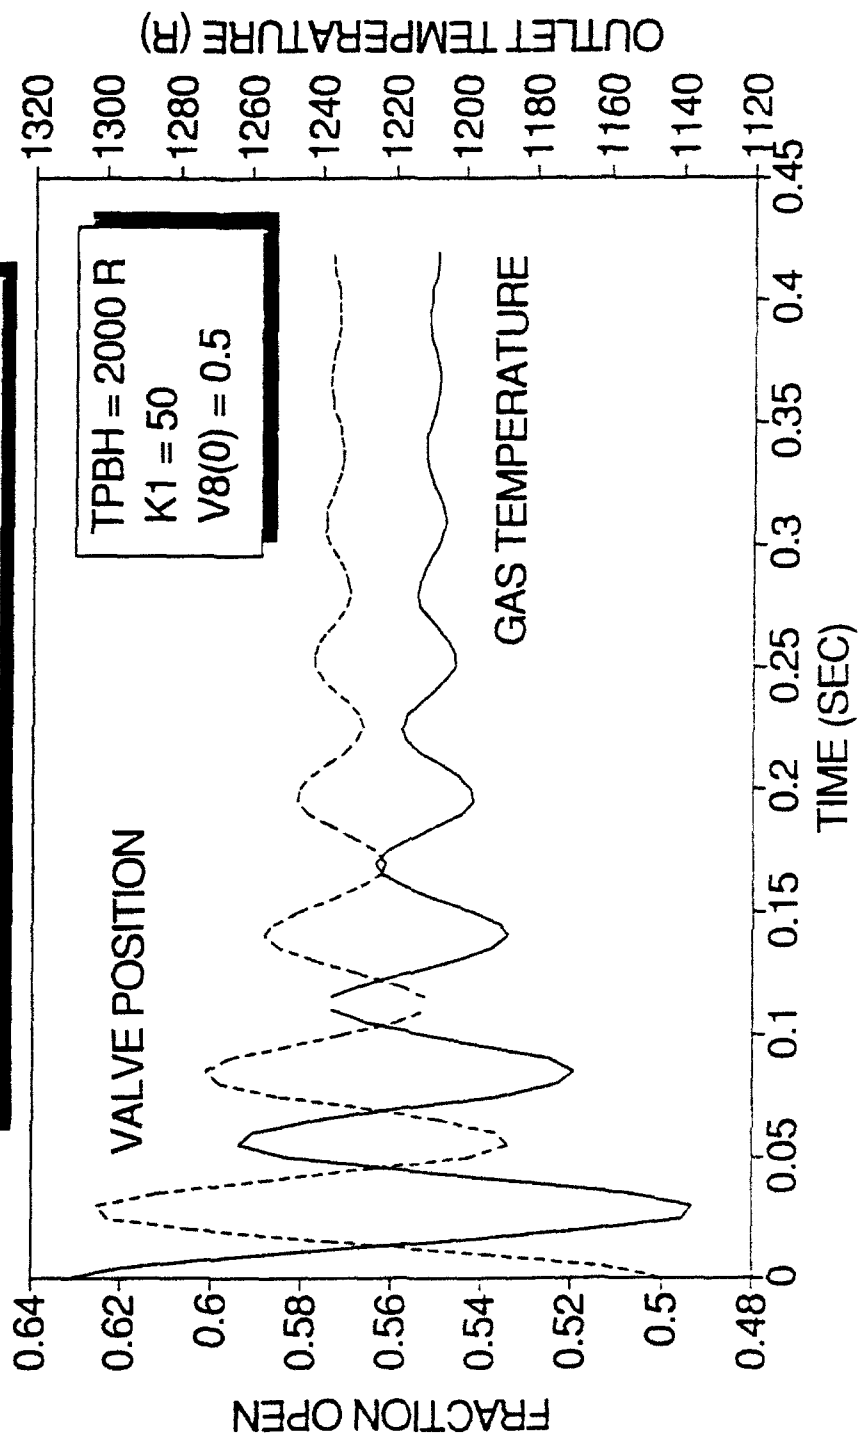


Figure 14. Pebble bed heater valve response.

5. Cost Estimate

Components of the control system are itemized in Table 2 along with a suggested vender and catalog prices. Unburdened hardware costs total \$56,000. The estimated price to procure, assemble, program, install and checkout the system is \$200,000. Including hardware purchases, the period of performance is expected to be six months.

BRL 1/6TH SCALE LBIS TESTBED CONTROL SYSTEM COSTS **DATA ACQUISITION/CONTROL AND PC COMPUTER COMPONENTS** **COMPLETE SYSTEM WITH AUTOMATION ON ALL SYSTEMS**

ITEM	QTY	UNIT	PART NUMBER	DESCRIPTION/SPECIFICATION	UNIT COST	EXT COST	VENDER
1	1	EA	WH-CH-7	WORKHORSE INDUSTRIAL CONTROL AND DATA ACQUISITION CHASS	750	750	METRABYTE CAT 24
2	1	EA	WH-CIB-PAR	WORKHORSE PARALLEL INTERFACE CARD	399	399	METRABYTE CAT 24
3	1	EA	WH-PCDB-ISO	WORKHORSE PC INTERFACE CARD	675	675	METRABYTE CAT 24
4	1	EA	WH-AIN-16	WORKHORSE 16 CHANNEL ANALOG INPUT CARD	795	795	METRABYTE CAT 24
5	1	EA	WH-P-40	WORKHORSE 10 TERMINAL FOR WH-AIN-16	50	50	METRABYTE CAT 24
6	3	EA	WH-TC-16	WORKHORSE 16 CHANNEL THERMOCOUPLE INPUT CARD	795	2385	METRABYTE CAT 24
7	3	EA	WH-P-40C-IC	WORKHORSE 10 TERMINAL FOR WH-TC-16	95	285	METRABYTE CAT 24
8	1	EA	WH-DIB-32	WORKHORSE 32 POINT LOW LEVEL DIGITAL I/O CARD	595	595	METRABYTE CAT 24
9	1	EA	WH-P-40	WORKHORSE 10 TERMINAL FOR WH-DIB-32	50	50	METRABYTE CAT 24
10	1	EA	WH-PWR-100/110	WORKHORSE SYSTEM POWER SUPPLY, 100 WATT, 110 VAC	750	750	METRABYTE CAT 24
11	200	FT	WH-CRO-200	INTERFACE CABLE FOR PC TO WORKHORSE, 200 FEET	1.75	350	METRABYTE CAT 24
12	1	EA	LTN 03/OPT REAL	LABTECH NOTEBOOK DATA ACQUISITION AND CONTROL SOFTWARE	1290	1290	METRABYTE CAT 24
13	1	EA	WH-DIAG	WORKHORSE DIAGNOSTIC CARD	375	375	METRABYTE CAT 24
14	1	EA	MDL 7810-14H	PC CHASSIS, 10 AT SLOTS, RACK MOUNT W/KEYBOARD DRAWER	1295	1295	INDUSTRIAL COMPUTER SOURCE CAT
15	1	EA	MDL SB386T/33-8ME	PC CARD, 80386DX CPU, 33 MHz, 8 MEGABYTES RAM	2995	2995	INDUSTRIAL COMPUTER SOURCE CAT
16	1	EA	MDL 80387-SS	80387 MATH CO-PROCESSOR CHIP	295	295	INDUSTRIAL COMPUTER SOURCE CAT
17	1	EA	MDL AT-200MB	PC HARD DISK DRIVE, 100 MEGABYTE, IDE	879	879	INDUSTRIAL COMPUTER SOURCE CAT
18	1	EA	MDL FD-1.2M	FLOPPY DRIVE, 5 1/4", 1.2 MEG	120	120	INDUSTRIAL COMPUTER SOURCE CAT
19	1	EA	MDL FD 1.4M	FLOPPY DRIVE, 3 1/2", 1.44 MEG	120	120	INDUSTRIAL COMPUTER SOURCE CAT
20	1	EA	MDL KB3	SMALL FOOTPRINT KEYBOARD, 101-KEY STYLE	150	150	INDUSTRIAL COMPUTER SOURCE CAT
21	1	EA	MDL TB-150AT	TAPE BACKUP SYSTEM, 150 MBYTE, INTERNAL	1249	1249	INDUSTRIAL COMPUTER SOURCE CAT
22	1	EA	MDL VGA-1024I	SUPER VGA GRAPHICS BOARD	285	285	INDUSTRIAL COMPUTER SOURCE CAT
23	1	EA	MDL 6531-4D	NEC 2A MONITOR RACK MOUNT KIT	395	395	INDUSTRIAL COMPUTER SOURCE CAT
24	1	EA	NEC-4D	NEC 2A MONITOR	595	595	INDUSTRIAL COMPUTER SOURCE CAT
25	1	EA	MDL 800PM	UNINTERRUPTABLE POWER SUPPLY, RACK MOUNTED	1099	1099	INDUSTRIAL COMPUTER SOURCE CAT
26	1	EA	MDL 6531-PRC3	RACK MOUNT PRINTER DRAWER	350	350	INDUSTRIAL COMPUTER SOURCE CAT
27	1	EA	MDL 7500-FMK	PRINTER DRAWER SLIDES	75	75	INDUSTRIAL COMPUTER SOURCE CAT
28	1	EA	MDL MX-1180	PANASONIC DOT MATRIX PRINTER, 80 COL, 9 PIN	215	215	INDUSTRIAL COMPUTER SOURCE CAT
29	1	EA	MDL CABLE-PAR80	PRINTER CABLE	19	19	INDUSTRIAL COMPUTER SOURCE CAT
30	1	EA	A-LSOH2412LP	NEMA 4 ENCLOSURE, 30 X 24 X 12, FOR WORKHORSE SYSTEM	156	156	HOFFMAN ENCLOSURES CAT
31	1	EA	A-RAK30	RACK MOUNT KIT FOR ENCLOSURE	33	33	HOFFMAN ENCLOSURES CAT
32	1	EA	D-1.722524	NEMA 12 RACK MOUNT ENCLOSURE, 72 X 24 X 30, FOR PC	850	850	HOFFMAN ENCLOSURES CAT
33	1	EA	D-AHX30A1	ENCLOSURE HEAT EXCHANGER FOR WORKHORSE COOLING	400	400	HOFFMAN ENCLOSURES CAT

Table 2 Automatic Control System Components

BRL 1/6TH SCALE LBTS TESTBED CONTROL SYSTEM COSTS **CONTROL AND MANUAL VALVE COMPONENTS**

ITEM	QTY	UNIT	PART NUMBER MODEL NUMBER	DESCRIPTION/SPECIFICATION	UNIT COST	EXT COST	VENDOR
1	1	EA	V-1 MOD	CONVERT EXISTING VALVE FOR REMOTE ON/OFF CONTROL	760	760	AUTOMATED VALVE SYSTEMS
2	1	EA	V-3	LN GLOBE VALVE WITH ELECTRO-PNEUMATIC ON/OFF CONTROL, 1"	2796	2796	MASONEN ANDRESSER
3	1	EA	V-5	LN GLOBE VALVE WITH ELECTRO-PNEUMATIC ON/OFF CONTROL, 1"	2796	2796	MASONEN ANDRESSER
4	1	EA	V-6	LN GLOBE VALVE WITH ELECTRO-PNEUMATIC PROPORTIONAL CONT	5463	5463	MASONEN ANDRESSER
5	1	EA	V-7	LN GLOBE VALVE WITH ELECTRO-PNEUMATIC PROPORTIONAL CONT	5463	5463	MASONEN ANDRESSER
6	1	EA	V-8	LN GLOBE VALVE WITH ELECTRO-PNEUMATIC PROPORTIONAL CONT	5463	5463	MASONEN ANDRESSER
7	1	EA	V-10	AUX NITROGEN GAS VALVE, 3/4", MANUAL	375	375	CAPITAL WESTWARD
8	1	EA	V-11	CONTROL VALVE SUPPLY, HIGH PRESSURE, 3/4", MANUAL	375	375	CAPITAL WESTWARD
9	1	EA	V-12	CONTROL VALVE SUPPLY, LOW PRESSURE, 3/4", MANUAL	225	225	CAPITAL WESTWARD
10	1	EA	V-13	DRIVER DRAIN VALVE, 3/4", MANUAL	375	375	CAPITAL WESTWARD
11	2	EA	R-1	CONTROL VALVE PRESSURE REGULATOR, 3/4", MANUAL	570	1140	CIRCLE SEAL CONTROLS
12	250	FT	AUXNIT1	AUX NITROGEN SUPPLY TUBING, 3/8" OD	75	1875	TUBESALES
13	30	EA	AUXNIT2	AUX NITROGEN SUPPLY FITTINGS	75	225	LONG BEACH VALVE AND FITTING
14	6	EA	PGH-45L-100	PRESSURE GAGE FOR CONTROL VALVES, 0-100 PSIG	115	690	OMEGA CATALOG
15	0	EA			0	0	
16	0	EA			0	0	
17	0	EA			0	0	
18	0	EA			0	0	
19	0	EA			0	0	
20	0	EA			0	0	
TOTAL CONTROL VALVE SYSTEM COST					28011		

Table 2 (Cont'd)

BRL 1/6TH SCALE LBTS TESTBED CONTROL SYSTEM COSTS **INSTRUMENTATION AND MISCELLANEOUS COMPONENTS**

ITEM	QTY	UNIT	PART NUMBER	DESCRIPTION/SPECIFICATION	UNIT COST	EXT COST	VENDOR
1	1	EA	MODEL NUMBER	REMOTE ELECTRICAL RELAY STATUS DISPLAY PANEL	750	750	CUSTOM MADE
2	8	EA	PANEL-EPX01	LN TEMPERATURE SENSOR, 10 TO 425 K	85	680	OMEGA ENGINEERING
3	2	EA	CY7-SD7	LOW PRESSURE TRANSMITTER, 0-300 PSI	399	798	OMEGA ENGINEERING
4	2	EA	PX700-300GI	HIGH PRESSURE TRANSMITTER, 0-3000 PSIG	485	990	OMEGA ENGINEERING
5	2	EA	PX725-3KGI	AUX NITROGEN SUPPLY PRESSURE GAGE, 0-3000 PSIG	282	564	OMEGA ENGINEERING
6	2	EA	PGT-608-3000	PRESSURE SWITCH, 10-100 PSI	60	120	OMEGA ENGINEERING
7	2	EA	PSW-108	PRESSURE SWITCH, 500-3000 PSI	111	222	OMEGA ENGINEERING
8	2	EA	PSW-133	FLOW SWITCH, LOW PRESSURE	126	252	OMEGA ENGINEERING
9	2	EA	FSW-112R	FLOW SWITCH, HIGH PRESSURE	524	1048	OMEGA ENGINEERING
10	12	EA	FSW-108	TYPE K THERMOCOUPLE PROBES W/ NEMA 4 ENCLOSURE, 1/8" DIA	44	528	OMEGA ENGINEERING
11	500	FT	NB2-CASS-18U-12	TYPE K THERMOCOUPLE WIRE, SHIELDED, 20 AWG SOLID	0.32	160	OMEGA ENGINEERING
12	500	FT	EXPP-K-20-TW5H	24 AWG 6 PAIR SHIELDED INSTRUMENTATION CABLE	1.35	675	OMEGA ENGINEERING
13	8	EA	87F3658WF	NEMA 4 ENCLOSURE, 14 X 12 X 6	52	416	NEWARK ELECTRONICS
14	1	EA	90F9808	MISC ELECTRICAL CONNECTOR HARDWARE	250	250	NEWARK ELECTRONICS
15	1	EA	MISCELC0N1	MISC ELECTRICAL CABLE TRAYS AND FASTENERS	500	500	ENG ESTIMATE
16	1	EA	MISCELTRY1	MISC MECHANICAL HARDWARE	500	500	ENG ESTIMATE
17	0	EA	MISCHDWR1		0	0	
18	0	EA			0	0	
19	0	EA			0	0	
20	0	EA			0	0	
TOTAL INSTRUMENTATION AND MISC HARDWARE COST						8453	

Table 2 (Cont'd)

6. Summary

Conclusions and recommendations reached as result of this design study are summarized below.

6.1 Conclusions

- * An automated control system for the BRL 1/6th scale shock tube is feasible and practical using off the shelf hardware.
- * Globe valves of the type selected for valves 7 and 8 give positive control over the output gas temperature with reasonable valve actuator positions.
- * Driver gas backpressure has a small effect on control valve position based on the Pebble Bed Heater pressure drop model developed here.
- * The analytical models should be calibrated with test data for each design condition.

6.2 Recommendations

- * Assembly, programming, installation and checkout of an automated control system should begin immediately.
- * The time dependent driver gas filling model developed in Reference 2 should be coupled to the gas supply system quasi-steady and dynamic control models in a system simulation to develop detailed control strategies for each test condition. This simulation should be used to establish test procedures, train operators and analyze test data.
- * Pebble Bed Heater and mixer nozzle pressure drop data should be obtained for a variety of flow conditions and a more detailed model developed for use in the control system model.
- * A control system analysis should be performed for the existing valves which are being retrofitted for automatic control and the models should be calibrated with test data.

7. REFERENCES

1. Osofsky, I., Hove, D., Mason, G. and Tanaka, M., "Development of a Pebble-Bed Liquid Nitrogen Evaporator/Superheater for the BRL 1/6th Scale Large Blast/Thermal Simulator," LA-92-TR-001, SPARTA, Inc., January 1992.
2. Hove, D., and Osofsky, I., "An Analytical Model for the BRL Heated Driver Gas Supply System," Twelfth International Symposium on Military Applications of Blast Simulation, Perpignon, France, October 1992.
3. Mason, G. M., "Procedures for the Operation of the Driver Gas Fill System for the BRL 1/6th Scale LB/TS Test Facility," LA91-21-TR, SPARTA, Inc., December 1991.
4. VALTEK Brochures: Mark One Body Assembly, Linear Spring Cylinder Actuators and Beta Control Valve Positioners.
5. Blevins, R., Applied Fluid Dynamics Handbook, Van Nostrand Reinhold Company, 1984.

INTENTIONALLY LEFT BLANK.

Nomenclature

A	area
CV	valve characteristic
C_p	specific heat at constant pressure
d	diameter
f	friction factor
F	force
G	transfer function
h_v	heat of vaporization
L	actuator full travel
k	spring constant
K	gain constant
m	mass
N	number of units
Re	Reynolds number
s	transform variable
t	time
T	temperature
U	fluid velocity
x	position

Greek

ω_n	natural frequency
ζ	damping
ρ	density

Superscripts

$\cdot$	derivative wrt time
$\cdot \cdot$	second derivative wrt time

Subscripts

7	valve 7 or primary line
8	valve 8 or bypass line
PB	pebble bed
p	pipe
T	total
90	elbow
LN	liquid nitrogen
R	reference
C	control

INTENTIONALLY LEFT BLANK.

No. of Copies	Organization	No. of Copies	Organization
2	Administrator Defense Technical Info Center ATTN: DTIC-DDA Cameron Station Alexandria, VA 22304-6145	1	Commander U.S. Army Missile Command ATTN: AMSMI-RD-CS-R (DOC) Redstone Arsenal, AL 35898-5010
1	Commander U.S. Army Materiel Command ATTN: AMCAM 5001 Eisenhower Ave. Alexandria, VA 22333-0001	1	Commander U.S. Army Tank-Automotive Command ATTN: ASQNC-TAC-DIT (Technical Information Center) Warren, MI 48397-5000
1	Director U.S. Army Research Laboratory ATTN: AMSRL-OP-CI-AD, Tech Publishing 2800 Powder Mill Rd. Adelphi, MD 20783-1145	1	Director U.S. Army TRADOC Analysis Command ATTN: ATRC-WSR White Sands Missile Range, NM 88002-5502
1	Director U.S. Army Research Laboratory ATTN: AMSRL-OP-CI-AD, Records Management 2800 Powder Mill Rd. Adelphi, MD 20783-1145	1	Commandant U.S. Army Field Artillery School ATTN: ATSF-CSI Ft. Sill, OK 73503-5000
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-IMI-I Picatinny Arsenal, NJ 07806-5000	(Class. only) 1	Commandant U.S. Army Infantry School ATTN: ATSH-CD (Security Mgr.) Fort Benning, GA 31905-5660
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-TDC Picatinny Arsenal, NJ 07806-5000	(Unclass. only) 1	Commandant U.S. Army Infantry School ATTN: ATSH-CD-CSO-OR Fort Benning, GA 31905-5660
1	Director Benet Weapons Laboratory U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-CCB-TL Watervliet, NY 12189-4050	1	WL/MNOI Eglin AFB, FL 32542-5000
(Unclass. only) 1	Commander U.S. Army Rock Island Arsenal ATTN: SMCRI-IMC-RT/Technical Library Rock Island, IL 61299-5000		<u>Aberdeen Proving Ground</u>
1	Director U.S. Army Aviation Research and Technology Activity ATTN: SAVRT-R (Library) M/S 219-3 Ames Research Center Moffett Field, CA 94035-1000	2	Dir, USAMSAA ATTN: AMXSY-D AMXSY-MP, H. Cohen
		1	Cdr, USATECOM ATTN: AMSTE-TC
		1	Dir, ERDEC ATTN: SCBRD-RT
		1	Cdr, CBDA ATTN: AMSCB-CI
		1	Dir, USARL ATTN: AMSRL-SL-I
		10	Dir, USARL ATTN: AMSRL-OP-CI-B (Tech Lib)

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Director of Defense Research & Engineering ATTN: DD/TWP Washington, DC 20301	1	Director Defense Intelligence Agency ATTN: DT-2/Wpns & Sys Div Washington, DC 20301
1	Assistant Secretary of Defense (Atomic Energy) ATTN: Document Control Washington, DC 20301	1	Director National Security Agency ATTN: R15, E. F. Butala Ft. George G. Meade, MD 20755
1	Chairman Joint Chiefs of Staff ATTN: J-5, R&D Division Washington, DC 20301	7	Director Defense Nuclear Agency ATTN: CSTI, Technical Library DDIR DFSP NANS OPNA SPSD SPTD Washington, DC 20305
2	Deputy Chief of Staff for Operations and Plans ATTN: Technical Library Director of Chemical and Nuclear Operations Department of the Army Washington, DC 20310	3	Commander Field Command, DNA ATTN: FCPR FCTMOF NMHE Kirtland AFB, NM 87115
1	European Research Office USARDSG (UK) ATTN: Dr. R. Reichenbach Box 65 FPO New York 09510-1500	10	Central Intelligence Agency DIR/DB/Standard ATTN: GE-47 HQ (10 cps) Washington, DC 20505
1	Director Defense Advanced Research Projects Agency ATTN: Technical Library 3701 North Fairfax Drive Arlington, VA 22203-1714	2	Commander, USACECOM ATTN: AMSEL-RD AMSEL-RO-TPPO-P Fort Monmouth, NJ 07703-5301
2	Director Federal Emergency Management Agency ATTN: Public Relations Office Technical Library Washington, DC 20472	1	Commander, USACECOM R&D Technical Library ATTN: ASQNC-ELC-IS-L-R, Myer Center Fort Monmouth, NJ 07703-5000
1	Chairman DOD Explosives Safety Board Room 856-C Hoffman Bldg. 1 2461 Eisenhower Avenue Alexandria, VA 22331-0600	1	Director US Army Missile and Space Intelligence Center ATTN: AIAMS-YDL Redstone Arsenal, AL 35898-5500

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Commander US Army Foreign Science and Technology Center ATTN: Research & Data Branch 220 7th Street, NE Charlottesville, VA 22901-5396	1	Commander US Army Corps of Engineers Fort Worth District ATTN: CESWF-PM-J P.O. Box 17300 Fort Worth, Texas 76102-0300
1	Director US Army TRAC - Ft. Lee ATTN: ATRC-L, Mr. Cameron Fort Lee, VA 23801-6140	1	Commander US Army Research Office ATTN: SLCRO-D P.O. Box 12211 Research Triangle Park, NC 27709-2211
1	Director US Army Research Laboratory Materials Directorate ATTN: AMXMR-ATL Watertown, MA 02172-0001	3	Commander US Army Nuclear & Chemical Agency ATTN: ACTA-NAW MONA-WE Tech. Lib. 7500 Backlick Rd. Bldg. 2073 Springfield, VA 22150
2	Commander US Army Strategic Defense Command ATTN: CSSD-H-MPL, Tech Lib CSSD-H-XM, Dr. Davies P.O. Box 1500 Huntsville, AL 35807	1	Director HQ, TRAC RPD ATTN: ATRC-RPR, Radda Fort Monroe, VA 23651-5143
2	Commander US Army Natick Research and Development Center ATTN: AMDNA-D, Dr. D. Sieling STRNC-UE, J. Calligeros Natick, MA 01762	1	Director TRAC-WSMR ATTN: ATRC-WC, Kirby White Sands Missile Range, NM 88002-5502
1	Commander US Army Engineer Division ATTN: HNDED-FD P.O. Box 1500 Huntsville, AL 35807	1	Director TRAC-FLVN ATTN: ATRC Fort Leavenworth, KS 66027-5200
3	Commander US Army Corps of Engineers Waterways Experiment Station ATTN: CEWES-SS-R, J. Watt CEWES-SE-R, J. Ingram CEWES-TL, Tech Lib P.O. Box 631 Vicksburg, MS 39180-0631	1	Commander US Army Test & Evaluation Command Nuclear Effects Laboratory ATTN: STEWS-TE-NO, Dr. J. L. Meason P.O. Box 477 White Sands Missile Range, NM 88002
		2	Chief of Naval Operations Department of the Navy ATTN: OP-03EG OP-985F Washington, DC 20350

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Commander Naval Electronic Systems Command ATTN: PME 117-21A Washington, DC 20360	1	Commander (Code 533) Naval Weapons Center ATTN: Technical Library China Lake, CA 93555-6001
1	Commander Naval Sea Systems Command ATTN: Code SEA-62R Department of the Navy Washington, DC 20362-5101	1	Commander Naval Weapons Evaluation Fac ATTN: Document Control Kirtland AFB, NM 87117
2	Office of Naval Research ATTN: Dr. A. Faulstick, Code 23 (2cps) 800 N. Quincy Street Arlington, VA 22217	1	Commander Naval Research Laboratory ATTN: Code 2027, Technical Library Washington, DC 20375
1	Officer-in-Charge (Code L31) Civil Engineering Laboratory Naval Construction Battalion Center ATTN: Technical Library Port Hueneme, CA 93041	1	AL/LSCF ATTN: J. Levine Edwards AFB, CA 93523-5000
1	Commanding Officer (Code L51) Naval Civil Engineering Laboratory ATTN: J. Tancreto Port Hueneme, CA 93043-5003	1	OLAC PL/TSTL ATTN: D. Shiplett Edwards AFB, CA 93523-5000
1	Commander Dahlgren Division Naval Surface Warfare Center ATTN: Code E23, Library Dahlgren, VA 22448-5000	2	Air Force Armament Laboratory ATTN: AFATL/DOIL AFATL/DLYV Eglin AFB, FL 32542-5000
1	Commander David Taylor Research Center ATTN: Code 522, Tech Info Ctr Bethesda, MD 20084-5000	1	RADC (EMTLD/Docu Library) Griffiss AFB, NY 13441
1	Officer in Charge White Oak Warfare Center Detachment ATTN: Code E232, Technical Library 10901 New Hampshire Avenue Silver Spring, MD 20903-5000	3	Phillips Laboratory (AFWL) ATTN: NTE NTED NTES Kirtland AFB, NM 87117-6008
1	Commanding Officer White Oak Warfare Center ATTN: Code WA501, NNPO Silver Spring, MD 20902-5000	1	AFESC/RDCS ATTN: Paul Rosengren Tyndall AFB, FL 32403
		1	AFIT ATTN: Technical Library, Bldg. 640/B Wright-Patterson AFB, OH 45433
		1	AFIT/ENY ATTN: LTC Hasen, PhD Wright-Patterson AFB, OH 45433-6583

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	FTD/NIIS Wright-Patterson AFB, Ohio 45433	1	Director Sandia National Laboratories Livermore Laboratory ATTN: Doc Control for Tech Library P.O. Box 969 Livermore, CA 94550
1	Director Idaho National Engineering Laboratory ATTN: Spec Programs, J. Patton 2151 North Blvd, MS 2802 Idaho Falls, ID 83415	1	Director National Aeronautics and Space Administration ATTN: Scientific & Tech Info Fac P.O. Box 8757, BWI Airport Baltimore, MD 21240
2	Director Idaho National Engineering Laboratory EG&G Idaho Inc. ATTN: R. Guenzler, MS-3505 R. Holman, MS-3510 P.O. Box 1625 Idaho Falls, ID 83415	1	Director NASA-Langley Research Center ATTN: Technical Library Hampton, VA 23665
1	Director Lawrence Livermore National Laboratory ATTN: Dr. Allan Kuhl 5230 Pacific Concourse Drive, Suite 200 Los Angeles, CA 90045	1	Director NASA-Ames Research Center Applied Computational Aerodynamics Branch ATTN: Dr. T. Holtz, MS 202-14 Moffett Field, CA 94035
1	Director Lawrence Livermore National Laboratory ATTN: Tech Info Dept L-3 P.O. Box 808 Livermore, CA 94550	1	ADA Technologies, Inc. ATTN: James R. Butz Honeywell Center, Suite 110 304 Inverness Way South Englewood, CO 80112
2	Director Los Alamos National Laboratory ATTN: Th. Dowler, MS-F602 Doc Control for Reports Library P.O. Box 1663 Los Alamos, NM 87545	1	Alliant Techsystems, Inc. ATTN: Roger A. Rausch (MN48-3700) 7225 Northland Drive Brooklyn Park, MN 55428
3	Director Sandia National Laboratories ATTN: Doc Control 3141 C. Cameron, Div 6215 A. Chabai, Div 7112 P.O. Box 5800 Albuquerque, NM 87185-5800	2	Applied Research Associates, Inc. ATTN: J. Keefer N.H. Ethridge P.O. Box 548 Aberdeen, MD 21001
		1	Aerospace Corporation ATTN: Tech Info Services P.O. Box 92957 Los Angeles, CA 90009

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
3	Applied Research Associates, Inc. ATTN: R. L. Guice (3cps) 7114 West Jefferson Ave., Suite 305 Lakewood, CO 80235	1	Goodyear Aerospace Corporation ATTN: R. M. Brown, Bldg 1 Shelter Engineering Litchfield Park, AZ 85340
1	Black & Veatch, Engineers - Architects ATTN: H. D. Laverentz 1500 Meadow Lake Parkway Kansas City, MO 64114	4	Kaman AviDyne ATTN: R. Ruetenik (2 cps) S. Criscione R. Milligan 83 Second Avenue Northwest Industrial Park Burlington, MA 01830
1	The Boeing Company ATTN: Aerospace Library P.O. Box 3707 Seattle, WA 98124	3	Kaman Sciences Corporation ATTN: Library P. A. Ellis F. H. Shelton P.O. Box 7463 Colorado Springs, CO 80933-7463
1	California Research & Technology, Inc. ATTN: M. Rosenblatt 20943 Devonshire Street Chatsworth, CA 91311	2	Kaman-Sciences Corporation ATTN: DASIAC (2cps) P.O. Drawer 1479 816 State Street Santa Barbara, CA 93102-1479
1	Carpenter Research Corporation ATTN: H. Jerry Carpenter 27520 Hawthorne Blvd., Suite 263 P. O. Box 2490 Rolling Hills Estates, CA 90274	1	Ktech Corporation ATTN: Dr. E. Gaffney 901 Pennsylvania Ave., N.E. Albuquerque, NM 87111
1	Dynamics Technology, Inc. ATTN: D. T. Hove G. P. Mason 21311 Hawthorne Blvd., Suite 300 Torrance, CA 90503	1	Lockheed Missiles & Space Co. ATTN: J. J. Murphy, Dept. 81-11, Bldg. 154 P.O. Box 504 Sunnyvale, CA 94086
1	EATON Corporation Defense Valve & Actuator Div. ATTN: J. Wada 2338 Alaska Ave. El Segundo, CA 90245-4896	2	McDonnell Douglas Astronautics Corporation ATTN: Robert W. Halprin K.A. Heinly 5301 Bolsa Avenue Huntington Beach, CA 92647
2	FMC Corporation Advanced Systems Center ATTN: J. Drotleff C. Krebs, MDP95 Box 58123 2890 De La Cruz Blvd. Santa Clara, CA 95052	1	MDA Engineering, Inc. ATTN: Dr. Dale Anderson 500 East Border Street Suite 401 Arlington, TX 76010

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Orlando Technology, Inc. ATTN: D. Matuska 60 Second Street, Bldg. 5 Shalimar, FL 32579	1	Sparta, Inc. Los Angeles Operations ATTN: I. B. Osofsky 3440 Carson Street Torrance, CA 90505
2	Physics International Corporation P.O. Box 5010 San Leandro, CA 94577-0599	1	Sunburst Recovery, Inc. ATTN: Dr. C. Young P.O. Box 2129 Steamboat Springs, CO 80477
1	R&D Associates ATTN: G.P. Ganong P.O. Box 9377 Albuquerque, NM 87119	1	Sverdrup Technology, Inc. ATTN: R. F. Starr P. O. Box 884 Tullahoma, TN 37388
1	Science Applications International Corporation ATTN: J. Guest 2301 Yale Blvd. SE, Suite E Albuquerque, NM 87106	1	Sverdrup Technology, Inc. Sverdrup Corporation-AEDC ATTN: B. D. Heikkinen MS-900 Arnold Air Force Base, TN 37389-9998
1	Science Applications International Corporation ATTN: N. Sinha 501 Office Center Drive, Apt. 420 Ft. Washington, PA 19034-3211	3	SRI International ATTN: Dr. G. R. Abrahamson Dr. J. Gran Dr. B. Holmes 333 Ravenswood Avenue Menlo Park, CA 94025
1	Science Center Rockwell International Corporation ATTN: Dr. S. Chakravarthy Dr. D. Ota 1049 Camino Dos Rios P.O. Box 1085 Thousand Oaks, CA 91358	1	Texas Engineering Experiment Station ATTN: Dr. D. Anderson 301 Engineering Research Center College Station, TX 77843
2	S-CUBED A Division of Maxwell Laboratories, Inc. ATTN: C. E. Needham L. Kennedy 2501 Yale Blvd. SE Albuquerque, NM 87106	1	Thermal Science, Inc. ATTN: R. Feldman 2200 Cassens Dr. St. Louis, MO 63026
3	S-CUBED A Division of Maxwell Laboratories, Inc. ATTN: Technical Library R. Duff K. Pyatt PO Box 1620 La Jolla, CA 92037-1620	1	TRW Ballistic Missile Division ATTN: H. Korman. Mail Station 526/614 P.O. Box 1310 San Bernadino, CA 92402

DISTRIBUTION LIST

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Battelle ATTN: TACTEC Library, J. N. Higgins 505 King Avenue Columbus, OH 43201-2693	1	Stanford University ATTN: Dr. D. Bershader Durand Laboratory Stanford, CA 94305
1	California Institute of Technology ATTN: T. J. Ahrens 1201 E. California Blvd. Pasadena, CA 91109	1	State University of New York Mechanical & Aerospace Engineering ATTN: Dr. Peyman Givi Buffalo, NY 14260
2	Denver Research Institute ATTN: J. Wisotski Technical Library P.O. Box 10758 Denver, CO 80210		<u>Aberdeen Proving Ground</u>
1	Massachusetts Institute of Technology ATTN: Technical Library Cambridge, MA 02139	1	Cdr, USATECOM ATTN: AMSTE-TE-F, L. Teletski
		1	Cdr, USATHMA ATTN: AMXTH-TE
		1	Cdr, USACSTA ATTN: STECS-LI
1	University of Minnesota Army High Performance Computing Research Center ATTN: Dr. Tayfun E. Tezduyar 1100 Washington Ave. South Minneapolis, Minnesota 55415		
2	University of New Mexico New Mexico Engineering Research Institute (CERF) ATTN: Dr. J. Leigh Dr. R. Newell P.O. Box 25 Albuquerque, NM 87131		
1	Northrop University ATTN: Dr. F. B. Safford 5800 W. Arbor Vitae St. Los Angeles, CA 90045		
3	Southwest Research Institute ATTN: Dr. C. Anderson S. Mullin A. B. Wenzel P.O. Drawer 28255 San Antonio, TX 78228-0255		

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number ARL-CR-46 Date of Report April 1993
2. Date Report Received _____
3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)
(DO NOT STAPLE)

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

BUSINESS REPLY MAIL

FIRST CLASS PERMIT No 0001, APS, MD

Postage will be paid by addressee

Director
U.S. Army Research Laboratory
ATTN: AMSRL-OP-CI-B (Tech Lib)
Aberdeen Proving Ground, MD 21005-5066

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES