


AD-A264 979



2

ARMY RESEARCH LABORATORY



Time-Temperature Shift Factors for Gun Propellants

Robert J. Lieb
Michael G. Leadore

ARL-TR-131

May 1993

DTIC
ELECTE
MAY 27 1993
S A D

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

93 5 26 023

93-11880



NOTICES

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute indorsement of any commercial product.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson

1. AGENCY USE ONLY <i>(Leave blank)</i>	2. REPORT DATE May 1993	3. REPORT TYPE AND DATES COVERED Final Jun 92 - Oct 92	
4. TITLE AND SUBTITLE Time-Temperature Shift Factors for Gun Propellants		5. FUNDING NUMBERS PR: 1L161102AH43	
6. AUTHOR(S) Robert J. Lieb and Michael G. Leadore			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WT-PE Aberdeen Proving Ground, MD 21005-5066		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-OP-CI-B (Tech Lib) Aberdeen Proving Ground, MD 21005-5066		10. SPONSORING/MONITORING AGENCY REPORT NUMBER ARL-TR-131	
11. SUPPLEMENTARY NOTES			
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.		12b. DISTRIBUTION CODE	
13. ABSTRACT <i>(Maximum 200 words)</i> To estimate the response of gun propellants at higher rates than can be easily reached within the laboratory, stress relaxation measurements have been made in compression for single- (M14), double- (JA2), and triple-based (M30) propellants, as well as a nitramine composite (M43) gun propellant, over the temperature range of -40 to 60 degrees celcius. Master curves were generated and shift factors were calculated which were used to determine the time-temperature shift factors for each of the propellants over these temperatures.			
14. SUBJECT TERMS Mechanical response, propellants, bed, M30, JA2, M43, stress profile, relaxation		15. NUMBER OF PAGES 27	16. PRICE CODE
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT SAR

TABLE OF CONTENTS

	<u>Page</u>
LIST OF FIGURES	v
LIST OF TABLES	v
1. INTRODUCTION	1
2. EXPERIMENTAL PROCEDURE AND RESULTS	1
2.1 Description of the Tester and Procedure	1
2.2 Test Results	3
3. ANALYSIS	4
3.1 Master Curve Generation	4
3.2 Shift Factors	6
4. CONCLUSIONS	6
5. FUTURE STUDIES	9
6. REFERENCES	11
APPENDIX A Temperature Corrected Master Curves.....	13
DISTRIBUTION LIST	19

Accession For	
NTIS CR&I	<input checked="" type="checkbox"/>
DHC TAB	<input type="checkbox"/>
Unannounced Justification	<input type="checkbox"/>
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
1 Servohydraulic Stress Relaxation Tester	2
2 Log Relaxation Modulus vs Log Time for Each Propellant	4
3 JA2 Relaxation Data at 0°C (as in Figure 2) Showing Typical Scatter about Averaged Values	5
4 Illustration of the Method of Curve Shifting	5
5 Master Relaxation Curves without Temperature Correction for Each Propellant	7
6 Shift Factors Used to Generate the Uncorrected Master Relaxation Curves	8
7 Failure Modulus vs the SCJ Propellant Bed Response	9
A1 Master Relaxation Curves for Each Propellant	15
A2 Shift Factors Used to Generate the Master Relaxation Curves	16

LIST OF TABLES

<u>Table</u>	<u>Page</u>
1 Nominal Percent Composition of Propellants	3
2 Average Specimen Strain	3
3 Time-Temperature Equivalence	9
A1 Comparison of the Values of Log[A(T)] Used to Shift the Uncorrected and Temperature Corrected Relaxation Curves	17

INTENTIONALLY LEFT BLANK.

1. INTRODUCTION

The response of gun propellant to mechanical stress plays a critical role in the evolution of pressure during the ballistic cycle. Attempts to link the relationship between mechanical measurements performed in the lab and both gun performance and vulnerability have made considerable progress in the last year^{1, 2, 3}. Previous work has revealed that at low temperatures the change in magnitude of failure parameters measured on a single propellant grain correlated well with the change in magnitude of the explosive response of propellant beds upon impact with shaped charge jets^{2, 3}. However, the mechanical response measurements were performed at rates of about 100 s^{-1} whereas the rate of mechanical deformation during the jet interaction is estimated to be between 10^4 and 10^6 s^{-1} . A more accurate correlation might be obtained if the mechanical response of the material could be more closely determined at higher rates.

One method used to estimate mechanical responses of materials at rates outside the limits of available equipment is to employ the time-temperature superposition principle^{4, 5} and determine the shift factors for the material using relaxation measurements. These measurements were performed on four propellant types, a single- (M14), double- (JA2), and triple-based (M30) propellants, and a nitramine composite (M43) gun propellant. These propellants were chosen so that a broad range of propellant types would be represented. Since the temperature range of interest for guns is -40 to 60°C , and testing can be easily performed within this range, measurements were made between these temperatures.

From the shift factors measured here, failure parameters can be determined that more accurately correspond to the mechanical response at higher rates. This is accomplished by testing the propellant at appropriately lower temperature. For example, a shift in strain rate by a factor of 100 can be approximated by a temperature shift of -20°C for M14 propellant, as is shown in this report.

2. EXPERIMENTAL PROCEDURE AND RESULTS

2.1 Description of the Tester and Procedure. The propellant relaxation response was measured using a specially designed servohydraulic tester⁶, illustrated in Figure 1. The machine allows for compression measurements to be performed at rates of up to 1000 s^{-1} for a specimen with a nominal length of 1 cm. Compression is arrested when contact occurs between the impact bell and cone. Therefore, the amount of specimen compression can be adjusted by setting the anvil height. This contact not only stops the specimen compression, but it also shunts the force around the specimen. The nitrogen spring absorbs and spreads out in time the decelerating force of the ram. The force

applied to the specimen is measured using the gage inside the impact bell. During normal compressive response measurements, displacement is measured with a linear variable differential transformer (LVDT) in the actuator column and is corrected for machine stiffness.

The specimens were prepared from multiperforated gun propellant grains whose formulations are listed in Table 1. A typical 7-perforated specimen appears on the left hand side of Figure 1. Specimen preparation in the relaxation procedure began by cutting the sample with a diamond saw to a length of 1.00 cm. The ends were cut flat, parallel and perpendicular to the grain axis according to the specifications found in a proposed NATO draft STANAG entitled "Uniaxial Compressive Test," which is an updated version of the test entitled "Uniaxial Compressive Gun Propellant Test" found in CPIA Pub 21. Temperature conditioning was achieved by placing prepared grains inside the environmental chamber for a time at least twice that needed to reach thermal equilibrium (30 minutes in most cases). The specimen was then placed on the anvil and tested. This testing took place within the conditioning chamber, so no transfer was required and, therefore, no thermal disruption occurred.

The strain at which relaxation occurred was determined by the distance between the anvil and the force gage when the bell and cone surfaces were mated. That distance was determined by placing a lead specimen on the anvil and performing a compression. The percentage strain used in these tests

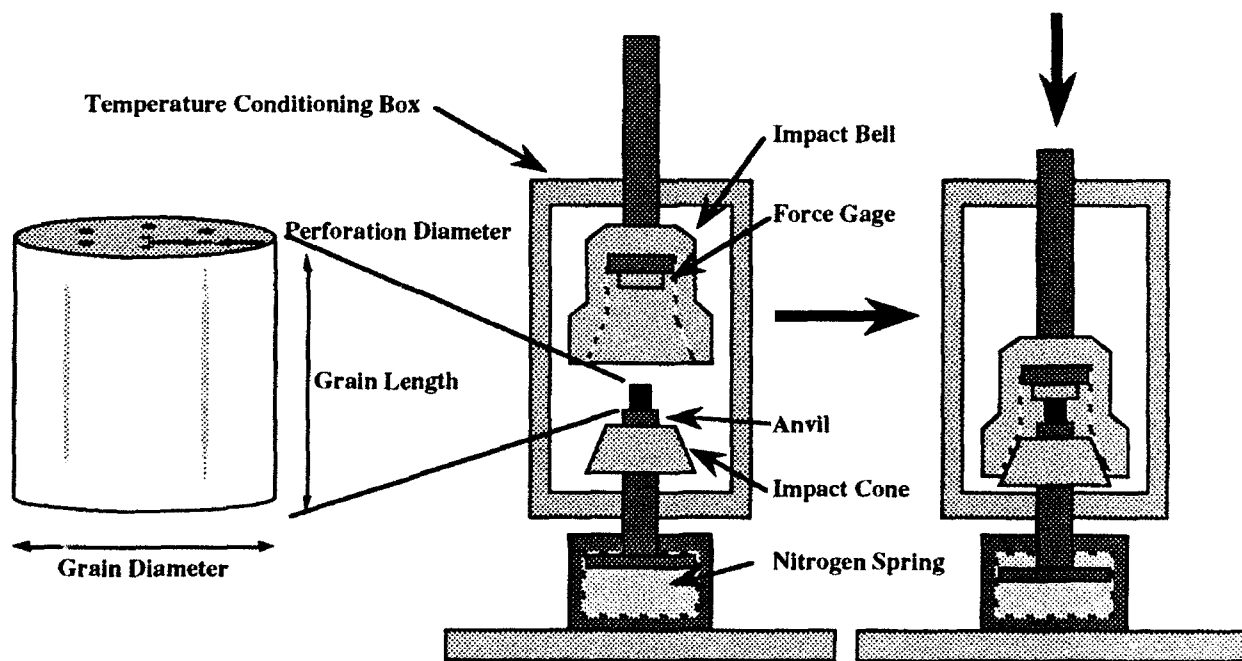


Figure 1. Servohydraulic Stress Relaxation Tester

Table 1. Nominal Percent Composition of Propellants

Component	M14	JA2	M30	M43
Nitrocellulose (NC)	89	59	28	4
NC Nitration Level	12.6	13.1	12.6	12.6
Nitroglycerin (NG)		15	22	
Nitroguanidine (NQ)			48	
Ethyl Centralite (EC)			2	
Diethylene Glycol Dinitrate		25		
Akardit II		1		
RDX (Ground)				76
Cellulose Acetate Butyrate				12
Plasticizer				8
DNT	8			
DBP	2			
DPA	1			

was based on previous mechanical response measurements, and was selected to keep the specimen strain below that at which failure was known to occur. Table 2 gives the average strain to which the propellants were taken during the relaxation measurements.

Once all the conditions for the test were set, the relaxation measurements were made at -40, -20, 0, 20, and 60°C (50°C for JA2). The specimen strain rate was chosen to be 1.00 s⁻¹. Data was acquired at a rate 100 points per second for about 40 seconds. Five repetitions were performed for each test condition.

2.2 Test Results. The modulus was calculated by dividing the force by the net area of the specimen to get the stress and then dividing the stress by the strain, determined as described above. A period equal to 10 times the period of compression was removed from the beginning of each relaxation curve to assure that no dynamic effects were in process when data was taken, e.g., four hundredths of a second is the time needed to compress a specimen to four percent. The five Relaxation Modulus-vs-Time curves were then averaged to produce a single curve for

Table 2. Average Specimen Strain

Propellant	Strain
M14	3 %
JA2	5 %
M30	5 %
M43	2 %

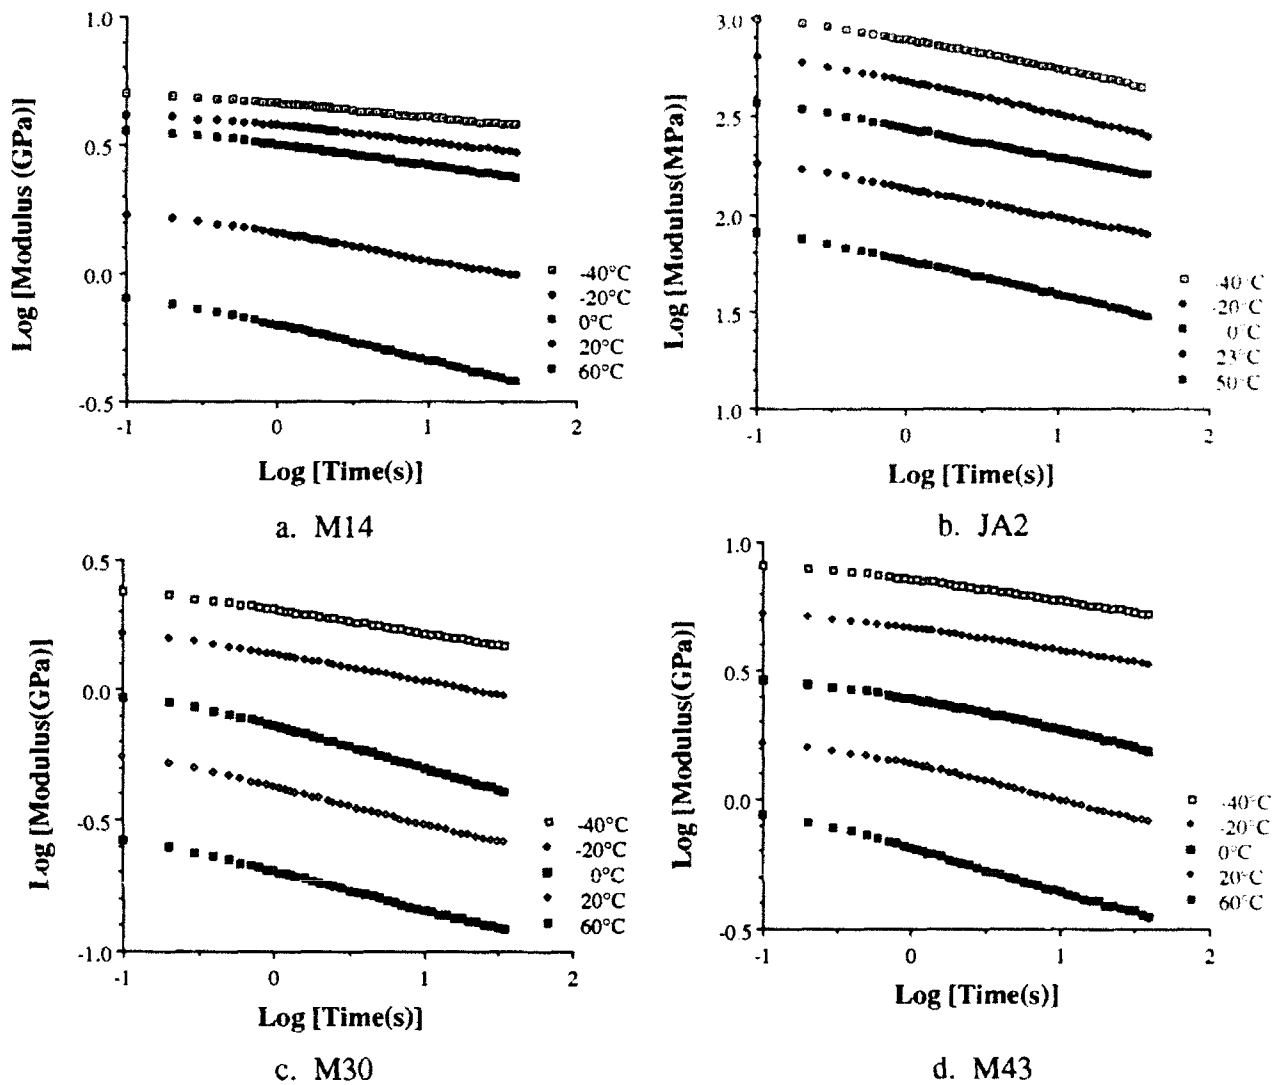


Figure 2. Log Relaxation Modulus vs Log Time for Each Propellant

each propellant at each temperature. These results appear in Figure 2 and are plotted in the usual log-log fashion. Figure 3 provides an example of scatter among data sets collected under the same conditions. All the sources of this scatter are not known. However, the largest source almost certainly arises from error in the strain measurement. At such low strains, small errors make large differences.

3. ANALYSIS

3.1 Master Curve Generation. A master curve was generated from each family of curves presented in Figure 2 by horizontally shifting each of the curves except one, the reference curve, to form a single curve on an expanded time axis. If the curves are to be used for the prediction of relaxation moduli or related phenomena at different rates, then temperature and density compensa-

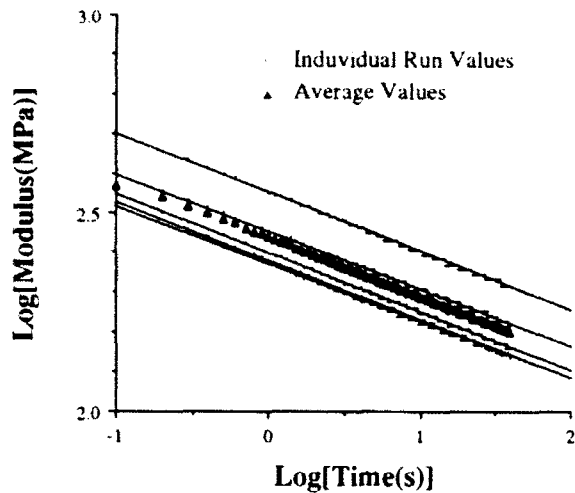


Figure 3. JA2 Relaxation Data at 0°C (as in Figure 2) Showing Typical Scatter about Averaged Values

temperatures used here are small. The amount that each of the curves is shifted can be used to establish the relationship between the temperature corresponding to that curve and the time (rate) with respect to the unshifted curve. Since this shift takes place on a log scale, the amount of shift corresponds to a rate factor.

The method used to shift the curves is illustrated in Figure 4 and is explained below. Each curve was shifted with respect to the curve closest to it in temperature. The best fit straight line was found for each curve on the Log-Log plots. An overlap region was identified between the two curves, as

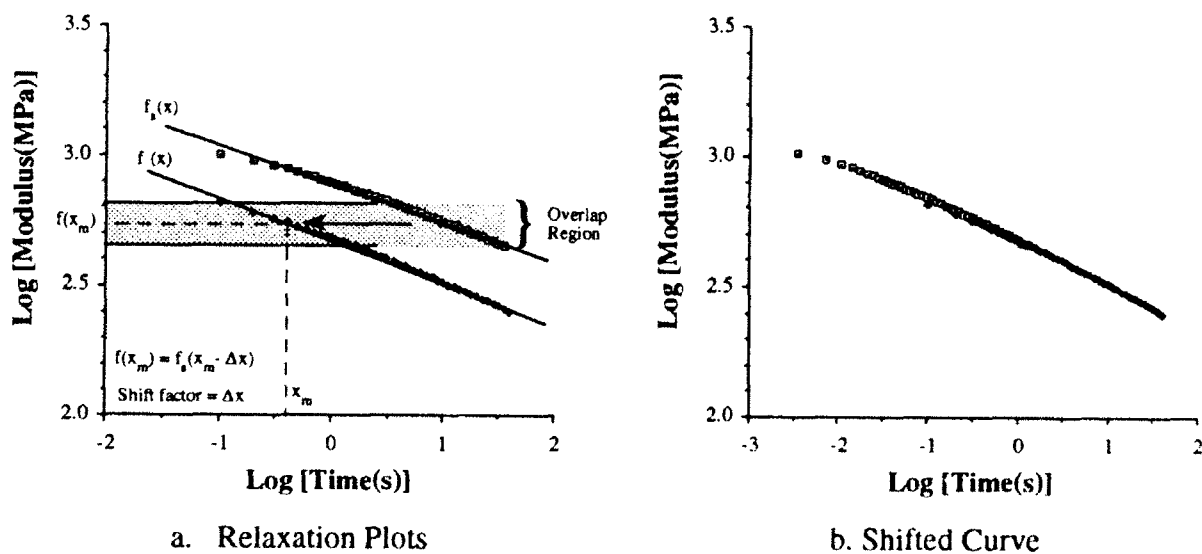


Figure 4. Illustration of the Method of Curve Shifting

tion are required^{4,5}, since the modulus and density of the material are a function of the temperature. However, the primary interest in these calculations is to know the temperature at which testing can be performed that would simulate higher rate conditions. For this latter purpose no temperature correction is required because the testing will occur at the lower temperature and the amount of shift has already accounted for moduli differences. Master curves for temperature compensated calculations appear in Appendix I. No compensation for density changes was made, since the differences in density at the

shown in Figure 4a. The midpoint of this region along the vertical axis was determined as $f(x_m)$. The shift, Δx , was then determined by solving the following equation:

$$f(x_m) = f_s(x_m - \Delta x). \quad (1)$$

If there was no curve overlap, as in some instances, the midpoint on the vertical axis between the extreme lower point of one curve and the extreme upper point of the other was used as $f(x_m)$. By shifting in this manner the shift factor is uniquely determined. The resulting combined curve is shown in Figure 4b. The advantages of this method are the definition of a unique shift factor, and the preservation of the nature of the overall curve fit, i.e., all curve segments are not forced to a single fit with the reference curve, but a relative fit with adjacent curves.

Master curves are presented in Figure 5. The master curves for M14 and M43 are fit best with a second order polynomial ($R^2 = 1.00$), which indicates multiple relaxation mechanisms are active that have different levels of activity as a function of temperature. The JA2 master curve is best fit with a linear equation ($R^2 = 0.999$) indicating that a single relaxation process dominates over the temperature range tested. The M30 master curve seems best fit with two linear curves indicating either a single mechanism operating in different material phases or two mechanisms one of which dominates at the lower temperatures (-40 to -20°C) and the other dominates at the higher (0 to 60°C). Note how the curve at 0°C nicely bridges the lower and higher temperature curves.

3.2 Shift Factors. The logarithm of the shift factors corresponding to the uncompensated master curves is plotted for each propellant in Figure 6. These plots indicate what temperature change is required in order to represent an equivalent rate change. Note that for M30 and M43 propellants the points are much better fit with a second order polynomial. Linear fits are used here to approximate the projected temperature-rate equivalence. Table 3 shows this information for each propellant, based on the linear least square fits shown. These numbers indicate that the mechanical response of materials undergoing high rates of deformation can be approximated by tests performed at lower rates and lower temperatures. Specific application of these results will be discussed in the *FUTURE STUDIES* section below.

4. CONCLUSIONS

Uniaxial stress relaxation measurements have been performed in compression on the four basic types of gun propellant. Single-, double-, and triple-based conventional propellant (M14, JA2, M30) and a nitramine composite (M43) were tested at -40, -20, 0, 20, and 60°C. The rate of compression



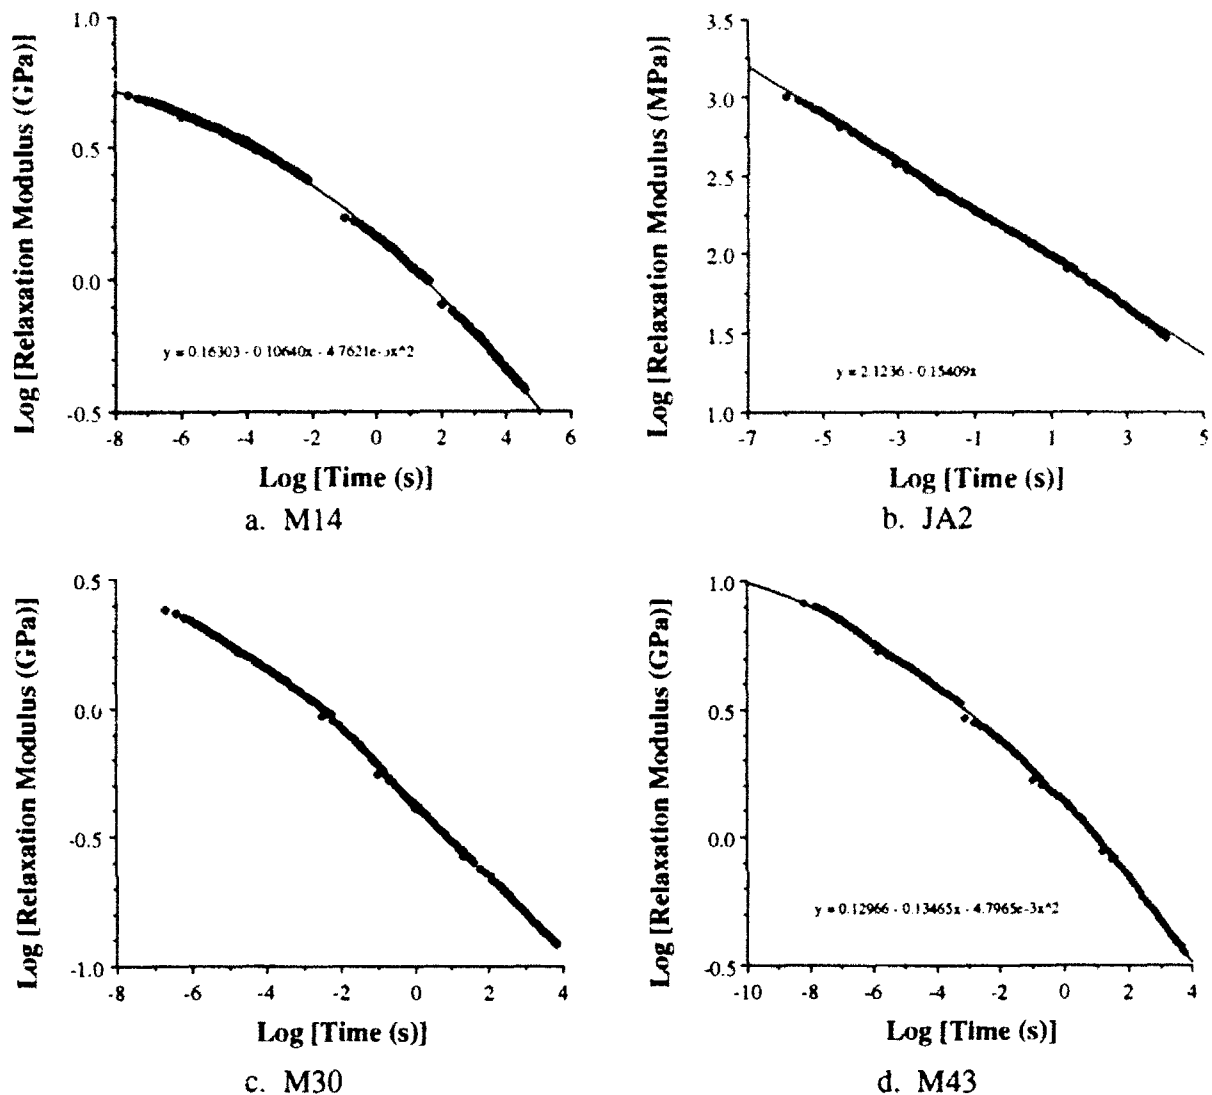


Figure 5. Master Relaxation Curves without Temperature Correction for Each Propellant


for these measurements was 1.00 s^{-1} . Master relaxation curves were generated and time-temperature shift factors were calculated. The single-based and nitramine composite propellant master curves showed a very good fit to a second order polynomial indicating multiple, competing relaxation processes. The double-based propellant master curve fit a linear curve very well indicating that a single mechanism dominates at this rate and over this temperature range. It is interesting to note that the temperature compensated master curve (discussed in Appendix I) and the uncompensated master curve closely overlap, but shift factors calculated using these curves differ significantly. The triple-based master curve showed two linear sections within the master curve indicating that different relaxation mechanisms dominate or that different phase states exist in the high (above 0°C) and the

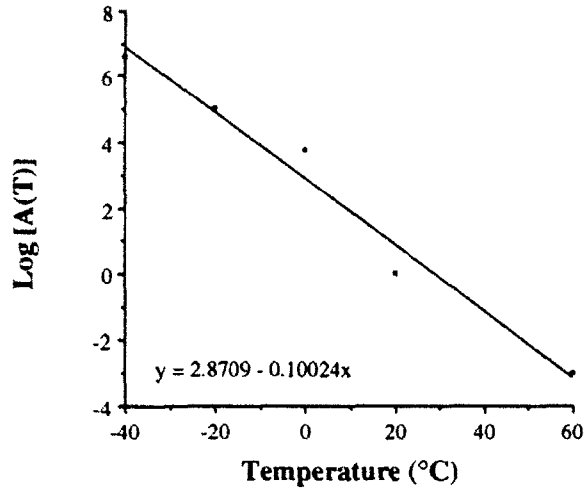


a. M14

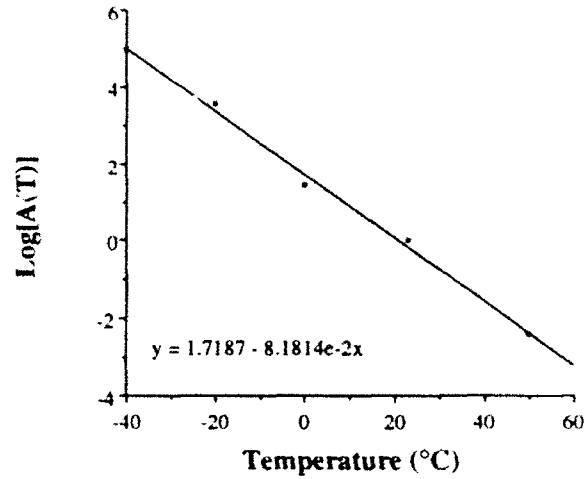

b. JA2

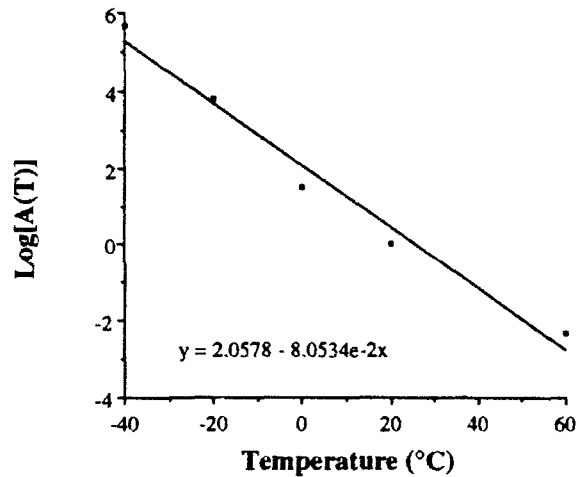

c. M30

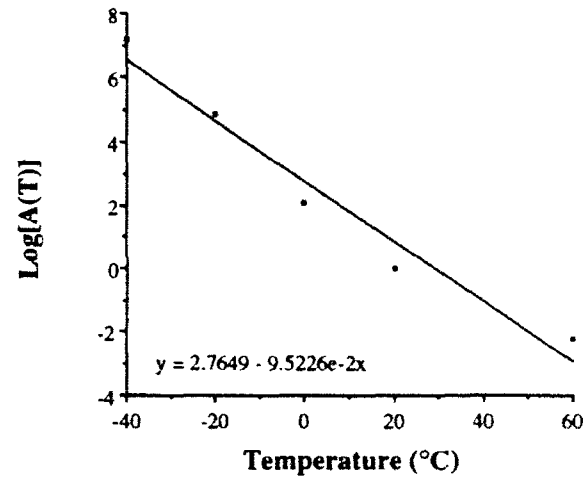

d. M43

Figure 6. Shift Factors Used to Generate the Uncorrected Master Relaxation Curves

low (below -20°C) temperature regions. The shift factors that generated these master curves showed that the propellants had similar time-temperature equivalence (within about 20%). However, the possibility of some propellant grouping exists, since the propellants that showed a good quadratic fit averaged lower temperature change per decade of rate change, whereas the propellants that showed more linear fitting showed a higher rate per decade. Presently, no assessment has been made as to the significance of this observation.

Propellant	Fit Slope (°C ⁻¹)	ΔT per Decade (°C per Decade)
M14	0.1002	9.98
JA2	0.0818	12.2
M30	0.0805	12.4
M43	0.0952	10.5

5. FUTURE STUDIES

In earlier studies^{2,3} a strong correlation was discovered between the change in the mechanical failure response of the propellants studied in this paper and the vulnerability response change that was measured when beds of these propellants were subjected to hypervelocity impact by a shaped charge jet (SCJ). Each propellant showed a similar trend between the failure parameter and impulse measurement, which indicated a SCJ response dependence on the mechanical failure mechanisms. However, there was no direct correlation between the values of the failure parameters and the impulse results among the propellants. Figure 7 shows the relationship between the two responses at lower temperatures. One possible reason for not being able to discover a direct correlation could be due to the rate differences experienced by the propellants in the mechanical properties and the hypervelocity impact procedures.

It is estimated that the rate of deformation of the propellant while being deformed by the jet is between 10^4 and 10^6 s⁻¹. The mechanical response measurements take place at 100 s⁻¹. The rate difference between the two processes corresponds to a factor between 10^2 and 10^4 . With the information generated in this report, each propellant could be tested at a temperature appropriately selected to reveal how well the mechanical response tracks with the vulnerability response when deformed under more equivalent conditions

Before the testing outlined above is performed, however, the equivalency of the response should be demonstrated as a check of the predictions and to see to what extent the equivalency of the response extends. This could be accomplished by measuring the mechanical response at temperature-rate combinations that are predicted to be equivalent over several decades of rate. A comparison of the response and parameters calculated from this response should reveal how well this application of time-temperature superposition will work.

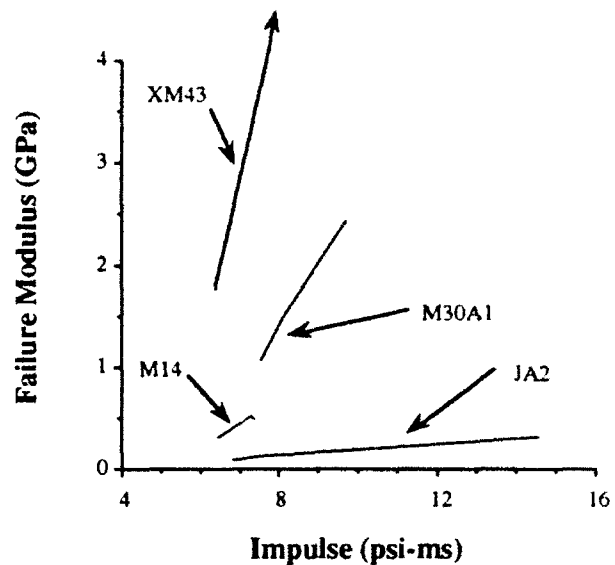


Figure 7. Failure Modulus vs the SCJ Propellant Bed Response

When the above work is completed, the information generated should help make the role that mechanical response plays in the area of vulnerability response clearer. Tests are now scheduled for these propellants and will be reported.

6. REFERENCES

1. G. A. Gazonas, A. Juhasz, and J. C. Ford, "Strain Rate Insensitivity of Damaged-Induced Surface Area in M30 and JA2 Gun Propellants," BRL-TR-3251, US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, August 1991.
2. P. Lu, B. Strauss, S. Moy, and R. Lieb. "Shaped Charge Jet Impact on Gun Propellants Study I- Temperature and Mechanical Properties Effects," 1991 Propulsion System Hazards Subcommittee Meeting, CPIA Publication 562, pp 517-531, March 1991.
3. R. J. Lieb, and M. G. Leadore, "Mechanical Failure Parameters in Gun Propellants," BRL-TR-3296, US Army Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, November 1991.
4. J. D. Ferry, Viscoelastic Properties of Polymers, Wiley, New York, 1961, pp 201-210.
5. J. J. Aklonis, W. J. MacKnight, and M. Shen, Introduction to Polymer Viscoelasticity, Wiley-Interscience, New York, 1972, pp 46-55.
6. G. A. Gazonas, "The Mechanical Response of M30, XM39, and JA2 Propellants at Strain Rates from 10^{-2} to 250 s^{-1} ." BRL-TR-3181, USA Ballistic Research Laboratory, Aberdeen Proving Ground, Maryland, January 1991.

INTENTIONALLY LEFT BLANK.


APPENDIX A

Temperature Corrected Master Curves


INTENTIONALLY LEFT BLANK.

The mechanical behavior of materials can be projected at higher or lower strain rates by shifting the relaxation curves that have been reported here through the procedure outlined in Section IV of this report. If these shifted curves are to be used to predict the response characteristics at the reference temperature, then temperature and density (ρ) corrections need to be made. Ferry⁴ states that to predict response characteristics at a temperature, T , other than the reference temperature, T_r , from a master curve, a shift of $\text{Log}(\rho T / \rho_r T_r)$ is required. Therefore, in order to construct a master curve from data taken at different temperatures, relaxation modulus values must be shifted vertically by $\text{Log}(\rho_r T_r / \rho T)$ before the separate pieces can be shifted horizontally to create the master curve.


Since density differences are very small, only the temperature corrections were made in the construction of the master curve at a reference temperature of 20°C. These curves for each propellant are shown in Figure A1, below. Note that the general shape of the curves has not changed from those found for the uncorrected master curves (Figure 4) presented earlier.

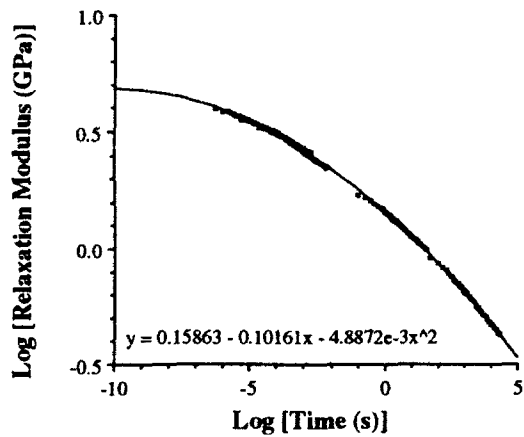


a. M14

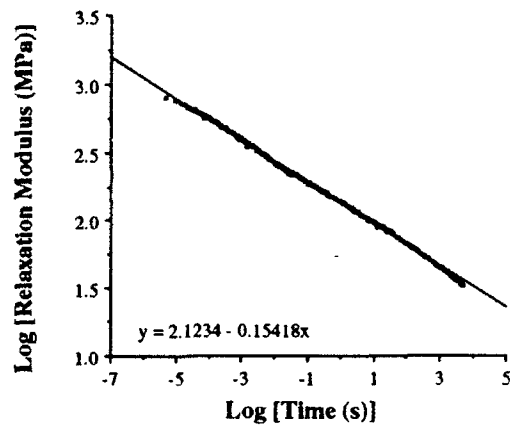

b. JA2

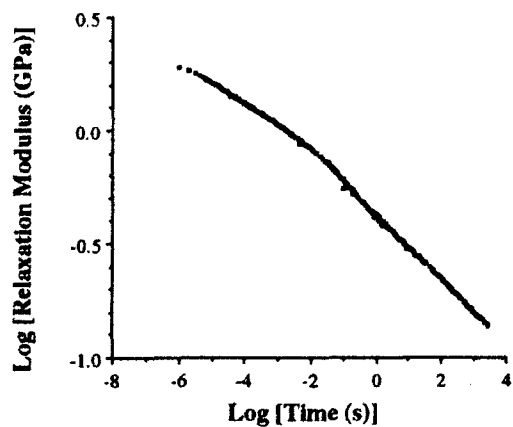


c. M30

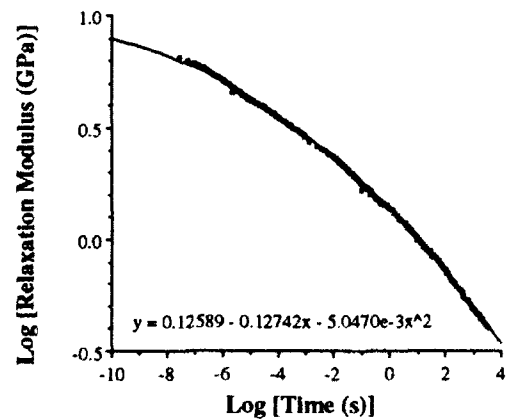


d. M43


Figure A1. Master Relaxation Curves for Each Propellant

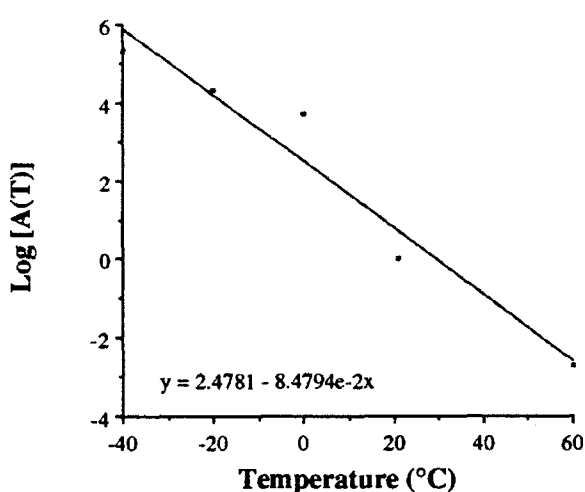


a. M14

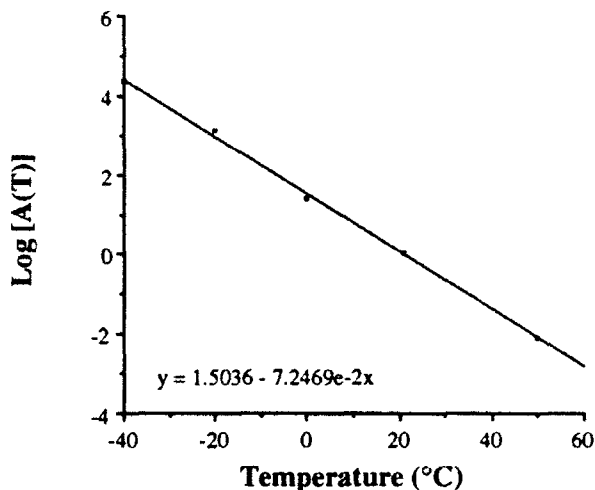

b. JA2

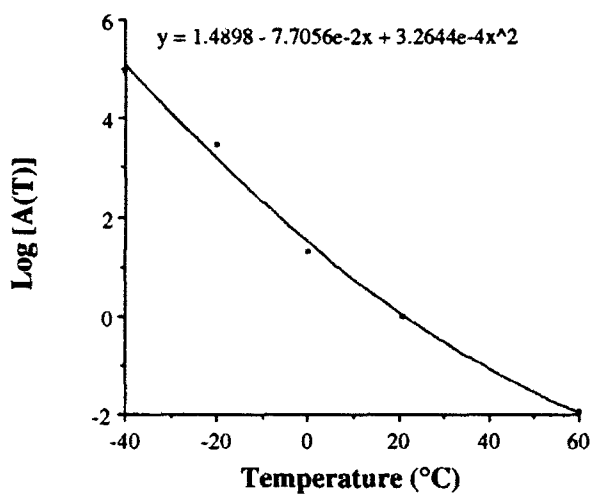

c. M30

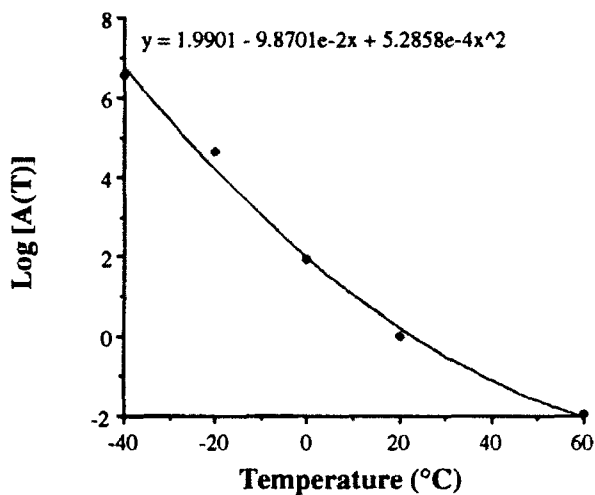

d. M43

Figure A2. Shift Factors Used to Generate the Master Relaxation Curves

It should be noted that the temperature correction shift is usually small, and is sometimes ignored when creating master curves. However, the degree to which this correction affects the value of $\text{Log}[A(T)]$ depends on the slope of the relaxation curve segments. The closer the slope is to zero, the more the value of the corrected $\text{Log}[A(T)]$ value is affected. Figure A2 shows the values of $\text{Log}[A(T)]$ plotted against temperature for each of the propellants. These values were calculated from the shifted curves. To provide a comparison of the values derived from the corrected and uncorrected relaxation curves, the values of $\text{Log}[A(T)]$ used to create both master curves are listed in Table A1 for each propellant.

Table A1. Comparison of the Values of Log[A(T)] Used to Shift the Uncorrected and Temperature Corrected Relaxation Curves

T (°C)	M14		JA2		M30		M43	
	Uncor.	Cor	Uncor.	Cor	Uncor.	Cor	Uncor.	Cor
-40	6.60	5.30	4.94	4.34	5.69	4.98	7.17	6.56
-20	5.00	4.31	3.55	3.13	3.79	3.45	4.86	4.62
0	3.75	3.70	1.45	1.36	1.51	1.31	2.09	1.92
20	0	0	0*	0*	0	0	0	0
60	-2.98	-2.70	-2.41*	-2.11*	-2.31	-1.94	-2.20	-1.95

* JA2 temperatures were -40°C, -20°C, 0°C, 23°C and 50°C

INTENTIONALLY LEFT BLANK.

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
2	Administrator Defense Technical Info Center ATTN: DTIC-DDA Cameron Station Alexandria, VA 22304-6145	1	Commander U.S. Army Missile Command ATTN: AMSMI-RD-CS-R (DOC) Redstone Arsenal, AL 35898-5010
1	Commander U.S. Army Materiel Command ATTN: AMCAM 5001 Eisenhower Ave. Alexandria, VA 22333-0001	1	Commander U.S. Army Tank-Automotive Command ATTN: ASQNC-TAC-DIT (Technical Information Center) Warren, MI 48397-5000
1	Director U.S. Army Research Laboratory ATTN: AMSRL-OP-CI-AD, Tech Publishing 2800 Powder Mill Rd. Adelphi, MD 20783-1145	1	Director U.S. Army TRADOC Analysis Command ATTN: ATRC-WSR White Sands Missile Range, NM 88002-5502
1	Director U.S. Army Research Laboratory ATTN: AMSRL-OP-CI-AD, Records Management 2800 Powder Mill Rd. Adelphi, MD 20783-1145	(Class. only) 1	Commandant U.S. Army Field Artillery School ATTN: ATSF-CSI Ft. Sill, OK 73503-5000
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-IMI-I Picatinny Arsenal, NJ 07806-5000	(Unclass. only) 1	Commandant U.S. Army Infantry School ATTN: ATSH-CD (Security Mgr.) Fort Benning, GA 31905-5660
2	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-TDC Picatinny Arsenal, NJ 07806-5000	1	WL/MNOI Eglin AFB, FL 32542-5000
1	Director Benet Weapons Laboratory U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-CCB-TL Watervliet, NY 12189-4050		<u>Aberdeen Proving Ground</u>
(Unclass. only) 1	Commander U.S. Army Rock Island Arsenal ATTN: SMCRI-IMC-RT/Technical Library Rock Island, IL 61299-5000	2	Dir USAMSAA ATTN: AMXSY-D AMXSY-MP, H. Cohen
1	Director U.S. Army Aviation Research and Technology Activity ATTN: SAVRT-R (Library) M/S 219-3 Ames Research Center Moffett Field, CA 94035-1000	1	Cdr, USATECOM ATTN: AMSTE-TC
		1	Dir, ERDEC ATTN: SCBRD-RT
		1	Cdr, CBDA ATTN: AMSCB-CI
		1	Dir, USARL ATTN: AMSRL-SL-I
		10	Dir, USARL ATTN: AMSRL-OP-CI-B (Tech Lib)

<u>No. of</u> <u>Copies</u>	<u>Organization</u>
1	Chairman DOD Explosives Safety Board Room 856-C Hoffman Bldg. 1 2461 Eisenhower Avenue Alexandria, VA 22331-0600
1	Headquarters U.S. Army Materiel Command ATTN: AMCICP-AD, M. Fisette 5001 Eisenhower Ave. Alexandria, VA 22333-0001
1	U.S. Army Ballistic Missile Defense Systems Command Advanced Technology Center P.O. Box 1500 Huntsville, AL 35807-3801
1	Department of the Army Office of the Product Manager 155mm Howitzer M109A6, Paladin ATTN: SFAE-AR-HIP-IP, Mr. R. De Kleine Picatinny Arsenal, NJ 07806-5000
3	Project Manager Advanced Field Artillery System ATTN: SFAE-ASM-AF-E LTC D. Ellis T. Kuriata J. Shields Picatinny Arsenal, NJ 07801-5000
1	Project Manager Advanced Field Artillery System ATTN: SFAE-ASM-AF-Q, W. Warren Picatinny Arsenal, NJ 07801-5000
2	Commander Production Base Modernization Agency U.S. Army Armament Research, Development, and Engineering Center ATTN: AMSMC-PBM, A. Siklosi AMSMC-PBM-E, L. Laibson Picatinny Arsenal, NJ 07806-5000

<u>No. of</u> <u>Copies</u>	<u>Organization</u>
4	PEO-Armaments Project Manager Tank Main Armament System ATTN: AMCPM-TMA AMCPM-TMA-105 AMCPM-TMA-120 AMCPM-TMA-AS, H. Yuen Picatinny Arsenal, NJ 07806-5000
4	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-CCH-V, C. Mandala E. Fennell SMCAR-CCH-T, L. Rosendorf SMCAR-CCS Picatinny Arsenal, NJ 07806-5000
19	Commander U.S. Army Armament Research, Development, and Engineering Center ATTN: SMCAR-AEE, J. Lannon SMCAR-AEE-B, A. Beardell D. Downs S. Einstein S. Westley S. Bernstein J. Rutkowski B. Brodman P. O'Reilly R. Cirincione A. Grabowsky P. Hui J. O'Reilly SMCAR-AEE-WW, M. Mezger J. Pinto D. Wiegand P. Lu C. Hu SMCAR-AES, S. Kaplowitz Picatinny Arsenal, NJ 07806-5000
1	Commander U.S. Army Armament Research, Development and Engineering Center ATTN: SMCAR-HFM, E. Barrieres Picatinny Arsenal, NJ 07806-5000

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
9	Commander U.S. Army Armament Research, Development and Engineering Center ATTN: SMCAR-FSA-T, M. Salsbury SMCAR-FSA-F, LTC R. Riddle SMCAR-FSC, G. Ferdinand SMCAR-FS, T. Gora SMCAR-FS-DH, J. Feneck SMCAR-FSS-A, R. Kopman B. Machek L. Pinder SMCAR-FSN-N, K. Chung Picatinny Arsenal, NJ 07806-5000	1	Project Manager U.S. Tank-Automotive Command Fighting Vehicle Systems ATTN: SFAE-ASM-BV Warren, MI 48397-5000
		1	Project Manager, Abrams Tank System ATTN: SFAE-ASM-AB Warren, MI 48397-5000
		1	Director HQ, TRAC RPD ATTN: ATCD-MA Fort Monroe, VA 23651-5143
3	Director Benet Weapons Laboratories ATTN: SMCAR-CCB-RA, G.P. O'Hara G.A. Pfligl SMCAR-CCB-S, F. Heiser Watervliet, NY 12189-4050	1	Commander U.S. Army Belvoir Research and Development Center ATTN: STRBE-WC Fort Belvoir, VA 22060-5006
2	Commander U.S. Army Research Office ATTN: Technical Library D. Mann P.O. Box 12211 Research Triangle Park, NC 27709-2211	1	Director U.S. Army TRAC-Ft. Lee ATTN: ATRC-L, Mr. Cameron Fort Lee, VA 23801-6140
		1	Commandant U.S. Army Command and General Staff College Fort Leavenworth, KS 66027
1	Commander, USACECOM R&D Technical Library ATTN: ASQNC-ELC-IS-L-R, Myer Center Fort Monmouth, NJ 07703-5301	1	Commandant U.S. Army Special Warfare School ATTN: Rev and Trng Lit Div Fort Bragg, NC 28307
1	Director U.S. Army Research Laboratory ATTN: AMSRL-D 2800 Powder Mill Rd. Adelphi, MD 20783-1145	1	Commander Radford Army Ammunition Plant ATTN: SMCAR-QA/HI LIB Radford, VA 24141-0298
1	Commandant U.S. Army Aviation School ATTN: Aviation Agency Fort Rucker, AL 36360	1	Commander U.S. Army Foreign Science and Technology Center ATTN: AMXST-MC-3 220 Seventh Street, NE Charlottesville, VA 22901-5396
1	Program Manager U.S. Tank-Automotive Command ATTN: AMCPM-ABMS, T. Dean Warren, MI 48092-2498		

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
2	Commandant U.S. Army Field Artillery Center and School ATTN: ATSF-CO-MW, E. Dublisky ATSF-CN, P. Gross Ft. Sill, OK 73503-5600	3	Commander Naval Surface Warfare Center ATTN: Code 730 Code R-13, R. Bernecker H. Sandusky Silver Spring, MD 20903-5000
1	Commandant U.S. Army Armor School ATTN: ATZK-CD-MS, M. Falkovitch Armor Agency Fort Knox, KY 40121-5215	7	Commander Naval Surface Warfare Center ATTN: T.C. Smith K. Rice S. Mitchell S. Peters J. Consaga C. Gotzmer Technical Library Indian Head, MD 20640-5000
1	U.S. Army European Research Office ATTN: Dr. Roy E. Richenbach Box 65 FPO New York 09510-1500		
2	Commander Naval Sea Systems Command ATTN: SEA 62R SEA 64 Washington, DC 20362-5101	4	Commander Naval Surface Warfare Center ATTN: Code G30, Guns & Munitions Div Code G32, Guns Systems Div Code G33, T. Doran Code E23 Technical Library Dahlgren, VA 22448-5000
1	Commander Naval Air Systems Command ATTN: AIR-954-Tech Library Washington, DC 20360		
4	Commander Naval Research Laboratory ATTN: Technical Library Code 4410, K. Kailasanate J. Boris E. Oran Washington, DC 20375-5000	5	Commander Naval Air Warfare Center ATTN: Code 388, C.F. Price T. Boggs Code 3895, T. Parr R. Derr Information Science Division China Lake, CA 93555-6001
1	Office of Naval Research ATTN: Code 473, R.S. Miller 800 N. Quincy Street Arlington, VA 22217-9999	1	Commanding Officer Naval Underwater Systems Center ATTN: Code 5B331, Technical Library Newport, RI 02840
1	Office of Naval Technology ATTN: ONT-213, D. Siegel 800 N. Quincy St. Arlington, VA 22217-5000	1	AFOSR/NA ATTN: J. Tishkoff Bolling AFB, D.C. 20332-6448
		1	OLAC PL/TSTL ATTN: D. Shiplett Edwards AFB, CA 93523-5000

<u>No. of Copies</u>	<u>Organization</u>	<u>No. of Copies</u>	<u>Organization</u>
3	AL/LSCF ATTN: J. Levine L. Quinn T. Edwards Edwards AFB, CA 93523-5000	1	Director Sandia National Laboratories Energetic Materials & Fluid Mechanics Department, 1512 ATTN: M. Baer P.O. Box 5800 Albuquerque, NM 87185
1	WL/MNAA ATTN: B. Simpson Eglin AFB, FL 32542-5434	1	Director Sandia National Laboratories Combustion Research Facility ATTN: R. Carling Livermore, CA 94551-0469
1	WL/MNME Energetic Materials Branch 2306 Perimeter Rd. STE 9 Eglin AFB, FL 32542-5910	4	Director Lawrence Livermore National Laboratory ATTN: L-355, A. Buckingham G. Benedetti M. Finger L-324, M. Constantino P.O. Box 808 Livermore, CA 94550-0622
1	WL/MNSH ATTN: R. Drabczuk Eglin AFB, FL 32542-5434	2	Director Los Alamos Scientific Lab ATTN: T3/D. Butler M. Division/B. Craig P.O. Box 1663 Los Alamos, NM 87544
2	NASA Langley Research Center ATTN: M.S. 408, W. Scallion D. Witcofski Hampton, VA 23605	2	Battelle ATTN: TACTEC Library, J.N. Huggins V. Levin 505 King Avenue Columbus, OH 43201-2693
1	Central Intelligence Agency Office of the Central References Dissemination Branch Room GE-47, HQS Washington, DC 20502	1	Battelle PNL ATTN: Mr. Mark Garnich P.O. Box 999 Richland, WA 99352
1	Central Intelligence Agency ATTN: J. Backofen NHB, Room 5N01 Washington, DC 20505	1	Institute of Gas Technology ATTN: D. Gidaspow 3424 S. State Street Chicago, IL 60616-3896
1	SDIO/TNI ATTN: L.H. Caveny Pentagon Washington, DC 20301-7100	1	Institute for Advanced Technology ATTN: T.M. Krehne The University of Texas of Austin 4030-2 W. Braker Lane Austin, TX 78759-5329
1	SDIO/DA ATTN: E. Gerry Pentagon Washington, DC 21301-7100		
2	HQ DNA ATTN: D. Lewis A. Fahey 6801 Telegraph Rd. Alexandria, VA 22310-3398		

<u>No. of</u> <u>Copies</u>	<u>Organization</u>	<u>No. of</u> <u>Copies</u>	<u>Organization</u>
2	CPIA - JHU ATTN: Hary J. Hoffman T. Christian 10630 Little Patuxent Parkway Suite 202 Columbia, MD 21044-3200	1	University of Massachusetts Department of Mechanical Engineering ATTN: K. Jakus Amherst, MA 01002-0014
1	Brigham Young University Department of Chemical Engineering ATTN: M. Beckstead Provo, UT 84601	1	University of Minnesota Department of Mechanical Engineering ATTN: E. Fletcher Minneapolis, MN 55414-3368
1	Jet Propulsion Laboratory California Institute of Technology ATTN: L.D. Strand, MS 125/224 4800 Oak Grove Drive Pasadena, CA 91109	3	Pennsylvania State University Department of Mechanical Engineering ATTN: V. Yang K. Kuo C. Merkle University Park, PA 16802-7501
1	California Institute of Technology 204 Karman Lab Main Stcp 301-46 ATTN: F.E.C. Culick 1201 E. California Street Pasadena, CA 91109	1	Rensselaer Polytechnic Institute Department of Mathematics Troy, NY 12181
3	Georgia Institute of Technology School of Aerospace Engineering ATTN: B.T. Zim E. Price W.C. Strahle Atlanta, GA 30332	1	Stevens Institute of Technology Davidson Laboratory ATTN: R. McAlevy III Castle Point Station Hoboken, NJ 07030-5907
1	Massachusetts Institute of Technology Department of Mechanical Engineering ATTN: T. Toong 77 Massachusetts Avenue Cambridge, MA 02139-4307	1	Rutgers University Department of Mechanical and Aerospace Engineering ATTN: S. Temkin University Heights Campus New Brunswick, NJ 08903
2	University of Illinois Department of Mechanical/Industry Engineering ATTN: H. Krier R. Beddini 144 MEB; 1206 N. Green St. Urbana, IL 61801-2978	1	University of Southern California Mechanical Engineering Department ATTN: OHE200, M. Gerstein Los Angeles, CA 90089-5199
1	University of Maryland ATTN: Dr. J.D. Anderson College Park, MD 20740	1	University of Utah Department of Chemical Engineering ATTN: A. Baer Salt Lake City, UT 84112-1194
		1	Washington State University Department of Mechanical Engineering ATTN: C.T. Crowe Pullman, WA 99163-5201
		1	AFELM, The Rand Corporation ATTN: Library D 1700 Main Street Santa Monica, CA 90401-3297

No. of
Copies Organization

1 Arrow Technology Associates, Inc.
ATTN: W. Hathaway
P.O. Box 4218
South Burlington, VT 05401-0042

3 AAI Corporation
ATTN: J. Hebert
J. Frankle
D. Cleveland
P.O. Box 126
Hunt Valley, MD 21030-0126

2 Alliant Techsystems, Inc.
ATTN: R.E. Tompkins
J. Kennedy
7225 Northland Dr.
Brooklyn Park, MN 55428

1 AVCO Everett Research Laboratory
ATTN: D. Stickler
2385 Revere Beach Parkway
Everett, MA 02149-5936

1 General Applied Sciences Lab
ATTN: J. Erdos
77 Raynor Ave.
Ronkonkama, NY 11779-6649

1 General Electric Company
Tactical System Department
ATTN: J. Mandzy
100 Plastics Ave.
Pittsfield, MA 01201-3698

1 IITRI
ATTN: M.J. Klein
10 W. 35th Street
Chicago, IL 60616-3799

4 Hercules, Inc.
Radford Army Ammunition Plant
ATTN: L. Gizzi
D.A. Worrell
W.J. Worrell
C. Chandler
Radford, VA 24141-0299

2 Hercules, Inc.
Allegheny Ballistics Laboratory
ATTN: William B. Walkup
Thomas F. Farabaugh
P.O. Box 210
Rocket Center, WV 26726

No. of
Copies Organization

1 Hercules, Inc.
Aerospace
ATTN: R. Cartwright
100 Howard Blvd.
Kenville, NJ 07847

1 Hercules, Inc.
Hercules Plaza
ATTN: B.M. Riggelman
Wilmington, DE 19894

1 MBR Research Inc.
ATTN: Dr. Moshe Ben-Reuven
601 Ewing St., Suite C-22
Princeton, NJ 08540

1 Olin Corporation
Badger Army Ammunition Plant
ATTN: F.E. Wolf
Baraboo, WI 53913

3 Olin Ordnance
ATTN: E.J. Kirschke
A.F. Gonzalez
D.W. Worthington
P.O. Box 222
St. Marks, FL 32355-0222

1 Olin Ordnance
ATTN: H.A. McElroy
10101 9th Street, North
St. Petersburg, FL 33716

1 Paul Gough Associates, Inc.
ATTN: P.S. Gough
1048 South St.
Portsmouth, NH 03801-5423

1 Physics International Library
ATTN: H. Wayne Wampler
P.O. Box 5010
San Leandro, CA 94577-0599

2 Princeton Combustion Research
Laboratories, Inc.
ATTN: N. Mer
N.A. Messina
Princeton Corporate Plaza
11 Deerpark Dr., Bldg IV, Suite 119
Monmouth Junction, NJ 08852

No. of
Copies Organization

- 3 Rockwell International
Rocketdyne Division
ATTN: BA08,
J. Flanagan
J. Gray
R.B. Edelman
6633 Canoga Avenue
Canoga Park, CA 91303-2703
- 2 Rockwell International Science Center
ATTN: Dr. S. Chakravarthy
Dr. S. Palaniswamy
1049 Camino Dos Rios
P.O. Box 1085
Thousand Oaks, CA 91360
- 1 Southwest Research Institute
ATTN: J.P. Riegel
6220 Culebra Road
P.O. Drawer 28510
San Antonio, TX 78228-0510
- 1 Sverdrup Technology, Inc.
ATTN: Dr. John Deur
2001 Aerospace Parkway
Brook Park, OH 44142
- 3 Thiokol Corporation
Elkton Division
ATTN: R. Willer
R. Biddle
Tech Library
P.O. Box 241
Elkton, MD 21921-0241

No. of
Copies Organization

- 1 Veritay Technology, Inc.
ATTN: E. Fisher
4845 Millersport Hwy.
East Amherst, NY 14501-0305
- 1 Universal Propulsion Company
ATTN: H.J. McSpadden
25401 North Central Ave.
Phoenix, AZ 85027-7837
- 1 SRI International
Propulsion Sciences Division
ATTN: Tech Library
333 Ravenwood Avenue
Menlo Park, CA 94025-3493
- Aberdeen Proving Ground
- 1 Cdr, USACSTA
ATTN: STECS-PO/R. Hendricksen

No. of
Copies Organization

- 1 Ernst-Mach-Institut
ATTN: Dr. R. Heiser
Hauptstrasse 18
Weil am Rhein
Germany
- 1 Defence Research Agency, Military
Division
ATTN: C. Woodley
RARDE Fort Halstead
Sevenoaks, Kent, TN14 7BP
England
- 1 School of Mechanical, Materials, and
Civil Engineering
ATTN: Dr. Bryan Lawton
Royal Military College of Science
Shrivenham, Swindon, Wiltshire,
SN6 8LA
England

No. of
Copies Organization

- 2 Institut Saint Louis
ATTN: Dr. Marc Giraud
Dr. Gunther Sheets
Postfach 1260
7858 Weail am Rhein 1
Germany
- 1 Explosive Ordnance Division
ATTN: A. Wildegger-Gaissmaier
Defence Science and Technology
Organisation
P.O. Box 1750
Salisbury, South Australia 5108
- 1 Armaments Division
ATTN: Dr. J. Lavigne
Defence Research Establishment
Valcartier
2459, Pie XI Blvd., North
P.O. Box 8800
Courcellette, Quebec G0A 1R0
Canada