

12

AD-A277 268



NSWCDD/TR-92/462

**LITHIUM AA-SIZE CELLS FOR NAVY MINE
APPLICATIONS:
II - EVALUATION OF COMMERCIAL CELLS**

BY W. P. KILROY, J. A. BANNER, G. F. HOFF, K. A. JOHNSTON,
AND W. A. FREEMAN

WEAPONS RESEARCH AND TECHNOLOGY DEPARTMENT

24 FEBRUARY 1994

DTIC
ELECTE
MAR 25 1994
S E D

94-09138

3/2/94



Approved for public release; distribution is unlimited.

DTIC QUALITY INSPECTED 1



**NAVAL SURFACE WARFARE CENTER
DAHLGREN DIVISION • WHITE OAK DETACHMENT**

Silver Spring, Maryland 20903-5640

94 8 22 106

NSWCDD/TR-92/462

**LITHIUM AA-SIZE CELLS FOR NAVY MINE
APPLICATIONS:
II - EVALUATION OF COMMERCIAL CELLS**

**BY W. P. KILROY, J. A. BANNER, G. F. HOFF, K. A. JOHNSTON,
AND W. A. FREEMAN**

WEAPONS RESEARCH AND TECHNOLOGY DEPARTMENT

24 FEBRUARY 1994

Approved for public release; distribution is unlimited

Accession For	
NTIS	CR&I
DTIC	TAB
Unannounced	
Justification	
By	
Distribution	
Availability Codes	
Dist	Avail and/or Special
A-1	

**NAVAL SURFACE WARFARE CENTER
DAHLGREN DIVISION • WHITE OAK DETACHMENT**

Silver Spring, Maryland 20903-5640


FOREWORD

The Navy is interested in developing a standard family of cells to be used in power supplies for Naval mine warfare applications. The AA-size cell is one of the component cells under consideration.

One goal of this program is to evaluate the performance of several commercial AA-size cells under conditions applicable to mine requirements. This report compares the discharge behavior of four Li/SOCl₂ cells and one Li/MnO₂ cell. The cells were tested according to the plan described in NSWCDD/TR-92/210.

Funding for this effort was provided by the Naval Sea Systems Command, PMO 407, under tasking N0002492WR10247, funding element 64601N. We wish to thank Mr. G. Leineweber and Mr. A. Suggs for their continued interest and support in developing lithium battery technology. We also wish to acknowledge Mr. F. Visk for assistance in planning the test program.

Approved by:



CARL E. MUELLER, Head
Weapons Materials Division

ABSTRACT

The discharge performance of five commercial AA-size lithium cells has been evaluated to determine the feasibility of incorporating them into various battery packages for future Naval mine applications.

Fresh cells and cells stored for varying durations at high temperature were discharged at (1) ambient room temperature at a low rate (3 mA) and (2) at a low temperature (-2°C) and 3 mA, 20 mA, and 50 mA rates including some with pulse applications.

The Li/SOCl_2 cells generally met all of the stringent performance requirements for mine operations. Specific test results often varied from manufacturer to manufacturer. The Li/MnO_2 technology failed to provide sufficient capacity when discharged at -2°C at 20 mA after high temperature storage and was also unable to provide high current pulses at -2°C .

CONTENTS

<u>Chapter</u>		<u>Page</u>
1	INTRODUCTION	1
2	EXPERIMENTAL EVALUATION	3
3	RESULTS AND DISCUSSION	5
4	SUMMARY	21

ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	TEST PLAN FOR EVALUATION OF AA-SIZE LITHIUM CELLS FOR NAVY MINE BATTERIES	2
2	EFFECT OF HIGH TEMPERATURE 45 DAY STORAGE ON THE CAPACITY OF AA CELLS DISCHARGED AT 3 mA TO 2.0V .	6
3	PERFORMANCE BEHAVIOR OF AA CELLS DISCHARGED AT 3 mA AT 23°C AFTER 45 DAY STORAGE AT 66°C	7
4	PERFORMANCE OF REPRESENTATIVE FRESH AA CELLS DISCHARGED AT 3 mA AT 49°C	9
5	EFFECT OF HIGH TEMPERATURE 49°C DISCHARGE ON THE CAPACITY OF AA CELLS DISCHARGED AT 3 mA TO 2.0V .	10
6	CAPACITY LOSS OF AA CELLS DISCHARGED AT 49°C AT 3 mA TO 2.0V RELATIVE TO CAPACITY AT 23°C	11
7	PERFORMANCE BEHAVIOR OF FRESH AA CELLS DISCHARGED AT 3 mA AT -2°C	13
8	COMPARISON OF THE CAPACITY OF AA CELLS DISCHARGED AT 23°C AND -2°C AT 3 mA	14
9	EFFECT OF 41°C STORAGE ON THE CAPACITY OF AA CELLS DISCHARGED AT 50 mA AT -2°C TO 2.0 VOLTS . . .	16
10	EFFECT OF 41°C STORAGE ON THE CAPACITY OF AA CELLS DISCHARGED AT 20 mA AT -2°C TO 2.0 VOLTS	18
11	COMPARISON OF THE BEST PERFORMING CELLS DISCHARGED AT 3 mA AT -2°C AFTER 45 DAYS STORAGE AT 66°C	19

TABLES

<u>Table</u>		<u>Page</u>
1	SUMMARY OF STORAGE AND DISCHARGE CONDITIONS FOR AA-SIZE CELL EVALUATION	4
2	CAPACITY OF CELLS DISCHARGED AT 3 mA AS A FUNCTION OF STORAGE AND DISCHARGE TEMPERATURE	20

CHAPTER 1

INTRODUCTION

Currently there are four dozen different batteries with more than a dozen different chemistries available for applications in Navy mines. To reduce the expense of procurement and the logistics associated with this inventory, the Navy is developing a standard family of lithium primary cells for use in developing batteries for mine warfare and mine countermeasure systems. The lithium/thionyl chloride (Li/SOCl_2) electrochemical system was selected in the early eighties from the available battery technologies. This chemistry has been developed and qualified for the CAPTOR and QUICKSTRIKE mine battery programs. Criteria that were important in the selection process included the following: high energy density, long shelf life, and low temperature operation.

The standard family of cells includes the #6, C, and A sizes. The fourth member will be developed as a AA-size cell for eventual assembly into batteries for Navy mines. The development will be carried out in the following tasks: (1) establish a test program to evaluate the ability of AA-size cells to meet the performance requirements of several mine system batteries; (2) purchase commercially available, low cost, AA-size cells for comparison; (3) discharge and compare the behavior of the cells as a function of storage, resistive load, and temperature; (4) develop and evaluate the performance of the AA-size cell configured in various mine battery systems; (5) conduct safety and shelf life/storage tests on the batteries; (6) identify logistics issues such as acquisition, handling, and storage.

Figure 1 is the Test Plan for Evaluation of AA-Size Lithium Cells for Navy Mine Batteries from NSWCDD/TR-92/210. This report summarizes data from performance testing of five commercial AA-size cells (task 3). These data will serve as a baseline for the performance expected from a low magnetic signature AA-size cell technology planned for future development.

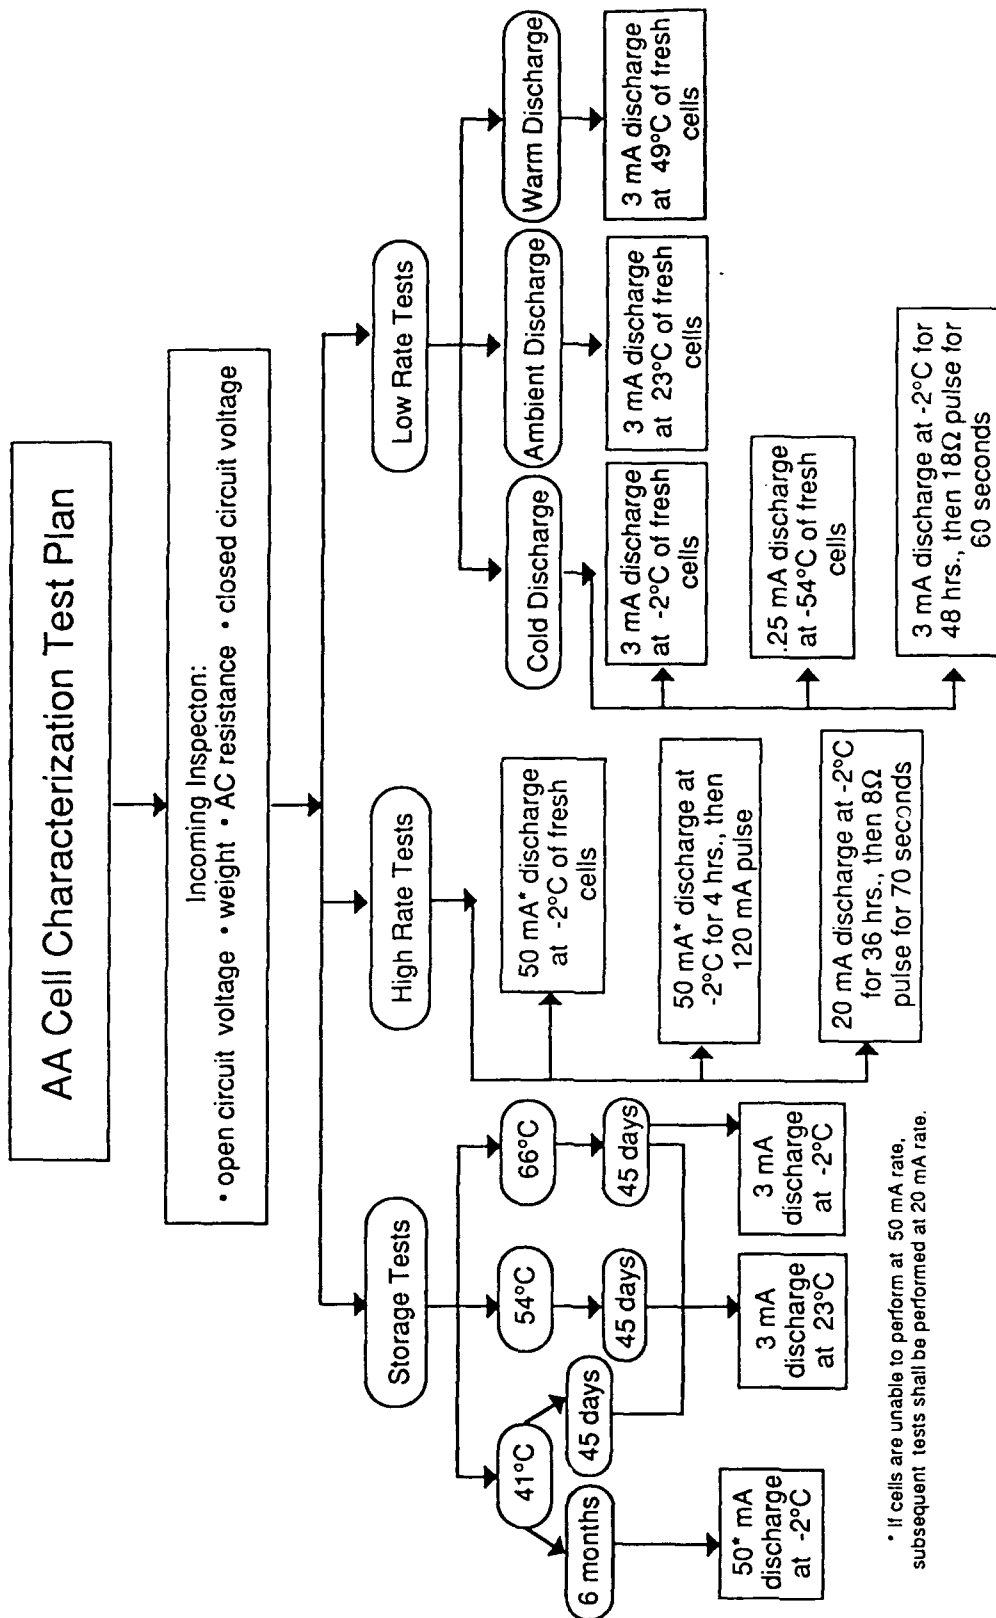


FIGURE 1. TEST PLAN FOR EVALUATION OF AA-SIZE LITHIUM CELLS
FOR NAVY MINE BATTERIES

CHAPTER 2

EXPERIMENTAL EVALUATION

Five AA-size cells were evaluated: a Li/MnO₂ cell, series CR AA, from Varta and four Li/SOCl₂ cells. The Li/SOCl₂ cells include the following: Hitachi Maxell series ER6C purchased from Electrochem Industries (E.I.) as series QTC85-3B940; SAFT France series LS6BA; Power Conversion Inc. (PCI) series T06/41; and an Eagle-Picher "Keeper" cell, series LTC-30P. The Keeper cell is a prismatic design. The other cells are a bobbin design. The Eagle-Picher and PCI cells contain more than 0.5g of lithium and thus require a DOT exemption for shipping.

The cells were weighed upon receipt, serial numbers were recorded, and open circuit voltages (OCV) were measured. The cells were then placed in a refrigerator at 10°C. Fresh cells were stored in this refrigerator prior to evaluation. Cells requiring high temperature storage were transferred to Tenny Jr. environmental chambers set at the prescribed storage temperatures.

Prior to discharge, the OCV and AC resistance of the cells were measured. Cells were mounted horizontally in AA-size cell holders on a board and allowed to equilibrate to the desired discharge temperature in a Tenny Jr. chamber. Each cell was discharged individually at constant resistance. Data were collected on a Fluke Data Logging System.

The planned storage and discharge conditions of the AA cell test program are shown in Table 1. The actual discharge current varied slightly from cell to cell, depending on the discharge conditions and the resistive load. The Varta Li/MnO₂ cells, which exhibited a lower OCV than the Li/SOCl₂ cells, were discharged at a lower resistance in order to achieve the same discharge current. In the 3 mA cell tests, the Varta cells were discharged with a resistance of 1000 ohms; all the SOCl₂ cells were discharged with a 1200-ohm load. The 50 mA discharge testing was performed using 50 ohms for the Varta cells and 65 ohms for the others. The 20 mA test employed a 125-ohm resistor for the Varta cells and a 175-ohm load for the others. The low-rate discharge (Test P) was carried out using 12.735 Kohm for the Varta cells and 15.08 Kohm for the other cells.

TABLE 1. SUMMARY OF STORAGE AND DISCHARGE CONDITIONS FOR AA-SIZE CELL EVALUATION

TEST	STORAGE		DISCHARGE*	
	TIME (days)	TEMP. (°C)	CURRENT (mA)	TEMP. (°C)
A	45	41	3	23
B [^]	45	54	3	23
C [^]	45	66	3	23
D	fresh	23	3	23
E	fresh	23	3	49
F	fresh	23	3	-2
G	fresh	23	20	-2
H	fresh	23	50/20	-2
I [^]	45	41	50/20	-2
J [^]	100	41	50/20	-2
K	135	41	50/20	-2
L	180	41	50/20	-2
M	45	66	3	-2
N	fresh	23	3 (48 hr)	-2
O	fresh	23	20 (48 hr)	-2
P	fresh	23	50 (4 hr)	-2
Q	fresh	23	0.25	-54

* Cell tests H-L were carried out at either 50 or 20 mA. SAFT and PCI cells were discharged at the 50-mA rate. The E.I., Eagle-Picher, and Varta cells could not sustain the 50 mA rate and were discharged at the 20-mA rate.

[^] After high temperature storage, the cells were stored an additional three to six weeks at ambient room temperature.

CHAPTER 3

RESULTS AND DISCUSSION

CHARACTERISTICS OF AA-SIZE CELLS DISCHARGED AT 3 MA AT AMBIENT ROOM TEMPERATURE

Effects of Storage on AA-Size Cells.

The effect of high temperature storage on the performance of AA-size cells was examined. Fresh cells and cells stored for 45 days at temperatures of 41°C, 54°C, and 66°C were discharged at constant resistive loads equivalent to ~3 mA at 23°C. Each test was performed on five cells from each manufacturer. A summary of the average capacity to a 2.0V cutoff is shown in Figure 2. The data show that fresh cells experience only a minimal loss in capacity after 45 days storage at high temperature. Except for the PCI cells, there was no appreciable additional loss in cell capacity by increasing the storage temperature from 41°C to 66°C.

Consistency of Performance.

In all cases, the PCI cells were the least consistent performers after high temperature storage, with one cell delivering less than one-half its rated capacity after 45 days storage at 54°C. Figure 3 shows the ambient temperature discharge behavior of the best performing cell from each manufacturer after the 45-day storage at 66°C. All of the Varta, SAFT, and Eagle-Picher cells had almost identical discharge characteristics to those illustrated in Figure 3. Both the PCI and E.I. cells exhibited large variability in capacity, especially after storage. The SAFT and Varta cells, either fresh or stored, displayed the most consistent behavior at 3 mA.

Fresh Cell Capacity.

The fresh cell capacity delivered to a 2.0V cutoff was compared with the capacity reported by the manufacturers. The SAFT and Eagle-Picher cells delivered about 11 and 18 percent more capacity, respectively, than advertised. The Varta and E.I. cells delivered the manufacturer's quoted nominal capacity, whereas the PCI cells fell 16 percent short of the 2.2 Ah indicated by the manufacturer.

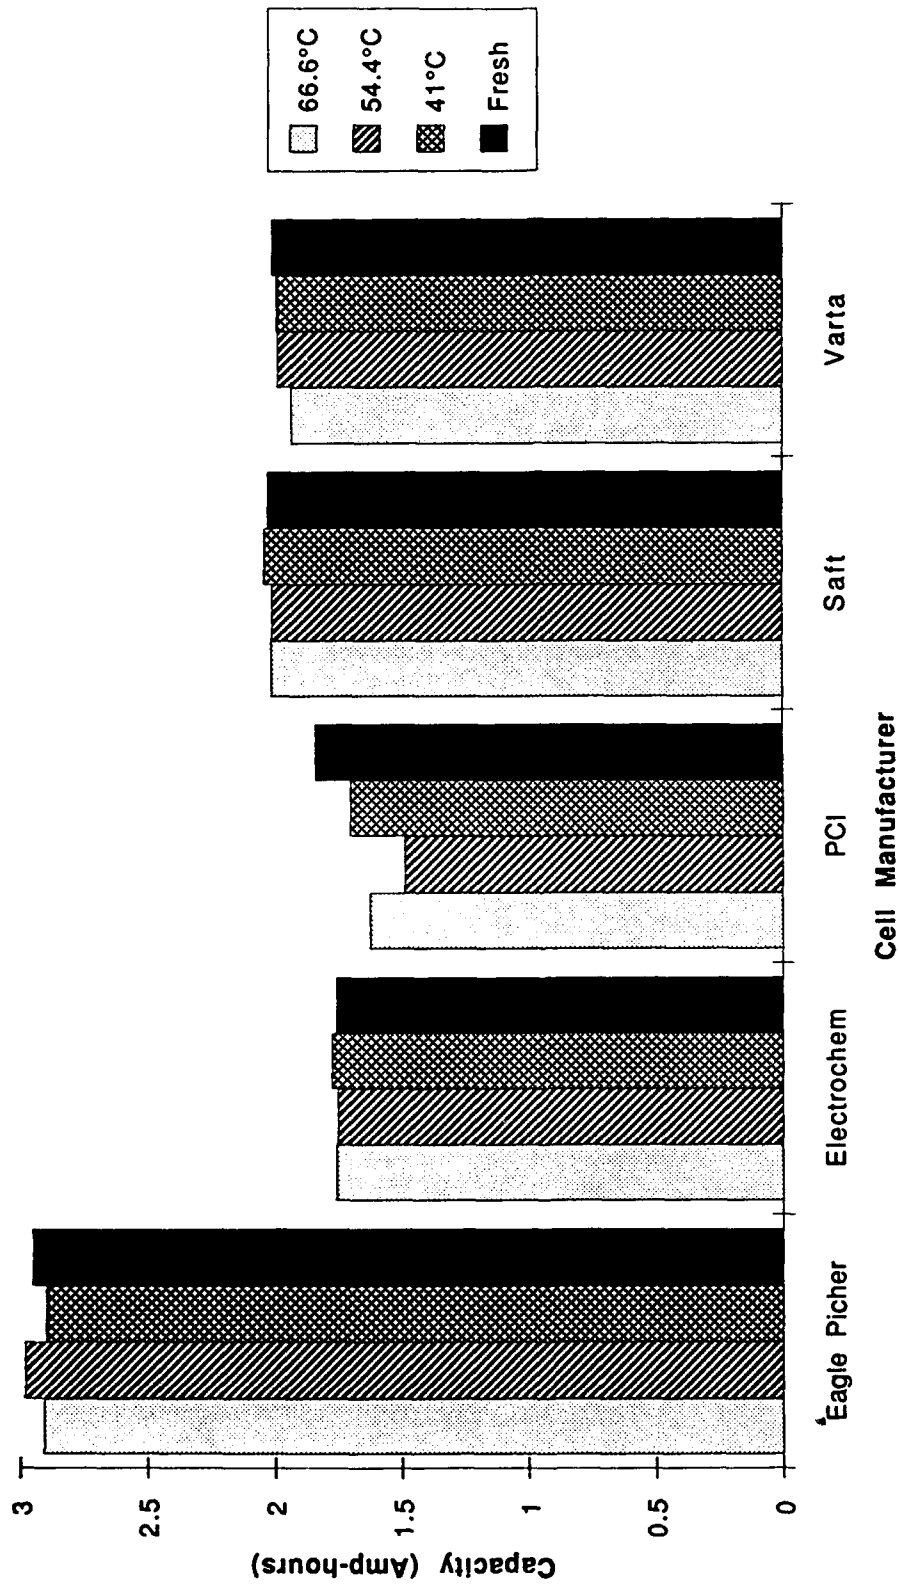


FIGURE 2. EFFECT OF HIGH TEMPERATURE 45 DAY STORAGE ON THE CAPACITY OF AA CELLS DISCHARGED AT 3 mA TO 2.0V

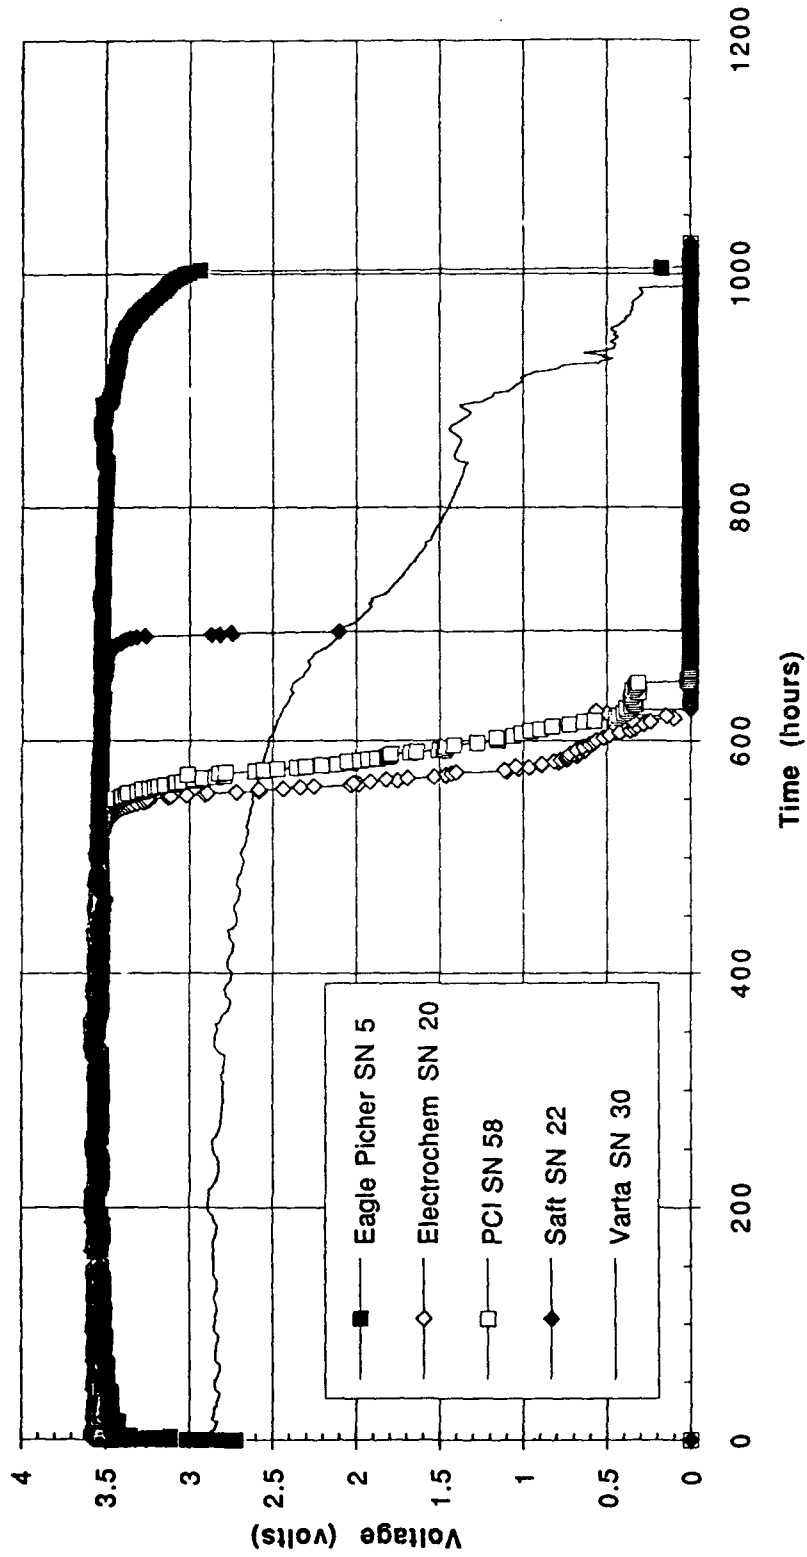


FIGURE 3. PERFORMANCE BEHAVIOR OF AA CELLS DISCHARGED AT 3 mA AT 23°C AFTER 45 DAY STORAGE AT 66°C

Voltage Delay.

The ambient temperature start-up performance of all the fresh cells was excellent. None of the Li/SOCl₂ cells dropped below 3.3V at the 3 mA rate. The Li/MnO₂ Varta cells showed no delay but characteristically discharged below 3.0V.

After high temperature storage, the start-up performance of the Eagle-Picher cells was generally poor compared with the other manufacturers' cells. At the lower storage temperatures, the cell voltage usually dropped to 1.5V prior to recovery. After 66°C storage, the cell voltage dropped to 1.3V and required from 15 min. to >3 hours to reach 3.0V when discharged at 3 mA at 23°C.

Voltage Regulation.

The voltage regulation of the cells displayed in Figure 3 was characteristic of the behavior of both the fresh and stored cells. The mid-discharge voltage of all the Varta Li/MnO₂ cells was 2.8V. The mid-discharge voltage of the SOCl₂ cells was 3.5V.

During discharge of fresh cells, the PCI cells exhibited a large knee (25 percent of the capacity) at the start of polarization. This behavior was not observed in the cells that were discharged after storage at high temperatures.

DISCHARGE PERFORMANCE OF FRESH CELLS AT 49°C

A comparison of fresh cells discharged at 23°C and 49°C reveals notable differences in performance. The discharge behavior characteristic of fresh cells discharged at 3 mA at 49°C is shown in Figure 4. Figure 5 compares the average capacity of cells discharged at 49°C with the baseline performance at 23°C. The mid-discharge voltage increases about 0.1V when the cells are discharged at the higher temperature. As Figure 6 illustrates, the Li/SOCl₂ cells lose some capacity at the higher temperature, presumably due to faster kinetics (non-passivated corrosion) occurring at the higher temperature during the prolonged slow discharge. However, a comparable increase in temperature of 25°C, i.e., when cells were discharged at 23°C relative to discharge at -2°C, reveals that a similar loss of capacity was not observed. The SAFT cells demonstrated the best capacity retention. In contrast, the Li/MnO₂ cell capacity improved at the higher discharge temperature because the kinetics of the solid cathode system is favored at higher temperatures.

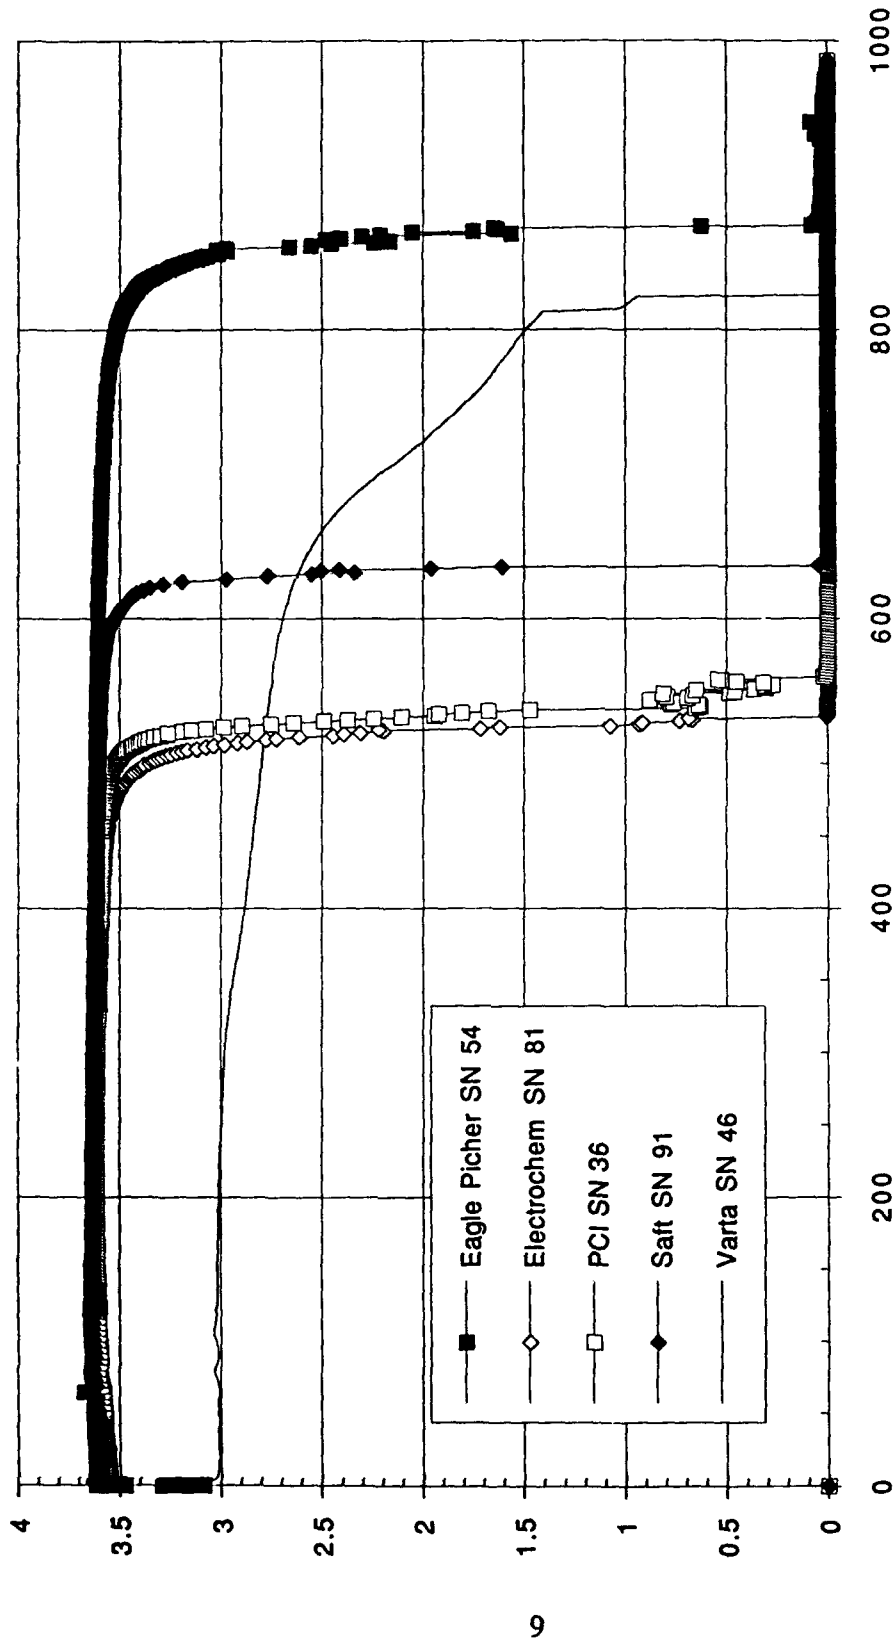


FIGURE 4. PERFORMANCE OF REPRESENTATIVE FRESH AA CELLS DISCHARGED AT 3 mA AT 49°C


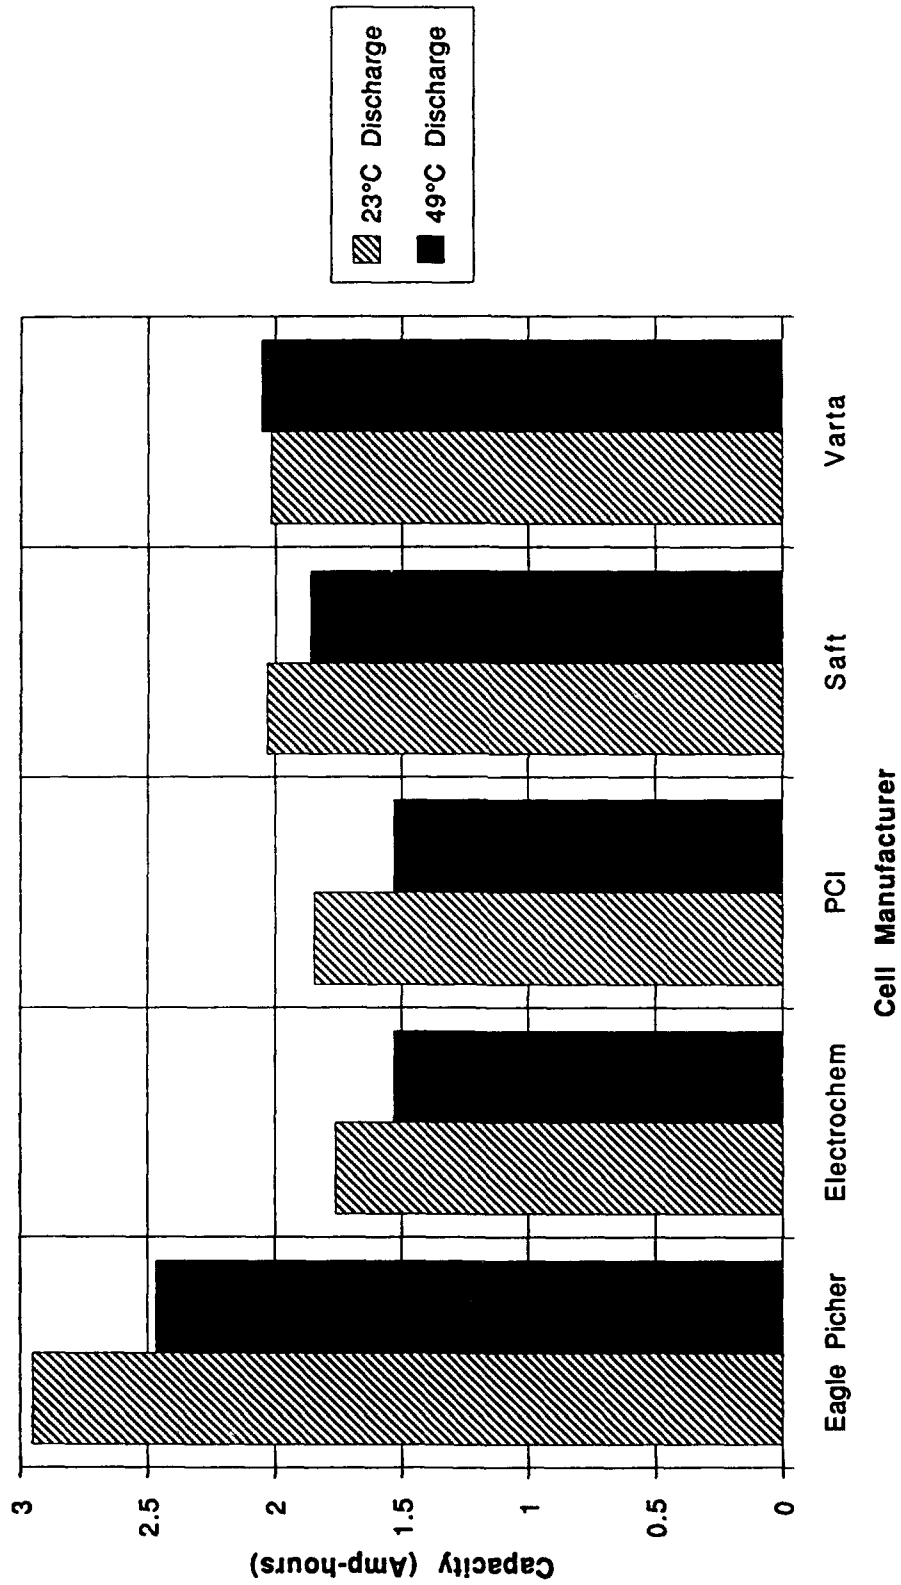


FIGURE 5. EFFECT OF HIGH TEMPERATURE 49°C DISCHARGE ON THE CAPACITY OF AA CELLS DISCHARGED AT 3 mA TO 2.0V

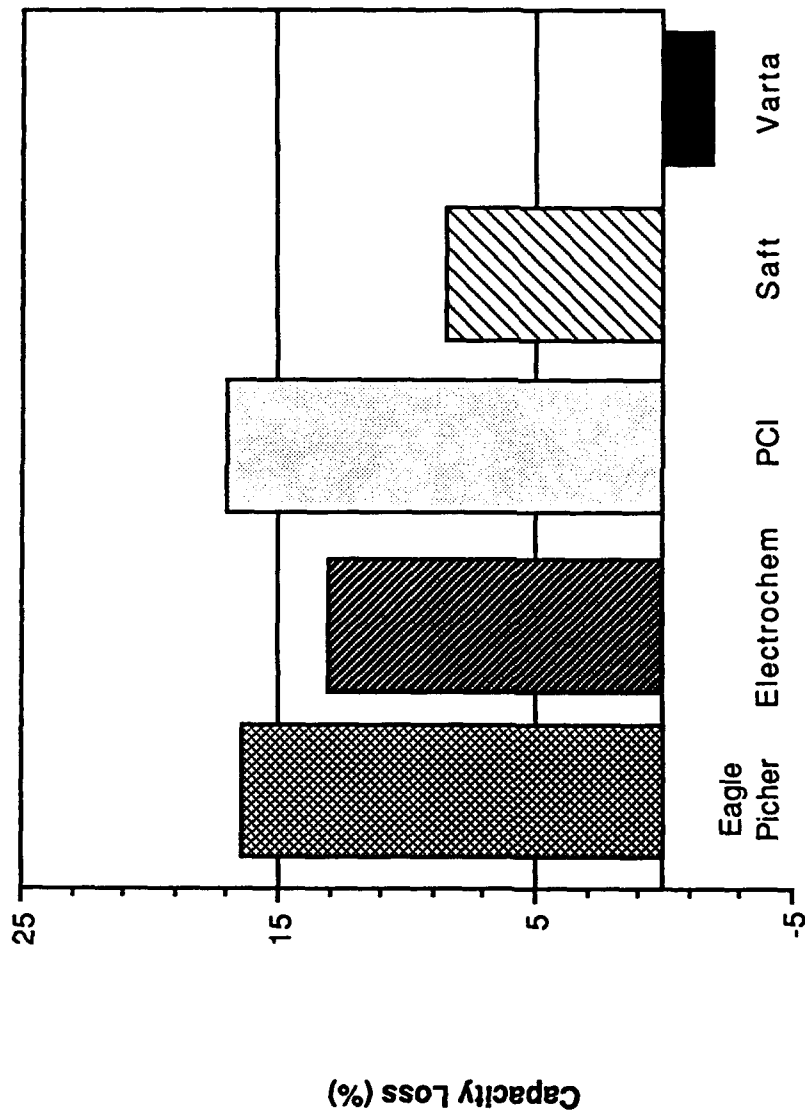

Cell Manufacturer

FIGURE 6. CAPACITY LOSS OF AA CELLS DISCHARGED AT 49°C AT 3 mA TO 2.0V RELATIVE TO CAPACITY AT 23°C

DISCHARGE PERFORMANCE OF AA-SIZE CELLS AT LOW TEMPERATURE

Fresh Cells at Very Low Rate.

For some applications, during the deployment phase of mine operation, the batteries are required to provide 0.25 mA at -54°C for approximately one day. The Li/SOCl₂ cells easily met these requirements. The cells were still discharging at 3.3V when the tests were terminated after 120 hours. The Li/MnO₂ cells were adequate - providing an average 30 hours to 2.0V with a mid-discharge voltage of 2.6V.

Fresh Cells At Low Rates (3 mA).

Figure 7 shows the discharge behavior of the best performing cells from each manufacturer at 3 mA at -2°C .

The cell performance at -2°C was similar to that observed at 23°C with the following exceptions: (1) at -2°C , the Varta and Eagle-Picher cells exhibited lower capacity and a 0.25V lower mid-discharge voltage; (2) the PCI and E.I. cells displayed a greater spread in delivered capacity at -2°C compared with their behavior at 23°C ; (3) the Eagle-Picher cells discharged at -2°C revealed a peculiar voltage delay, manifested by an initial depression to zero voltage upon activation, followed by a rapid rise to 3.3V with subsequent loss of voltage over a 20 hour period to 3.05V where it remained for 35 hours before rising to the mid-discharge voltage of 3.3V. It is possible that this behavior is characteristic of the prismatic cell design, since none of the bobbin cells of the same chemistry exhibited this type of performance.

The average capacities of the AA cells discharged at 3 mA are compared at -2°C and ambient temperature ($\sim 23^{\circ}\text{C}$) in Figure 8.

Fresh Cells Discharged With Intermittent Pulse.

All the cells were placed in controlled storage at 10°C for one year. The cells were equilibrated at -2°C and discharged at a constant load equivalent to either ~ 20 mA or ~ 3 mA.

20 mA Discharge. After 36 hours, the discharge was interrupted by application of a pulse for 20 seconds with an 8-ohm load. The performance under this test regime could be characterized by capacity to 2.0V, voltage regulation, and pulse capability. Perhaps the best indicator of overall reliability was the voltage profile. Only two of the Eagle-Picher cells discharged above 2.0V. Four of the E.I. cells discharged above 3.2V; the fifth took 60 hours to reach 3.0V. All of the PCI cells discharged above 3.2V. The SAFT cells discharged above 3.1V, however, all had positive voltage spikes during the polarization at the end of cell life. The Li/MnO₂ cells discharged consistently; all polarized severely from the start. The time of discharge was ~ 5 hours above 2.0V.

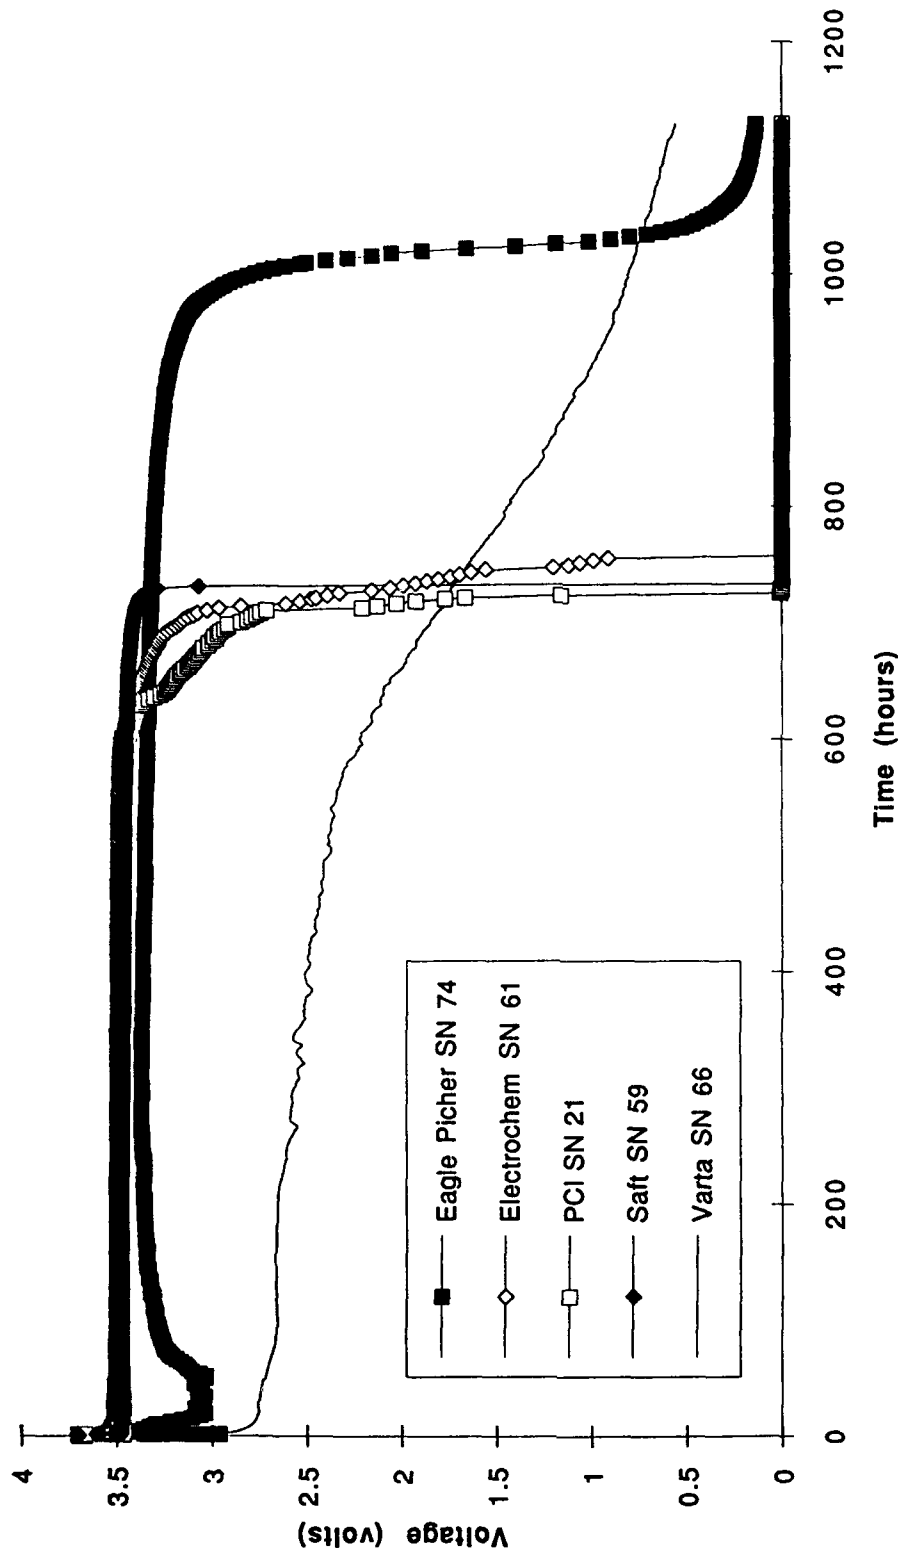


FIGURE 7. PERFORMANCE BEHAVIOR OF FRESH AA CELLS DISCHARGED AT 3 mA AT -2°C

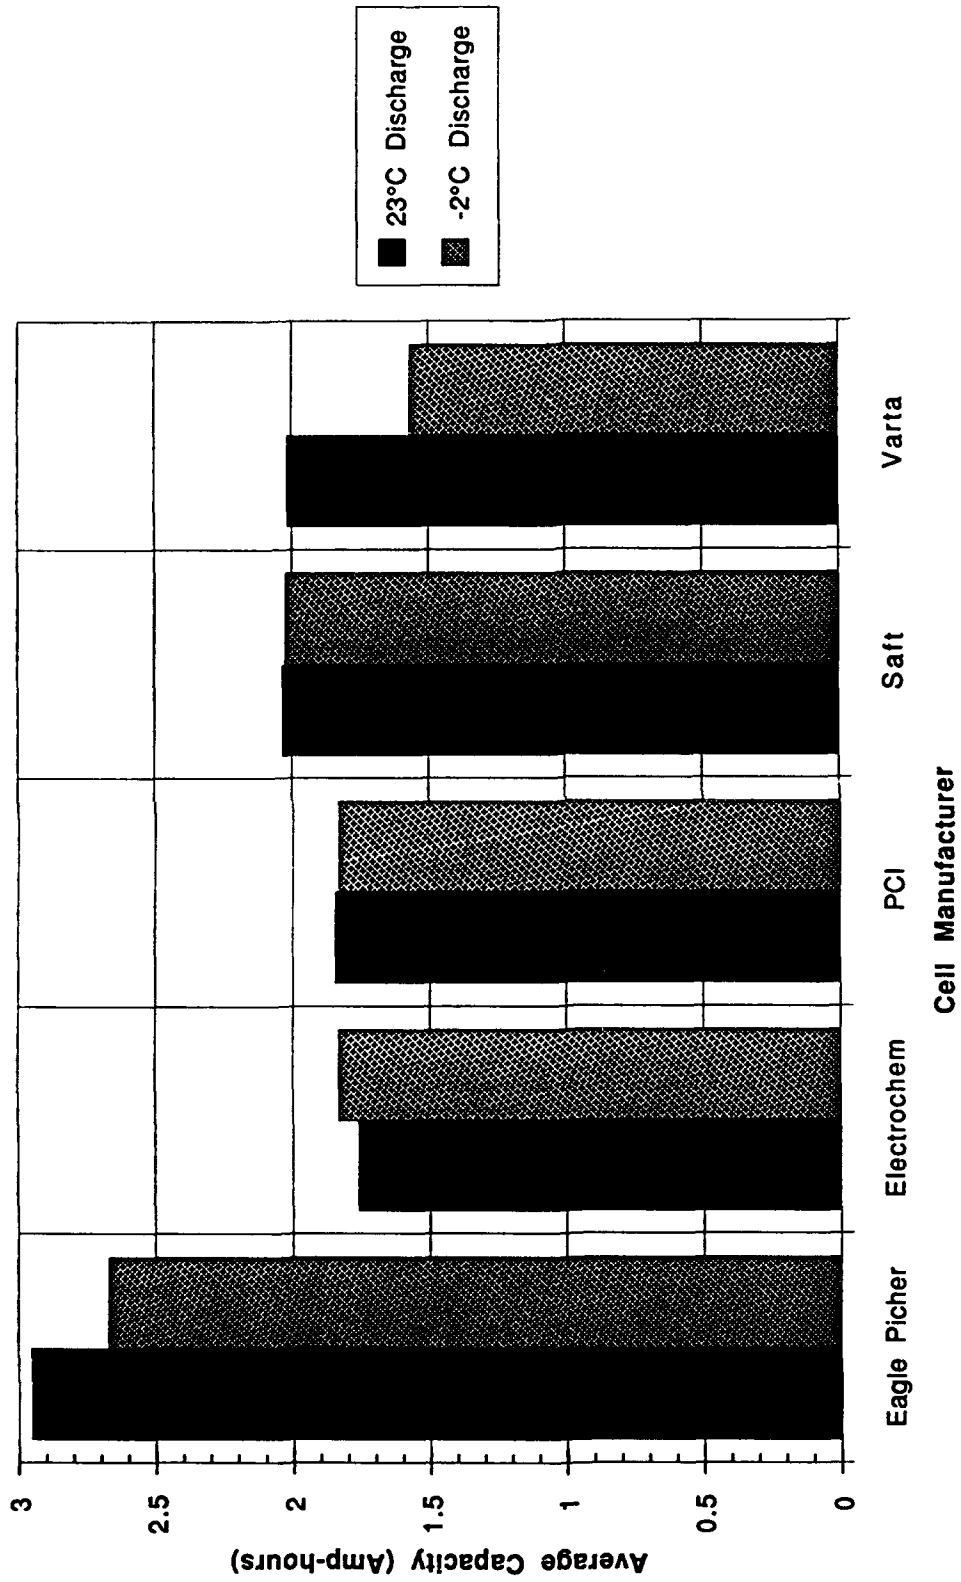


FIGURE 8. COMPARISON OF THE CAPACITY OF AA CELLS DISCHARGED AT 23°C AND -2°C AT 3 mA

The average capacity recorded to 2.0V was as follows: PCI (1.61 Ah); SAFT (1.39 Ah); E.I. (1.38 Ah); Eagle-Picher (0.51 Ah); and Varta (0.11 Ah). The low capacity of the Eagle-Picher cells was due to the failure of three of the cells to discharge above 2.0V. The AC resistances measured prior to the cell discharges provide some insight into this behavior. The three cells with the low voltage profiles had high internal impedances, whereas the cells with high voltage profiles displayed low internal impedances. This voltage behavior was not previously observed when Eagle-Picher cells were discharged at 20 mA at -2°C, even after high temperature storage as discussed below.

Only the cells from PCI, SAFT, and E.I. were able to provide consistent current pulses of about 65 mA for the required time.

3 mA Discharge. Cells maintained under controlled temperature at 10°C for one year were discharged at ~3 mA at -2°C for 48 hours and then subjected to a 5-second pulse with a 27-ohm load. The PCI, SAFT, E.I., Varta, and Eagle-Picher cells provided pulse currents of approximately 110, 110, 100, 75, and 45 mA, respectively. Based on the poor performance of the Eagle-Picher cells in these two pulse tests, it is believed that the cells' age, prismatic design, or a combination of these two factors severely limited their current carrying capability.

Stored Cells Discharged At High Rates

One of the most stringent performance requirements for mine batteries is to provide relatively high currents from stored cells at low discharge temperatures - the "old/cold" syndrome. The test plan required cells to provide 0.2 Ah capacity at a 50 mA rate after storage at 41°C.

Groups of three cells were removed at periodic intervals for evaluation. After exposure to 45 day storage at 41°C, the E.I., Eagle-Picher, and Varta cells could not be discharged above 2.0V at -2°C at 50 mA. Only the SAFT and PCI cells were capable of this performance. Thus, all the cells were not compared at 50 mA at -2°C. In subsequent tests, the SAFT and PCI cells were discharged at 50 mA and the other cells were discharged at 20 mA.

Discharge at 50 mA Figure 9 compares the individual cell capacities to 2.0V for the SAFT and PCI cells, respectively.

At the 50 mA rate, the SAFT cells performed very consistently at -2°C. The average cell capacity (0.94 Ah) after 45 or 100 days storage was essentially unchanged compared with the fresh cell capacity (0.93 Ah). The "fresh" cells were maintained at 10°C prior to equilibration at -2°C. The average capacity of cells stored at 41°C for periods of 135 and 180 days declined approximately 10 percent relative to the fresh cells. This magnitude of loss would be expected as a result of long term, high temperature storage based on the cell design and chemistry. The performance is well above the 0.2 Ah requirement cited above.

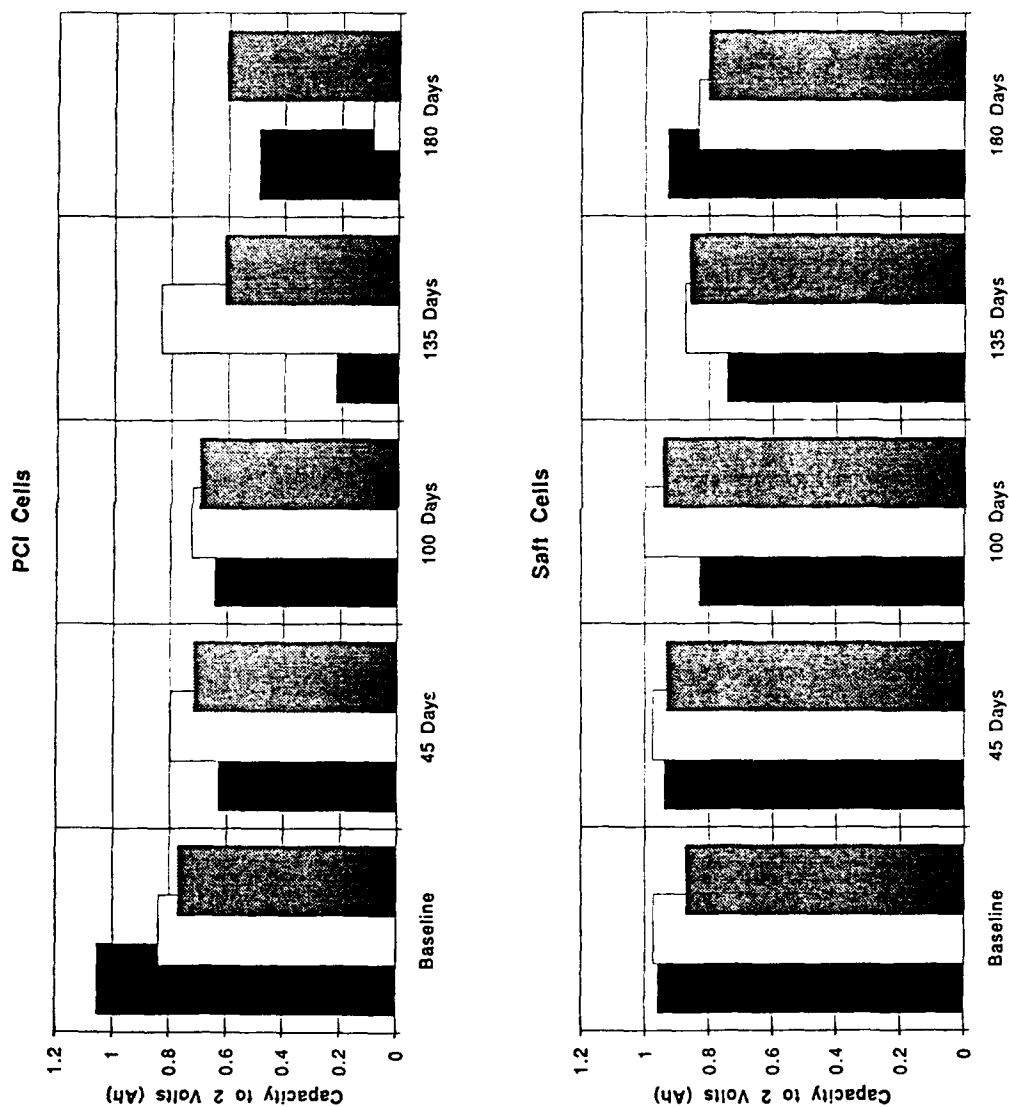


FIGURE 9. EFFECT OF 41°C STORAGE ON THE CAPACITY OF AA CELLS DISCHARGED AT 50 mA AT -2°C TO 2.0 VOLTS

The average capacity of the PCI cells at 50 mA degraded from 0.89 Ah for the fresh cells to 0.72, 0.69, 0.56, and 0.40 Ah with increasing time of storage. After extended periods of storage at 41°C, the reliability of the cells to deliver the required 0.2 Ah capacity was poor — one-third of the tested PCI cells either failed or were marginal.

Discharge at 20 mA. The low temperature performance of the E.I., Eagle-Picher, and Varta cells at the 20 mA rate are compared as a function of storage time in Figure 10.

E.I. cells stored for 135 or 180 days at 41°C declined in consistent discharge behavior at -2°C and exhibited a significant loss (> 50 percent) in average capacity relative to fresh cells.

The average capacity of the Eagle-Picher "Keeper" cells declined approximately 9 percent after 135 or 180 day storage relative to the fresh cell capacity.

The Li/MnO₂ cells from Varta failed to deliver the required 0.2-Ah capacity when discharged at 20 mA at -2°C, regardless of storage conditions. However, after storage at 41°C, a small improvement in cell capacity was observed relative to fresh cells.

50 mA Discharge Followed by a High Current Pulse. Some mine batteries are required to provide a pulse discharge, i.e., deliver a sufficiently high current for a brief period, in order to blow a fuse. In this test regime, the pulse current was to be applied approximately four hours after discharging the cell at 50 mA.

As noted above, the Eagle-Picher, E.I., and Varta cells discharged below 2V at the 50 mA rate - all three failed to provide a high current pulse. The Eagle-Picher cells failed to exceed 25 mA; the Varta cells peaked for a few seconds at 35 mA with the voltage falling to 0.5V; the E.I. cells reached 42 mA for a few seconds as the voltage fell from 1.7V to 0.8V.

Only the SAFT and PCI cells were capable of sustained, high pulse currents. The SAFT cells delivered more than 100 mA for four hours at about 3.0V. The PCI cells delivered 100 mA for two hours at 2.8V.

Stored Cells Discharged at Low Rate

Five cells from each manufacturer were placed in controlled storage at 10°C for six months followed by 45 days storage at 66°C. The cells were discharged at ~3 mA at -2°C. The discharge behavior of the best performing cells from each manufacturer are compared in Figure 11. As shown in Figure 11, voltage spiking near the end of cell life was characteristic of the PCI cells. The SAFT cells were extremely consistent; all five cells displayed nearly identical discharge behavior.

The capacity of cells discharged at 3 mA are compared as a function of storage temperature and discharge temperature in Table 2.

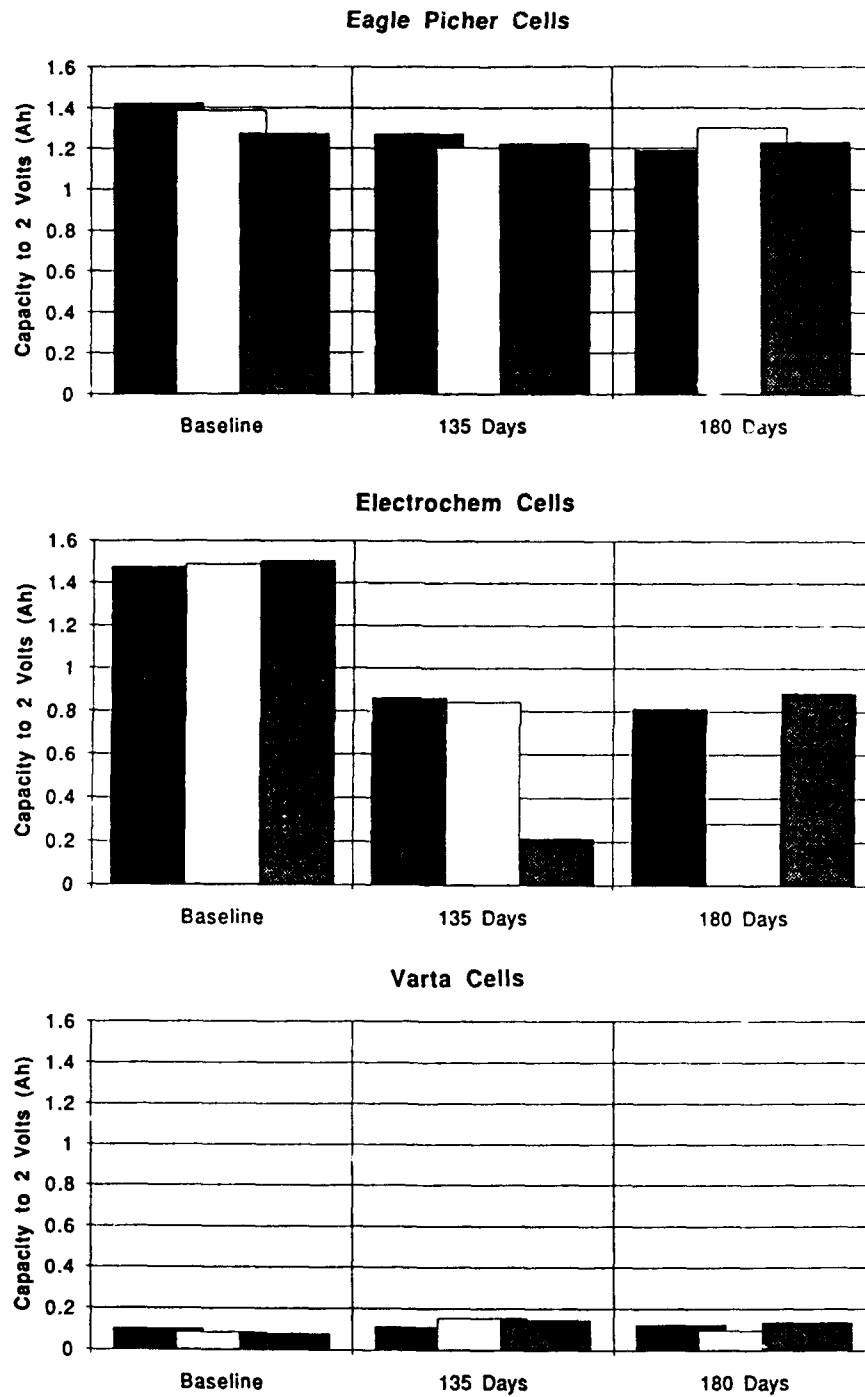


FIGURE 10. EFFECT OF 41°C STORAGE ON THE CAPACITY OF AA CELLS DISCHARGED AT 20 mA AT -2°C TO 2.0 VOLTS

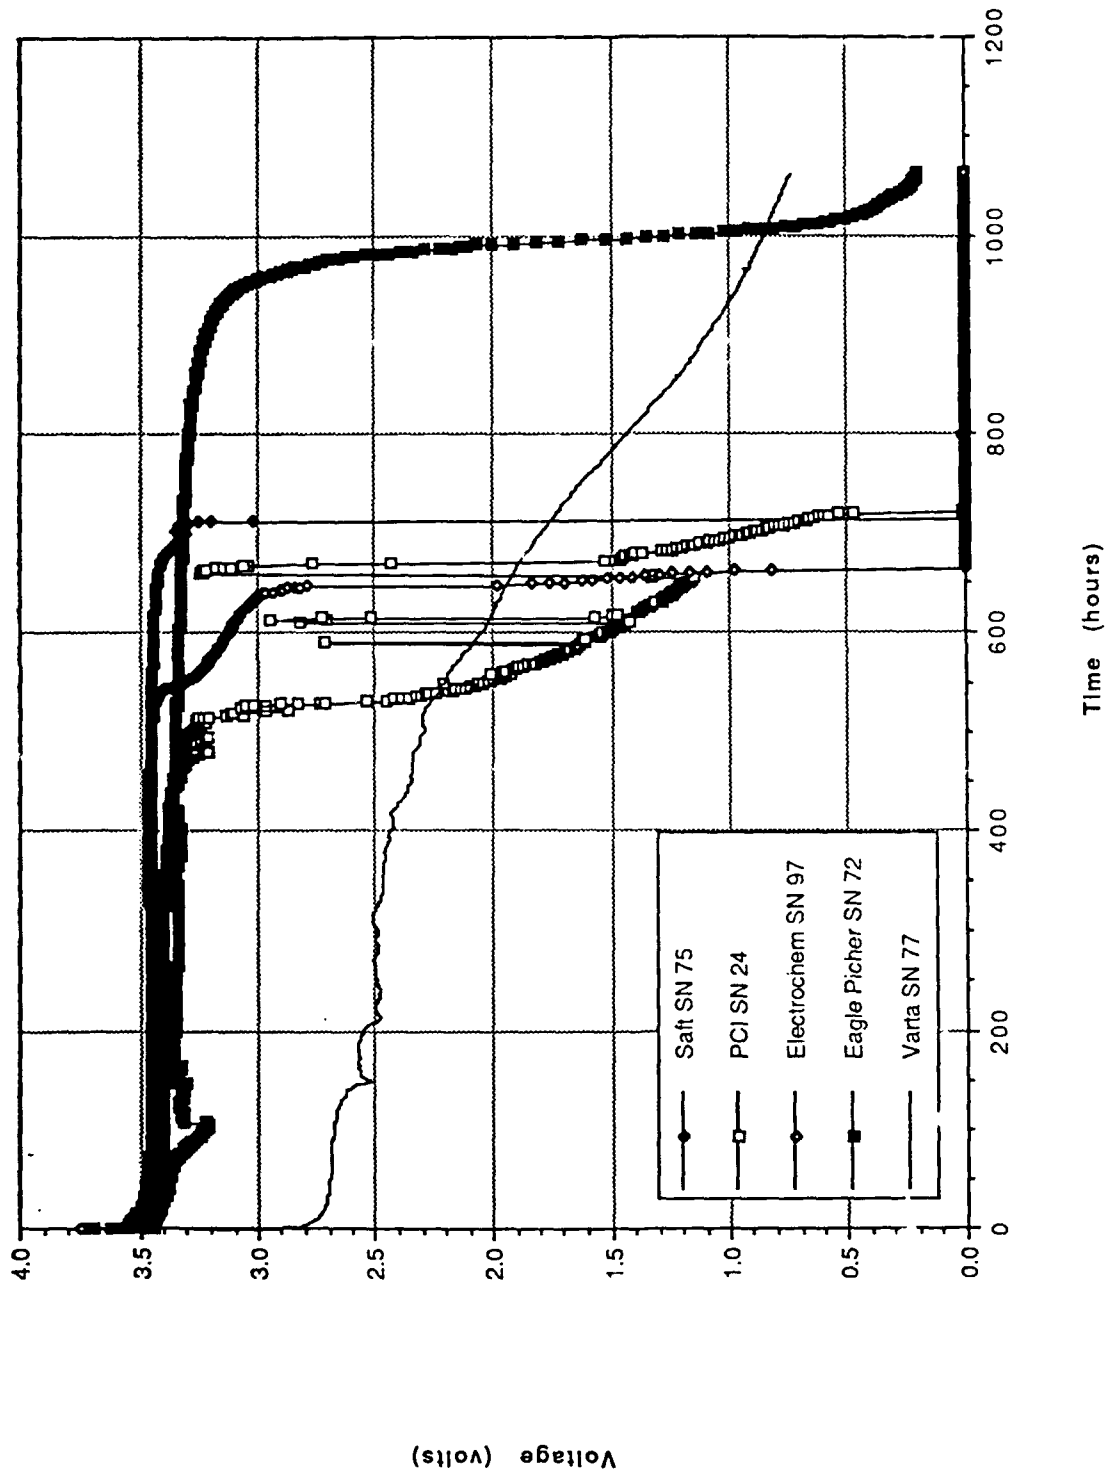


FIGURE 11. COMPARISON OF THE BEST PERFORMING CELLS DISCHARGED AT 3 mA AT -2°C AFTER 45 DAYS STORAGE AT 66°C

TABLE 2. CAPACITY OF CELLS DISCHARGED AT 3 mA AS A FUNCTION OF STORAGE AND DISCHARGE TEMPERATURE

Manufacturer	-2°C Discharge	-2°C Discharge	23°C Discharge	23°C Discharge
	Fresh Cells	45 Days/66°C Storage	Fresh Cells	45 Days/66°C Storage
Eagle-Picher	2.67 Ah	2.65 Ah	2.96 Ah	2.91 Ah
Electrochem Industries	1.84 Ah	1.82 Ah	1.76 Ah	1.76 Ah
PCI	1.83 Ah	1.62 Ah	1.85 Ah	1.63 Ah
SAFT	2.03 Ah	2.02 Ah	2.04 Ah	2.02 Ah
VARTA	1.57 Ah	1.44 Ah	2.02 Ah	1.94 Ah

High temperature storage for 45 days and low temperature discharge had little effect on the capacity of the SAFT and E.I. cells.

Eagle-Picher and PCI cells displayed contrasting capacity behavior. The capacity of Eagle-Picher cells discharged at either 23°C or -2°C was not affected by high temperature storage, whereas the PCI cells lost about 10 percent of their capacity under similar conditions. Conversely, the capacity of PCI cells was not affected by discharging at -2°C relative to 23°C, whereas the Eagle-Picher cells had 10 percent lower capacity at -2°C than at 23°C, regardless of storage conditions.

Irrespective of the discharge temperature, the capacity of the Varta Li/MnO₂ cells was about 7 percent lower after the high temperature storage for 45 days. The capacity of these cells was ~23 percent lower when discharged at -2°C relative to discharge at 23°C regardless of storage conditions.

CHAPTER 4

SUMMARY

The discharge performance of Li/SOCl₂ AA-size cells from four manufacturers was evaluated under a test plan designed to meet existing and future Naval mine applications. A Li/MnO₂ cell from Varta was also evaluated to compare the two chemistries.

At low rate, ambient temperature discharge, the fresh PCI cells failed to deliver the 2.2 Ah advertized capacity. Both the PCI and E.I. cells failed to deliver consistent capacity after storage. The Eagle-Picher cells displayed voltage delay after storage.

The Li/SOCl₂ cell technology has an inherent advantage over that of the Li/MnO₂ system, i.e., better voltage regulation, with a 0.7V higher mid-discharge voltage. However, under high temperature discharge, the Varta Li/MnO₂ cell showed better capacity retention than the Li/SOCl₂ cells. SAFT had the best capacity retention of the Li/SOCl₂ cells.

The Li/MnO₂ cells failed to deliver sufficient capacity at low temperature (-2°C) and high rates (20 mA). The Varta, E.I., and Eagle-Picher cells would not discharge at the 50 mA rate. SAFT and PCI cells performed at this rate and also provided pulse (100 mA) capability. However, the PCI cells appeared to lose capacity after elevated temperature storage as a result of inconsistent performance. Upon activation at 3 mA and -2°C, the Eagle-Picher cells were the only fresh cells to display a voltage delay to zero volt, albeit briefly.

After considering all the evaluation testing, the SAFT France series LS6BA cell technology was judged to have the best overall performance to meet the mine requirements. Although consistency of performance was an issue identified during testing, the Power Conversion Inc. (PCI) series T06/41 was identified as a second choice.

DISTRIBUTION

	<u>Copies</u>		<u>Copies</u>
DOD (CONUS) ACTIVITIES		ATTN SPAWAR OOF (A SLIWA)	1
ATTN ONR-T CODE 4520 (A TUCKER)	1	COMMANDER	
ONR-T CODE 4525 (D HOUSER)	1	SPACE AND NAVAL WARFARE	
ONR-T CODE 4530 (R FEDEN)	1	SYSTEMS COMMAND	
ONR-T CODE 4533 (W CHING)	1	WASHINGTON DC 20363-5100	
ONR-S CODE 313 (R NOWAK)	1		
OFFICE OF THE CHIEF OF NAVAL		ATTN CODE N2120 (M BRADSHAW)	1
RESEARCH		CODE N2720 (G HESOUN)	1
800 N QUINCY STREET		CODE N2720 (E BARNES)	1
ARLINGTON VA 22217-5660		CODE N3210 (T ENGLISH)	1
		COASTAL SYSTEMS STATION	
ATTN PMS415G (J LASCODY)	1	DAHLGREN DIVISION	
PMS393	1	NAVAL SURFACE WARFARE CENTER	
PMS 407	1	6703 WEST HIGHWAY 98	
COMMANDER		PANAMA CITY FL 32407-5000	
NAVAL SEA SYSTEMS COMMAND			
2531 JEFFERSON DAVIS HIGHWAY		ATTN CODE 4520N	1
ARLINGTON VA 22254-5160		NAVAL SURFACE WARFARE CENTER	
		INDIAN HEAD DIVISION	
ATTN CODE 634 (S SZPAK)	1	BLDG 600	
CODE 634 (P BOSS)	1	INDIAN HEAD MD 20640	
CODE 633 (L JOHNSON)	1		
COMMANDER		ATTN CODE 804 (S TUCKER)	1
NAVAL COMMAND, CONTROL, AND		CODE 8222 (P HALLAL)	1
OCEAN SURVEILLANCE CENTER		NAVAL UNDERWATER WARFARE	
RDT&E DIVISION		CENTER	
SAN DIEGO CA 92512-5000		NEWPORT LABORATORY	
		NEWPORT RI 02841-5047	
ATTN CODE 609 (J GUCINSKI)	1		
CODE 609 (W JOHNSON)	1	ATTN CODE 3853 (M MILES)	1
CODE 609 (D MAINS)	1	CODE 36263 (R NOLAN)	1
DIVISION CRANE		COMMANDER	
NAVAL SURFACE WARFARE CENTER		NAVAL AIR WARFARE CENTER	
300 HIGHWAY 361		WEAPONS DIVISION	
CRANE IN 47522-5000		CHINA LAKE CA 93555-9001	
ATTN CODE 5041 (J ZAROFF)	1	ATTN CODE 7000 (C BOWERS)	1
COMMANDER		CODE 7000 (H GRIFFITH)	1
NAVAL AIR WARFARE CENTER		NAVAL SURFACE WARFARE CENTER	
AIRCRAFT DIVISION WARMINSTER		DAHLGREN DIVISION	
WARMINSTER PA 18974-5000		MINE WARFARE ENGINEERING ACTIVITY	
		P O BOX 10	
		YORKTOWN VA 23691-5076	

DISTRIBUTION (CONT.)

	<u>Copies</u>		<u>Copies</u>
ATTN DR ROBERT B OSWALD HEADQUARTERS US ARMY CORPS OF ENGINEERS 20 MASSACHUSETTS AVE NW WASHINGTON DC 20314-1000	1	ATTN J NELSON ARMY RESEARCH LABORATORY 2800 POWDER MILL ROAD ADELPHI MD 20783	1
ATTN CODE 280.08 STOP 060 (R HOULTER)	1	ATTN CODE BMO/ENSE CODE AFISC/SES	1
MARE ISLAND NAVAL SHIPYARD VALLEJO CA 94590-5100		NORTON AIR FORCE BASE NORTON AFB CA 92409	1
ATTN CODE 272T (H URBACH)	1	DEFENSE TECHNICAL INFORMATION CENTER	12
CODE 2752 (R BLOOMQUIST)	1	CAMERON STATION ALEXANDRIA VA 22304-6145	
NAVAL SURFACE WARFARE CENTER CARDEROCK DIVISION ANNAPOLIS DET 3A LEGGETT CIRCLE ANNAPOLIS MD 21402-5067		ATTN CODE AFWAL/P00S (D MARSH)	1
ATTN LIBRARY	1	WRIGHT LABORATORIES AIR FORCE SYSTEMS COMMAND WRIGHT-PATTERSON AIR FORCE BASE OH 45433-6563	
NAVAL TECHNICAL INTELLIGENCE CENTER 4301 SUTLAND ROAD WASHINGTON DC 20390		ATTN CODE N7B3 (H HOLTER)	1
ATTN D GUERRINO	1	CODE N7B3 (P WRIGHT)	1
NAVAL ELECTRONICS SYSTEMS SECURITY CENTER 3801 NEBRASKA AVE NW WASHINGTON DC 20390-5270		NAVAL ORDNANCE CENTER EOD TECHNICAL DIVISION BLDG 2154 2008 STUMP NECK ROAD INDIAN HEAD MD 20640-5070	
ATTN DEFENSE REUTILIZATION MARKETING OFFICE	1	DOD (EX-CONUS) ACTIVITIES NONE	
NORFOLK NAVAL BASE PO BOX 15068 NORFOLK VA 23511-0068		NON-DOD ACTIVITIES	
ATTN RICK L MENZ	1	ATTN G-ECV-3	1
ODDDR&E (S&T/ET) 3D1089 THE PENTAGON WASHINGTON DC 20301-3080		HEADQUARTERS DEPARTMENT OF TRANSPORTATION US COAST GUARD CIVIL ENGINEERING DIVISION WASHINGTON DC 20593	
ATTN M BINDER	1	ATTN CODE CE-32 (R SUTULA)	1
M T BRUNDAGE	1	DEPARTMENT OF ENERGY HQ CONSERVATION AND RENEWABLE ENERGY 1000 INDEPENDENCE AVENUE SW WASHINGTON DC 20585	
S GILMAN	1		
E REISS	1		
COMMANDER ARMY RESEARCH LABORATORY AMSRL-EP-PA FORT MONMOUTH NJ 07703-5601			

DISTRIBUTION (CONT.)

	<u>Copies</u>		<u>Copies</u>
ATTN CRS-ENR (A ABELL)	1	ATTN LIBRARY	1
CRS-SPR (F SISSINE)	1	JOHNS HOPKINS APPLIED RESEARCH	
GIFT AND EXCHANGE DIV	4	LABORATORY	
LIBRARY OF CONGRESS		JOHNS HOPKINS ROAD	
WASHINGTON DC 20540		LAUREL MD 20707	
CENTER FOR NAVAL ANALYSES	1	ATTN DR D VISSARS	1
4401 FORD AVENUE		ARGONNE NATIONAL LABORATORY	
ALEXANDRIA VA 22302-0268		9700 SOUTH CASS AVENUE	
		ARGONNE IL 60439	
ATTN CODE EP5 (B J BRAGG)	1	ATTN D CHUA	1
ATTN CODE EP5 (E DARCEY)	1	ALLIANT TECHSYSTEMS	
NASA JOHNSON SPACE CENTER		104 ROCK ROAD	
NASA ROAD 1		HORSHAM PA 19044	
HOUSTON TX 77058			
ATTN MS 433 (J GOWDEY)	1	ATTN DR ROBERT B DAVIDSON	1
NASA LANGLEY		SCIENCE APPLICATIONS	
HAMPTON VA 23665		INTERNATIONAL CORP	
ATTN SPACE POWER APPLICATIONS		1710 GOODRIDGE DRIVE	
BRANCH (CODE 711)	1	MCLEAN VA 22102	
NASA GODDARD SPACE FLIGHT		ATTN LIBRARY	1
CENTER		T REDDY	1
GREENBELT MD 20771		POWER CONVERSION INC	
ATTN OTS (T X MAHY)	1	495 BOULEVARD	
OTS (G METHILE)	1	ELMWOOD PARK NJ 07407	
CENTRAL INTELLIGENCE AGENCY		ATTN CH BUSH	1
WASHINGTON DC 205051		SPARTAN ELECTRONICS	
ATTN K KINOSHITA	1	2400 E GANSON ST	
DEPARTMENT OF ENERGY		JACKSON MI 49202	
LAWRENCE LIVERMORE LABORATORY		ATTN GLENN CRUZE	1
BERKELEY CA 94720		KEITH MAUTER	1
ATTN DIV 2523 (W CIESLAK)	1	W BOWDEN	1
DIV 2523 (S C LEVY)	1	A N DEY	1
DIV 2523 (D DODDAPANENI)	1	F GIBBARD	1
SANDIA NATIONAL LABORATORIES		DURACELL USA	
PO BOX 5800		TECHNICAL SALES MARKETING GROUP	
ALBUQUERQUE NM 87185		BERKSHIRE INDUSTRIAL PARK	
ATTN G HALPERT	1	BETHEL CT 06801	
R SURAMPUDI	1	ATTN DEPT 8144 (V TEOSILO)	1
CALIFORNIA INSTITUTE OF		LOCKHEED MISSILE AND SPACE	
TECHNOLOGY		COMPANY INC	
4800 OAK GROVE DRIVE		PO BOX 3504	
PASADENA CA 91109		SUNNYVALE CA 94088-3504	

DISTRIBUTION (CONT.)

	<u>Copies</u>		<u>Copies</u>
ATTN DEPT 9350		ATTN A FRAIZER	1
(R HOLLANDSWORTH)	1	J CLANCY	1
LIBRARY	1	HAZELTINE CORP	
LOCKWOOD PALO ALTO RESEARCH		115 BAY STATE DRIVE	
LABORATORY		BRAINTREE MA 02184	
LOCKHEED MISSILE AND SPACE			
COMPANY INC		ATTN J CIESLA	1
3251 HANOVER STREET		DME CORPORATION	
PALO ALTO CA 94304-1191		111 SW 33RD STREET	
		FT LAUDERDALE FL 33315	
ATTN RW RACE	1		
MGR ADVANCED K-PROGRAMS		ATTN FRASER M WALSH	1
MARKETING		ECO	
GENERAL ELECTRIC CO		20 ASSEMBLY SQUARE DR	
ROOM 2546 OP#2		SOMERVILLE MA 02145	
100 PLASTICS AVENUE			
PITTSFIELD MA 01201		ATTN SARAH SIROIS	1
		MS-R354	
ATTN JEPSTEIN	1	MITRE CORPORATION	
C SCHLAJJKER	1	BURLINGTON RD	
BATTERY ENGINEERING INC		BEDFORD MA 01730	
1536 HYDE PARK RD			
HYDE PARK MA 02136		ATTN H HOSSAIN	1
		A P KARPINSKY	1
ATTN LIBRARY	1	YARNEY TECHNICAL PRODUCTS	
RL HIGGINS	1	92 MECHANIC STREET	
EAGLE PICHER INDUSTRIES		PAWCATUCK CT 02891	
COUPLES DEPARTMENT			
PO BOX 47		ATTN BATTERY SALES DIVISION	1
JOPLIN MO 64802		PANASONIC INDUSTRIAL CO	
		PO BOX 1511	
ATTN BC BERGUM	1	SECAUCUS NJ 07094	
S MEGAHED	1		
RAY O VAC CORP		ATTN E TAKEUCHI	1
601 RAY-O-VAC DRIVE		W CLARK	1
MADISON WI 53711		WILSON GREATBATCH LTD	
		10000 WEHRLE DRIVE	
ATTN RCYR	1	CLARENCE NY 14031	
SONATECH INC			
879 WARD DRIVE		ATTN KM ABRAHAM	1
SANTA BARBARA CA 93111-2920		EIC LABORATORIES INC	
		111 DOWNEY STREET	
ATTN G SKELTON	1	NORWOOD MA 02062	
BLDG 618 MS/Q111			
HUGHES AIRCRAFT COMPANY		ATTN A HIMY	1
UNDERSEA WEAPONS SYSTEMS		WESTINGHOUSE ELECTRIC CORP	
DIVISION		P O BOX 18249	
PO BOX 3310		PITTSBURGH PA 15236-0249	
FULLERTON CA 92634			

DISTRIBUTION (CONT.)

	<u>Copies</u>		<u>Copies</u>
ATTN R KAISER SIPPICAN INC 7 BARNABAS ROAD MARION MA 02738	1	ATTN DR D UNTEREKER MEDTRONICS INC 6700 SHINGLE CREEK PARKWAY BROOKLYN CENTER MN 55430	1
ATTN MICHELE JENNINGS MARINE SYSTEMS GROUP 600 SECOND STREET NE HOPKINS MN 55343	1	POWER INFORMATION CENTER HORIZON INC 10700 PARKRIDGE BLVD SUITE 250 RESTON VA 22091	1
ATTN R NUPP FLIGHTLINE ELECTRONICS ELECTRONICS SYSTEM DIVISION PO BOX 750 FISHERS NY 14453	1	ATTN C JOHNSON S GROSS BOEING AEROSPACE COMPANY P O BOX 3999 SEATTLE WA 98122	1 1
ATTN J CAPUTO LORAL DEFENSE SYSTEMS 1210 MASSILLON ROAD AKRON OH 44315-0001	1	ATTN DR P BRO HYDE PARK ESTATES SANTE FE NM 87501	1
ATTN M WALSH CAPE COD RESEARCH PO BOX 600 BUZZARDS BAY MA 02532	1	ATTN G E BLOOMGREN DR JOHN BAILEY EVEREADY P O BOX 45035 WESTLAKE OH 44145	1 1
ATTN N ISAACS I HOLSON CATALYST RESEARCH 38 LOVETON CIRCLE SPARKS MD 21152	1 1	ATTN DR J J AUBORN BELL LABORATORIES 600 MOUNTAIN AVENUE MURRAY HILL NJ 07974	1
ATTN R STANIEWICZ G CHAGNON SAFT AMERICA 107 BEAVER COURT COCKEYSVILLE MD 21030	1 1	ATTN LIBRARY ESB RESEARCH CENTER 19 WEST COLLEGE AVENUE YARDLEY PA 19067	1
ATTN N SHUSTER WESTINGHOUSE ELECTRICAL POWER SYSTEMS 476 CENTER STREET CHARDON OH 44024	1	ATTN M LEMBO HOPPECKE BATTERY SYSTEMS INC 292 MAIN ST BUTLER NJ 07405	1
ATTN J CONASONTI VARTA BATTERIES 300 EXECUTIVE BLVD ELMSFORD NY 10523-1202	1	ATTN H BITTNER A HELLER B CARTER G JUVINAL AEROSPACE CORPORATION P O BOX 92957 LOS ANGELES CA 90009	1 1 1 1

NSWCDD/TR-92/462

DISTRIBUTION (CONT.)

	<u>Copies</u>		<u>Copies</u>
ATTN T ANDOLINO ALEXANDER BATTERY CO P O BOX 1508 MASON CITY IA 50401	1	ATTN N MARGALIT TRACOR APPLIED SCIENCES BATTERY TECHNOLOGY CENTER 1601 RESEARCH BLVD ROCKVILLE MD 20850	1
ATTN SARGADE TECHNOCHEM CO 203A CREEK RIDGE ROAD GREENSBORO NC 27406	1	ATTN G ARCHDALE DOWTY BATTERIES 18 NUFFIELD WAY ABINGDON, OXON, UK	1
ATTN V KOCH COVALENT ASSOCIATES INC P O BOX 3129 SAXONVILLE STA FRAMINGHAM MA 01701	1	ATTN DR A HARKNESS BALLARD BATTERY SYSTEMS CORPORATIONS 1164 WEST 15TH ST, NORTH VANCOUVER BRITISH COLUMBIA CANADA V7P 1M9	1
ATTN F DAMPIER LITHIUM ENERGY ASSOCIATES P O BOX 25 WAVERLY STATION BELMONT MA 02178	1	INTERNAL	
ATTN K BAILEY EAGLE-PICHER INDUSTRIES INC P O BOX 130 SENECA MO 64865	1	20M (SUGGS)	1
		2610 (VISK)	1
		D45 (WILSON)	1
		E231	2
		E232	3
		E342 (GIDEP)	1
		E35	1
		R30	1
ATTN MARKETING DEPARTMENT SANYO ENERGY 200 RIVER ROAD LITTLE FERRY NJ 07643	1	R33 (BANNER)	20
		R33 (FILES)	20
		R33 (KILROY)	10

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 23 FEBRUARY 1994		3. REPORT TYPE AND DATES COVERED PHASE II FINAL
4. TITLE AND SUBTITLE LITHIUM AA-SIZE CELLS FOR NAVY MINE APPLICATIONS: II - EVALUATION OF COMMERCIAL CELLS			5. FUNDING NUMBERS	
6. AUTHOR(S) W. J. Kilroy, J. A. Banner, G. F. Hoff, K. A. Johnston, and W. A. Freeman				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Surface Warfare Center, R33 White Oak Detachment 10901 New Hampshire Avenue Silver Spring, Maryland 20903-5640			8. PERFORMING ORGANIZATION REPORT NUMBER NSWCDD/TR-92/462	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Naval Sea Systems Command (PMO-407) 2531 Jefferson Davis Highway Arlington VA 22242-5160			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The discharge performance of five commercial AA-size lithium cells has been evaluated to determine the feasibility of incorporating them into various battery packages for future Naval mine applications. Fresh cells and cells stored for varying durations at high temperature were discharged at (1) ambient room temperature at low rates (3 mA) and, (2) low temperatures (-2°C) at low and high rates (3, 20, and 50 mA) including some with pulse applications. The Li/SOCl₂ cells generally met all of the stringent performance requirements for mine operations. Specific test results often varied from manufacturer to manufacturer. The Li/MnO₂ technology failed to provide sufficient capacity when discharged at -2°C at 20mA after high temperature storage and was also unable to provide high current pulses at -2°C.				
14. SUBJECT TERMS lithium/thionyl chloride lithium/manganese dioxide lithium battery			15. NUMBER OF PAGES 37	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT SAR	

GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and its title page. Instructions for filling in each block of the form follow. It is important to *stay within the lines* to meet optical scanning requirements.

Block 1. Agency Use Only (Leave blank).

Block 2. Report Date. Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.

Block 3. Type of Report and Dates Covered. State whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 - 30 Jun 88).

Block 4. Title and Subtitle. A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.

Block 5. Funding Numbers. To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract	PR - Project
G - Grant	TA - Task
PE - Program Element	WU - Work Unit Accession No.

BLOCK 6. Author(s). Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).

Block 7. Performing Organization Name(s) and Address(es). Self-explanatory.

Block 8. Performing Organization Report Number. Enter the unique alphanumeric report number(s) assigned by the organization performing the report.

Block 9. Sponsoring/Monitoring Agency Name(s) and Address(es). Self-explanatory.

Block 10. Sponsoring/Monitoring Agency Report Number. (If Known)

Block 11. Supplementary Notes. Enter information not included elsewhere such as: Prepared in cooperation with...; Trans. of...; To be published in... When a report is revised, include a statement whether the new report supersedes or supplements the older report.

Block 12a. Distribution/Availability Statement. Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. NOFORN, REL, ITAR).

DOD - See DoDD 5230.24, "Distribution Statements on Technical Documents."
DOE - See authorities.
NASA - See Handbook NHB 2200.2
NTIS - Leave blank.

Block 12b. Distribution Code.

DOD - Leave blank.
DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.
NASA - Leave blank.
NTIS - Leave blank.

Block 13. Abstract. Include a brief (*Maximum 200 words*) factual summary of the most significant information contained in the report.

Block 14. Subject Terms. Keywords or phrases identifying major subjects in the report.

Block 15. Number of Pages. Enter the total number of pages.

Block 16. Price Code. Enter appropriate price code (*NTIS only*)

Blocks 17.-19. Security Classifications. Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.

Block 20. Limitation of Abstract. This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.