

AD-A279 297



AD

①


TECHNICAL r e p o r t

USA-BRDEC-TR // 2526

Evaluation of Thermal Viewers for Mine Detection

by
Harry Keller
Edmund Nawrocki
Peter Ngan
Ahn Trang

Report Date
May 1992

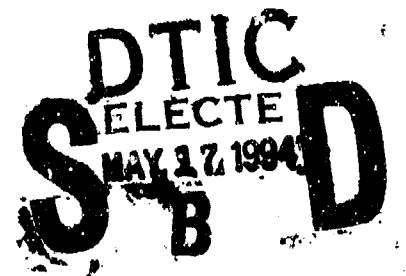

Distribution unlimited; approved for public release.

94-14517



United States Army
Belvoir Research, Development and Engineering Center
Fort Belvoir, Virginia 22060-5806

DTIC QUALITY INSPECTED 1

04 5 16 038

Destroy this report when it is no longer needed.
Do not return it to the originator.

The citation in this report of trade names of
commercially available products does not constitute
official endorsement or approval of the use of such
products.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Service, Direction of Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE May 1992		3. REPORT TYPE AND DATES COVERED Final
4. TITLE AND SUBTITLE Evaluation of Thermal Viewers for Mine Detection (U)			5. FUNDING NUMBERS	
6. AUTHOR(S) Harry Keller, Edmund Nawrocki, Peter Ngan, and Ahn Trang				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Belvoir Research, Development & Engineering Center Countermine Systems Directorate, STRBE-NT Fort Belvoir, VA 22060-5606			8. PERFORMING ORGANIZATION REPORT NUMBER 2526	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES POC: Harry Keller, (703) 704-1092				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Distribution unlimited; approved for public release.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) A brief field evaluation of four different infrared thermal viewers was conducted using buried and surface antitank mines as viewing objects. Under the conditions which existed, buried mines were visible for about half the viewing opportunities; surface mines were almost always visible. [Because of the very limited range of conditions of this brief evaluation, the results and conclusions presented here may not apply to other sets of circumstances and should not be considered "general."]				
14. SUBJECT TERMS field of view infrared clutter thermal image hand held viewers thermal viewer			15. NUMBER OF PAGES 24	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT Unlimited	

Report Number 2526

Evaluation of Thermal Viewers for Mine Detection

by
Harry Keller
Edmund Nawrocki
Peter Ngan
Ahn Trang



US Army Belvoir RD&E Center
Fort Belvoir, Virginia 22060-5606

May 1992

Distribution unlimited; approved for public release.

Table of Contents

	Page
Section I Background	1
Section II Introduction	2
Objectives	2
Scope	2
Section III Test Conditions.....	4
Area	4
Minefield Installation	5
Types of Mines	6
Viewing Procedures	7
Section IV Results.....	8
Data.....	8
Discussion of Results.....	10
Time-Lapse Video	11
Section V Conclusions	12
Bibliography	13
Appendix Individual Observer Impressions of Viewers	A-1
Tables	
1 Viewing Devices	2
2 Mine Characteristics.....	6

Accession For	
NRIS GRAAI	☒
DTIC TAB	☐
Unannounced	☐
Justification	
By	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A-1	

Figures

1	AN/TAS-4	3
2	SRTS.....	3
3	MVX-48	3
4	Test Area	4
5	Test Area	5
6	Mine Layout	6
7	Viewing Procedure	7
8	Histogram—Temperature Differences	8
9	Histogram—Mine Visibility Rate	9
10	Histogram—Visibility and Temperatures.....	9

Section I

Background

The impetus for this evaluation came from reports from recent military action in the Mideast (Desert Storm) in which land mines were sighted through tank infrared weapons sights.

Theoretical studies and experimental measurements of the effects of buried land mines on soil surface temperature distributions were done in the late 1950s and 1960s.¹ Evaluations of hand held thermal viewers for buried mine detection were done extensively in the early 1970s and reported in 1972² and 1976.³ More recently, experimental airborne infrared mine detection systems have been demonstrated in 1990 and 1991. All of these efforts have confirmed that under favorable circumstances, mines and minefields can be detected by thermal imaging devices.

Section II

Introduction

OBJECTIVES

Two objectives existed for the work described in this report. The first was to evaluate available current thermal viewing devices with respect to their capabilities for tactical antitank mine detection. The second objective was to record a time-lapse video image of a typical buried mine over a complete diurnal cycle. The achievement of these objectives was limited by funding constraints to a single environment and a time span of a few days effort.

SCOPE

This report describes the results of a one week effort, including data collection for approximately three days which was performed at Fort A.P. Hill, VA, in November 1991. The target sample included approximately 25 antitank land mines of six varieties, principally U.S. Army types. These were emplaced as buried or surface devices according to their ordinary use. Three hand held thermal viewers and one larger weapon sight were used in the evaluation (Figures 1, 2, and 3). Characteristics of these viewing devices are shown in Table 1. Operational realism was subordinated to data collection in the conduct of the test. Locations of mines were known and viewed repeatedly to collect information including thermal measurements of the surface over the mines and over the surrounding areas.

Table 1. Viewing Devices

	AN/TAS-4	SRTS	MVX-48	HHV
Spectral Bandwidth (microns)	8-12	8-12	3-5	3-5
Field of View Used (Az x El) (degrees)	6.8 x 3.4	N/A	16 x 8	15 x 5
Mine. Res. Temp. Dif. (°C)	.10	N/A	.12	0.15

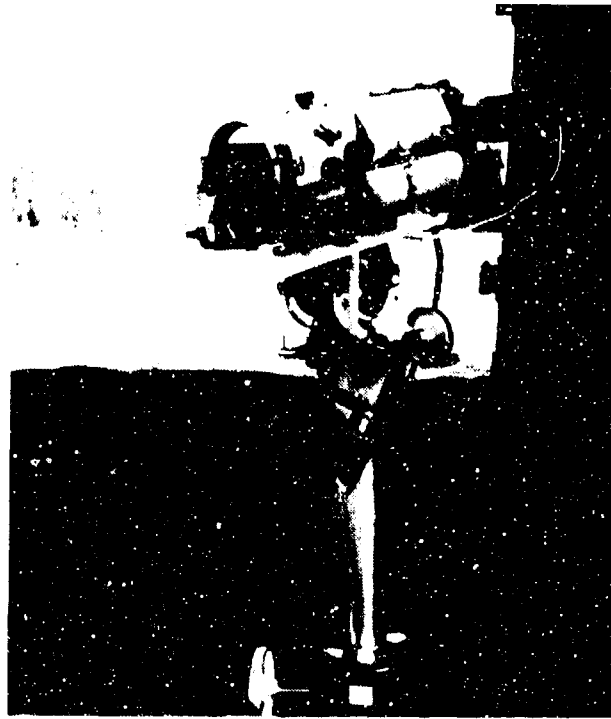


Figure 1. AN/TAS-4

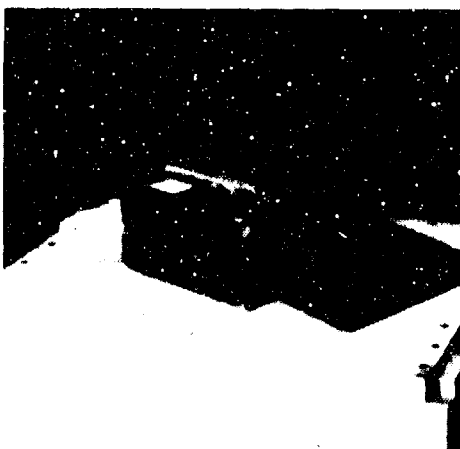


Figure 2. SRTS



Figure 3. MVX-48

Section III

Test Conditions

AREA

The test area selected was located near the Night Vision test facility at Fort A.P. Hill. The site provided a rudimentary roadbed, a grass-covered area, and an area which was mostly unvegetated, due to vehicular activity some time in the past. Figures 4 and 5 show these areas. The roadbed consisted simply of a layer of crushed bluestone bound by native clay and was not graded. The soil type in the area is mostly red clay mixed with gravel.



Figure 4. Test Area



Figure 5. Test Area

MINEFIELD INSTALLATION

The minefield was installed on 13 - 14 November. Sectors were laid out to incorporate a variety of mine types at various distances in each of the three environments. The soil was moist but not wet at the time of installation. Mines were installed by hand. Although a power auger was used to a depth of six inches for the installation of some of the mines, the holes were enlarged to finished size using hand tools. Spoil was deposited on the ground around the holes and scraped or shoveled back into place when the mines were deployed. In the three-day interval between installation and first viewing, the weather was cool and dry. When viewing began on 18 November, the moisture from any residual spoil seemed to have disappeared, although digging scars were still visible around the installed mines and for the most part remained somewhat visible during the week. The locations of mines buried in the grassy area were more readily visible to the unaided eye because of spoil residue on the grassy surface and discoloration of the grass itself.

Viewers were used from the back of a laboratory test van parked at a position which provided visibility to the aforementioned three minefield environments. Layout of the mines is shown in Figure 6.

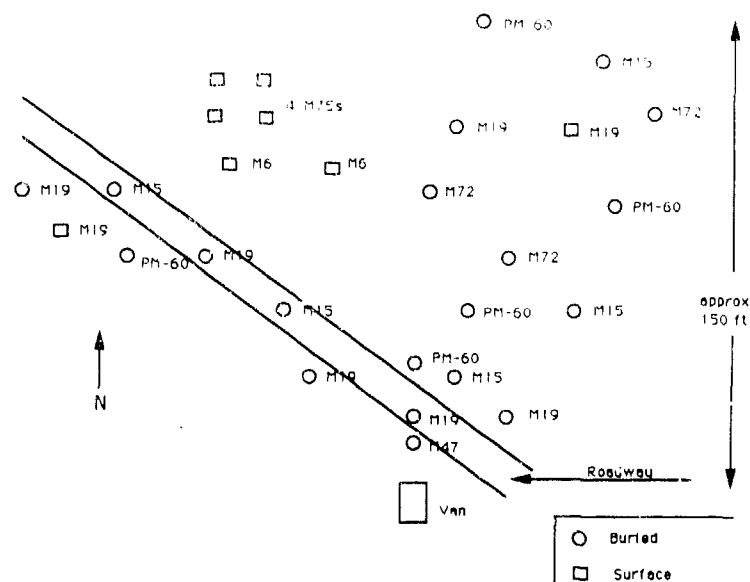


Figure 6. Mine Layout

TYPES OF MINES

The mines were inert common antitank mines which were wax filled to simulate the thermal properties of actual mines. Some characteristics of these mines are summarized in Table 2.

Table 2. Mine Characteristics

TYPE	SIZE (cm)	WEIGHT (kg)	CASE MATERIAL
M15	34 diameter 12.5 height	14.25	metal
M19	33 square 9.4 height	12.6	plastic
M6	28 diameter 7.6 height	7	metal
M75	12 diameter 6.6 height	1.7	metal cylinder, plastic ends
PM-60 (German)	31 diameter 13 height	10	plastic

VIEWING PROCEDURES

All recorded viewing was done from within or atop an instrument van, see Figure 7. The procedure used was to view the site of the mine from the van, reach a two or three person group consensus regarding its visibility, and then make thermal measurements at the mine site. The decision of visibility was not based on being able to discriminate the position of the mine from the clutter of the entire area of the minefield, but instead on being able to differentiate the position of the mine with respect to its immediate neighborhood. Thermal measurements used the hand held pyrometer first aimed directly at the location of the mine and second taking an average of a roughly 4-foot diameter circular path around the mine.

Hand held viewers were used in three ways: viewing from the instrument van, viewing from the bed of a pickup truck as it moved slowly along the road, and viewing on foot from various positions in the minefield.

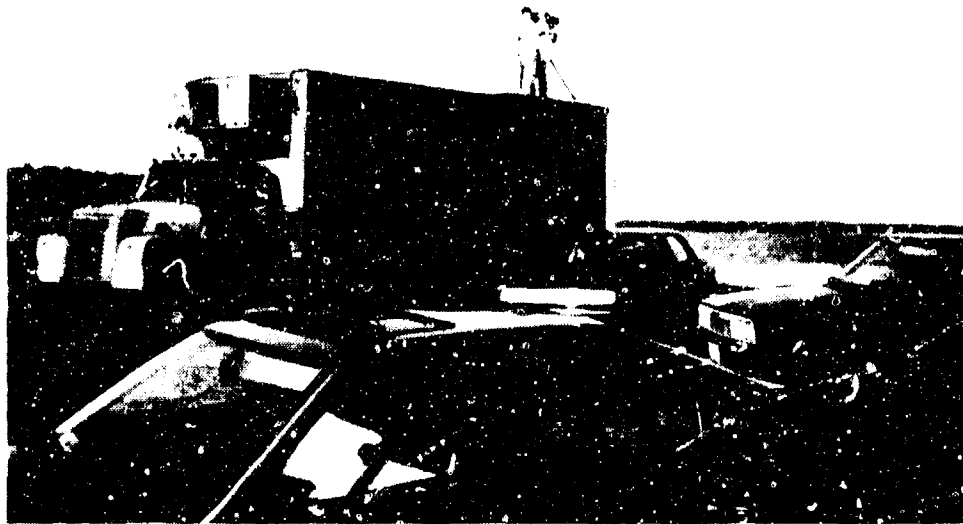


Figure 7. Viewing Procedures

Section IV

Results

DATA

Figure 8 is a histogram of temperature differences (over mine vs. near mine) in $^{\circ}\text{C}$ for all viewing opportunities. Figure 9 shows the mine visibility rate as a function of this temperature difference. The number of instances of delta temperatures above 2°C was too small to develop statistically stable data. Figure 10 shows visibility of buried mines (%), air temperature and soil temperature ($^{\circ}\text{C}$) as functions of time from the beginning of the evaluation at 1000 hours on 18 November. During the days of data collection, no rain fell; wind speed never exceeded 4 knots and was mostly in the 0 to 2 knot range.

User comments regarding the hand held viewers are provided in the appendix.

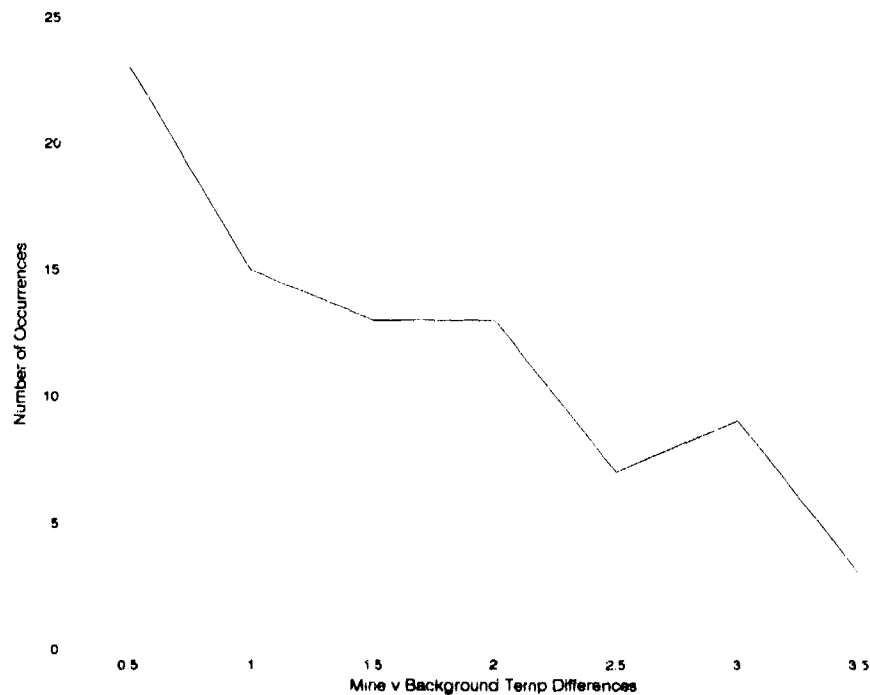


Figure 8. Histogram—Temperature Differences

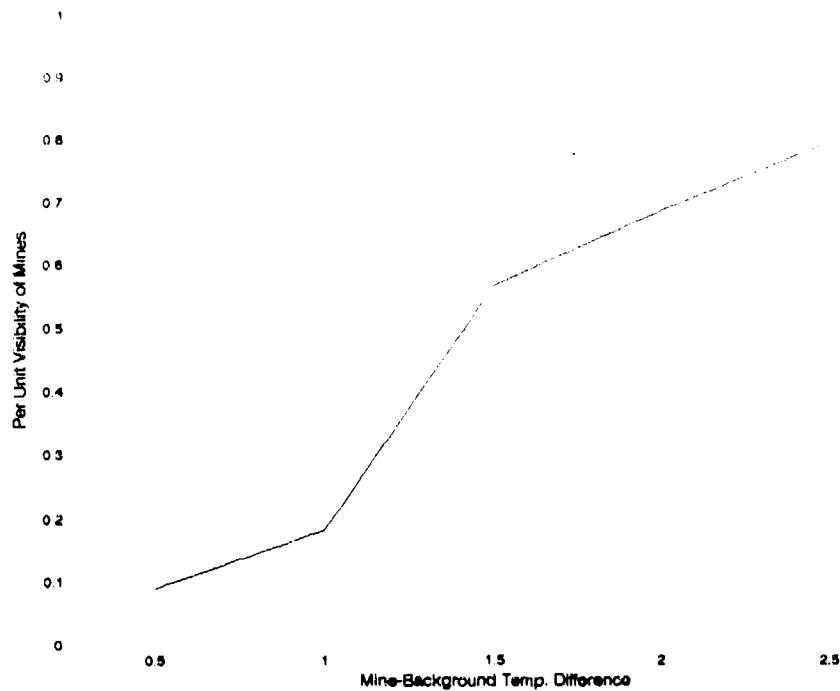


Figure 9. Histogram—Mine Visibility Rate

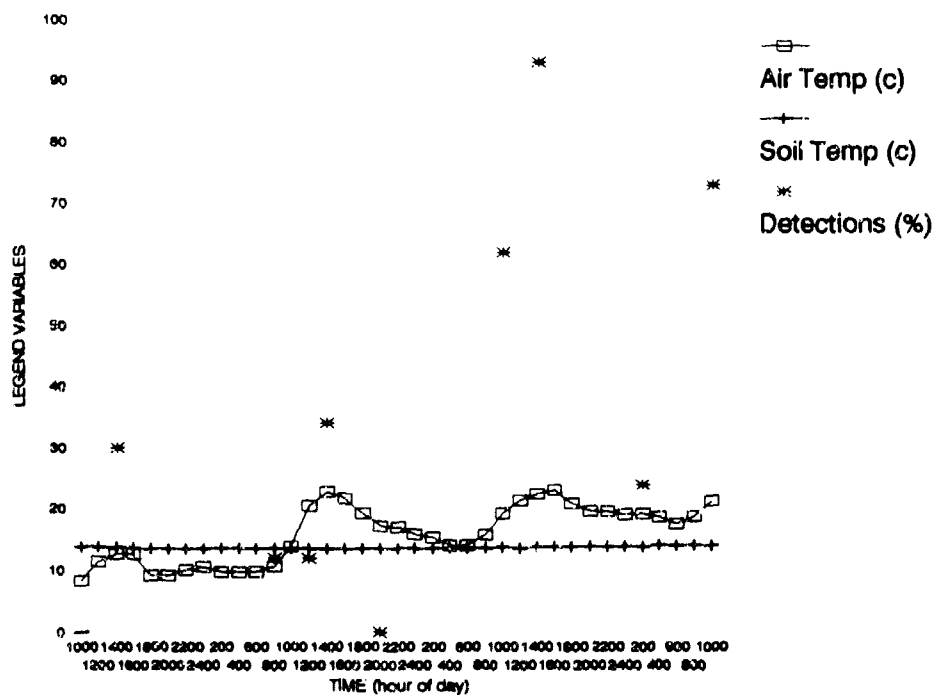


Figure 10. Histogram—Visibility and Temperatures

DISCUSSION OF RESULTS

Overall, the visibility rate using the AN/TAS-4 for buried mines was about 0.45 for all opportunities. For surface mines, the visibility rate was 0.98. The hand held viewers were used in comparison with the AN/TAS-4. The 8-12 micron hand held viewer performed comparably with the AN/TAS-4 against buried mines on the road, whereas with the 3-5 micron viewers, buried mines were not seen. Earlier reports have indicated that both near and far infrared are effective in viewing buried mines. All viewers were effective against surface mines.

The viewpoint from the van load bed was approximately 10 feet above ground, approximately the height of the AN/TAS-4 when vehicle mounted. The results of the first viewing session were affected by the contour of the test area which in one place was the backslope of a slight rise between the van and mine locations. The more distant mines were viewed at an angle which made them very difficult to see through the viewers.

All later data were recorded from atop the van at a height of 17 feet. This resulted in a better viewing angle and enabled data to be taken over a large enough area to include the variety of backgrounds available at the site. Since an operational viewing height would be approximately half that of the viewpoint on the van roof, one could expect that mine visibility in operational circumstances would be good to about half the distances noted here.

Up to about 200 feet in the circumstances of this minefield, the visibility of mines was determined by factors other than range. Beyond that range, mines became difficult to see because of distance.

The barren area of the test site was an unfavorable site for detection because the surface roughness due to past vehicle activities resulted in thermal background clutter which was comparable in magnitude to the buried mine signatures. The viewing method used compensated somewhat for this condition because much of the clutter could be ignored in the visibility decision. Detection in such clutter would otherwise have been very difficult.

The thermal images of buried mines seen throughout the days of data collection were, to a large extent, images of the burial scars. Throughout the week, no rain fell and, even though the surface moisture appeared to have equalized between the background surface and the surface over the mine location, the surface texture of the scars remained visible both to the thermal viewer aided eye and the unaided eye. Rain occurred during the weekend following the data

collection. It was noted during the taping of the time-lapse imagery the following week that the thermal image much more closely matched the shape of the underlying mine than it had earlier. Further weathering in of the minefield prior to collecting data might have resulted in better detection results due to easier discrimination of mine shapes.

The effect of the season on the detection capability of the viewers was probably substantial. The angle of incidence of solar radiation in late November appeared to be 45 degrees or more from vertical at noon, and so the driving force which generates the detectable thermal differences would have been considerably smaller than during most of the rest of the year.

TIME-LAPSE VIDEO

Early in the week following the viewer evaluation effort, a time-lapse video recording was made of the image presented by the AN/TAS-4. The subject of the imagery was one of the M19 mines buried in the roadway a week and a half earlier. An additional M19 was positioned on the road surface to appear in the upper right corner of the recorded image as an item of reference. Recording was accomplished through a viewport in the instrumentation van's rear door; the camera was located about 25 feet laterally and 10 feet vertically from the mine. A controllable time-lapse video recorder was set to record continually to achieve a 12 minute record over the period of a 24 hour day. Recording began after noon on a clear, still, cool day. The image of the mine, which was warmer than background, was faint but visible. After thermal crossover around dark, the image, cooler than background, became quite clear by early evening and remained that way throughout the night. After sunrise, the sky was overcast and the image was not readily visible. This condition remained until afternoon when recording was terminated.

Section V

Conclusions

Thermal effects of mines and buried mines under favorable circumstances can be viewed by infrared imaging devices.

Separating valid images from background clutter in many environments is difficult. Roadbeds, because of their homogeneous nature, tend to be low clutter environments and should be a relatively favorable environment for detection of mines.

The spectral range of 8-12 microns provided visibility of buried mines which were not visible in the range of 3-5 microns under the circumstances of this evaluation.

The better view is the higher view, within limits. The overhead viewpoint of a low flying aircraft provides a less interruptible line of sight, a more distinctive plan view of an individual mine, and a greater likelihood of seeing patterns in conventionally deployed minefields.

Performance of thermal viewers in detection of mines is highly dependent on conditions, as can be seen from the varying results obtained at one site over a very brief time. The data and conclusions provided in this report should not be considered definitive in applying such devices under different conditions of soil, ground cover, soil moisture, insolation, cloud cover, wind, precipitation, and other factors.

Bibliography

1. S. L. Carts, Jr., "Feasibility of Land Mine Detection by Infrared Thermal Imaging," Report RR-1744, Fort Belvoir, Va., USAERDL, 25 March 1963.
2. Dwight L. Gravitte, "Field Evaluation of Hand-Held Thermal Viewer for Mine Detection," Report 2022, Fort Belvoir, Va., USAMERDC, February 1972.
3. Dwight L. Gravitte, "Potentials and Limitations of Thermal Imagers for Mine Detection," Report 2172, Fort Belvoir, Va., USAMERDC, April 1976.

Appendix

Individual Observer Impressions of Viewers

INDIVIDUAL 1

1. Effectiveness in viewing buried mines.

AN/TAS-4: Good and best among others. Although shapes of mines were rarely seen, the disturbed soil above mines was clearly identified.

SRTS: Mines were never identified, but view was great.

MVX-48: Mines were never identified, resolution was kind of poor.

HHV: View was great with better resolution than other portables. Only disturbed soil could sometimes be identified.

2. Effectiveness in viewing surface mines.

AN/TAS-4: Very good shapes, contours, and other features were often seen.

SRTS: Good

MVX-48: Target seen but not easily identified.

HHV: Targets could sometimes be seen.

3. General image quality and practicality of use.

AN/TAS-4: Best image quality; confidence in identifying targets.

SRTS: Good quality image. Everything in one piece.

MVX-48: Not very heavy. Not very good resolution.

HHV: Heavy. Hard to use forehead ON switch. Difficult to carry with two heavy pieces. Resolution OK. Targets not often seen.

INDIVIDUAL 2

1. Effectiveness in viewing buried mines.

AN/TAS-4: Excellent compared with other viewers. Could see some buried mines at long distance.

SRTS: Good, could see some buried mines at short distance.

MVX-48: Could not see buried mines.

HHV: Could not see buried mines.

2. Effectiveness in viewing surface mines.

AN/TAS-4: Excellent, could see all surface mines with high image quality.

SRTS: Good, could see all surface mines.

MVX-48: Good, could see all surface mines.

HHV: Good, could see all surface mines.

3. General image quality and practicality of use.

AN/TAS-4: Excellent long range viewer for use on combat vehicles. Not usable hand held.

SRTS: Excellent for hand held use due to light weight, small size and simple operation.

MVX-48: Acceptable for hand held use.

HHV: Good for hand held or vehicle-mounted use. Better image quality than other hand held viewers.

INDIVIDUAL 3

1. Effectiveness in viewing buried mines.

AN/TAS-4: Able to detect mines buried in road and a few in dirt with patches of grass and weeds. Use of external monitor was helpful because of red phosphor used in the viewer display. Off-road mines were difficult to identify due to clutter.

SRTS: Able to detect mines buried in the road and a few were visible off-road. Off-road mines were difficult to identify due to clutter.

MVX-48: Similar to SRTS.

HHV: Similar to SRTS.

2. Effectiveness in viewing surface mines.

AN/TAS-4: All the mines on the surface were detected at the hours we tested. Mines were visible at up to approximately 300 feet.

SRTS: All surface mines were detected at the hours we tested. Surface mines were visible at up to 50 feet.

MVX-48: All surface mines were detected at the hours we tested. Mines were visible at up to 300 feet when the sight was adjusted correctly.

HHV: All surface mines were detected at the hours we tested. Mines were visible at up to 300 feet when the sight was correctly adjusted.

3. General image quality and practicality of use.

AN/TAS-4: The external monitor provided easy viewing of mines. Contrast and gain adjustments were helpful in detecting buried and surface mines. Uses bottled gas for cooling. Not being hand held, this unit was easy to use without operator fatigue.

SRTS: Lighter and easier to operate than the other thermal viewers. Operator fatigue and a need for extra batteries would limit viewing time.

MVX-48: Heavier than SRTS. Operator fatigue and need for extra batteries would limit viewing time with this device.

HHV: The device is not practical for hand held mine detection. Its forehead pressure power ON switch is uncomfortable and fatiguing to use. This unit consisted of two modules, viewer and support modules, connected by a heavy cable. A cooling gas bottle and battery connected to the support module. This arrangement was not as convenient to use as the other two self-contained single unit designs. The unit tested suffered intermittent operation when the connecting cable was moved.

Distribution for Report No. 2526

Department of Defense

- 1 Director, Technical Information
Defense Advanced Research Projects Agency
1400 Wilson Blvd.
Arlington, VA 22209
- 2 Defense Technical Information Center
Cameron Station
ATTN: DTIC-FDAC
Alexandria, VA 22304-6145

Department of the Army

- 1 HQDA (DAMA-AOA-M)
Washington, DC 20310
- 1 HQDA (DALO-TSM)
Washington, DC 20310
- 1 HQDA (DAEN-RDL)
Washington, DC 20314
- 1 HQDA (DAEN-MPE-T)
Washington, DC 20314
- 1 Director
Army Materials and Mechanics Research
Command
ATTN: AMXMR-RL (Technical Library)
Watertown, MA 02172-0001
- 1 Commander
Chemical Research R&D Center
ATTN: SMCCR-SPS (Technical Library)
Aberdeen Proving Ground, MD 21005
- 1 Commander
US Army Aberdeen Proving Ground
ATTN: STEAP-MT-U (GE Branch)
Aberdeen Proving Ground, MD 21005-5071
- 1 Director
US Army Materiel System Analysis Agency
ATTN: AMXSY-MP
Aberdeen Proving Ground, MD 21005-5071

- 1 Director
US Army Engineer Waterways Experiment Station
ATTN: Chief, Library Branch
Technical Information Center
Vicksburg, MS 39180
- 1 Commander
US Army Troop Support and Aviation Materiel
Readiness Command
4300 Goodfellow Blvd.
St. Louis, MO 63120
- 1 President
US Army Aviation Test Board
ATTN: STEBG-PO
Fort Rucker, AL 36360
- 1 US Army Aviation School Library
PO Drawer O
Fort Rucker, AL 36360
- 1 Commander
Rock Island Arsenal
ATTN: SARRI-LPL
Rock Island, IL 61299-7300
- 1 HQDA
ODCSLOG
DALO-TSE
Room 1E588, Pentagon
Washington, DC 20310-0561
- 1 Commandant
US Army Engineer School
ATZA-CDD
Fort Leonardwood, MO 65473
- 1 Commander
Headquarters, 39th Engineer Bn (Cbt)
Fort Devens, MA 01433
- 1 President
US Army Airborne, Communications, and
Electronics
ATTN: STEBF-ABTD
Fort Bragg, NC 28307

- 1 President
US Army Armor and Engineer Board
ATTN: ATZK-AE-PD-E
Fort Knox, KY 40121-5470
- 1 Director
ATTN: STSTO-TPP
Tobyhanna Army Depot
Tobyhanna, PA 18466-5097
- 1 HQ, USAEUR & Seventh Army
Deputy Chief of Staff, Engineer
ATTN: AEAEN-MT-P
APO New York 09403
- 1 Director
US Army TRADOC
Systems Analysis Activity
ATTN: ATAA-SL (Technical Library)
White Sands Missile Range, NM 88002

Director
US Army LABCOM/Ballistic Research Lab
Aberdeen Proving Ground, MD 21005-5066
- 1 HQDA, FARD-TT
Washington, DC 20310-0103
- 2 Night Vision & Electro-Optics Directorate
ATTN: AMSEL-RD-NV-STDD (K. Miller)
Fort Belvoir, VA 22060-5677
- 2 Army Armaments Research, Development
and Engineering Center
ATTN: SMCAR-FSF-RO, Bldg 95, North
Picatinny Arsenal, NJ 07806-5000

Belvoir RD&E Center

Circulate

- 1 Commander STRBE-Z
Deputy Commander STRBE-ZD
Technical Director STRBE-ZT
Assoc Tech Dir (E&A) STRBE-ZTE
Assoc Tech Dir (R&D) STRBE-ZTR
Executive Officer STRBE-ZX
Sergeant Major STRBE-ZM
Advanced Systems Concept Dir STRBE-H
Program Planning Div STRBE-HP
Foreign Intelligence Div STRBE-HF
Systems and Concepts Div STRBE-HC
- 5 STRBE-N
- 6 STRBE-NT

- 3 Tech Reports Ofc ASQNK-BVP-G
- 3 Security Ofc (for liaison officers) STRBE-S
- 2 Technical Library STRBE-BT
- 1 Public Affairs Ofc STRBE-I
- 1 Ofc of Chief Counsel STRBE-L

Department of the Navy

- 1 Library (Code L08A)
Civil Engineering Laboratory
Naval Construction Battalion Center
Port Hueneme, CA 93043
- 1 Naval Training Equipment Center
ATTN: Technical Library
Orlando, FL 32813

Department of the Air Force

- 1 HQ USAF/RDPT
ATTN: Commander
Washington, DC 20330
- 1 HQ USAF/PREEU
Chief, Utilities Branch
Washington, DC 20330
- 1 HQ Air Force Engineering & Services Center
Technical Library FL7050
Tyndall AFB, FL 32403
- 1 HQ Air Force Civil Engineering
Support Agency, RAAE
ATTN: C. Calobrisi
Tyndall AFB, FL 32403-6001