




Contract Report ITL-95-1
June 1995

**US Army Corps
of Engineers**
Waterways Experiment
Station

Computer-Aided Structural Engineering (CASE) Report

Comparison of Barge Impact Experimental and Finite Element Results for the Lower Miter Gate of Lock and Dam 26

by Kenneth M. Will, Georgia Institute of Technology

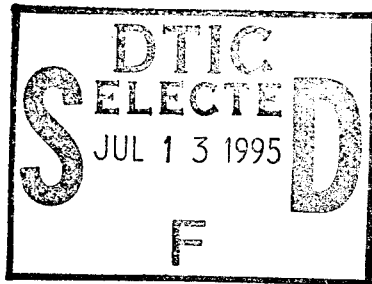

Approved For Public Release; Distribution Is Unlimited

19950706 020

DTIC QUALITY INSPECTED 5

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.



PRINTED ON RECYCLED PAPER

Comparison of Barge Impact Experimental and Finite Element Results for the Lower Miter Gate of Lock and Dam 26

by Kenneth M. Will

Georgia Institute of Technology
Atlanta, GA 30332

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

Final report

Approved for public release; distribution is unlimited


Prepared for U.S. Army Corps of Engineers
Washington, DC 20314-1000

Under Contract No. DACW39-91-M-1917

Monitored by U.S. Army Engineer Waterways Experiment Station
3909 Halls Ferry Road, Vicksburg, MS 39180-6199



**US Army Corps
of Engineers**
Waterways Experiment
Station

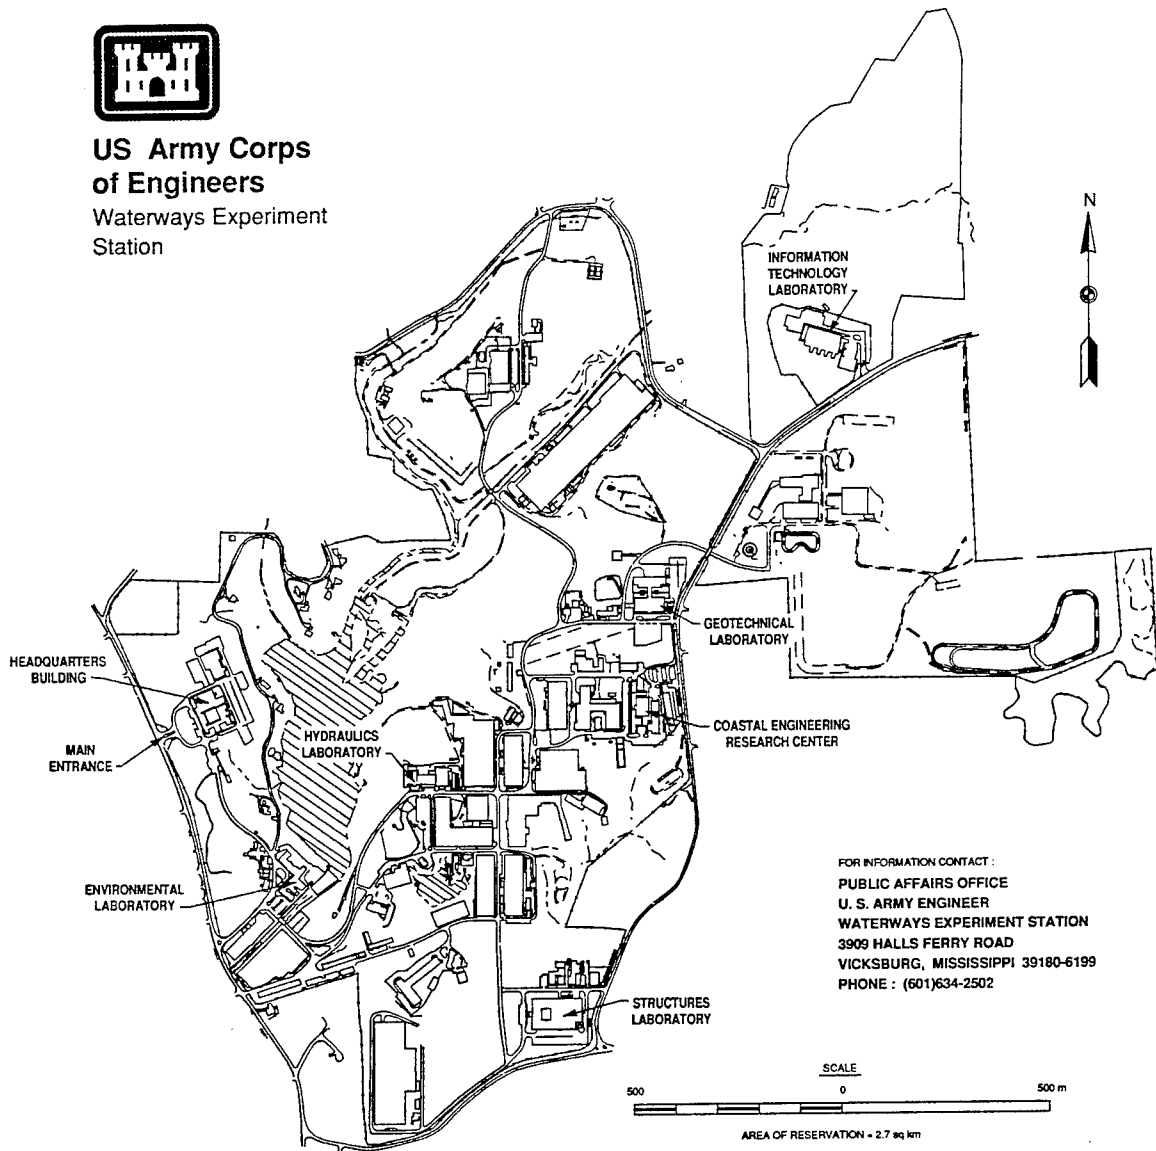

FOR INFORMATION CONTACT :
PUBLIC AFFAIRS OFFICE
U. S. ARMY ENGINEER
WATERWAYS EXPERIMENT STATION
3909 HALLS FERRY ROAD
VICKSBURG, MISSISSIPPI 39180-6199
PHONE : (601)634-2502

Waterways Experiment Station Cataloging-in-Publication Data

Will, Kenneth M.

Comparison of barge impact experimental and finite element results for the lower miter gate of Lock and Dam 26 / by Kenneth M. Will ; prepared for U.S. Army Corps of Engineers ; monitored by U.S. Army Engineer Waterways Experiment Station.

48 p. : ill. ; 28 cm. -- (Contract report ; ITL-95-1)

Includes bibliographical references.

1. Hydraulic gates -- Mathematical models. 2. Locks (Hydraulic engineering) -- Data processing. 3. Hydraulic structures. I. United States. Army. Corps of Engineers. II. U.S. Army Engineer Waterways Experiment Station. III. Information Technology Laboratory (U.S. Army Engineer Waterways Experiment Station) IV. Computer-aided Structural Engineering Project. V. Title. VI. Series: Contract report (U.S. Army Engineer Waterways Experiment Station) ; ITL-95-1.

TA7 W34c no.ITL-95-1

Contents

Preface	iv
Conversion Factors, Non-SI to SI Units of Measurement	v
1—Introduction	1
Overview	1
Experimental Testing	1
Objectives of the Finite Element Study	2
2—The Finite Element Model	3
Description of Structure	3
Overview of the Model Development Procedure	3
Description of the Model	4
Skin plate	5
Diagonals and gusset plates	5
Top girder	7
Bottom girder	7
Vertical girders	8
Vertical beams	8
Vertical quoin beam	8
Box below top girder near center of girder	10
Loading Conditions	10
Boundary Conditions	12
GTSTRUDL Input File	13
3—Analytical and Experimental Results	14
Analysis Procedure and Results	14
Experimental and Analytical Results for Loading 1	14
Stress Results for Other Loadings	16
Deformed Shape of the Structure for Loadings 1, 2, and 3	20
4—Recommendations	22
Appendix A: GTSTRUDL Input File	A1

Preface

The work described in this report was performed under the Computer-Aided Structural Engineering (CASE) Project. The CASE Project is managed by the Scientific and Engineering Applications Center (S&EAC), Computer-Aided Engineering Division, Information Technology Laboratory (ITL), U.S. Army Engineer Waterways Experiment Station (WES). The CASE Project is funded by the Civil Works Directorate, Headquarters, U.S. Army Corps of Engineers (HQUSACE). Mr. Cameron Chasten, formerly S&EAC, monitored this work under the general supervision of Mr. H. Wayne Jones, Chief, S&EAC, and Dr. N. Radhakrishnan, Director, ITL.

The work was performed by Dr. Kenneth M. Will, Consultant, Georgia Institute of Technology, Atlanta, under USACE contract DACW3991M1917.

At the time of publication of this report, Director of WES was Dr. Robert W. Whalin. Commander was COL Bruce K. Howard, EN.

The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval for the use of such commercial products.

Conversion Factors, Non-SI to SI Units of Measurement

Non-SI units of measurement used in this report can be converted to SI units as follows:

Multiply	By	To obtain
degrees (angle)	0.01745329	radians
feet	0.3048	meters
inches	0.0254	meters
kips	4448.	newtons
kips per square inch	6.895	megapascals

1 Introduction

Overview

The passing of barges through locks may result in the impact of the barge against one or both of the closed miter gates. The forces resulting from the impact of the barge against a miter gate must be considered in the design of the miter gate. The engineer responsible for the miter gate design must have guidelines as to the magnitude and distribution of this impact force.

Criteria for this barge impact loading is currently given in EM 1110-2-2703 (US Army Corps of Engineers 1984). For horizontally framed miter gates, an equivalent water load of 6 ft minimum is used for loading above the top girder in the design of the skin plate and 10 ft minimum is used below the top girder for the design of the horizontal girders. For vertically framed gates, a 120 kip concentrated load is specified and may be applied anywhere from the miter end to within 10 feet of the lock wall with a 33 percent overstress being allowed. Unfortunately, no supporting documentation is available in EM 1110-2-2703 to support the above criteria. The engineer must assume that these criteria are accurate or at least conservative and use them in the design.

Experimental Testing

The replacement of Mississippi Locks and Dam 26 by the Melvin Price Locks and Dam presented an excellent opportunity to perform an experimental study to study the behavior of barge impact on the lower miter gates. These miter gates were vertically framed. The main purposes of the experimental testing was to obtain strain gage and load magnitude data, and to observe the behavior of the miter gate due to barge impact. There was no head differential on the gates. A series of four progressively increasing impact loads was applied to the miter gates by impacting the gate with a barge tow. The velocity of the impact was varied to generate the increasing impact loads. A summary of the experimental testing program and results may be found in a paper by Chasten, C. P., and Ruff, T., "Miter Gate Barge Impact Testing, Lock and Dam 26, Mississippi River," *Proceedings of the 1991 Corps of Engineers Structural Engineering Conference*, 1991.

Objectives of the Finite Element Study

A primary objective of this study was to develop a finite element model of the lower miter gate of Lock and Dam 26. Once the model was developed, static analyses were to be performed to determine the behavior of the gate.

An initial objective of the study was to perform the finite element analysis of the lower miter gate of Lock and Dam 26 and perform a barge impact static analysis prior to the experimental testing. The purpose of performing this first analysis was to assist the experimental program in the location of the strain gages. Unfortunately, due to the short time that existed before the demolition of the gate and contractual delays, the finite element model could not be developed prior to actual testing.

After the experimental program had been completed and the data analyzed, the primary objective of the study was to determine if the guidelines in the EM 1110-2-2703 were accurate or needed to be modified in order to more accurately reflect the barge impact loading. A finite element model of the miter gate was developed and an analysis performed for an impact at the same location as in the experimental study. The magnitude of the load was the same as recorded in one of the impacts measured in the experimental study. The finite element results were then compared with the experimental strain gage results at several locations in the top girder. If needed, the finite element model was to be calibrated to match the experimental results for further analyses. No calibration was felt to be necessary. Further analyses were then performed for design loading conditions based on the EM criteria for both horizontally and vertically framed gates. These results were compared with hand calculations based on the gate behaving as a three hinged arch. The purpose of these calculations was to determine if the finite element results were reasonable for the additional loading conditions.

Chapter 2 of this report summarizes the finite element model including descriptions of the modelling of the structural elements of the gate, the boundary conditions, and the various loadings. Chapter 3 compares the finite element results for the impact loading with the experimental results, and also compares the finite element results with the three hinged arch calculations. Finally, Chapter 4 presents recommendations regarding the impact loading used for design.

2 The Finite Element Model

Description of the Structure

As mentioned previously, the lower miter gate on the old Mississippi River Lock and Dam 26 was selected for this investigation as well as the experimental study. The lower miter was a vertically framed gate with each leaf approximately 45 feet high with 60 feet wide. The drawings for the gate are dated November 1933. Each leaf was made up of three panels with diagonals on both the upstream and downstream faces. The skin plate was made of buckled plates. The primary method of connection of the various structural elements of the gate was by riveting.

Overview of the Model Development Procedure

The first step in preparing the model was to obtain drawings of the gate. The original drawings had been preserved in storage and full size copies of the originals were obtained.

Based on reviewing the drawings and photographs, the model was developed. Although this gate was a vertically framed gate, the modelling approach used previously for horizontally framed gates (Ref. T.R. ITL-87-4, RPT. 1-7, AUG. 1987) was applicable. The major assumptions used in developing the model are listed below:

- a. The gate would behave linearly elastically and undergo small deflections and rotations. This assumption was made in order to be able to perform a linear analysis on the gate. Photographs from the barge impact experimental studies clearly showed nonlinear behavior but this behavior appeared to be isolated to the impact area and was not considered to have a major effect on the overall structural behavior.
- b. The riveted construction provided rigid connection of the various components of the gate just as would be assumed if modern welding techniques were used in the fabrication and erection of the gate.
- c. The gate leafs were symmetrical.
- d. The miter contact between the leafs was present for all loading conditions and there was no loss of contact.

- e. The diagonals were tensioned so they would be immediately effective upon load application.
- f. The webs of the vertical beams and the top and bottom horizontal girders were modelled using plate elements which could represent both in-plane and out-of-plane behavior. These elements assume that there is not any coupling of the in-plane and out-of-plane behavior at the element level. There is coupling in the overall model due to elements in different planes intersecting each other. The flanges of the vertical beam were modelled using one-dimensional space frame members. The properties of these flange members varied especially on the horizontal girders since the girder flanges had one to four cover plates at several locations. This assumes that the stress distribution across the flanges varies linearly.
- g. The skin plate was also modelled using plate elements and the effect of the buckled plates was neglected. The elements were assumed to be flat.
- h. The sill provided continuous support perpendicular to the flange of the bottom horizontal girder.
- i. Stress concentrations due to the numerous rivets were ignored.
- j. The dimensions shown on the drawings were assumed to be the same as in the actual structure. The model was based on the drawing dimensions.
- k. Photographs of the gate revealed a box like area just below the top horizontal girder near midspan of the leaf. This area was not shown in the original drawings and may have been used to assist in the erection process. This area was modelled using plate elements and space frame members where appropriate. Properties for this box structure were assumed.
- l. The pintle and gudgeon pin casting support points were approximated in the model. The detail required to accurately model these areas would have resulted in an unnecessarily fine mesh. The actual supports in these areas was assumed to be at single nodes in the model.

Description of the Model

The model was prepared using the GTSTRUDL program (GTICES Systems Laboratory, GTSTRUDL USERS MANUAL, Revision M, 1991, School of Civil Engineering, Georgia Tech, Atlanta). Space frame members and flat plate elements were utilized. The flat plate elements used in the model were SBHQ6 and SBHT6 elements. These elements can represent in-plane membrane behavior and out-of-plane bending behavior and also contain an artificial 6th degree-of-freedom to prevent numerical instabilities when modelling plate and shell structures.

Details regarding the modelling of various components of the model will be presented later. Figure 1 shows a wire frame view of the overall model. Figures 2 and 3 show upstream and downstream views of the model with hidden lines removed. The model contained 1,435 plate elements (SBHQ6 and SBHT6), 796 space frame members, and 1,435 nodes. A description of the modelling of the skin plate, diagonals, top and bottom girders, vertical girders and beams, and the quoin and miter regions is presented below.

Skin plate

The skin plate was modelled entirely with plate elements. The buckled plates were all modelled as flat elements. Horizontally, two divisions of elements were placed between each vertical beam and vertical girder. Each buckled plate was subdivided into two elements vertically. The thickness of all skin plate elements was 0.375 inches.

Diagonals and gusset plates

The diagonals were modelled as space frame members with hinges at each end. The cross section properties of each diagonal were computed based on a rectangular bar. Some of the bars were 8 inches wide and 1.25 inches thick, others 8 inches wide and 1 inch thick, and others 6 inches wide and 0.75 inches thick.

The gusset plates used to connect the diagonal bars to the rest of the structure were each modelled with two plate elements which were 1 inch thick.

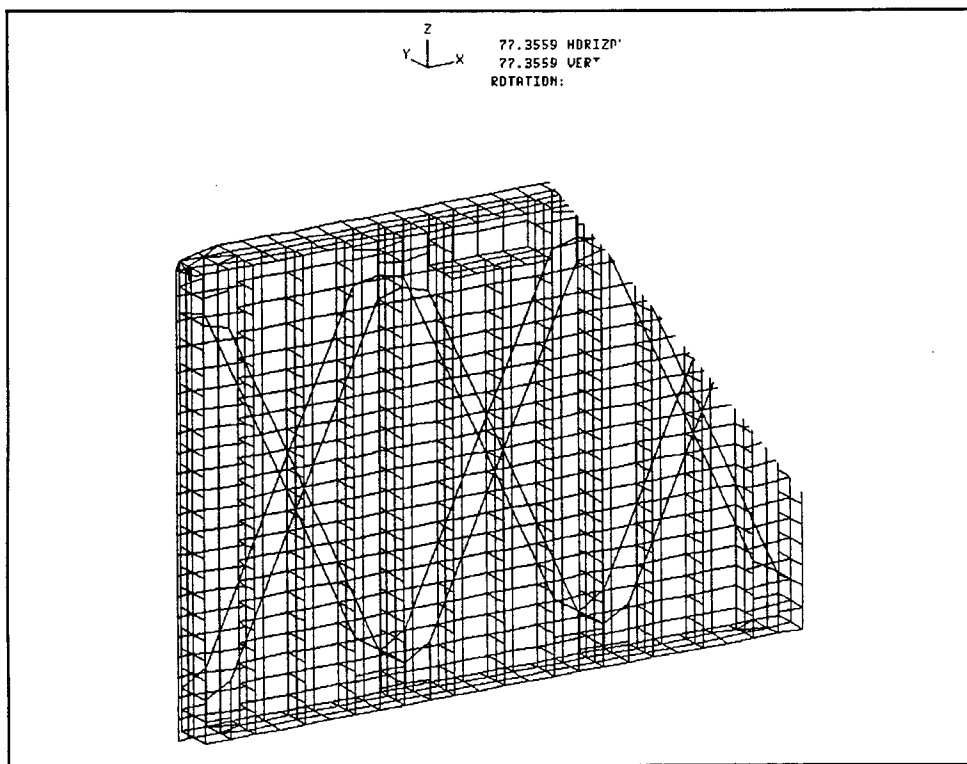


Figure 1. Wire frame view of leaf

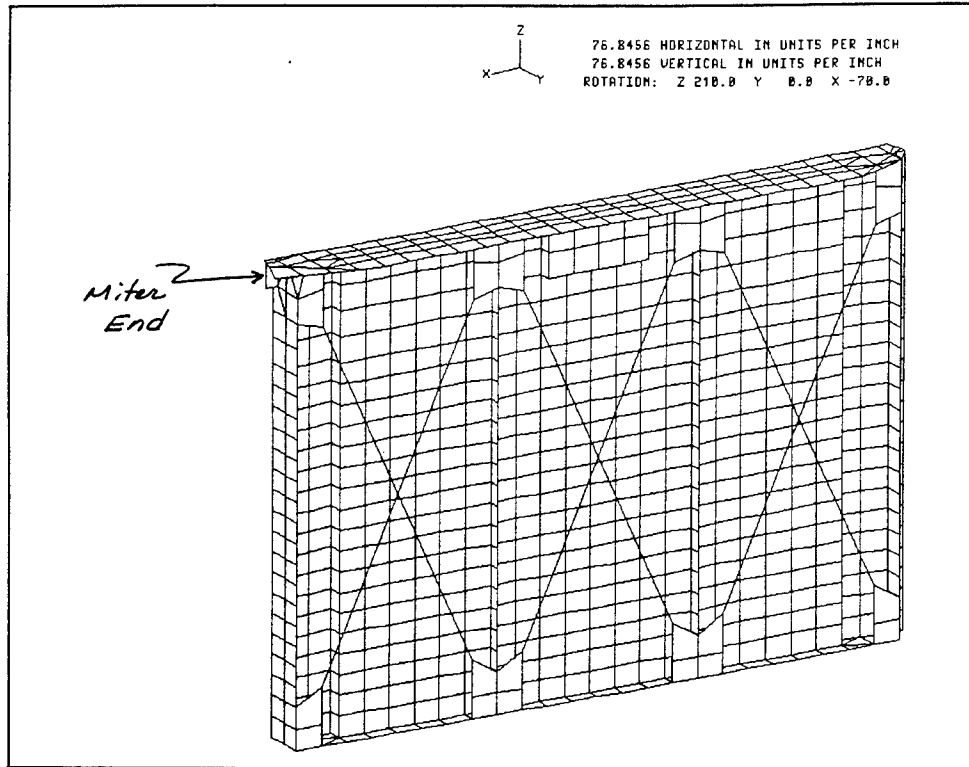


Figure 2. Upstream view of leaf with hidden lines removed

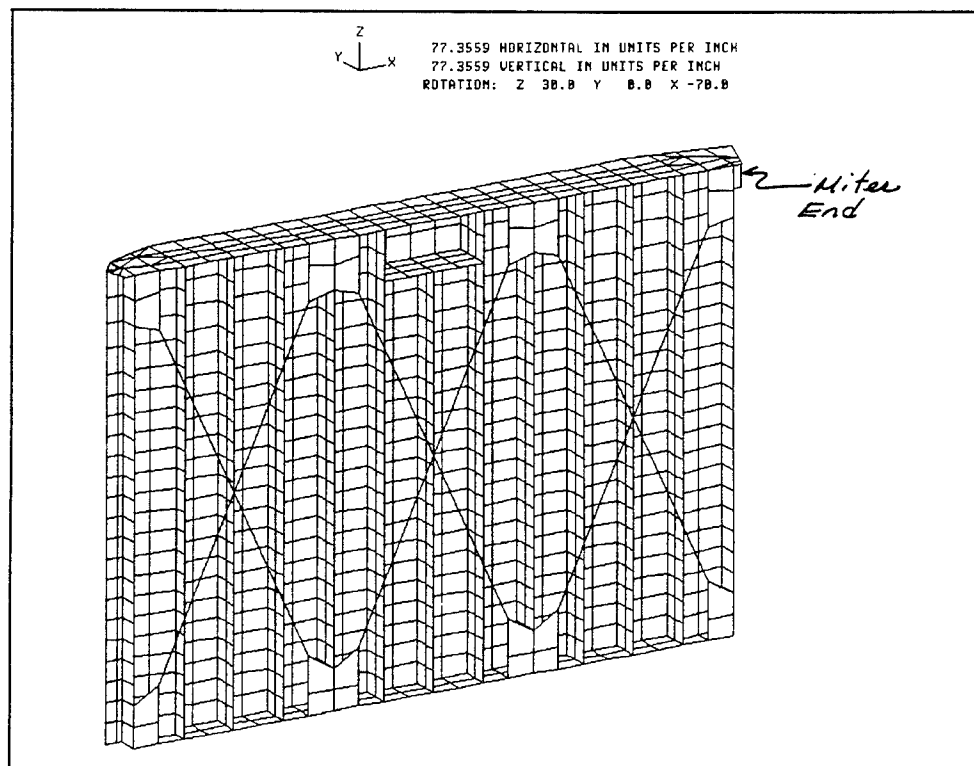


Figure 3. Downstream view of leaf with hidden lines removed

Top girder

The web of the top girder was modelled using plate elements which were 0.5 inches thick. The web was subdivided across its width with three elements. The subdivision along the length of the girder was the same as used for the skin plate. Figure 4 shows the mesh used to model the top girder utilizing the shrink option to shrink finite elements away from the edges. The shrink option was used so the elements and the space frame members could be seen.

As shown by Figure 4, space frame members were used to model the upstream and downstream flanges. The space frame members oriented horizontally between the upstream and downstream flanges represent angles used to connect the skin plate to the top girder. The properties for the downstream flange were calculated based on 2 angles, 8 inches x 6 inches x 0.875 inches thick with 0.5 inch spacing. The properties used to connect the skin plate were based on one angle, 3.5 inches x 3.5 inches x 0.375 inches.

The upstream flange properties were based on a double angle 8 inch x 8 inch x 0.875 inch with 0.5 inch spacing and with one to four 18 inch x 0.5 inch cover plates.

The quoin block flange casting properties were based on a 8 inch x 1 inch rectangular plate.

Bottom girder

The web of the bottom girder was modelled using plate elements which were 0.375 inches thick. As with the top girder, the web was subdivided across the girder depth with three elements. Figure 5 shows the mesh for the bottom girder.

Space frame members were used to model upstream and downstream flanges. The properties for the upstream flange were based on a single 6 inch x 6 inch x 0.5 inch angle. The downstream flange properties were based on double 6 inch x 3.5 inch x 0.5 inch angles with a 8 inch wide x 0.5 inch fill plate and a 8 inch x 0.5 inch bearing plate.

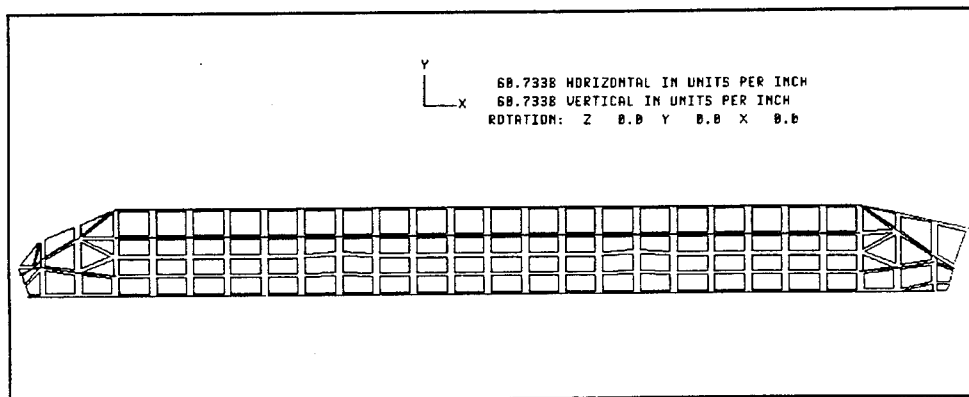


Figure 4. Top girder finite element shrink plot

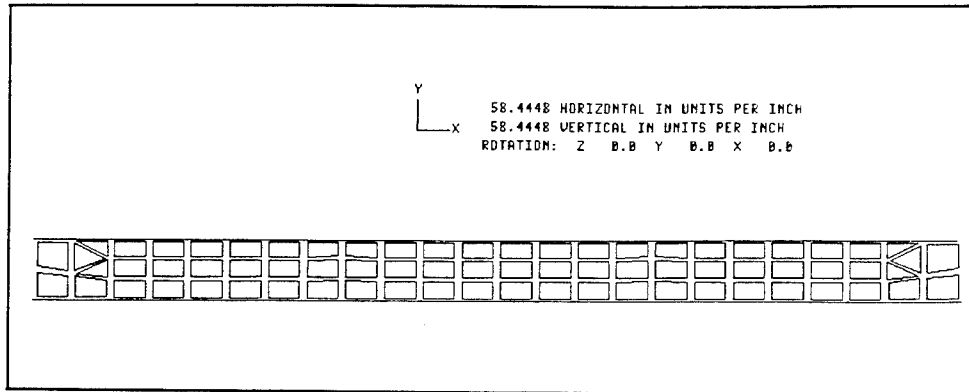


Figure 5. Bottom girder finite element shrink plot

Vertical girders

The web of the vertical girders was modelled with plate elements which were 0.375 inches thick. Three elements were used across the depth of these girders. The properties for the flanges of the vertical girders were calculated based on double 6 inch x 4 inch x 0.5 inch angles with 0.375 inch spacing. For the intermediate vertical girders, an additional vertical line of space frame members was used to model the angle used to connect the skin plate to the web of these intermediate girders. The properties of these members were calculated based on a double angles which were 3.5 inches x 3.5 inches x 0.375 inches with a 0.375 inch spacing. Figure 6 shows the mesh used to model the interior vertical girders.

Vertical beams

The web of the rolled vertical beams was modelled using plate elements which were 0.57 inches thick. Two elements were used across the depth of each vertical beam. The flanges of the vertical beam were modelled using space frame members. Figure 7 shows the mesh used to model each vertical beam.

The properties of the downstream flange were calculated based on a rectangular plate which was 11.5 inches wide by 0.805 inches thick. The properties of the upstream flange varied due to addition of splices and cover plates. All of the upstream flanges included an 11.5 inch wide by 0.805 inch thick flange. Some of the members also had upstream flanges with 12.5 inch x 0.375 inch splice plates while others had one to two 12.5 inch x 0.5 inch cover plates.

Vertical quoin beam

The rolled vertical beam in the quoin was also modelled using a combination of plate elements and space frame members for the flanges. The web was modelled with two plate elements across the depth which were 0.32 inches thick. The flange properties were calculated based on a rectangular plate which was 7.5 inches wide and 0.55 inches thick.

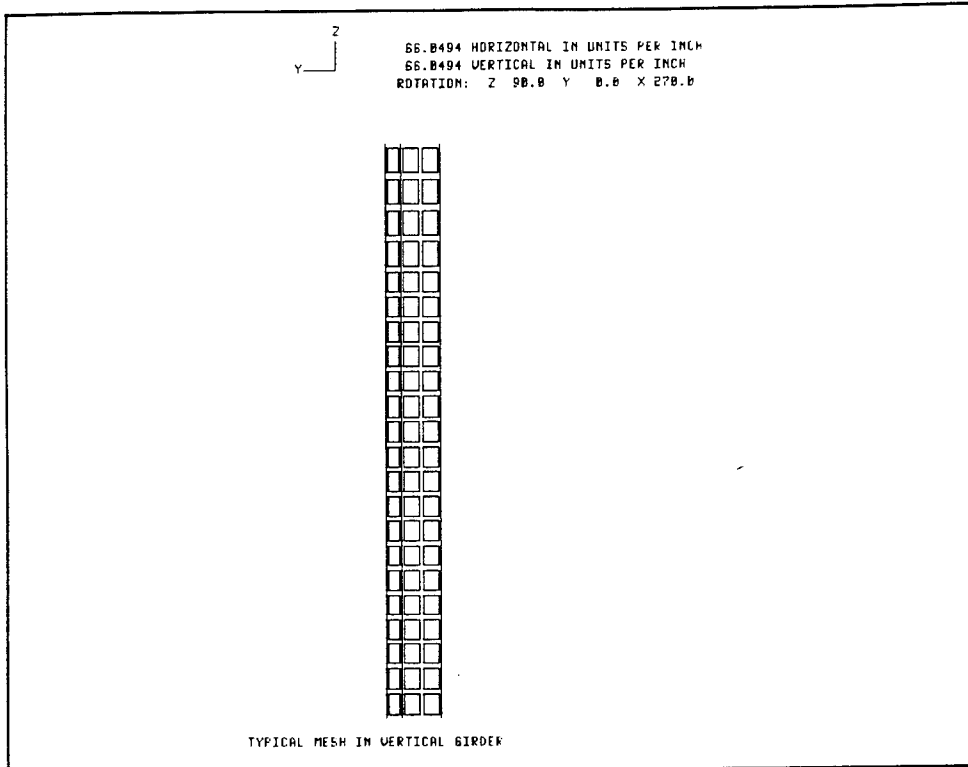


Figure 6. Interior vertical girder finite element shrink plot

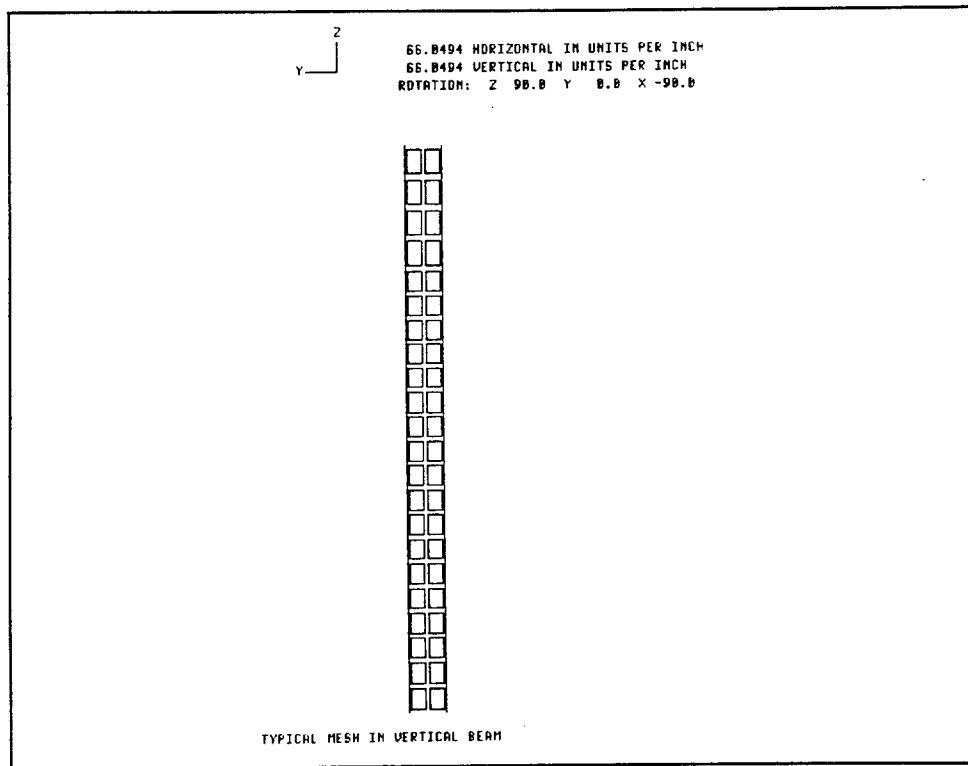


Figure 7. Typical vertical beam finite element shrink plot

Box below top girder near center of girder

As mentioned previously, the box structure below the top girder shown in Figures 1 to 3 was not indicated on the plans. Although this box could have been omitted from the model, it was represented since it was so close to the primary area of interest, the top girder. This box was modelled entirely using 0.5 inch thick plate elements.

Loading Conditions

The gate was assumed to be in the mitered position for all loading conditions. The loading conditions were developed to simulate the barge impact load of the experimental study and to consider EM 1110-2-2703 loadings for both horizontally and vertically framed gates. Loadings for both horizontally and vertically framed gates were considered in order to determine the suitability of these loadings. The loading conditions are briefly summarized below:

Loading 1 Impact load of 100 kips applied at the location of the barge impact in the experimental study. This load was transformed into global components and applied at the node in the model which was the closest to the barge impact location in the experimental study. Figure 8 shows the load components and location.

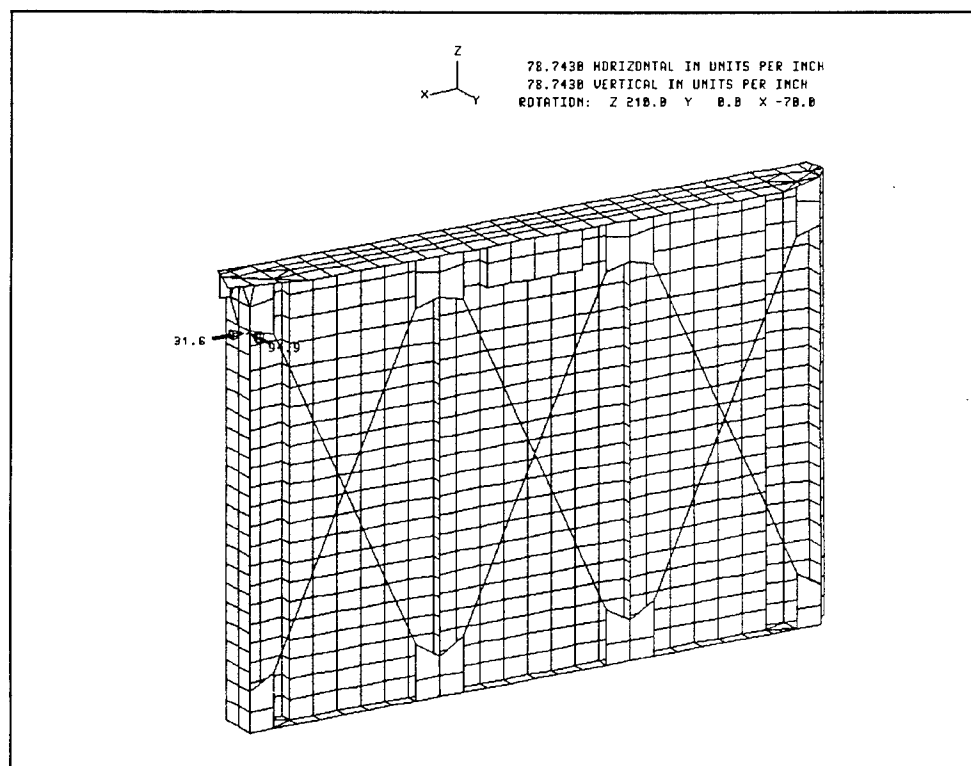


Figure 8. Components of 100 kip barge impact load - Loading 1

- Loading 2* 10 feet of head from 10 feet below the high pool to the top girder. This load was applied as a surface force normal to the skin plate elements and was used to simulate the loading for horizontally framed gates as specified by EM 1110-2-2703.
- Loading 3* 120 kip concentrated load applied at midspan of the top girder. This load is shown in Figure 9 and was used to represent the EM loading for vertically framed gates.
- Loading 4* Hydrostatic load from 10 feet below high pool to bottom girder. This load was applied as a surface force normal to the skin plate elements in this region.
- Loading 5* Hydrostatic load from high pool to 10 feet below high pool. This load was applied as a surface force normal to the skin plate elements in this region. Loadings 4 and 5 when added together represent the full hydrostatic loading.
- Loading 6* Same as Loading 3. The boundary conditions for this loading were changed at the miter to antisymmetric boundary conditions. One half of this loading combined with one half of loading 3 represents a 120 kip barge impact on one leaf only. This load was used to represent the EM loading for vertically framed gates.

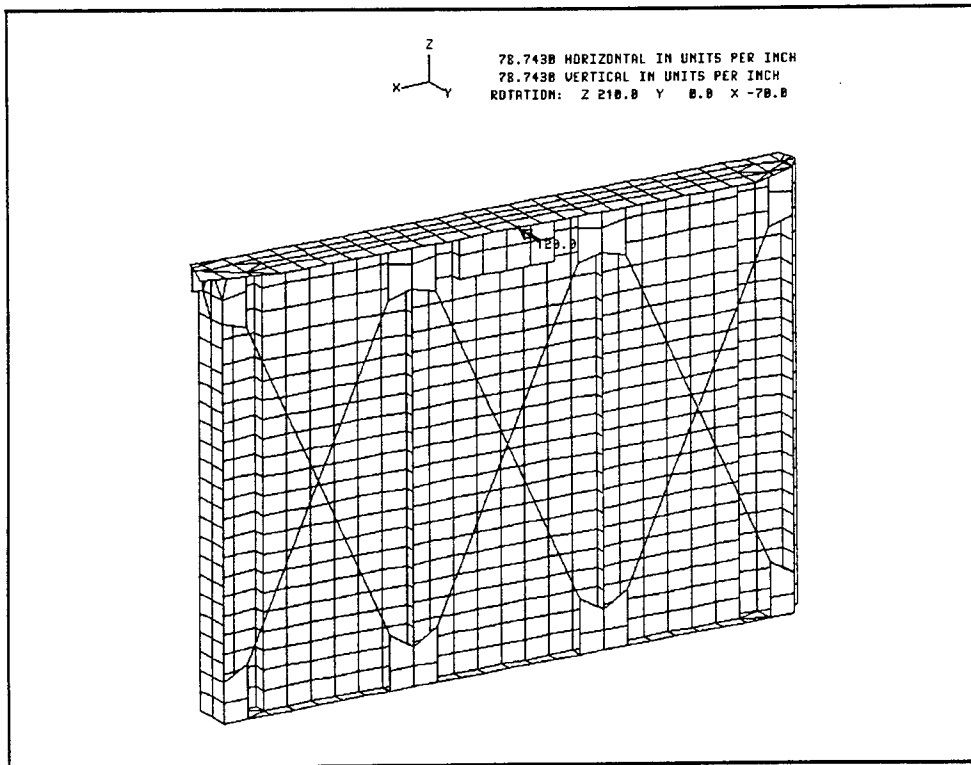


Figure 9. Concentrated load of 120 kips applied at center of top girder - Loading 3

- Loading 7* This was a loading combination of loadings 2 + 4. This loading was used to simulate barge impact load (10 feet of head) plus hydrostatic head. This load was used to represent the EM loading for horizontally framed gates plus the hydrostatic head.
- Loading 8* This was a loading combination of loadings 3 + 4 + 5. This loading was used to simulate barge impact on both leafs plus full hydrostatic head. This load was used to represent the EM loading for vertically framed gates plus hydrostatic head.
- Loading 9* This was a loading combination of $0.5 \times (\text{loadings } 3 + 6) + 4 + 5$. This loading was used to simulate barge impact on one leaf only plus full hydrostatic head. These results are for the leaf modelled. This load was used to represent the EM loading for vertically framed gates plus hydrostatic head.
- Loading 10* This was a loading combination of $0.5 \times (\text{loadings } 3 - 6) + 4 + 5$. This load was used to simulate barge impact on one leaf only plus full hydrostatic head. These results would represent those for the leaf which was not modelled. This load was used to represent the EM loading for vertically framed gates where only one leaf was impacted plus hydrostatic head.

Boundary Conditions

The gate was assumed to be in the mitered position for all loadings. Only two nodes existed along the miter since the miter seal was not modelled. For most loading conditions, symmetric boundary conditions were used along the miter. However, for the case of a barge impacting only one leaf, the loading was broken into symmetric and antisymmetric components since only one leaf was modelled which required the boundary conditions along the miter to be changed to antisymmetric for loading condition 6.

The symmetric boundary conditions at the miter were based on creating a local coordinate system at the two nodes by rotating -18.43 degrees about the global Z direction. This created a local X direction in the direction of the miter block. The only restraint for the symmetric boundary conditions was in this local X direction. The antisymmetric boundary conditions at the miter also used this local coordinate system. The only restraints at the miter for the antisymmetric case were in the local Y direction and in the local Z direction which was the same as the global Z direction.

Along the bottom girder, the gate was assumed to be in contact with the sill along its entire length. The nodes along the downstream flange of the bottom girder were restrained only against movement normal to the girder.

The restraint by the quoin block on the top girder was represented with one node which was restrained in the direction of the quoin block but was free to translate in other directions and rotate freely.

The support at the pintle was modelled with one node on the bottom girder. This node was restrained against all translation but was allowed to rotate freely.

The support at the gudgeon pin was modelled with one node on the top girder. This node was restrained against translation in the plane of the web of the top girder but was free to move vertically and to rotate.

Figure 10 shows the full model of the gate leaf with the restrained supported nodes labelled.

GTSTRUDL Input File

A listing of the GTSTRUDL input used in the analysis is included in Appendix A. This listing is commented to aid in the understanding of the modelling procedure.

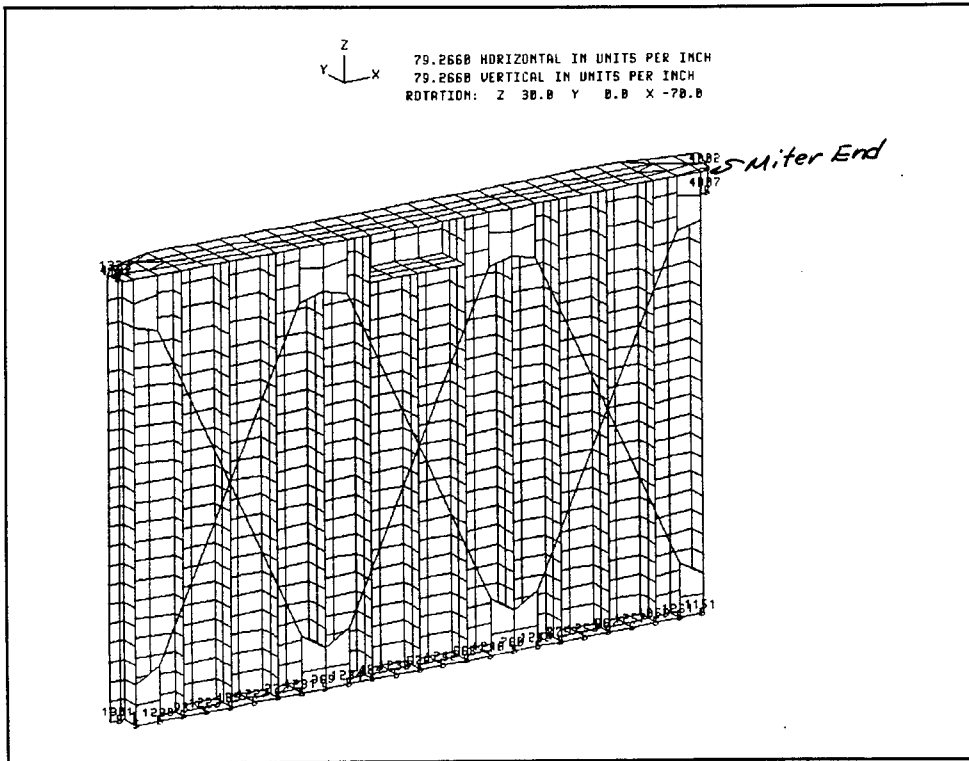


Figure 10. Support locations

3 Analytical and Experimental Results

Analysis Procedure and Results

Once the model was generated, a linear static analysis was run for independent Loadings 1 to 5 for symmetric boundary conditions at the miter. The boundary conditions were then changed to be antisymmetric at the miter and a second linear analysis was run for Loading 6 only. After this analysis had been completed, Loading Combinations 7 to 10 were formed. Selected results were then output and graphical displays of the deformed shape and stress contours in the top girder were obtained. The analysis sequence, changes in boundary conditions, and creation of the loading combinations are given in the input listing in Appendix A.

Experimental and Analytical Results for Loading 1

A stress contour plot of the SXX stress component in the top girder due to Loading 1 is shown in Figure 11. The contour lines on the contour plot are labelled with integers such as -2, -1, and 0. The stress associated with the contour line is determined by multiplying the integer on the line by the Contour Step Value which is found to the left of the X-Y coordinate axes. For the contour plot in Figure 11, the Contour Step Value is 2.0 ksi. Therefore, the SXX stress on a contour line labelled with a -2 is -4.0 ksi with the negative sign indicating compression. The SXX stress component is the normal stress component in the

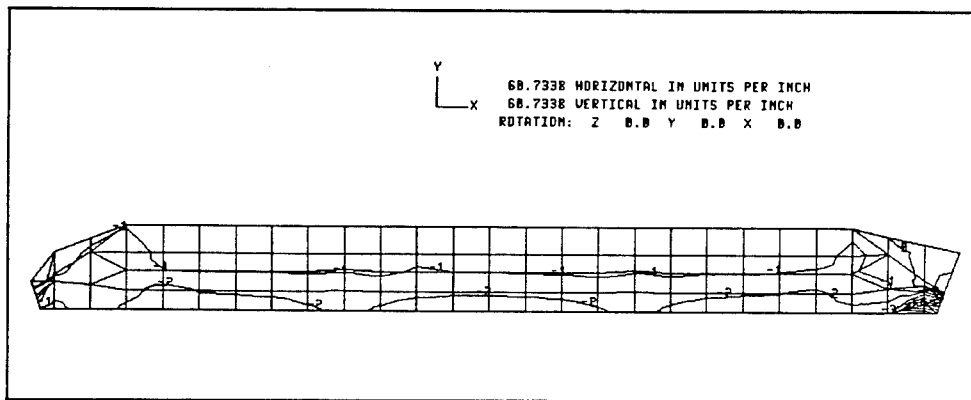


Figure 11. SXX stress contour in top girder for Loading 1

X-direction of the planar coordinate system in GTSTRUDL. For the top girder, the planar X direction is the same as global X which corresponds to the longitudinal direction of the miter leaf. As shown by Figure 11, the stress variation was high near the quoin and miter ends of the top girder with the greatest variation near the miter end. This is due to the 100 kip load being applied just below the top girder near the miter end and the supports being modelled at points rather than being distributed as they are in the real structure.

Stresses obtained from the finite element analysis of the model were then compared with stresses calculated from strain gage readings on the top girder. Experimental results existed for a total barge impact of 203 kips which was very close to the 200 kip total applied load in Loading 1 (100 kips applied to each leaf of the gate). The SXX stresses at the nodes which were the closest to the strain gage locations in the upstream and downstream flanges of the top girder were used for the comparison. The location of these nodes is shown in Figure 12. A comparison of the results is shown in Table 1 below.

The results indicate that the finite element model is predicting the compressive stress on the downstream flange of the top girder within 11 percent of the experimental results. On the upstream flange, the percentage difference is much larger due to the smaller magnitude of the stresses. The largest difference

Table 1 Finite Element and Experimental Stresses			
Strain gage, location (Chasten, 1991)	Stress based on strain gage readings (ksi)	Finite element node	Finite element nodal stress (ksi)
I	-0.11	2267	-0.79
N	-4.34	251	-4.83
G	0.04	2275	-0.54
H	-5.08	642	-4.67
AF	0.04	2283	-0.83
U	-4.89	1033	-4.87

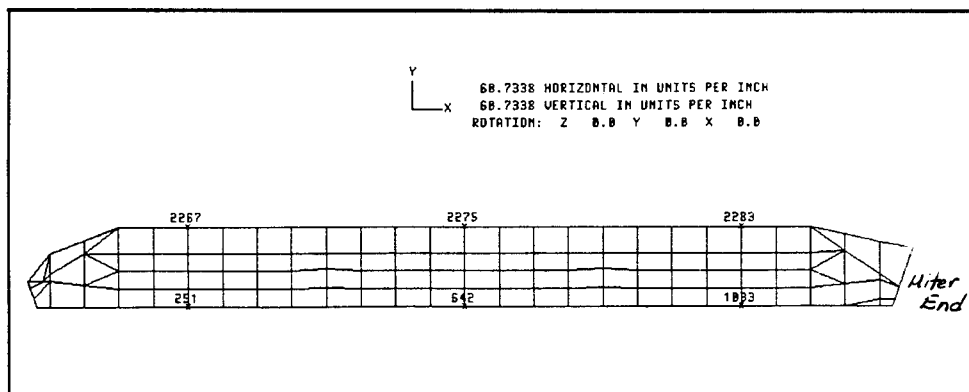


Figure 12. Location of nodes used for comparison with experimental results for Loading 1

in stress in the upstream flange is -0.79 ksi. The finite element model is consistently predicting more compression in the upstream flange. Despite this variation, the results compare well and the model calibration was not necessary for other loadings.

Stress Results for Other Loadings

Finite element SXX stress contour plots for the top girder were also obtained for Loadings 2, 3, and 7 to 10. Contour plots were not obtained for Loadings 4, 5, and 6 since these are realistic only when combined with other loadings. The contour plots for Loadings 2, 3, and 7 to 10 are shown in Figures 13-18, respectively.

As stated in Chapter 2, the motivation for using other loadings was to determine the suitability of these loadings. Loading 2 represents the barge impact loading for horizontally framed gates. Loading 3 was used to model a barge impact of 120 kips at midspan of the top girder to represent guidance for barge impact on vertically framed gates. Comparing the contour plots for Loadings 2 and 3 shown in Figures 13 and 14 respectively, clearly indicates major differences in the behavior of the gate leaf. The stress magnitude and

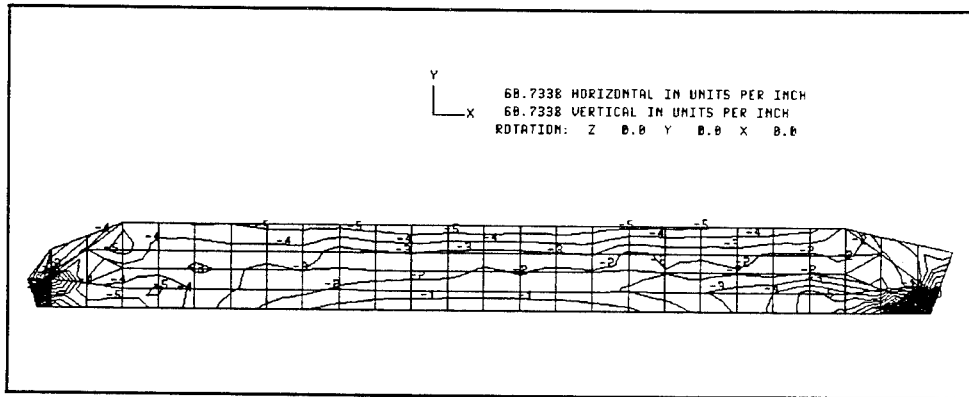


Figure 13. SXX stress contour in top girder for Loading 2

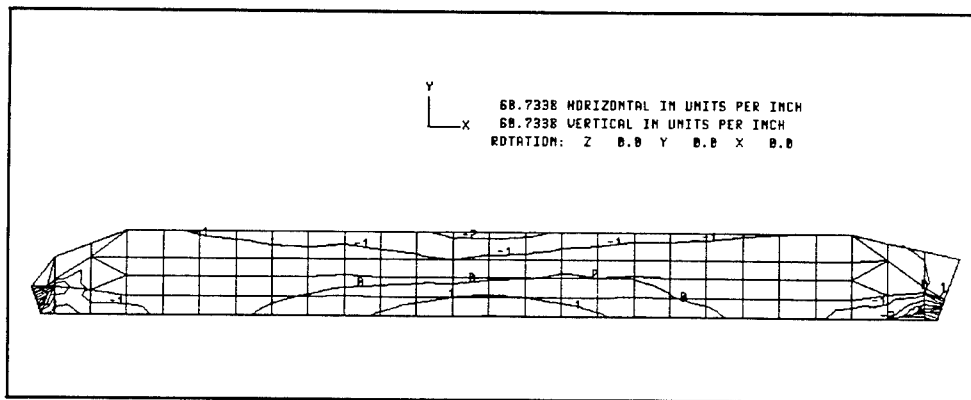


Figure 14. SXX stress contour in top girder for Loading 3

distribution are very different in the top girder for these two loadings. Using the contour lines to obtain the stress magnitude for the upstream and downstream flanges at midspan yields stresses of approximately -10 and 0 ksi for Loading 2 and approximately -4 and 4 ksi for Loading 3. Similarly when Loadings 2 and 3 are combined with full hydrostatic head to form Loadings 7 and 8, the results are very different as shown in the contour plots in Figures 15 and 16. The results for the upstream and downstream flanges at midspan are approximately -16 and 0 ksi respectively for Loading 7 and approximately -12 and 4 ksi respectively for Loading 8.

Loadings 9 and 10 were used to determine the effect on the model of a barge impacting only one leaf of the gate plus full hydrostatic head. A concentrated load of 120 kips was applied at midspan of the top girder on one leaf only. Since only one leaf was modelled, Loading 9 was used to represent the behavior of the leaf which the barge impacted while Loading 10 was used to represent the behavior of the leaf which was not impacted. The stress contours for Loadings 9 and 10 are shown in Figures 17 and 18 respectively. The leaf with the barge impact (Figure 17) exhibits higher stresses and stress gradients than the leaf which was not impacted (Figure 18) as expected.

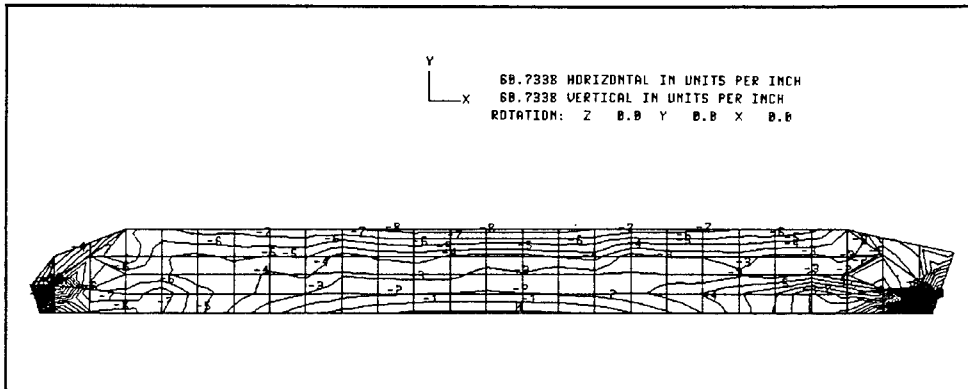


Figure 15. SXX stress contour in top girder for Loading 7

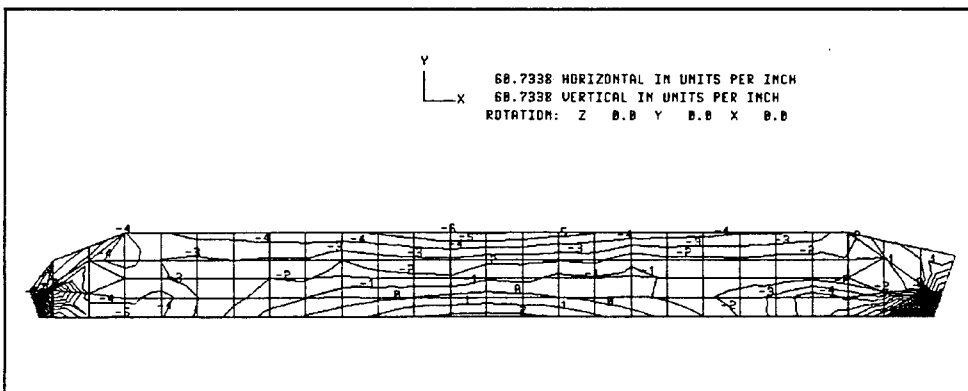


Figure 16. SXX stress contour in top girder for Loading 8

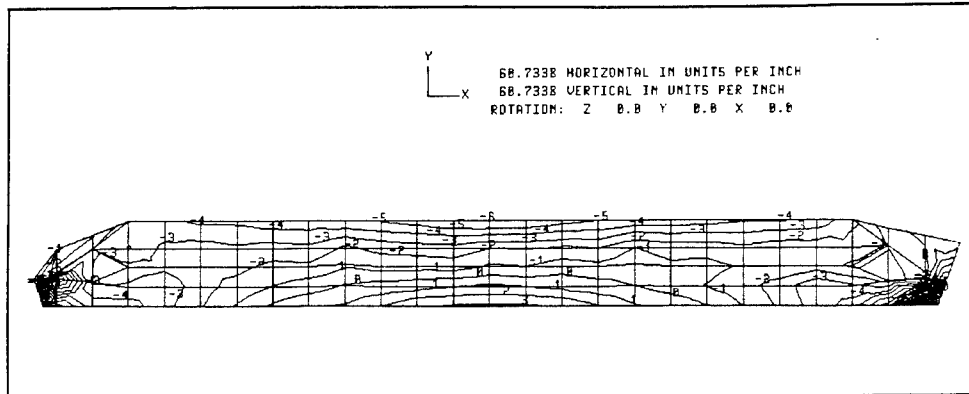


Figure 17. SXX stress contour in top girder for Loading 9

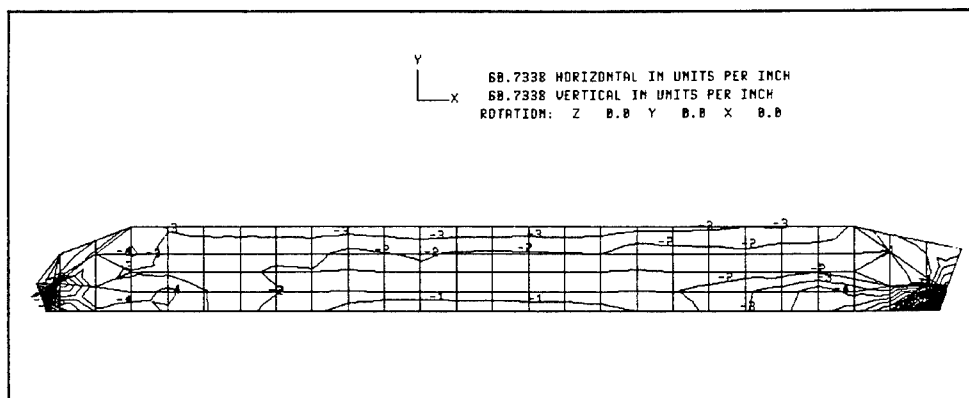


Figure 18. SXX stress contour in top girder for Loading 10

Comparing the results with only one leaf impacted plus full hydrostatic as shown in Figure 17 with the results from both leafs impacted plus full hydrostatic as shown in Figure 16 indicates that the stresses are not affected as much as might be expected. For instance, the stress magnitude obtained using the contour lines for the upstream and downstream flanges at midspan are approximately -12 and 4 ksi respectively for Loading 8 and approximately -12 and 6 ksi respectively for Loading 9. The distribution of the stresses is also very similar.

Three hinged arch hand computations were also performed for all of the loadings. The purpose of this analysis was to determine if the finite element results were reasonable. For Loadings 2, 4, and 5 which were distributed hydrostatic loads applied below the top girder, a vertical unit width of the gate was taken that was assumed to be simply supported between the top and bottom girders. The top girder reaction was then used as a distributed load applied normal to the three hinged arch members. For Loading 1 which was the 100 kip barge impact loading applied below the top girder, the hydrostatic load was assumed to be distributed between the top and bottom girders assuming the miter girder acted as a simply supported beam between the top and bottom girders. This resulted in 89.0 kips being applied to the top girder on each leaf directly above the impact point.

Once the forces acting on the three hinged arch were determined, the reactions were computed and the axial and shear forces at the quoin were computed. Stresses in the upstream and downstream flanges of the top girder at midspan were computed assuming the girder acted as a beam-column using P/A plus or minus Mc/I where P is the axial load, A is the cross section area, M is the bending moment, c is the distance in the plane of the cross section from the centroid to the location of stress computation, and I is the moment of inertia of the cross section. In computing M , the eccentricity of the line of action of the axial load and the centroid of the beam at midspan was taken into account. The results of these calculations and a comparison with the finite element results are shown in Table 2 below.

Loading	Three hinged arch stress (ksi)		Finite element stress (ksi)	
	Upstream	Downstream	Upstream	Downstream
1	0.89	-7.86	-0.54	-4.67
2	-10.7	0.30	-11.97	-0.19
3	-4.70	5.15	-4.72	4.07
4	-7.00	0.16	-5.44	0.57
5	-1.92	0.04	-2.17	0.02
7	-17.7	0.46	-17.42	0.38
8	-13.6	5.35	-12.33	4.67
9	-13.9	8.10	-12.83	6.44
10	-8.60	-2.60	-8.08	-0.54

The results in the above table indicate that the finite element results appear reasonable. In fact, for some loadings, the results agree surprisingly well given the number of approximations involved in the three hinged arch calculations. For Loadings 1, 3, 4, 7, 8, 9, and 10, the three hinged arch results are conservative considering the stresses with the largest magnitude. In Loading 2, the three hinged arch results were within 12 percent of the upstream flange compressive stress in the finite element model.

Even though the three hinged arch results for Loading 1 are conservative, the difference in the results for Loading 1 is cause for some concern since the finite element results compared favorably with the experimental results for this case. After examination of the hand calculation results and assumptions, no single major cause of these differences could be determined. One factor which could have contributed to the difference for Loading 1 are the assumption of a constant eccentricity of 3.75 feet in the hand calculations. The load in Loading 1 was applied as a concentrated load with global X and Y components of -31.62 and -94.87 kips respectively. The application point of these components is shown in

Figure 9. As can be seen from this Figure, the X component of -31.62 is applied at a point away from the line joining the miter and quoin end supports by a considerable distance. This causes a change in the effective eccentricity. The hand calculations assumed the load was applied parallel to the lock wall and on the line joining the miter and quoin points of support. Furthermore, the gudgeon pin location in the finite element model was also restrained in the X and Y directions. This also produces a shift in the eccentricity. Another factor which may have contributed to the difference between the hand calculation and finite element results is the box structure located below the top girder near midspan. The box was ignored in the hand calculations but present in the finite element model and in the experimental study.

Deformed Shape of the Structure for Loadings 1, 2, and 3

Deformed shape plots of the top girder were made for Loadings 1, 2, and 3. The deformed shape of the top girder is shown by dashed lines in Figures 19, 20, and 21 for Loadings 1, 2, and 3 respectively. The undeformed shape of the top girder is shown by solid lines in these figures. The magnitude of the deformations was amplified in order to be seen. The maximum negative Y component of the displacement was -0.37 inches for Loading 1, -0.22 inches for Loading 2, and -0.78 inches for Loading 3.

The differences in the deformed shapes are clearly evident from Figures 19-21. The deformed shape of the top girder for Loading 2 and Loading 3 are similar but not the same. Comparing the deformed shapes of Loadings 1 and 2 indicates very dissimilar shapes. Clearly, the 10 feet of hydrostatic head from 10 feet below the top girder to the top girder does not accurately represent the effect of a barge impact on a vertically framed miter gate.

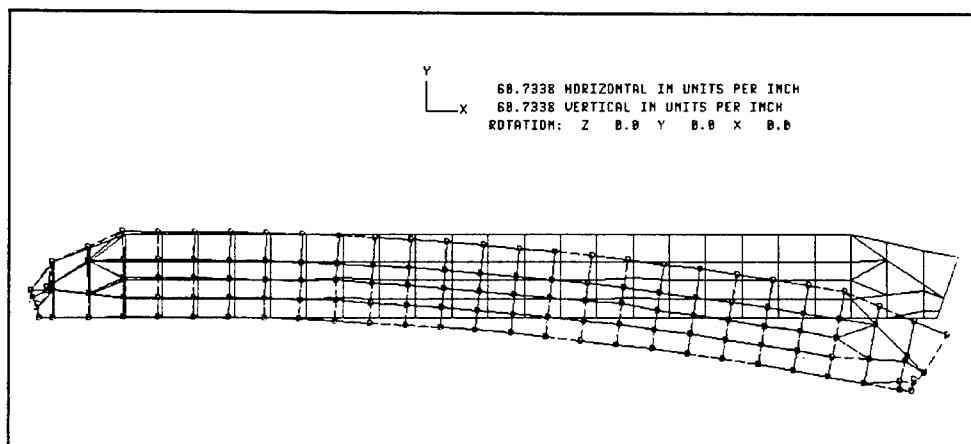


Figure 19. Original and deformed shape of top girder for Loading 1

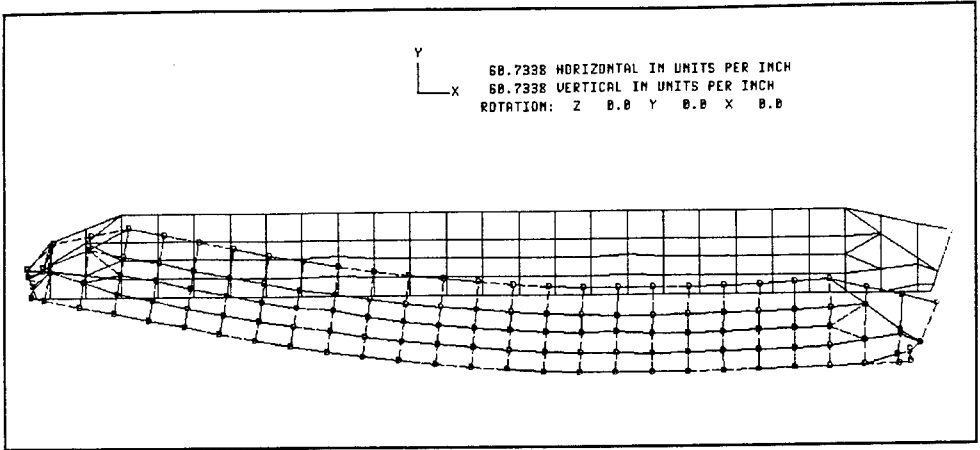


Figure 20. Original and deformed shape of top girder for Loading 2

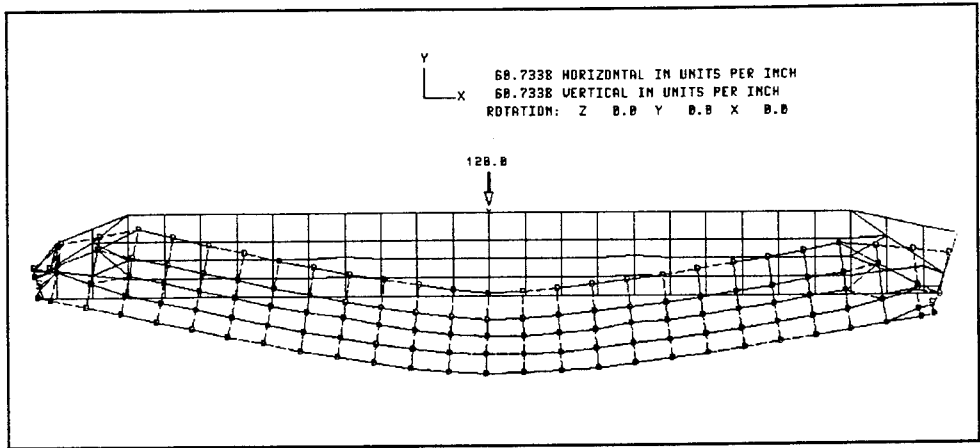


Figure 21. Original and deformed shape of top girder for Loading 3

4 Recommendations

This study indicates that a finite element model can be developed which accurately represents an experimental barge impact study for a closed vertically framed miter gate. However, design engineers will not develop finite element models but more likely use a three hinged arch approximation as also done in this study. The three hinged arch computations performed in this study were performed mainly to establish if the finite element results were reasonable. The stresses predicted by the three hinged arch at the midspan of the top girder were surprisingly close to the finite element results for many of the loadings in this study and were usually conservative. The point of application of the barge impact should be considered when calculating the moment at the centroid of a section along the length when using the three hinge arch load assumptions.

Based on the deformed shape plots in Chapter 3, the use of hydrostatic head to represent barge impact is not reasonable for vertically framed gates. It is also hard to justify the use of hydrostatic head for horizontally framed gates since each girder in a horizontally framed gate should deform similar to the top girder of a vertically framed gate. The hydrostatic head approach can not accurately represent barge impacts which could occur almost anywhere along the length of the gate. The Corps of Engineers has been using the hydrostatic head criteria for many years so it must be conservative because barge impacts have occurred.

A more reasonable impact loading appears to be a concentrated load that can be applied anywhere along the length of a girder. The difficulty is establishing the magnitude of the concentrated load and for horizontally framed gates, also establishing the distribution of the load to neighboring horizontal girders. Both the magnitude and distribution of the impact load depend on the stiffness of the various components of the gate. One technique to determine the magnitude of the impact loads would be to instrument gates in service. The distribution of the load to surrounding horizontal girders could also be determined in the experimental study. Such a study might not be financially feasible or practical in the actual operation of the gate.

The new EM 1110-2-2105, Design of Hydraulic Steel Structures, 1993, established the magnitude of the concentrated impact load so as to produce a design similar to previous designs which used the hydrostatic head criteria. This appears to be a conservative approach. The distribution of the impact load to neighboring horizontal girders could be determined using existing finite element models and applying concentrated loads to represent the impact. The reactions at

the quoin and miter blocks could be used to establish the distribution of the load to the horizontal girders.

Appendix A

GTSTRUDL Input File

```

*TITLE 'ANALYSIS OF 44 FT 7 IN HIGH MITER GATE'
STRU DL 'MITER45' 'ANALYSIS OF 45 FT HIGH MITER GATE , JULY 1991'
$
$
TYPE SPACE FRAME
$
MATERIAL STEEL
$
UNITS INCHES KIPS
$
$
-----
$ JOINTS IN QUOIN AND MITER GIRDERS
$
$
-----
$
PRINT GENERATE OFF
$
GENE 3 JOI ID 1 1 X 0 0 Y 0 24.125
REPEAT 22 TIMES ID 3 Z DIFF 2 AT 24.25, 14 AT 23., 2 AT 23.625, 4 AT 29.3125
REPEAT 1 TIME ID 1150 X 696.
$
$
-----
$ JOINTS IN VERTICAL BEAMS
$
$
-----
$ BEAMS 1 -3
$
GENE 3 JOI ID 93 1 X 58 Y 0 16.5
REPEAT 22 TIMES ID 3 Z DIFF 2 AT 24.25, 14 AT 23., 2 AT 23.625, 4 AT 29.3125
REPEAT 2 TIMES ID 92 X 58
$
$ BEAMS 4-6
$
GENE 3 JOI ID 484 1 X 290 Y 0 16.5
REPEAT 22 TIMES ID 3 Z DIFF 2 AT 24.25, 14 AT 23., 2 AT 23.625, 4 AT 29.3125
REPEAT 2 TIMES ID 92 X 58
$
$ BEAMS 7-9
$
GENE 3 JOI ID 875 1 X 522 Y 0 16.5
REPEAT 22 TIMES ID 3 Z DIFF 2 AT 24.25, 14 AT 23., 2 AT 23.625, 4 AT 29.3125
REPEAT 2 TIMES ID 92 X 58
$
$
$
-----
$ JOINTS IN VERTICAL GIRDERS
$
$
$
GENE 4 JOI ID 369 1 X 232 Y DIFF 0 2 AT 17.4375 13.375
REPEAT 22 TIMES ID 4 Z DIFF 2 AT 24.25, 14 AT 23., 2 AT 23.625, 4 AT 29.3125
REPEAT 1 TIMES ID 391 X 232
$
$
$
-----
$ INTERMEDIATE JOINTS IN SKIN PLATE BETWEEN GIRDERS AND BEAMS
$
$
$
$
GENE 23 JOI ID 70 1 X 29 Y 20.3125 Z DIFF 0, 2 AT 24.25, 14 AT 23., 2 AT 23.625, -
4 AT 29.3129
REPEAT 1 ID 1058 X 638
$
GENE 23 JOI ID 162 1 X 87. Y 33. Z DIFF 0. 2 AT 24.25, 14 AT 23., 2 AT 23.625, -
4 AT 29.3129
REPEAT 2 TIMES ID 92 X 58.
$
GENE 23 JOI ID 461 1 X 261 Y 33. Z DIFF 0. 2 AT 24.25, 14 AT 23., 2 AT 23.625, -
4 AT 29.3129
REPEAT 3 TIMES ID 92 X 58.
$
GENE 23 JOI ID 852 1 X 493 Y 33. Z DIFF 0. 2 AT 24.25, 14 AT 23., 2 AT 23.625, -
4 AT 29.3129
REPEAT 2 TIMES ID 92 X 58.
$

```

```

$ -----
$
$ JOINTS IN BOTTOM GIRDER NOT ALREADY GENERATED
$
$ -----
$
$
$ GENE 43 JOI ID 1220 1 X LIST -
2 AT 29, 58,3 AT 87, 116,3 AT 145, 174, 3 AT 203, 3 AT 261, 290, 3 AT 319, -
1 AT 348, 3 AT 377, 406, 3 AT 435, 3 AT 493, 522, 3 AT 551, 1 AT 580, 3 AT 609 -
638, 2 AT 667, Y LIST -
0, 48.25,48.25,0,16.5,48.25,48.25,0,16.5,48.25,48.25,0,16.5,48.25,0,16.5, -
2 AT 48.25, 0,16.5, 2 at 48.25,0,16.5,2 at 48.25,0,16.5,48.25,0,16.5, -
48.25,48.25,0,16.5,48.25 -
48.25,0,16.5,48.25,48.25,0,48.25
$
REPEAT 1 ID 1000 Z 535
$
$ -----
$
$ VERTICAL JOINTS IN QUOIN REGION FOR I BEAM
$
$ -----
$
$ GENE 23 JOI ID 1301 1 X -6 0 Y 24.125 0 Z DIFF 0., 2 AT 24.25, -
14 AT 23., 2 AT 23.625, 4 AT 29.3129
REPEAT 1 ID 23 X -12.
$
$ -----
$
$ ADDITIONAL JOINTS NEEDED FOR TOP GIRDER WHICH IS 6 FT WIDE
$
$ GENE 25 JOI ID 2263 1 X 0 29. Y 72. Z 535
$
$ -----
$
$ ADDITIONAL JOINTS NEEDED FOR GUSSET PLATES FOR DIAGONALS
$
$ -----
$
$ GENE 24 JOINTS LIST
3001 29. 0. 24.25
3002 29. 0. 66.875
$
3003 203. 0. 24.25
3004 203. 0. 66.875
3005 261. 0. 24.25
3006 261. 0. 66.875
$
3007 435. 0. 24.25
3008 435. 0. 66.875
3009 493. 0. 24.25
3010 493. 0. 66.875
$
3011 667. 0. 24.25
3012 667. 0. 66.875
$
3013 29. 0. 468.125
3014 29. 0. 511.
$
3015 203. 0. 468.125
3016 203. 0. 511.
3017 261. 0. 468.125
3018 261. 0. 511.
$
3019 435. 0. 468.125
3020 435. 0. 511.
3021 493. 0. 468.125
3022 493. 0. 511.
$
3023 667. 0. 468.125
3024 667. 0. 511.
$
REPEAT 1 ID 100 Y 48.25
$
$ -----
$
$ GENERATE ELEMENTS IN QUOIN AND MITER GIRDERS
$
$ -----

```

```

$
$
GENE 2 ELEM ID 11 F 21 T 1 T 4 T 5
REPEAT 21 ID 2 F 3
REPEAT 1 ID 44 F 1150
$
-----
$
$
$ GENERATE ELEMENTS IN VERTICAL BEAMS
$
-----
$
$
GENE 2 ELEM ID 89 1 F 94 1 T 93 T 96 T 97
REPEAT 21 ID 2 F 3
REPEAT 2 ID 44 F 92
$
GENE 2 ELEM ID 221 1 F 485 1 T 484 T 487 T 488
REPEAT 21 ID 2 F 3
REPEAT 2 ID 44 F 92
$
GENE 2 ELEM ID 353 1 F 876 1 T 875 T 878 T 879
REPEAT 21 ID 2 F 3
REPEAT 2 ID 44 F 92
$
$
$
-----
$
$
$ GENERATE ELEMENTS IN SKIN PLATE
$
-----
$
$
$
GENE 22 ELEM ID 500 24 F 2 3 T 70 1 T 71 1 T 5 3
$
GENE 22 ELEM ID 501 24 F 70 1 T 94 3 T 97 3 T 71 1
$
GENE 22 ELEM ID 502 24 F 95 3 T 162 1 T 163 1 T 98 3
REPEAT 2 ID 2 F 92
REPEAT 2 ID 8 F 391
$
GENE 22 ELEM ID 503 24 F 162 1 T 187 3 T 190 3 T 163 1
REPEAT 1 ID 2 F 92
REPEAT 2 ID 8 F 391
$
GENE 22 ELEM ID 507 24 F 346 1 T 371 4 T 375 4 T 347 1
REPEAT 1 ID 8 F 391
$
GENE 22 ELEM ID 508 24 F 371 4 T 461 1 T 462 1 T 375 4
REPEAT 1 ID 8 F 391
$
GENE 22 ELEM ID 509 24 F 461 1 T 486 3 T 489 3 T 462 1
REPEAT 1 ID 8 F 391
$
GENE 22 ELEM ID 523 24 F 1128 1 T 1152 3 T 1155 3 T 1129 1
$
$ CHANGE ELEMENT INCIDENCES FOR 522 TO 1026 BY 24
$
CHANGES
GENE 22 ELEM ID 522 24 F 1060 3 T 1128 1 T 1129 1 T 1063 3
ADDITIONS
$
-----
$
$
$ GENERATE ELEMENTS IN BOTTOM GIRDER
$
-----
$
$
$
GENE 66 ELEMENTS LIST
1101 1 1220 70 2
1102 2 70 1221 3
1103 1220 93 94 70
1107 93 1223 1224 94
1108 94 1224 162 95
1109 95 162 1225 1222
1110 1223 185 186 1224
1111 1224 186 187 162
1112 162 187 1226 1225
1113 185 1227 1228 186
1114 186 1228 254 187

```

1115 187 254 1229 1226
1116 1227 277 278 1228
1117 1228 278 279 254
1118 254 279 1230 1229
\$
1119 277 1231 1232 278
1120 278 1232 346 279
1121 279 346 1233 1230
1122 1231 369 370 1232
1123 1232 370 371 346
1124 346 371 372 1233
1125 369 1234 1235 370
1126 370 1235 461 371
1127 371 461 1236 372
1128 1234 484 485 1235
1129 1235 485 486 461
1130 461 486 1237 1236
1131 484 1238 1239 485
1132 485 1239 553 486
1133 486 553 1240 1237
1134 1238 576 577 1239
1135 1239 577 578 553
1136 553 578 1241 1240

\$
1137 576 1242 1243 577
1138 577 1243 645 578
1139 578 645 1244 1241
1140 1242 668 669 1243
1141 1243 669 670 645
1142 645 670 1245 1244
1143 668 1246 1247 669
1144 669 1247 737 670
1145 670 737 1248 1245
1146 1246 760 761 1247
1147 1247 761 762 737
1148 737 762 763 1248
1149 760 1249 1250 761
1150 761 1250 852 762
1151 762 852 1251 763
1152 1249 875 876 1250
1153 1250 876 877 852
1154 852 877 1252 1251

\$
1155 875 1253 1254 876
1156 876 1254 944 877
1157 877 944 1255 1252
1158 1253 967 968 1254
1159 1254 968 969 944
1160 944 969 1256 1255
1161 967 1257 1258 968
1162 968 1258 1036 969
1163 969 1036 1259 1256
1164 1257 1059 1060 1258
1165 1258 1060 1061 1036
1166 1036 1061 1260 1259
1167 1059 1261 1128 1060
1171 1261 1151 1152 1128
1172 1128 1152 1153 1262

\$
GENE 6 ELEM LIST

1104 70 94 95
1105 70 95 1221
1106 1221 95 1222
1168 1060 1128 1061
1169 1061 1128 1262
1170 1061 1262 1260

\$

\$

\$ ELEMENTS IN INTERMEDIATE VERTICAL GIRDERS

\$

\$

\$

\$

GENE 3 ELEM ID 1201 1 F 370 1 T 369 T 373 T 374

REPEAT 21 TIMES ID 3 F 4

REPEAT 1 TIME ID 66 F 391

\$

\$

\$

\$ ELEMENTS FOR WEB OF VERTICAL I BEAM FROM QUOIN TO PINTLE

\$
GENE 22 ELEM ID 1401 2 F 1301 1 T 2 3 T 5 3 T 1302 1
GENE 22 ELEM ID 1402 2 F 1324 1 T 1301 1 T 1302 1 T 1325 1

\$
\$-----
\$
\$ ELEMENTS FOR WED IN TOP GIRDER
\$

\$-----
GENE 66 ELEMENTS LIST

3101 67 2220 92 68
3102 68 92 2221 69
3103 2220 159 160 92
3107 159 2223 2224 160
3108 160 2224 184 161
3109 161 184 2225 2222
3110 2223 251 252 2224
3111 2224 252 253 184
3112 184 253 2226 2225
3113 251 2227 2228 252
3114 252 2228 276 253
3115 253 276 2229 2226
3116 2227 343 344 2228
3117 2228 344 345 276
3118 276 345 2230 2229
\$
3119 343 2231 2232 344
3120 344 2232 368 345
3121 345 368 2233 2230
3122 2231 457 458 2232
3123 2232 458 459 368
3124 368 459 460 2233
3125 457 2234 2235 458
3126 458 2235 483 459
3127 459 483 2236 460
3128 2234 550 551 2235
3129 2235 551 552 483
3130 483 552 2237 2236
3131 550 2238 2239 551
3132 551 2239 575 552
3133 552 575 2240 2237
3134 2238 642 643 2239
3135 2239 643 644 575
3136 575 644 2241 2240
\$
3137 642 2242 2243 643
3138 643 2243 667 644
3139 644 667 2244 2241
3140 2242 734 735 2243
3141 2243 735 736 667
3142 667 736 2245 2244
3143 734 2246 2247 735
3144 735 2247 759 736
3145 736 759 2248 2245
3146 2246 848 849 2247
3147 2247 849 850 759
3148 759 850 851 2248
3149 848 2249 2250 849
3150 849 2250 874 850
3151 850 874 2251 851
3152 2249 941 942 2250
3153 2250 942 943 874
3154 874 943 2252 2251
\$
3155 941 2253 2254 942
3156 942 2254 966 943
3157 943 966 2255 2252
3158 2253 1033 1034 2254
3159 2254 1034 1035 966
3160 966 1035 2256 2255
3161 1033 2257 2258 1034
3162 1034 2258 1058 1035
3163 1035 1058 2259 2256
3164 2257 1125 1126 2258
3165 2258 1126 1127 1058
3166 1058 1127 2260 2259
3167 1125 2261 1150 1126
3171 2261 1217 1218 1150
3172 1150 1218 1219 2262
\$
GENE 6 ELEM LIST

3104 92 160 161
3105 92 161 2221
3106 2221 161 2222
3168 1126 1150 1127
3169 1127 1150 2262
3170 1127 2262 2260

\$
\$ ADDITIONAL ELEMENTS IN OUTSIDE OF TOP GIRDER

\$
ELEMENT INCIDENCES

3173 69 2221 2264 2263
3174 2221 2222 2265 2264
3175 2222 2225 2266 2265
3176 2225 2226 2267 2266
3177 2226 2229 2268 2267
3178 2229 2230 2269 2268
3179 2230 2233 2270 2269
3180 2233 460 2271 2270
3181 460 2236 2272 2271
3182 2236 2237 2273 2272
3183 2237 2240 2274 2273
3184 2240 2241 2275 2274
3185 2241 2244 2276 2275
3186 2244 2245 2277 2276
3187 2245 2248 2278 2277
3188 2248 851 2279 2278
3189 851 2251 2280 2279
3190 2251 2252 2281 2280
3191 2252 2255 2282 2281
3192 2255 2256 2283 2282
3193 2256 2259 2284 2283
3194 2259 2260 2285 2284
3195 2260 2262 2286 2285
3196 2262 1219 2287 2286

\$

\$
\$ MEMBERS USED FOR FLANGES

\$

\$
\$ FLANGES FOR QUOIN AND MITER GIRDERS

\$

\$
\$
\$ GENE 22 MEM ID 2001 1 F 3 3 T 6 3
\$ REPEAT 1 ID 22 F -2
\$ REPEAT 1 ID 44 F 1150

\$
\$ FLANGES FOR INTERMEDIATE VERTICAL GIRDERS

\$
\$ GENE 22 MEM ID 2089 1 F 372 4 T 376
\$ REPEAT 1 ID 22 F -3
\$ REPEAT 1 ID 44 F 391

\$

\$
\$ FLANGES FOR VERTICAL BEAMS

\$

\$
\$ GENE 22 MEM ID 2177 1 F 95 3 T 98
\$ REPEAT 1 ID 22 F -2
\$ REPEAT 2 ID 44 F 92

\$
\$ GENE 22 MEM ID 2309 1 F 486 3 T 489
\$ REPEAT 1 ID 22 F -2
\$ REPEAT 2 ID 44 F 92

\$
\$ GENE 22 MEM ID 2441 1 F 877 3 T 880
\$ REPEAT 1 ID 22 F -2
\$ REPEAT 2 ID 44 F 92

\$

\$
\$ FLANGES FOR VERTICAL I BEAM FROM QUOIN TO PINTLE

\$

\$

GENE 22 MEM ID 2601 1 F 2 3 T 5 3
GENE 22 MEM ID 2623 1 F 1324 1 T 1325 1

\$

\$
\$ MEMBERS USED TO CONNECT SKIN PLATE TO INTERMEDIATE VERTICAL GIRDERS
\$

\$

GENE 22 MEM ID 2701 1 F 371 4 T 375 4
REPEAT 1 ID 22 F 391

\$

\$
\$ FLANGES FOR BOTTOM GIRDER
\$

GENE 24 MEM LIST

2801 1 1220
2802 1220 93
2803 93 1223
2804 1223 185
2805 185 1227
2806 1227 277
2807 277 1231
2808 1231 369
2809 369 1234
2810 1234 484
2811 484 1238
2812 1238 576
2813 576 1242
2814 1242 668
2815 668 1246
2816 1246 760
2817 760 1249
2818 1249 875
2819 875 1253
2820 1253 967
2821 967 1257
2822 1257 1059
2823 1059 1261
2824 1261 1151

\$
GENE 24 MEM LIST

2825 3 1221
2826 1221 1222
2827 1222 1225
2828 1225 1226
2829 1226 1229
2830 1229 1230
2831 1230 1233
2832 1233 372
2833 372 1236
2834 1236 1237
2835 1237 1240
2836 1240 1241
2837 1241 1244
2838 1244 1245
2839 1245 1248
2840 1248 763
2841 763 1251
2842 1251 1252
2843 1252 1255
2844 1255 1256
2845 1256 1259
2846 1259 1260
2847 1260 1262
2848 1262 1153

\$

\$
\$ FLANGES FOR TOP GIRDER AND INTERMEDIATE CONNECTION FOR SKIN PLATE
\$

\$

MEM INC

3801 67 2220
3802 2220 159
3803 159 2223
3804 2223 251
3805 251 2227
3806 2227 343

3807 343 2231
3808 2231 457
3809 457 2234
3810 2234 550
3811 550 2238
3812 2238 642
3813 642 2242
3814 2242 734
3815 734 2246
3816 2246 848
3817 848 2249
3818 2249 941
3819 941 2253
3820 2253 1033
3821 1033 2257
3822 2257 1125
3823 1125 2261
3824 2261 1217

\$
GENE 24 MEM ID 3825 1 F 2263 1 T 2264 1

\$
\$ INTERMEDIATE CONNECTION FOR SKIN PLATE
\$

MEM INC

3849 68 92
3850 92 160
3851 2222 2225
3852 2225 2226
3853 2226 2229
3854 2229 2230
3855 2230 2233
3856 2233 460
3857 460 2236
3858 2236 2237
3859 2237 2240
3860 2240 2241
3861 2241 2244
3862 2244 2245
3863 2245 2248
3864 2248 851
3865 851 2251
3866 2251 2252
3867 2252 2255
3868 2255 2256
3869 2256 2259
3870 2259 2260
3871 1126 1150
3872 1150 1218

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

\$

```

4019 3019 840 844 3020
4020 3020 844 848 2246
4021 840 3021 3022 844
4022 844 3022 2249 848
$
4023 3023 1211 1214 3024
4024 3024 1214 1217 2261
$
4025 3 1221 3101 6
4026 6 3101 3102 9
$
4027 1233 372 376 3103
4028 3103 376 380 3104
4029 372 1236 3105 376
4030 376 3105 3106 380
$
4031 1248 763 767 3107
4032 3107 767 771 3108
4033 763 1251 3109 767
4034 767 3109 3110 771
$
4035 1262 1153 1156 3111
4036 3111 1156 1159 3112
$
4037 63 3113 3114 66
4038 66 3114 2221 69
$
4039 3115 452 456 3116
4040 3116 456 460 2233
4041 452 3117 3118 456
4042 456 3118 2236 460
$
4043 3119 843 847 3120
4044 3120 847 851 2248
4045 843 3121 3122 847
4046 847 3122 2251 851
$
4047 3123 1213 1216 3124
4048 3124 1216 1219 2262
$
$
$
$ TENSION RODS
$
$
$
MEM INC
5001 3002 3015
5002 3004 3013
5003 3006 3019
5004 3008 3017
5005 3010 3023
5006 3012 3021
$
5007 3102 3115
5008 3104 3113
5009 3106 3119
5010 3108 3117
5011 3110 3123
5012 3112 3121
$
$
$
$ ADD HINGES FOR TENSION RODS
$
$
$
MEMBER RELEASES
5001 TO 5012 START MOMENT Y Z END MOMENT X Y Z
$
$
$
$ ELEMENT PROPERTIES
$
$
$
$
ELEM PROP
$
$ WEB OF QUOIN AND MITER GIRDERS
$
$
1 TO 88 TYPE 'SBHQ' THICK 0.375

```

```

$
$ WEB OF VERTICAL BEAMS
$
89 TO 484 TYPE 'SBHQ6' THICK 0.570
$
$ BUCKLED SKIN PLATE
$
500 TO 1027 TYPE 'SBHQ6' THICK 0.375
$
$ WEB OF BOTTON GIRDER
$
1101 TO 1172 TYPE 'SBHQ6' THICK 0.375
$
$ WEB OF INTERMEDIATE VERTICAL GIRDERS
$
1201 to 1332 TYPE 'SBHQ6' THICK 0.375
$
$ WEB OF VERTICAL I BEAM FROM QUOIN TO PINTLE
$
1401 TO 1444 TYPE 'SBHQ6' THICK 0.32
$
$ WEB OF TOP GIRDER
$
3101 TO 3196 TYPE 'SBHQ6' THICKNESS 0.5
$
$
$ GUSSET PLATES FOR DIAGONALS
$
4001 TO 4048 TYPE 'SBHQ6' THICK 1.
$
-----
$
$ MEMBER PROPERTIES
$
-----
$
MEMBER PROPERTIES
$
$ ***** TENSION RODS *****
$
$ 8 X 1.25
$
5002 5008 -
AX 10 IX 5.21 IY 53.33 IZ 1.30
$
$ 8X 1
$
5004 5010 -
AX 8 IX 2.66 IY 2.67 IZ 0.67
$
$ 6 X 0.75
$
5001 5003 5005 TO 5007 5009 5011 5012 -
AX 4.5 IX 0.84 IY 0.84 IZ 0.21
$
$ *****FLANGES FOR QUOIN GIRDER*****
$
$ DOWNSTREAM AND UPSTREAM, 2 ANGLES 6 X 4 X 0.5, 0.375 SPACING
$
2001 TO 2044 -
AX 9.5 IX 0.79 IY 79.7 IZ 12.54
$
$ *****FLANGES FOR MITER GIRDER*****
$
$ 2 ANGLES 6 X 4 X 0.5, 0.375 SPACING
$
2045 TO 2088 -
AX 9.5 IX 0.79 IY 79.70 IZ 12.54
$
$ *****FLANGES FOR VERTICAL BEAM IN QUOIN*****
$
$ 7.5 X 0.55
$
2601 TO 2644 -
AX 4.125 IX 0.42 IY 19.34 IZ 0.10
$
$ *****FLANGES FOR OTHER VERTICAL GIRDERS*****
$
$ 2 ANGLES 6 X 4 X 0.5 , 0.375 SPACING
$
2089 2090 2111 2112 2133 2134 2155 2156 2105 TO 2110, 2127 TO 2132, -

```

2149 TO 2154, 2171 TO 2176 -
 AX 9.5 IX 0.79 IY 79.70 IZ 12.54
 \$
 \$ 2 ANGLES 6 X 4 X 0.5 WITH 13 X 0.375 COVER PLATE
 \$
 2091 TO 2104, 2113 TO 2126, 2135 TO 2148, 2157 TO 2170 -
 AX 14.375 IX 3.19 IY 148.36 IZ 17.04
 \$
 \$ *****INTERMEDIATE STIFFENERS ON VERTICAL GIRDERS*****
 \$
 \$ 2 ANGLES 3.5 X 3.5 X 0.375, 0.375 SPACING
 \$
 2701 TO 2744 -
 AX 4.97 IX 0.23 IY 12.89 IZ 5.73
 \$
 \$ *****VERTICAL BEAM FLANGES*****
 \$
 \$ UPSTREAM 11.5 X 0.805 FLANGE FOR IBEAM PLUS 12.5 X 0.375 SPLICE
 \$ PLATE ON TOP OF 0.375 BUCKLE PLATE
 \$
 2177 TO 2198, 2221 TO 2242, 2265 TO 2286 -
 2309 TO 2330, 2353 TO 2374, 2397 TO 2418 -
 2441 TO 2462, 2485 TO 2506, 2529 TO 2550 -
 AX 13.95 IX 15.67 IY 163.06 IZ 3.45
 \$
 \$ DOWNSTREAM
 \$ 11.5 X 0.805 FLANGE
 \$
 2199 2200 2217 TO 2220 -
 2243 2244 2261 TO 2264 -
 2287 2288 2305 TO 2308 -
 2331 2332 2349 TO 2352 -
 2375 2376 2393 TO 2396 -
 2419 2420 2437 TO 2440 -
 2463 2464 2481 TO 2484 -
 2507 2508 2525 TO 2528 -
 2551 2552 2569 TO 2572 -
 AX 9.25 IX 2.0 IY 102.02 IZ 0.5
 \$
 \$ I BEAM FLANGE 11.5 X 0.805 WITH 12.5 X 0.5 PLATE
 \$
 2201 2216 2245 2260 2289 2304 2333 2348 -
 2377 2392 2421 2436 2465 2480 2509 2524 -
 2553 2568 -
 AX 15.51 IX 9.26 IY 183.41 IZ 2.21
 \$
 \$ I BEAM FLANGE 11.5 X 0.805 WITH 2 12.5 X 0.5 PLATES
 \$
 2202 TO 2215, 2246 TO 2259, 2290 TO 2303, 2334 TO 2347 -
 2378 TO 2391, 2422 TO 2435, 2466 TO 2479, 2510 TO 2523 -
 2554 TO 2567 -
 AX 21.75 IX 24.50 IY 264.78 IZ 5.87
 \$
 \$
 \$ *****BOTTOM GIRDER *****
 \$
 \$ UPSTREAM FLANGES 1 ANGLE 6 X 6 X 0.5, IGNORE BETA AND USE PARALLEL AXIS
 \$ PROPERTIES
 \$
 2825 TO 2848 -
 AX 5.75 IX 0.48 IY 19.9 IZ 19.9
 \$
 \$ DOWNSTREAM FLANGES 2 ANGLES 6 X 3.5 X 0.5 PLUS 8 X 0.5 FILL PLATE PLUS
 \$ 8 X 0.625 BEARING PLATE
 \$
 2801 TO 2824 -
 AX 18. IX 17.41 IY 127.60 IZ 18.21
 \$
 \$ *****TOP GIRDER*****
 \$
 \$ DOWNSTREAM FLANGE 2 ANGLES 8 X 6 X 0.875, 0.5 SPACING
 \$
 3801 TO 3824 6108 -
 AX 22.97 IX 5.86 IY 332.35 IZ 69.72
 \$
 \$ INTERMEDIATE CONNECTION FOR SKIN PLATE, ONE ANGLE 3.5 X 3.5 X 0.375,
 \$ IGNORE BETA AND USE PARALLEL AXIS PROPERTIES
 \$
 3849 TO 3872 -
 AX 2.48 IX 0.09 IY 2.9 IZ 2.9
 \$

\$ UPSTREAM FLANGE
 \$
 \$ 2 ANGLES 8 X 8 X 0.875, 0.5 SPACING
 \$
 6109 6110 3825 3826 3827 -
 3846 3847 3848 7002 7003 7004 7001 -
 AX 26.47 IX 6.76 IY 334.23 IZ 159.16
 \$
 \$ SAME ANGLES PLUS 1 FLANGE PLATE 18 X 0.5
 \$
 3828 3845 -
 AX 35.47 IX 18.78 IY 577.23 IZ 203.77
 \$
 \$ SAME ANGLES PLUS 2 FLANGE PLATES 18 X 0.5
 \$
 3829 3844 -
 AX 44.47 IX 42.73 IY 820.23 IZ 245.97
 \$
 \$ SAME ANGLES PLUS 3 FLANGE PLATES 18 X 0.5
 \$
 3830 3831 3842 3843 -
 AX 53.47 IX 83.56 IY 1063.23 IZ 434.35
 \$
 \$ SAME ANGLES PLUS 4 FLANGE PLATES 18 X 0.5
 \$
 3832 TO 3841 -
 AX 62.47 IX 145.76 IY 1306.23 IZ 462.64
 \$
 \$ QUOIN BLOCK FLANGE - CASTING - APPX AS 8 X 1
 \$
 7005 -
 AX 8 IX 2.66 IY 2.67 IZ 0.67
 \$
 \$
 \$
 \$
 \$ CHANGE PROPERTIES FOR TRIANGLES IN TOP AND BOTTOM GIRDERS
 \$
 \$
 \$
 \$
 CHANGES
 ELEM PROP
 1104 TO 1106 1168 TO 1170 3104 TO 3106 3168 TO 3170 TYPE 'SBHT'
 ADDITIONS
 \$
 \$
 \$
 \$ CHANGES FOR BOX AT THE TOP OF BEAM5 BELOW TOP GIRDER
 \$ NOTE: THIS WAS NOT ON DRAWINGS PROVIDED BUT IS SHOWN ON
 \$ PHOTOS
 \$
 \$
 \$
 \$
 \$ FIRST DELETE PART OF WEB AND FLANGES OF VERTICAL BEAM 5 AND
 \$ THE SKIN PLATE ELEMENTS
 \$
 DELETIONS
 ELEM 305 TO 308, 990 TO 993, 1014 TO 1017
 MEM 2373 2374 2395 2396
 ADDITIONS
 \$
 \$ ADD NEW JOINTS FOR BOX
 \$
 JOINT COORDINATES
 3501 290 48 476.375
 3502 319 48 476.375
 3503 348 48 476.375
 3504 377 48 476.375
 3505 406 48 476.375
 \$
 3506 290 48 505.6875
 3507 319 48 505.6875
 3508 348 48 505.6875
 3509 377 48 505.6875
 3510 406 48 505.6875
 \$
 3511 319 0 476.375
 3512 319 16.5 476.375
 \$ 3513 319 33 476.375
 \$
 3514 377 0 476.375

3515 377 16.5 476.375
 \$ 3516 387 33 476.375
 \$
 \$ ADD NEW ELEMENTS FOR BOX
 \$
 ELEM INC
 4501 544 3511 3512 545
 4502 3511 636 637 3512
 4503 636 3514 3515 637
 4504 3514 728 729 3515
 \$
 4505 545 3512 573 546
 4506 3512 637 638 573
 4507 637 3515 665 638
 4508 3515 729 730 665
 \$
 4509 546 573 3502 3501
 4510 573 638 3503 3502
 4511 638 665 3504 3503
 4512 665 730 3505 3504
 \$
 4513 3501 546 549 3506
 4514 3506 549 552 2237
 \$
 4515 3505 730 733 3510
 4516 3510 733 736 2245
 \$
 4517 3501 3502 3507 3506
 4518 3506 3507 2240 2237
 4519 3502 3503 3508 3507
 4520 3507 3508 2241 2240
 \$
 4521 3503 3504 3509 3508
 4522 3508 3509 2244 2241
 4523 3504 3505 3510 3509
 4524 3509 3510 2245 2244
 \$
 ELEM PROP
 4501 TO 4524 TYPE 'SBHQ' THICK 0.5 \$ THICKNESS UNKNOWN - NOT ON DRAWINGS
 \$

 \$
 \$ ADDITIONS, CHANGES, AND DELETIONS IN TOP GIRDER NEAR MITER END
 \$

 \$
 CHANGES
 JOI COOR
 2262 Y 50.25
 2286 Y 65.38
 1219 Y 28.5
 2287 Y 58.76
 \$
 ELEM INC
 3195 2285 2262 2286
 3171 2261 4005 1218 1150
 3170 1127 2262 2260
 \$
 MEM INC
 3847 2285 2262
 3848 2262 1219
 \$
 ELEM PROP
 3195 3170 TYPE 'SBHT'
 \$
 ADDITIONS
 JOI COOR
 4005 696.7 0.625 535.
 4001 706.34 0 535
 4002 708.69 7.0625 535
 4003 712.31 17.90 535
 4004 723.965 52.375 535
 \$
 ELEM INC
 6001 1217 4001 4002 4005
 6002 4005 4002 4003 1218
 6003 1218 4003 1219
 6004 1219 4003 4004 2287
 6005 2261 1217 4005
 6015 2260 2262 2285
 \$

ELEM PROP
6003 6005 6015 TYPE 'SBHT6' THICK 0.5
6001 6002 6004 TYPE 'SBHQ6' THICK 0.5

\$
MEM INC
7001 1219 4003
7002 2285 2286
7003 2286 2287
7004 2287 4004

\$
DELETIONS
ELEM 85 TO 88
ADDITIONS
JOI COOR
4006 696. 7.0625 505.69
4007 708.69 7.0625 505.69

\$
ELEM INC
6014 4006 4007 4002 4005
6006 1214 4006 4005 1217
6007 4006 1218 4005
6008 1218 1215 1219
6009 4006 1215 1218
6010 1215 1216 2287 1219
6011 1211 1212 4006 1214
6012 4006 1212 1215
6013 1212 1213 1216 1215

\$
MEM INC
7005 4007 4002

\$
ELEM PROP
6006 TO 6014 TYPE 'SBHQ6' THICK 0.375
CHANGES

ELEM PROP
6007 TO 6009 6012 TYPE 'SBHT6'
6014 THICK 1.0
ADDITIONS

\$

\$
\$ CHANGES AND ADDITIONS FOR QUOIN END OF TOP GIRDER
\$

\$

\$
\$
\$

CHANGES
JOI COOR
2264 Y 60

\$
ELEM INC
3173 4104 2221 2264 69
3174 2221 2222 2265
3102 68 92 2221 4104

\$
ELEM PROP
3174 TYPE 'SBHT6'

\$
MEM INC
3825 4104 2221
3826 2221 2265

\$
DELETIONS
JOINT 2263

\$
ADDITIONS
JOINT COOR
4101 -10.34 0.0 535.
4102 -13.34 8.948 535.
4103 -16.34 17.896 535.
4104 0. 29.78 535.

\$
ELEM INC
6101 4101 67 68 4102
6102 4102 68 1323 4103
6103 4103 1323 1346
6104 1346 1323 69
6105 1323 4104 69
6106 1323 68 4104
6107 2221 2265 2264

\$

```

ELEM PROP
6101 6102 TYPE 'SBHQ6' THICK 1.
6103 TO 6107 TYPE 'SBHT6' THICK 1.
$
MEM INC
6108 4101 67
6109 4103 1323
6110 1323 4104
$
$-----
$
$
$ CHANGES FOR QUOIN GIRDER TO ACCOMIDATE CHANGES IN TOP GIRDER
$
$-----
$
CHANGES
ELEM INC
44 66 65 4104 69
$
ADDITIONS
ELEM INC
6111 65 68 4104
$
ELEM PROP
6111 TYPE 'SBHT6' THICK 0.375
$
$-----
$
$ BOUNDARY CONDITIONS
$
$-----
$
UNITS DEGREES
$
$ *****PINTLE AND GUDGEON PIN*****
$
STATUS SUPPORT 1301 1323
JOI REL
1301 MOM X Y Z
1323 FORCE Z MOM X Y Z
$
$ *****QUOIN BLOCK ON TOP GIRDER*****
$
STATUS SUPPORT 4102
JOI REL
4102 FORCE Y Z MOM X Y Z TH1 18.433
$
$ *****MITER BLOCK*****
$
STATUS SUPPORT 4002 4007
JOI REL
4002 4007 FORCE Y Z MOM X Y Z TH1 -18.433
$
$ *****DOWNSTREAM FLANGE OF BOTTOM GIRDER*****
$
STATUS SUPPORT -
1 93 185 277 369 484 576 668 760 875 967 1059 1151 -
1220 1223 1227 1231 1234 1238 1242 1246 1249 1253 1257 1261
JOINT REL
1 93 185 277 369 484 576 668 760 875 967 1059 1151 -
1220 1223 1227 1231 1234 1238 1242 1246 1249 1253 1257 1261 -
FORCE X Z MOMENT X Y Z
$
QUERY
$
$
$
LOADING 1 'IMPACT LOAD OF 100 KIPS APPLIED AT JOINT 1213'
UNITS KIPS
JOINT LOAD
1213 FORCE X -31.623 Y -94.868
$
units lbs ft
$
$ pressure load corresponding to 10 ft of head over top
$ 21 ft of gate to simulate guidelines for horizontally framed
$ gates
LOADING 2 '10 FT. OF HEAD FROM 10 FT BELOW HIGH POOL TO TOP GIRDER'
ELEMENT LOAD
764 TO 1027, 4517 TO 4524 -
SURFACE FORCE GLOBAL PY -624.
$

```

```

$ DELETE PREVIOUSLY DELETED ELEMENTS SINCE THEY WERE USED IN THE
$ ABOVE LOADING LIST
$
DELETIONS
ELEMENTS 990 TO 993, 1014 TO 1017
ADDITIONS
$
$ 120 KIP LOAD AT MIDSPAN OF TOP GIRDER
$
UNITS KIPS
LOAD 3 '120 KIP LOAD AT MIDSPAN OF TOP GIRDER'
JOINT LOAD
2275 FORCE Y -120
$
UNITS LBS FEET
$
$ HYDROSTATIC LOAD PART I - FULL HYDROSTATIC IS PART I OF PART II
$ THE LOAD WAS BROKEN UP THIS WAY IN ORDER TO USE HEAD LOADING
$ TO SIMULATE BARGE IMPACT
$
$ CORRECTED DIRECTION OF HYDROSTATIC LOADS TO GLOBAL Y 6/25/92
$
LOAD 4 'HYDROSTATIC LOAD - PART I'
ELEMENT LOAD
500 TO 643 SURFACE FORCE GLOBAL PY -1248.00
644 TO 667 SURFACE FORCE GLOBAL PY -1211.81
668 TO 691 SURFACE FORCE GLOBAL PY -1092.00
692 TO 715 SURFACE FORCE GLOBAL PY -972.19
716 TO 739 SURFACE FORCE GLOBAL PY -853.00
740 TO 763 SURFACE FORCE GLOBAL PY -733.20
$
$ HYDROSTATIC LOAD PART II
$
LOAD 5 'HYDROSTATIC LOAD -PART II'
ELEMENT LOAD
764 TO 787 SURFACE FORCE GLOBAL PY -612.14
788 TO 811 SURFACE FORCE GLOBAL PY -494.21
812 TO 835 SURFACE FORCE GLOBAL PY -374.40
836 TO 859 SURFACE FORCE GLOBAL PY -254.59
860 TO 883 SURFACE FORCE GLOBAL PY -133.54
$
$ LOADING 6 - SAME AS LOAD 5 BUT USED TO STORE RESULTS FOR ANTISYMMETRIC
$ IMPACT LOADING
$
UNITS KIPS
LOADING 6 '120 KIP ANTISYMMETRIC LOAD AT MIDSPAN'
JOINT LOAD
2275 FORCE Y -100.
$
$ SYMMETRIC ANALYSIS - LOADINGS 1 TO 5
$
LOAD LIST 1 TO 5
units inches
STIFFNESS ANALYSIS
$
$ ANTISYMMETRIC ANALYSIS - LOADING 6 ONLY
$
CHANGES
$
$ CHANGE BC AT MITER BLOCK
$
JOINT RELEASES
4002 4007 FORCE X MOM X Y Z TH1 -18.433
$
ADDITIONS
LOAD LIST 6
STIFFNESS ANALYSIS
$
LOAD LIST ALL
LIST REACTIONS
$
LIST SUM REACTIONS
LIST DISP JOINT 1213 1216 1219
SAVE 'MITERALL'
FINISH

```

```

restore 'MITERALL'
$
$ joints in top girder
$
define GROUP '/GP/TOPG' joints -
  67  68  69  1217 1218 1219 159 -
  160 161 251 252 253 343 344 -
  345 550 551 552 642 643 644 -
  734 735 736 941 942 943 1033 -
  1034 1035 1125 1126 1127 457 458 -
  459 460 848 849 850 851 92 -
  1150 184 276 368 483 575 667 -
  759 874 966 1058 2220 2221 2222 -
  2223 2224 2225 2226 2227 2228 2229 -
  2230 2231 2232 2233 2234 2235 2236 -
  2237 2238 2239 2240 2241 2242 2243 -
  2244 2245 2246 2247 2248 2249 2250 -
  2251 2252 2253 2254 2255 2256 2257 -
  2258 2259 2260 2261 2262 1323 1346 -
  4101 2264 2265 2266 2267 2268 2269 -
  2270 2271 2272 2273 2274 2275 2276 -
  2277 2278 2279 2280 2281 2282 2283 -
  2284 2285 2286 2287 4005 4001 4002 -
  4003 4004 4104 4102 4103
$
$ elements in top girder
$
define GROUP '/GP/ETOP' elements -
  3101 3102 3103 3107 3108 3109 3110 -
  3111 3112 3113 3114 3115 3116 3117 -
  3118 3119 3120 3121 3122 3123 3124 -
  3125 3126 3127 3128 3129 3130 3131 -
  3132 3133 3134 3135 3136 3137 3138 -
  3139 3140 3141 3142 3143 3144 3145 -
  3146 3147 3148 3149 3150 3151 3152 -
  3153 3154 3155 3156 3157 3158 3159 -
  3160 3161 3162 3163 3164 3165 3166 -
  3167 3171 3172 3104 3105 3106 3168 -
  3169 3170 3173 3174 3175 3176 3177 -
  3178 3179 3180 3181 3182 3183 3184 -
  3185 3186 3187 3188 3189 3190 3191 -
  3192 3193 3194 3195 3196 6001 6002 -
  6003 6004 6005 6015 6101 6102 6103 -
  6104 6105 6106 6107
$
$ members in top girder
$
define GROUP '/GP/MTOP' members -
  3801 3802 3803 3804 3805 3806 3807 -
  3808 3809 3810 3811 3812 3813 3814 -
  3815 3816 3817 3818 3819 3820 3821 -
  3822 3823 3824 3825 3826 3827 3828 -
  3829 3830 3831 3832 3833 3834 3835 -
  3836 3837 3838 3839 3840 3841 3842 -
  3843 3844 3845 3846 3847 3848 3849 -
  3850 3851 3852 3853 3854 3855 3856 -
  3857 3858 3859 3860 3861 3862 3863 -
  3864 3865 3866 3867 3868 3869 3870 -
  3871 3872 6108 6109 6110 7002 7003 -
  7004 7001
$
$ define load combinations
$
loading combination 7 '10 feet of head + hydrostatic'
combine 7 2 1.0 4 1.0
$
loading combination 8 '120 k symmetric loading at midspan of top girder + hydro'
combine 8 3 1.0 4 1.0 5 1.0
$
loading combination 9 '120 k antisymmetric + hydro'
combine 9 3 0.5 6 0.5 4 1.0 5 1.0
$
loading combination 10 '120 k antisym(other leaf) + hydro'
combine 10 3 0.5 6 -0.5 4 1.0 5 1.0
$
units kips inches
list reactions
CALCULATE AVERAGE STRESSES top middle bottom ELEM GROUP '/GP/ETOP'
LIST FORCES MEMBERS GROUP '/GP/MTOP'
save 'loadcomb'
FINISH

```

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE June 1995	3. REPORT TYPE AND DATES COVERED Final report	
4. TITLE AND SUBTITLE Comparison of Barge Impact Experimental and Finite Element Results for the Lower Miter Gate of Lock and Dam 26			5. FUNDING NUMBERS Contract No. DACW39-91-M-1917	
6. AUTHOR(S) Kenneth M. Will				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Georgia Institute of Technology Atlanta, GA 30332			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army Corps of Engineers Washington, DC 20314-1000			10. SPONSORING/MONITORING AGENCY REPORT NUMBER Contract Report ITL-95-1	
11. SUPPLEMENTARY NOTES Available from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) A finite element analysis of barge impact on the lower miter gate of Lock and Dam 26 is presented. The response of the structure was assumed to be linear and the barge impact was modeled as an equivalent static load. The analysis was originally intended to aid in planning full scale barge impact tests at Lock and Dam 26. Due to contract delays and the scheduled demolition of the gate, the analysis was not completed prior to testing. The results of the finite element analysis are presented and compared with the full scale test results.				
14. SUBJECT TERMS Barge impact Finite element Miter gate			15. NUMBER OF PAGES 48	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMITATION OF ABSTRACT	

**WATERWAYS EXPERIMENT STATION REPORTS
PUBLISHED UNDER THE COMPUTER-AIDED
STRUCTURAL ENGINEERING (CASE) PROJECT**

	Title	Date
Technical Report K-78-1	List of Computer Programs for Computer-Aided Structural Engineering	Feb 1978
Instruction Report O-79-2	User's Guide: Computer Program with Interactive Graphics for Analysis of Plane Frame Structures (CFRAME)	Mar 1979
Technical Report K-80-1	Survey of Bridge-Oriented Design Software	Jan 1980
Technical Report K-80-2	Evaluation of Computer Programs for the Design/Analysis of Highway and Railway Bridges	Jan 1980
Instruction Report K-80-1	User's Guide: Computer Program for Design/Review of Curvilinear Conduits/Culverts (CURCON)	Feb 1980
Instruction Report K-80-3	A Three-Dimensional Finite Element Data Edit Program	Mar 1980
Instruction Report K-80-4	A Three-Dimensional Stability Analysis/Design Program (3DSAD) Report 1: General Geometry Module Report 3: General Analysis Module (CGAM) Report 4: Special-Purpose Modules for Dams (CDAMS)	Jun 1980 Jun 1982 Aug 1983
Instruction Report K-80-6	Basic User's Guide: Computer Program for Design and Analysis of Inverted-T Retaining Walls and Floodwalls (TWDA)	Dec 1980
Instruction Report K-80-7	User's Reference Manual: Computer Program for Design and Analysis of Inverted-T Retaining Walls and Floodwalls (TWDA)	Dec 1980
Technical Report K-80-4	Documentation of Finite Element Analyses Report 1: Longview Outlet Works Conduit Report 2: Anchored Wall Monolith, Bay Springs Lock	Dec 1980 Dec 1980
Technical Report K-80-5	Basic Pile Group Behavior	Dec 1980
Instruction Report K-81-2	User's Guide: Computer Program for Design and Analysis of Sheet Pile Walls by Classical Methods (CSHTWAL) Report 1: Computational Processes Report 2: Interactive Graphics Options	Feb 1981 Mar 1981
Instruction Report K-81-3	Validation Report: Computer Program for Design and Analysis of Inverted-T Retaining Walls and Floodwalls (TWDA)	Feb 1981
Instruction Report K-81-4	User's Guide: Computer Program for Design and Analysis of Cast-in-Place Tunnel Linings (NEWTUN)	Mar 1981
Instruction Report K-81-6	User's Guide: Computer Program for Optimum Nonlinear Dynamic Design of Reinforced Concrete Slabs Under Blast Loading (CBARCS)	Mar 1981
Instruction Report K-81-7	User's Guide: Computer Program for Design or Investigation of Orthogonal Culverts (CORTCUL)	Mar 1981
Instruction Report K-81-9	User's Guide: Computer Program for Three-Dimensional Analysis of Building Systems (CTABS80)	Aug 1981
Technical Report K-81-2	Theoretical Basis for CTABS80: A Computer Program for Three-Dimensional Analysis of Building Systems	Sep 1981
Instruction Report K-82-6	User's Guide: Computer Program for Analysis of Beam-Column Structures with Nonlinear Supports (CBEAMC)	Jun 1982

(Continued)

**WATERWAYS EXPERIMENT STATION REPORTS
PUBLISHED UNDER THE COMPUTER-AIDED
STRUCTURAL ENGINEERING (CASE) PROJECT**

(Continued)

	Title	Date
Instruction Report K-82-7	User's Guide: Computer Program for Bearing Capacity Analysis of Shallow Foundations (CBEAR)	Jun 1982
Instruction Report K-83-1	User's Guide: Computer Program with Interactive Graphics for Analysis of Plane Frame Structures (CFRAME)	Jan 1983
Instruction Report K-83-2	User's Guide: Computer Program for Generation of Engineering Geometry (SKETCH)	Jun 1983
Instruction Report K-83-5	User's Guide: Computer Program to Calculate Shear, Moment, and Thrust (CSMT) from Stress Results of a Two-Dimensional Finite Element Analysis	Jul 1983
Technical Report K-83-1	Basic Pile Group Behavior	Sep 1983
Technical Report K-83-3	Reference Manual: Computer Graphics Program for Generation of Engineering Geometry (SKETCH)	Sep 1983
Technical Report K-83-4	Case Study of Six Major General-Purpose Finite Element Programs	Oct 1983
Instruction Report K-84-2	User's Guide: Computer Program for Optimum Dynamic Design of Nonlinear Metal Plates Under Blast Loading (CSDOOR)	Jan 1984
Instruction Report K-84-7	User's Guide: Computer Program for Determining Induced Stresses and Consolidation Settlements (CSETT)	Aug 1984
Instruction Report K-84-8	Seepage Analysis of Confined Flow Problems by the Method of Fragments (CFRAG)	Sep 1984
Instruction Report K-84-11	User's Guide for Computer Program CGFAG, Concrete General Flexure Analysis with Graphics	Sep 1984
Technical Report K-84-3	Computer-Aided Drafting and Design for Corps Structural Engineers	Oct 1984
Technical Report ATC-86-5	Decision Logic Table Formulation of ACI 318-77, Building Code Requirements for Reinforced Concrete for Automated Constraint Processing, Volumes I and II	Jun 1986
Technical Report ITL-87-2	A Case Committee Study of Finite Element Analysis of Concrete Flat Slabs	Jan 1987
Instruction Report ITL-87-1	User's Guide: Computer Program for Two-Dimensional Analysis of U-Frame Structures (CUFRAM)	Apr 1987
Instruction Report ITL-87-2	User's Guide: For Concrete Strength Investigation and Design (CASTR) in Accordance with ACI 318-83	May 1987
Technical Report ITL-87-6	Finite-Element Method Package for Solving Steady-State Seepage Problems	May 1987
Instruction Report ITL-87-3	User's Guide: A Three Dimensional Stability Analysis/Design Program (3DSAD) Module	Jun 1987
	Report 1: Revision 1: General Geometry	Jun 1987
	Report 2: General Loads Module	Sep 1989
	Report 6: Free-Body Module	Sep 1989

(Continued)

**WATERWAYS EXPERIMENT STATION REPORTS
PUBLISHED UNDER THE COMPUTER-AIDED
STRUCTURAL ENGINEERING (CASE) PROJECT**

(Continued)

	Title	Date
Instruction Report ITL-87-4	User's Guide: 2-D Frame Analysis Link Program (LINK2D)	Jun 1987
Technical Report ITL-87-4	Finite Element Studies of a Horizontally Framed Miter Gate Report 1: Initial and Refined Finite Element Models (Phases A, B, and C), Volumes I and II Report 2: Simplified Frame Model (Phase D) Report 3: Alternate Configuration Miter Gate Finite Element Studies—Open Section Report 4: Alternate Configuration Miter Gate Finite Element Studies—Closed Sections Report 5: Alternate Configuration Miter Gate Finite Element Studies—Additional Closed Sections Report 6: Elastic Buckling of Girders in Horizontally Framed Miter Gates Report 7: Application and Summary	Aug 1987
Instruction Report GL-87-1	User's Guide: UTEXAS2 Slope-Stability Package; Volume I, User's Manual	Aug 1987
Instruction Report ITL-87-5	Sliding Stability of Concrete Structures (CSLIDE)	Oct 1987
Instruction Report ITL-87-6	Criteria Specifications for and Validation of a Computer Program for the Design or Investigation of Horizontally Framed Miter Gates (CMITER)	Dec 1987
Technical Report ITL-87-8	Procedure for Static Analysis of Gravity Dams Using the Finite Element Method – Phase 1a	Jan 1988
Instruction Report ITL-88-1	User's Guide: Computer Program for Analysis of Planar Grid Structures (CGRID)	Feb 1988
Technical Report ITL-88-1	Development of Design Formulas for Ribbed Mat Foundations on Expansive Soils	Apr 1988
Technical Report ITL-88-2	User's Guide: Pile Group Graphics Display (CPGG) Post-processor to CPGA Program	Apr 1988
Instruction Report ITL-88-2	User's Guide for Design and Investigation of Horizontally Framed Miter Gates (CMITER)	Jun 1988
Instruction Report ITL-88-4	User's Guide for Revised Computer Program to Calculate Shear, Moment, and Thrust (CSMT)	Sep 1988
Instruction Report GL-87-1	User's Guide: UTEXAS2 Slope-Stability Package; Volume II, Theory	Feb 1989
Technical Report ITL-89-3	User's Guide: Pile Group Analysis (CPGA) Computer Group	Jul 1989
Technical Report ITL-89-4	CBASIN—Structural Design of Saint Anthony Falls Stilling Basins According to Corps of Engineers Criteria for Hydraulic Structures; Computer Program X0098	Aug 1989

(Continued)

**WATERWAYS EXPERIMENT STATION REPORTS
PUBLISHED UNDER THE COMPUTER-AIDED
STRUCTURAL ENGINEERING (CASE) PROJECT**

(Continued)

	Title	Date
Technical Report ITL-89-5	CCHAN—Structural Design of Rectangular Channels According to Corps of Engineers Criteria for Hydraulic Structures; Computer Program X0097	Aug 1989
Technical Report ITL-89-6	The Response-Spectrum Dynamic Analysis of Gravity Dams Using the Finite Element Method; Phase II	Aug 1989
Contract Report ITL-89-1	State of the Art on Expert Systems Applications in Design, Construction, and Maintenance of Structures	Sep 1989
Instruction Report ITL-90-1	User's Guide: Computer Program for Design and Analysis of Sheet Pile Walls by Classical Methods (CWALSHT)	Feb 1990
Technical Report ITL-90-3	Investigation and Design of U-Frame Structures Using Program CUFRCB Volume A: Program Criteria and Documentation Volume B: User's Guide for Basins Volume C: User's Guide for Channels	May 1990
Instruction Report ITL-90-6	User's Guide: Computer Program for Two-Dimensional Analysis of U-Frame or W-Frame Structures (CWFRAM)	Sep 1990
Instruction Report ITL-90-2	User's Guide: Pile Group—Concrete Pile Analysis Program (CPGC) Preprocessor to CPGA Program	Jun 1990
Technical Report ITL-91-3	Application of Finite Element, Grid Generation, and Scientific Visualization Techniques to 2-D and 3-D Seepage and Groundwater Modeling	Sep 1990
Instruction Report ITL-91-1	User's Guide: Computer Program for Design and Analysis of Sheet-Pile Walls by Classical Methods (CWALSHT) Including Rowe's Moment Reduction	Oct 1991
Instruction Report ITL-87-2 (Revised)	User's Guide for Concrete Strength Investigation and Design (CASTR) in Accordance with ACI 318-89	Mar 1992
Technical Report ITL-92-2	Finite Element Modeling of Welded Thick Plates for Bonneville Navigation Lock	May 1992
Technical Report ITL-92-4	Introduction to the Computation of Response Spectrum for Earthquake Loading	Jun 1992
Instruction Report ITL-92-3	Concept Design Example, Computer Aided Structural Modeling (CASM) Report 1: Scheme A Report 2: Scheme B Report 3: Scheme C	Jun 1992 Jun 1992 Jun 1992
Instruction Report ITL-92-4	User's Guide: Computer-Aided Structural Modeling (CASM) - Version 3.00	Apr 1992
Instruction Report ITL-92-5	Tutorial Guide: Computer-Aided Structural Modeling (CASM) - Version 3.00	Apr 1992

(Continued)

**WATERWAYS EXPERIMENT STATION REPORTS
PUBLISHED UNDER THE COMPUTER-AIDED
STRUCTURAL ENGINEERING (CASE) PROJECT**

(Continued)

	Title	Date
Contract Report ITL-92-1	Optimization of Steel Pile Foundations Using Optimality Criteria	Jun 1992
Technical Report ITL-92-7	Refined Stress Analysis of Melvin Price Locks and Dam	Sep 1992
Contract Report ITL-92-2	Knowledge-Based Expert System for Selection and Design of Retaining Structures	Sep 1992
Contract Report ITL-92-3	Evaluation of Thermal and Incremental Construction Effects for Monoliths AL-3 and AL-5 of the Melvin Price Locks and Dam	Sep 1992
Instruction Report GL-87-1	User's Guide: UTEXAS3 Slope-Stability Package; Volume IV, User's Manual	Nov 1992
Technical Report ITL-92-11	The Seismic Design of Waterfront Retaining Structures	Nov 1992
Technical Report ITL-92-12	Computer-Aided, Field-Verified Structural Evaluation	
	Report 1: Development of Computer Modeling Techniques for Miter Lock Gates	Nov 1992
	Report 2: Field Test and Analysis Correlation at John Hollis Bankhead Lock and Dam	Dec 1992
	Report 3: Field Test and Analysis Correlation of a Vertically Framed Miter Gate at Emsworth Lock and Dam	Dec 1993
Instruction Report GL-87-1	User's Guide: UTEXAS3 Slope-Stability Package; Volume III, Example Problems	Dec 1992
Technical Report ITL-93-1	Theoretical Manual for Analysis of Arch Dams	Jul 1993
Technical Report ITL-93-2	Steel Structures for Civil Works, General Considerations for Design and Rehabilitation	Aug 1993
Technical Report ITL-93-3	Soil-Structure Interaction Study of Red River Lock and Dam No. 1 Subjected to Sediment Loading	Sep 1993
Instruction Report ITL-93-3	User's Manual—ADAP, Graphics-Based Dam Analysis Program	Aug 1993
Instruction Report ITL-93-4	Load and Resistance Factor Design for Steel Miter Gates	Oct 1993
Technical Report ITL-94-2	User's Guide for the Incremental Construction, Soil-Structure Interaction Program SOILSTRUCT with Far-Field Boundary Elements	Mar 1994
Instruction Report ITL-94-1	Tutorial Guide: Computer-Aided Structural Modeling (CASM); Version 5.00	Apr 1994
Instruction Report ITL-94-2	User's Guide: Computer-Aided Structural Modeling (CASM); Version 5.00	Apr 1994
Technical Report ITL-94-4	Dynamics of Intake Towers and Other MDOF Structures Under Earthquake Loads: A Computer-Aided Approach	Jul 1994
Technical Report ITL-94-5	Procedure for Static Analysis of Gravity Dams Including Foundation Effects Using the Finite Element Method – Phase 1B	Jul 1994

(Continued)

**WATERWAYS EXPERIMENT STATION REPORTS
PUBLISHED UNDER THE COMPUTER-AIDED
STRUCTURAL ENGINEERING (CASE) PROJECT**

(Concluded)

	Title	Date
Instruction Report ITL-94-5	User's Guide: Computer Program for Winkler Soil-Structure Interaction Analysis of Sheet-Pile Walls (CWALSSI)	Nov 1994
Instruction Report ITL-94-6	User's Guide: Computer Program for Analysis of Beam-Column Structures with Nonlinear Supports (CBEAMC)	Nov 1994
Instruction Report ITL-94-7	User's Guide to CTWALL – A Microcomputer Program for the Analysis of Retaining and Flood Walls	Dec 1994
Contract Report ITL-95-1	Comparison of Barge Impact Experimental and Finite Element Results for the Lower Miter Gate of Lock and Dam 26	Jun 1995