

ARMY RESEARCH LABORATORY




The Effect of Initial and Gun Mount Conditions on the Accuracy of Kinetic Energy (KE) Projectiles

Stephen Wilkerson

ARL-TR-895

November 1995

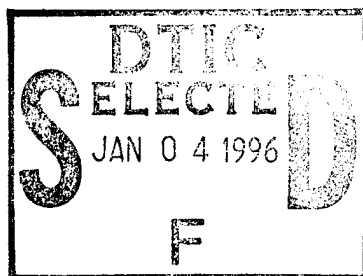

19960102 001

DTIC QUALITY INSPECTED 3

APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

NOTICES

Destroy this report when it is no longer needed. DO NOT return it to the originator.

Additional copies of this report may be obtained from the National Technical Information Service, U.S. Department of Commerce, 5285 Port Royal Road, Springfield, VA 22161.

The findings of this report are not to be construed as an official Department of the Army position, unless so designated by other authorized documents.

The use of trade names or manufacturers' names in this report does not constitute indorsement of any commercial product.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project(0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE November 1995	3. REPORT TYPE AND DATES COVERED Final, 1-31 Jan 95		
4. TITLE AND SUBTITLE The Effect of Initial and Gun Mount Conditions on the Accuracy of Kinetic Energy (KE) Projectiles			5. FUNDING NUMBERS PR: 1L162618AH80	
6. AUTHOR(S) Stephen Wilkerson				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRL-WT-PD Aberdeen Proving Ground, MD 21005-5066			8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-895	
9. SPONSORING/MONITORING AGENCY NAMES(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The U.S. Army Research Laboratory (ARL) has invested considerable resources in the development of numerical techniques for the prediction of kinetic energy (KE) projectile accuracy. In particular, a validated three-dimensional transient finite element (FE) model of the M256 120-mm M1A1 main weapon system's performance has been created from the trunnions up. This model considers for the first time the gun tube, breech, piston, cradle and mount assembly, along with their associated boundary conditions. This enhanced numerical approach provides new insight into occasion-to-occasion and round-to-round variability in the M256 gun system. Numerical and experimental analysis techniques have been coupled to validate model attributes.				
14. SUBJECT TERMS gun systems, 120 mm M1A1 main weapon system, KE projectile			15. NUMBER OF PAGES 33	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

INTENTIONALLY LEFT BLANK.

PREFACE

The U.S. Army Research Laboratory (ARL) has invested considerable resources in the development of numerical techniques for the prediction of kinetic energy (KE) projectile accuracy. In particular, a validated three-dimensional transient finite element (FE) model of the M256 120-mm M1A1 main weapon system has been created from the trunnions up. This model considers for the first time the gun tube, breech, piston, cradle and mount assembly, along with the associated boundary conditions. This enhanced numerical approach provides new insight into occasion-to-occasion and round-to-round variability in the M256 gun system. Numerical and experimental analysis techniques have been coupled to validate model attributes including:

- gun tube/breech pressurization,
- more accurate representation of both the gun tube profile and tube flexibility,
- a complete recoil assembly with clearances and sliding interfaces between associated parts,
- trunnion supports and the elevation mechanism.

This report presents results substantiating these claims and demonstrating the robustness of the numerical approach.

Using the enhanced M256 gun system numerical model, a detailed examination of normal propulsion variations and projectile initial malalignment effects on projectile performance has been performed. Additionally, the numerical model was used to enhance experimental findings by isolating discrete components of variability within the scope of normal gun system attributes. For example, studies of pressure variations on projectile impact locations have been coupled with possible occasion-to-occasion and round-to-round permutations that occur within the recoil alignment and projectile initial seating, respectively.

INTENTIONALLY LEFT BLANK.

ACKNOWLEDGMENTS

The author wishes to express gratitude to Dr. Burns and Dr. Schmidt of the U.S. Army Research Laboratory (ARL), Aberdeen Proving Ground, MD, for their technical and administrative support of this project. The author also wishes to thank others from the ARL: Bob Kaste for his assistance in simplifying the initial model of the M256 gun system and Dave Hopkins for his continued technical support of the finite element (FE) codes which were invaluable in completing this study. Finally, the author wishes to acknowledge Tank Main Armament Systems (TMAS), the Research, Development, and Engineering Center (RDEC), and the Armament Research, Development, and Engineering Center (ARDEC).

Accession For	
NTIS CRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

INTENTIONALLY LEFT BLANK.

TABLE OF CONTENTS

	<u>Page</u>
PREFACE	iii
ACKNOWLEDGMENTS	v
LIST OF FIGURES	ix
LIST OF TABLES	ix
1. BACKGROUND	1
2. ANALYSIS	11
3. SUMMARY	14
4. REFERENCES	17
DISTRIBUTION LIST	19

INTENTIONALLY LEFT BLANK.

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1.	Cutaway view of the M256 120-mm gun recoil system	4
2.	CAD drawing of M256 main components	6
3.	FE representation of gun tube breech and piston assembly	7
4.	DYNA3D FE model with cutaway view of chamber area	8
5.	Model of the DM13 KE projectile	10
6.	Detailed model of a modern KE projectile	16

LIST OF TABLES

<u>Table</u>		<u>Page</u>
1.	Gun Tube Tilted With Clearances, Unbalanced	12
2.	Gun Tube Tilted With Clearances, Balanced	13
3.	Gun Tube Without Clearances, Unbalanced	13
4.	Gun Tube Without Clearances, Balanced	13
5.	Projectile Initial Seating	14

INTENTIONALLY LEFT BLANK.

1. BACKGROUND

Early numerical analytical studies concentrated on determining the structural integrity of improved kinetic energy (KE) projectiles. These improvements have focused, to a large extent, on reducing the sabot weight while increasing the subprojectile length and mass. As the mass of the sabot has been gradually reduced, the complexity of the design has increased. In turn, as the complexity of the sabot/subprojectile system has evolved, so has the sophistication of the numerical analysis techniques employed to analyze them. Examples of some of these techniques are given by Burns (1981).

This report presents analytical techniques that can be used to develop the in-bore structural design of saboted KE projectiles with long, high-density rods. A number of important design issues regarding saboted projectiles are also presented. For example, a methodology for the design of the sabot/rod interface is presented. Additional information on the effective design of sabot ramps and the use of two-dimensional (2-D) finite element (FE) methods for the verification of projectile structural strength is also provided. The results of these numerical and analytical design techniques were subsequently expanded for the development of very efficient projectile designs for both 105-mm and 120-mm tank guns. The report also offers a fair compendium of work performed prior to 1981 on sabot/rod systems.

Using similar numerical techniques, Drysdale, Kirkendall, and Kokinakis (1980) showed insight into how numerical modeling methods might be used to increase the performance of KE projectile designs. In this study, the requirements for a modern long rod penetrator sabot were described in terms of analysis techniques that could be employed to find the lightest possible sabot or an optimal sabot/rod configuration. Another such paper on the structural design of projectiles defines some of the problems encountered when the in-bore behavior of a projectile is considered (Drysdale and Burns 1988). These reports review many of the analytical and numerical techniques that are currently being used to develop modern projectiles.

Nonetheless, these reports point out that the techniques used thus far do not take into consideration the projectile transverse loading during in-bore travel. Such loadings, as introduced by an unbalanced breech, barrel drop due to gravity, tube heating, or a bent gun tube (gun tubes are never perfectly straight) are not considered in the initial design of the projectile. In the past, a series of experimental tests has been used for the final optimization of the KE projectile. Typically, the projectile would be designed based on known numerical and analytical design techniques. The design would then be manufactured and tested in groups of 5 or 10. Based on the results of these tests, slight modifications would be made, and the

cycle of testing and modifying would continue until an acceptable design was derived (Burns and Wilkerson 1990). Tested parameters are often evaluated from radiographs, high-speed and smear photography, velocity and target impact data, proximity probes, and yaw cards. Data were collected using these test results, which also helped to determine the structural integrity of the projectile and the sabot discard characteristics.

With the availability of high-speed computers, three-dimensional (3-D) FE techniques that can take traverse loadings into account have been applied to the study of in-bore projectile behavior (Rabern 1988, 1989; Rabern, Parker, and McAfee 1990). It is now believed that these new techniques may be capable of improving the initial and modified sabot designs of future projectiles. This ability would add significantly to the existing collection of analytical and numerical techniques that are available to aid in KE projectile design. Three-dimensional FE techniques might also reduce the number of iterations in the current, costly cycle of testing and design modification.

Rabern's early work (1988, 1989) introduced, for the first time, a methodology to characterize the performance of a projectile that was subjected to lateral and axial loading. The methodology was developed using a state-of-the-art 3-D FE approach. It was subsequently evaluated by direct comparison with experimental results. The results indicated that the phenomena observed experimentally could be accurately simulated using known numerical techniques. The experimental portion of the study involved full-scale testing of two separate sabot/rod designs in a 120-mm launch tube that was slightly bent. A 2.3-MeV x-ray unit was employed to determine the lateral displacements occurring in the sabot and rod as they traveled down the launch tube and exited at a very high speed. Due to the relatively quick ballistic cycle, on the order of 7 ms, the projectiles were subjected to significant lateral loads from the bent gun tube. After the projectile exited the launch tube, the sabot separation and rod straightness were recorded by four 150-keV x-ray units. These test results were then used to bench mark the numerical analysis.

The numerical analysis involved a 3-D model of the sabot, rod, and gun tube using the DYNA3D FE program (Hallquist and Whirley 1989, Brown and Hallquist 1984). The comparison of displacement profiles of those recorded by radiographs in the experiment and those calculated by the numerical simulations showed that this technique could yield good results. Based on that observation, it was not unreasonable to conclude that the numerical predictions for stress and strain would track equally well. The study also performed a series of calculations to determine the sensitivity of the mesh refinement.

These calculations revealed that the method was converging when more than 5,000 elements were used. At this point in the mesh refinement, the calculations were within 1% of one another. The actual FE model of the sabot and rod was made from a half-symmetric or 180° slice. This half-symmetric model was used for simplicity and enabled the isolation of the vertical displacements induced into the projectile from the bent gun tube. Most importantly though, the study proved that parameters like the strength profiles of bent gun tubes can be accurately simulated in a 3-D analysis. Moreover, the work provided the opportunity for the various aspects leading to projectile lateral loads (e.g., unbalanced breech, bent tubes, initial conditions, etc.) to be studied individually or collectively using modern numerical analysis.

In a subsequent study (Rabern, Parker, and McAfee 1990), it was shown that small differences in the projectile initial seating could lead to significant changes in the projectile lateral velocity and rotational rates at muzzle exit. This work concentrated on a comparison between various initial conditions for 105-mm XM900E1 projectiles. These included pitched-up, pitched-down, and aligned conditions as well. Additionally, a nonrotating condition was analyzed to examine the effects of rifle-twist on the projectile motion. The numerical simulation used a full 360° model of the projectile and gun tube to examine both horizontal and vertical displacements, velocities, and rotational rates of the sabot/rod at muzzle exit. This model does not discard the sabot from the rod at muzzle exit as would occur in reality.

In a connected effort, Hopkins (1990) related the importance of gun tube pressurization while, for the first time, demonstrating methodologies to include pressurization effects in the FE analysis of a gun system launching of a bullet. Afterwards, Rabern and Lewis (1992) incorporated a traveling pressure front into a full 3-D model and examined the dynamic response of the projectile and gun together. In addition, Hopkins and Wilkerson (1993) examined the accuracy of various methods to incorporate traveling pressure fronts in 3-D FE models of gun systems.

Although some gun and projectile interaction problems are beginning to be addressed with 3-D FE techniques, questions pertaining to the effects of the gun system recoil mechanism have just recently begun to be studied. Using a series of small scale experiments (Wilkerson, Fulton, and Thiravong 1993; Wilkerson, Burman, and Li 1993) and some numerical studies (Wilkerson 1993; Wilkerson and Hopkins 1994), simulations of the recoiling motion of the M1A1 main weapon system have been conducted. In these recent models, an M256 120-mm gun system was modeled from the gun tube to the trunnion, which mount the gun and recoil system to the M1A1 turret.

Figure 1 shows a cutaway view of the M256 120-mm gun system. As shown in the figure, the system consists of a complicated series of components that have varying clearances which can slide relative to one another during the recoil and counter-recoil strokes. To model these parts using FE techniques required careful scrutiny of the drawings and actual hardware. Observing the assembly and disassembly of parts during routine maintenance provided additional insight about clearances between associated parts. The primary parts (labeled in Figure 1) were first modeled using a Computer-Aided-Design (CAD) package (Autodesk Inc. 1987). These CAD models served as the basis for the FE representation of the M256. Figure 2 shows the CAD approximations of the M256 major components. The FE model of these parts was constructed primarily from eight noded brick elements as well as linear spring elements.

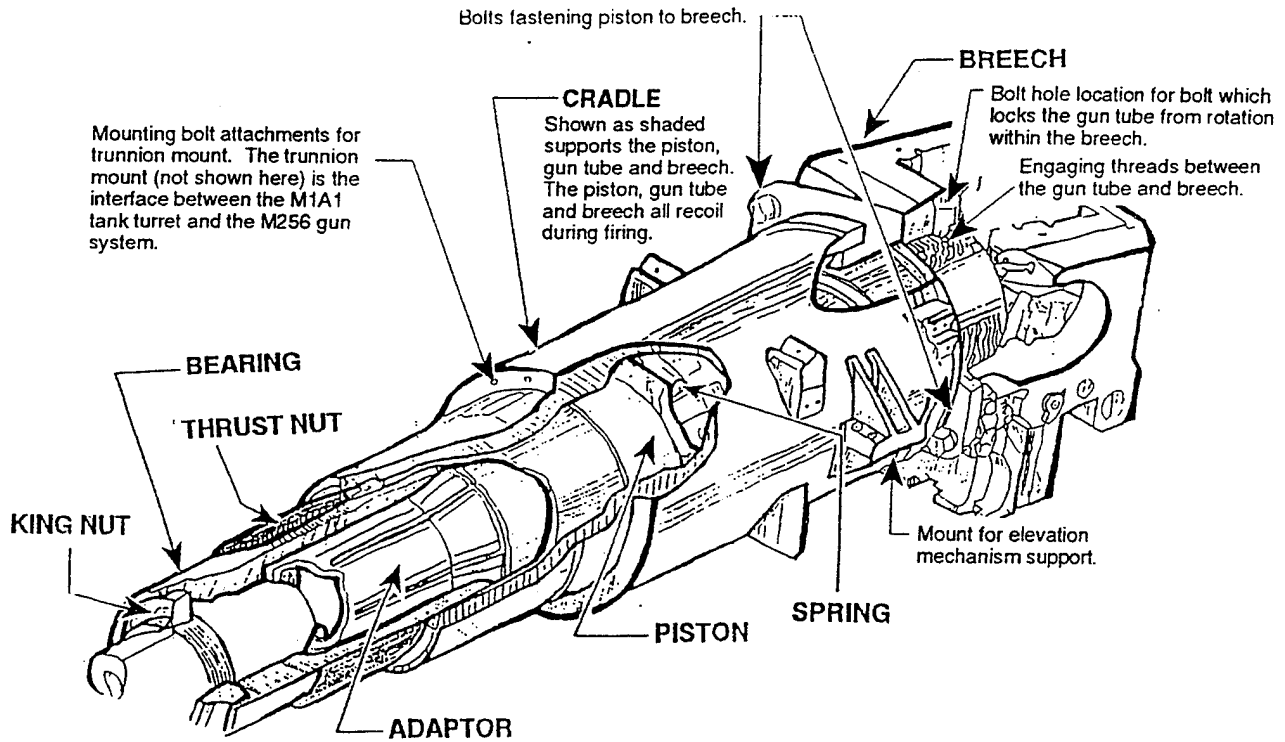


Figure 1. Cutaway view of the M256 120-mm gun recoil system.

The first two pieces modeled were the gun tube and breech. In the actual assembly, these two parts are engaged with an interrupted thread. The gun tube slides inside the breech and is then rotated 45°. The opposing threads on the breech and gun tube tightly connect the two parts. Finally, a bolt is threaded through the upper portion of the breech and into a corresponding notch in the gun tube to limit relative rotation between the two parts. While these components have some clearances between them for ease of installation, their axial movement is heavily coupled. The relative vertical and horizontal motion between the parts is also very closely coupled.

Being unable to ascertain the relative movement between the piston and gun tube along the rear contact point, it was assumed that these components respond as if they were rigidly connected. In addition, the piston bolts to the breech at two locations across its rear face, which adds rigidity to this connection. Just forward of that location on the gun tube, the piston radially supports the gun tube at two contact points. To simplify the model, these two axial locations are merged. Along the forward end of the piston, a series of parts are used to secure the gun tube to the piston. This clamping device consists of the adapter, bearing, king nut, and thrust nut (Figures 2 and 3).

These parts form a fairly rigid clamp between the piston and gun tube. In addition to the piston and gun tube attachment, the piston is supported inside the cradle. The cradle allows the gun, breech, and piston to recoil during firing. Creating a model of the cradle attachment points, particularly at the front of the piston, is non-trivial.* Therefore, a series of static load experiments were conducted to determine how to best model the supporting interfaces between the piston and cradle. The results of these experiments are reported in Wilkerson, Fulton, and Thiravong (1993). These experiments validated the assumption that the piston and gun needed to be modeled as two parts using rigid attachment points between them. Measurements confirmed that when transverse forces are applied to the gun tube, the gun and piston essentially move together. However, the measurements also indicated that the same out-of-plane forces produced relative motion between the piston and cradle. This series of static load experiments confirmed that the gun tube, breech, and piston interfaces could be modeled, at least initially, as rigid contact points. Finally, the FE model of the piston which includes the adapter, bearing, king nut, and thrust nut was modeled as a single component. In the model, these parts connect the gun tube and piston at the same location as the actual contact points on the M256. The assumption of a rigid contact undoubtedly makes the overall system stiffer than the actual gun. The effect of this approximation

* These parts are not, in most cases, rigidly attached to one another.

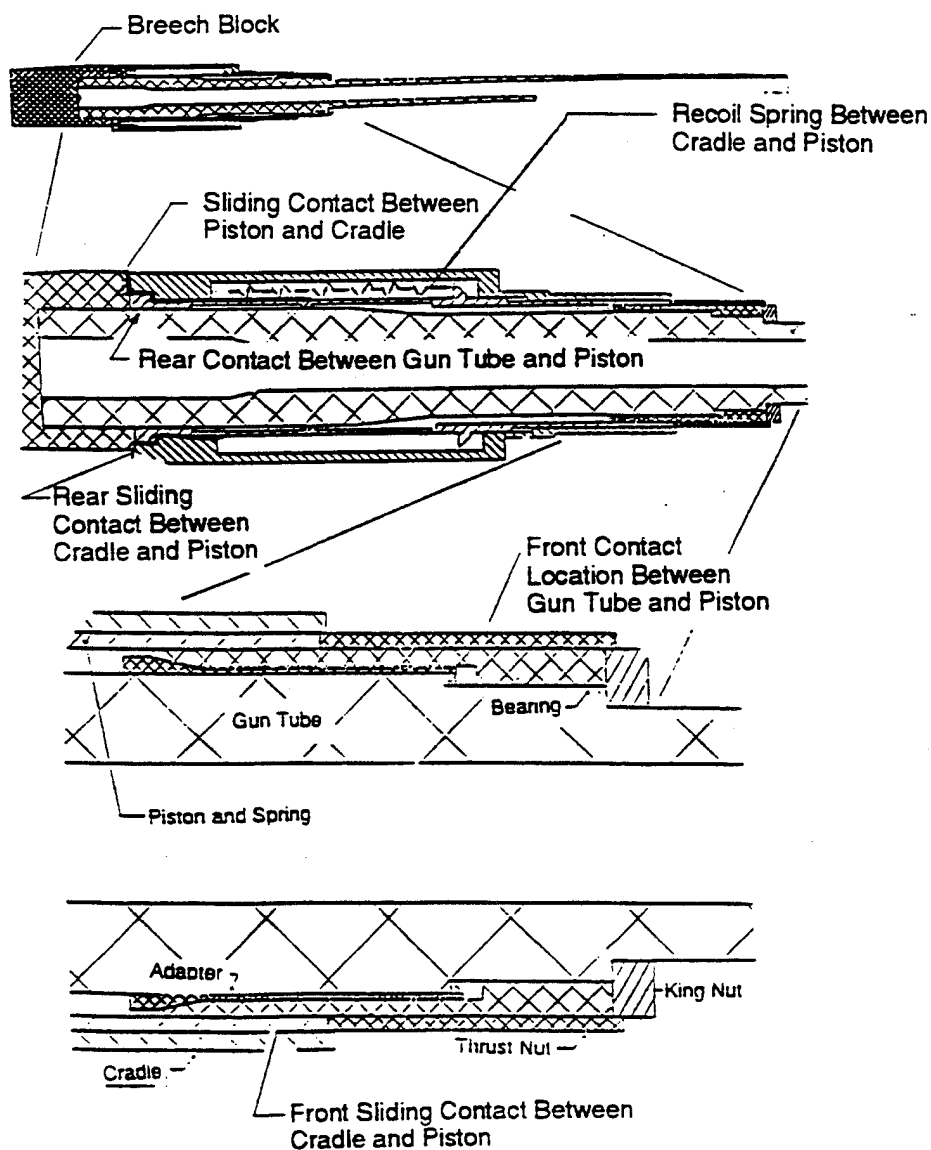


Figure 2. CAD drawing of M256 main components.

will be further investigated in future models. Nonetheless, for the purpose of this study, the effects of this assumption are negligible. Figure 4 shows the FE model developed for these three primary parts.

The gun tube, breech, and piston are supported in the tank turret by the cradle. The cradle connects to the tank turret through the mantlet that has a pair of trunnions supported by the turret and the elevating mechanism. The trunnions allow free rotation of the cradle while the elevating mechanism controls that rotation. The cradle sliding support for the piston also allows the gun tube, breech, and piston to recoil

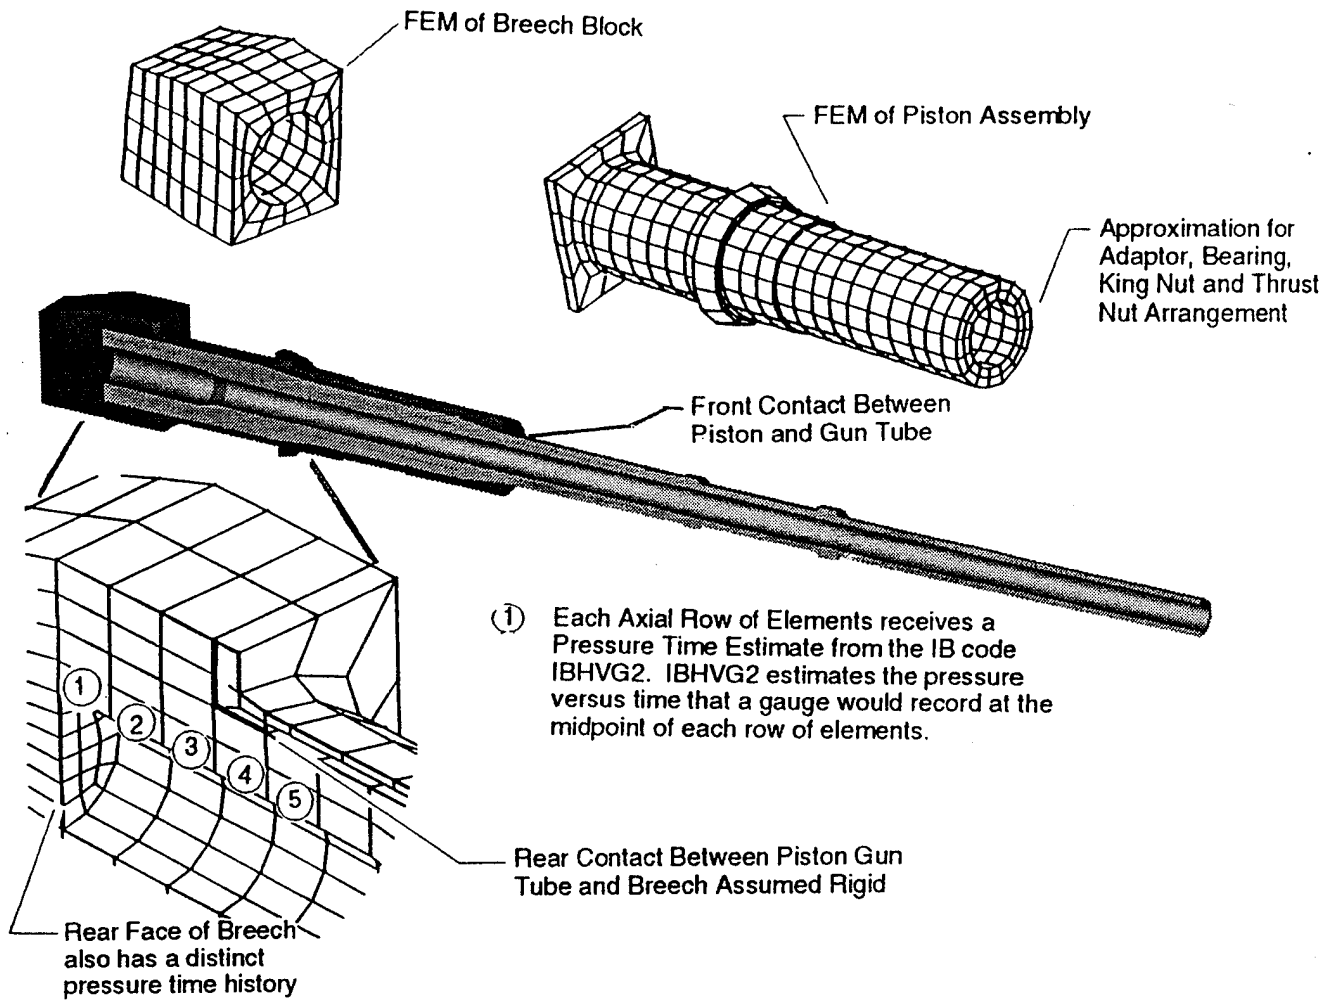


Figure 3. FE representation of gun tube breech and piston assembly.

during firing. Therefore, it was necessary to model these interfaces using the sliding contact capabilities in DYNA3D (Hallquist and Whirley 1989). The clearances between these sliding contacts, which were observed to influence movement of the system during the static load experiments, are of paramount importance in estimating the changes in response between the balanced and unbalanced systems. The incorporation of this important attribute is discussed in detail in Wilkerson and Hopkins (1994).

The recoil consists of a large spring and damper that absorb the gun recoil energy. The gun tube, breech, and piston recoil approximately 11 in during gun firing. A number of simpler beam element models have been used to determine the best method to model the recoil behavior. During the recoil stroke, considerable energy is absorbed from the system through damping. Therefore, to model the

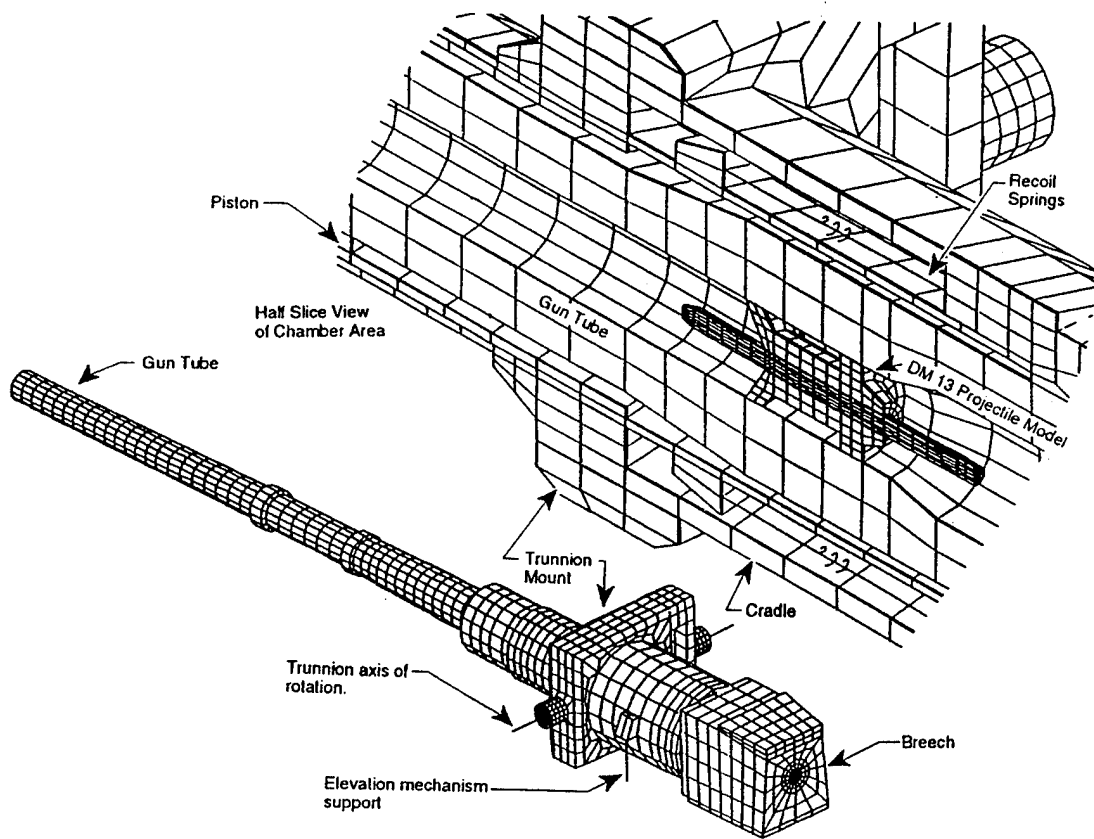


Figure 4. DYNA3D FE model with cutaway view of chamber area.

entire stroke, it is necessary to include a preloaded spring, as in the actual system, and a damper unit. However, since the gun recoils only about 1.5 in before the bullet exits the gun, and this study is primarily interested in the gun system motion while the bullet is still in-bore, the entire recoil stroke was not modeled in the simulation. Consequently, this model utilized only a simple undamped spring to simulate the recoil system behavior while the bullet remained in-bore. The validity of these assumptions was ascertained by comparing axial recoil motion predicted by the model with experimental data from an actual firing cycle. This comparison confirms that neglecting damping during early time motion (approximately the first 7 ms) has little effect on model accuracy.

The M256 cradle and recoil assembly is bolted to a metal mount with trunnions. The gun system is free to rotate about the trunnions. Only the elevation mechanism restricts movement in this plane. The elevation mechanism is a hydraulic actuator used to aim the weapon in the vertical plane. The model includes approximations for these important boundary constraints. Figure 4 shows the trunnion and elevating mechanism as represented in the FE model. As can be seen in the figure, the model is supported

by trunnions whose axis of rotation in the x-y plane is at the same approximate location as the actual system. The cradle rotation is controlled via a spring element located in a position that closely mimics the actual system.

While it is recognized that the dynamics of the elevation mechanism are nonlinear, they were modeled using linear approximations based on results from the static load experiments (Wilkerson, Fulton, and Thiravong 1993). Furthermore, this assumption seems reasonable since the system displacements are on the order of one-tenths of a millimeter, before the projectile exits the muzzle, while the nonlinear attributes of the elevating mechanism are evident only for much larger displacements. Therefore, the assumption of linearity for the cases represented here seems reasonable. The components of the final model have the same approximate thickness, weight, moments of inertia, and CG as the actual parts in the M256 (Wilkerson, Berman, and Li 1993). The DYNA3D FE program was used to run the simulation, while the PATRAN and PATDYN translators were used to post-process the results (Hallquist and Whirley 1989; PDA Engineering 1987a, 1987b).

The centerline profile of gun tube No. 5064 was used in the analysis presented here in accordance with the techniques discussed by Wilkerson (1993). Basically, the techniques used to incorporate a particular gun tube centerline profile correlate the technologies used to measure gun tube centerline with FE calculation of gravity droop. In particular, gun tubes are measured while being supported in a fashion that is similar to the actual gun tube support in the gun mount. However, when the gun is fired, there are devices attached at various locations along the gun tube (such as the bore evacuator, thermal shrouds, and muzzle reference system) that change the tube centerline profile from that originally measured. The methods discussed in Wilkerson (1993) make allowances for additional mass to be included in the model of the gun tube by recalculating the change to the centerline profile accordingly. For this study, tube No. 5064 was chosen because it was also one of the tubes used during the balanced breech experiments (Held and Erlin 1991).

The projectile model was a simplified version of the DM13 projectile (Figure 5) because it was one of the KE projectiles used during the balanced breech experiments. The procedures used in the projectile model were similar to the procedures used by Kaste and Wilkerson (1992) for the XM900E1 projectile. The one notable difference was how the treatment of interferences between the sabot petals was handled. In this study, the motion of the gun system was of primary importance; with the projectile motion and its

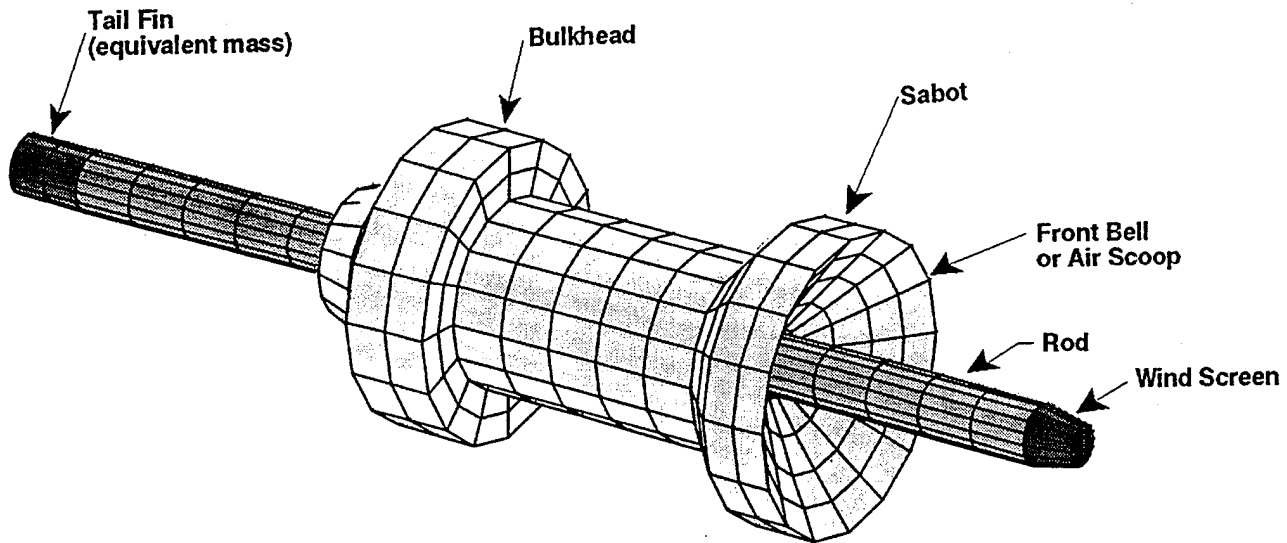


Figure 5. Model of the DM13 KE projectile.

interactions with the gun system being of secondary importance. Hence, to reduce run times, the interfaces between the sabot petals are not modeled. In other words, the sabot itself is modeled as a one-piece component. However, the rod, wind screen, tail fins, and interfaces between the sabot and rod were also included in this model as was done for the XM900E1 projectile by Kaste and Wilkerson (1992). In particular, the wind screen and tail fins are approximated using a lumped mass approach as described in Kaste and Wilkerson (1992).

To simulate the proper ballistic environment inside the 120-mm gun during a firing event, pressure-time estimates based on an actual shot were made using the IBHVG2 interior ballistic (IB) code (Anderson and Fickie 1984). The calculations provided pressure-time histories as a function of projectile travel along the axial length of the gun tube. In the model, the inside face of each axial row of elements comprising the gun tube received a unique pressure-time curve to simulate the actual pressure across the inside wall of the gun tube. Additionally, the inside breech face, which is exposed to the chamber pressure, also had a distinct pressure loading history. Finally, an estimate of the pressure along the rear surface of the projectile was included. The rear surface of the projectile is considered to be any portion of the projectile that would be exposed to the burning propellant gasses. In all, 70 unique pressure-time load curves were used in the FE model simulations.

It has been shown that calculations made using the DYNA and NIKE (Brown and Hallquist 1984) family of codes for projectile displacement, velocity, and acceleration, using the above assumptions, very closely duplicate the predictions from an IB code (Wilkerson 1991). Results are typically within 1–2% of more accurate modeling approaches (Hopkins and Wilkerson 1993). Noting that the pressure at any axial location of the tube is primarily dependent on the projectile position, and that this attribute has been shown to be accurately predicted by the DYNA and NIKE codes, the pressurization of the gun barrel is also reasonably accurate. As a check of this assumption, calculations were made on a generic gun tube to estimate the influence of axial grid spacing. Calculations were made using the unique pressure-time curve at each axial location and compared to a coupled calculation where the FE and IB codes are linked together. In the latter calculation, DYNA results for projectile displacement, velocity, and accelerations were fed back into the IB code and the pressure at every location was calculated based on this information at each time step (Hopkins and Wilkerson 1993). Without this coupling, the IB code uses a lumped mass approach to model the projectile and its equations of motion. When the codes are coupled, the pressure along the interior gun tube wall can be calculated very accurately as the projectile moves down the tube, exposing the surface to the propellant gas pressure.

It was found that for any reasonably finite discretization, the FE model and its associated set of load curves resulted in reasonable estimates for displacements, stresses, and strains. The current process of applying individual pressure curves at various axial locations along the tube length was adapted for its simplicity in application, although future models may include the more accurate coupled approach.

2. ANALYSIS

The sophistication and flexibility of the 3-D model allow issues pertaining to occasion-to-occasion and/or round-to-round variability to be examined independent of one another or in combination. For this particular analysis, the variations in exit shot conditions are used as a gauge of the round-to-round variation. One typical parameter that can change from round to round of a given ammunition type is the pressure variations in the propellant bed (Robbins 1994). A typical example of pressure variations was accomplished by changing the pressure on the back of the projectile by $\pm 4\%$ the norm (Robbins 1994).^{*} The results from these calculations are given in Table 1.

^{*} This value was estimated as "typical" of what could occur; not necessarily the largest or what happens every time a 120-mm gun is fired with a KE projectile. In other words, this value represents a typical high value.

Table 1. Gun Tube Tilted With Clearances, Unbalanced

Pressure Percent (Maximum)	Average y Velocity (in/s)	Average z Velocity (in/s)	Pitch Rate (rad/s)	Yaw Rate (rad/s)
0.96	39.2	11.6	15.9	4.7
1.00	40.4	11.5	14.8	4.1
1.04	37.3	12.6	13.6	4.1

Table 1 is labeled as: "Gun Tube Tilted With Clearances, Unbalanced" —in reference to the recoil configuration.* This particular scenario is what is currently believed to be standard, or normal, configuration for the M256 120-mm mounted in the M1A1 tank.† Then, applying $\pm 4\%$ pressure variation to the back of the projectile, variations in shot exit conditions can be used to quantify the effect of normal pressure deviations. Table 1, column 1, gives the percent of the total pressure on the base of the projectile. Columns 2 and 3 give the vertical and horizontal velocities in inches per second, respectively. Columns 4 and 5 give the pitch (vertical) and yaw (horizontal) rates in radians per second. As can be seen in this table, the variance is small between the associated pressures.

Initially, when the balanced breech experiments (Wilkerson and Hopkins 1994) were analyzed, several different configurations for the recoil of the gun were examined. One such variance is presented in Table 2. Table 2 contains the same pressure variations as in Table 1 only for the case of a balanced breech. For the balanced breech block, the change in exit state conditions between the various pressures was of similar magnitude as for the unbalanced breech. However, the change between the balanced and unbalanced breech results, particularly in the vertical components of velocity and pitch rate, were substantial.

* "Unbalanced" refers to the fact that the breech block on the M256 120-mm gun system is slightly offset from the gun tube's centerline. That is, the top of the breech is cut at an angle so the gun can be aimed downward without having the breech hit the top of the turret. This design results in an asymmetric breech block.

† Within the gun recoil, there exists small clearances between parts. They are on the order of several thousands of an inch. In the current analysis, the clearances between the cradle and piston are included in the model (see Figures 1 and 2). However, in the M256 recoil, there are kick blocks that engage the breech block as it returns into battery, and forces it to sit in the cradle the same way every time. These blocks push the breech and piston toward the top of the cradle. This position, and the resulting motion caused when the gun is fired, were thought to be the cause of puzzling experimental measurements of the breech movement during the balanced breech experiments (Held and Erling 1991). Later, this theory was tested with the current model, which showed this to be the case (Wilkerson and Hopkins 1994).

Table 2. Gun Tube Tilted With Clearances, Balanced

Pressure Percent (Maximum)	Average y Velocity (in/s)	Average z Velocity (in/s)	Pitch Rate (rad/s)	Yaw Rate (rad/s)
0.96	21.4	11.8	6.6	3.7
1.00	19.6	10.8	5.8	3.0
1.04	17.1	10.7	5.2	2.9

Two other configurations that were examined numerically during the balanced breech simulations are presented in Tables 3 and 4. In these two cases, the clearances between the cradle and piston were eliminated, and the recoiling parts were no longer allowed to sit at an angle inside the cradle mechanism. Table 3 represents the unbalanced breech with no clearances between the cradle and piston and Table 4 represents the balanced case.

Table 3. Gun Tube Without Clearances, Unbalanced

Pressure Percent (Maximum)	Average y Velocity (in/s)	Average z Velocity (in/s)	Pitch Rate (rad/s)	Yaw Rate (rad/s)
0.96	20.1	4.4	7.4	1.0
1.00	21.0	6.2	7.0	1.1
1.04	19.8	7.5	6.6	1.0

Table 4. Gun Tube Without Clearances, Balanced

Pressure Percent (Maximum)	Average y Velocity (in/s)	Average z Velocity (in/s)	Pitch Rate (rad/s)	Yaw Rate (rad/s)
0.96	10.6	5.5	4.2	1.3
1.00	10.3	6.1	3.8	1.2
1.04	10.5	8.6	3.4	1.0

Another parameter that is believed to affect fall of shot is the initial orientation of the bullet as it sits inside the weapon chamber. Modern day KE rounds consist of a double ramped sabot with the rear ramp, or bulkhead, sealing off the propellant gas. The forward bell, or front ramp, typically has several thousands of an inch clearance between its outer diameter and the inner diameter of the gun tube. This clearance allows the bullet to cock slightly inside of the gun tube when it is loaded. Table 5 gives the results from a series of simulations that examine differences in bullet initial seating. For the DM13 bullet, this allowed the projectile to tilt up to 0.134°. Row 1 in Table 5 presents the exit state differences for a bullet tilted upward the maximum amount. Row 2 presents the results when the bullet is tilted only half that amount, and row 3 presents the norm when the bullet is not titled. Rows 4 and 5 tilt the bullet downward initially. In row 4, the tilt is one-half, and in row 5, the tilt is the maximum amount that would be possible. As can be seen in the table, the initial conditions of the bullet have a much larger effect on exit shot conditions than pressure variations.

Table 5. Projectile Initial Seating

Projectile Tilt (°)	Average y Velocity (in/s)	Average z Velocity (in/s)	Pitch Rate (rad/s)	Yaw Rate (rad/s)
0.134 ↑	35.2	20.6	7.2	4.7
0.067 ↑	42.9	14.0	10.9	3.2
0.0	40.7	11.3	-3.6	4.0
0.067 ↓	56.8	19.1	12.9	2.0
0.134 ↓	69.3	19.1	11.2	2.6

3. SUMMARY

The numerical model developed during this study allows the examination of subtle nuances of gun and bullet designs and their effects on projectile performance to be studied in detail. These techniques can also be coupled with experimentation to improve the numerical approximations and expand or otherwise help explain observed projectile gun tube interaction. Although the use of these elaborate

techniques to solve ballistic problems are in their infancy, * efforts are underway to utilize this technology to streamline the design and test procedures currently in practice for developing new tank munitions. One such step that is underway is to examine changes in KE projectile design and fabrication by evaluating their exit state conditions using techniques similar to the ones presented herein. Figure 6 shows a KE projectile that includes many of the bullet details which were overlooked in this preliminary study. Models such as the one shown in Figure 6 will allow the examination and analysis of future materials and new geometries to help optimize a bullet prior to testing. Hence, near future efforts will include an emphasis to improve and streamline the numerical methodologies presented here, allowing a more timely and accurate assessment of gun and projectile performance.

* Far more needs to be done to quantify and correlate the numerical results from this type of analysis.

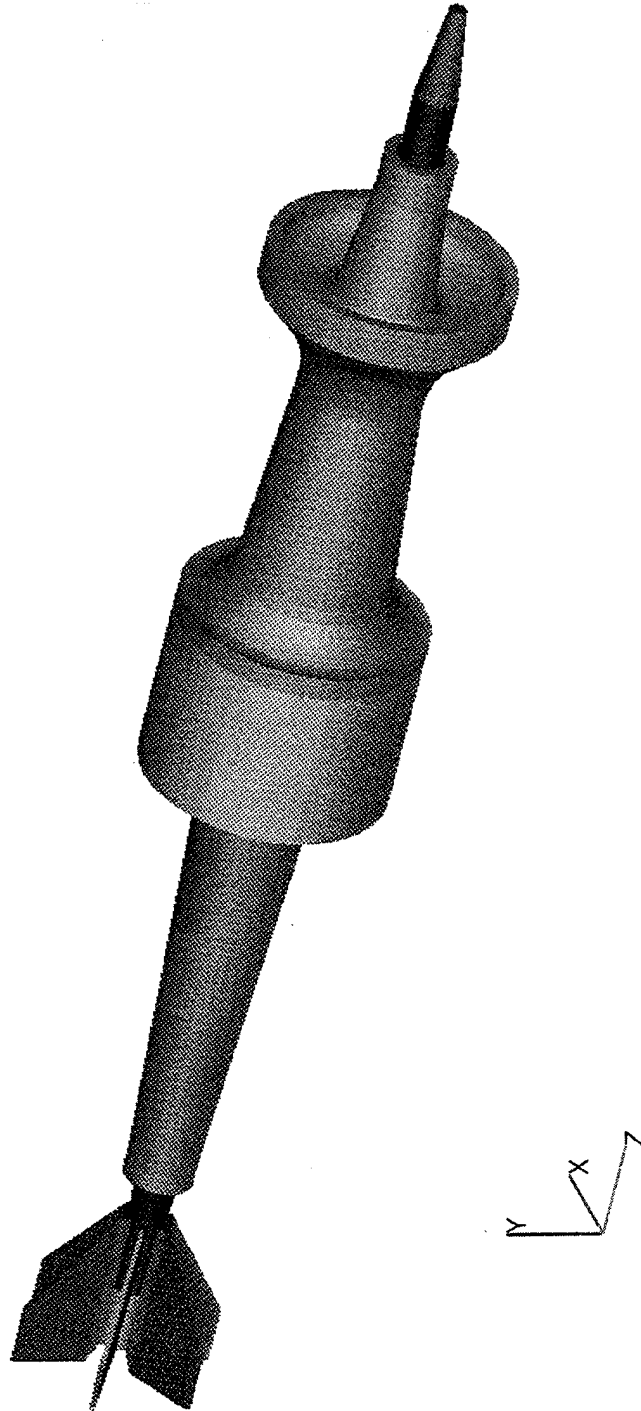


Figure 6. Detailed model of a modern KE projectile.

4. REFERENCES

- Anderson, R., and K. Fickie. "IBHVG2 A Users Guide." BRL-TR-2829, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, July 1984.
- Autodesk Inc. AutoCAD release 2.6 Reference Manual, 1987.
- Brown, B., and J. Hallquist. "TAURUS: An Interactive Post-Processor for The Analysis Codes NIKE3D, DYNA3D, TACO3D." UCID-19392, rev. 1, Lawrence Livermore National Laboratory, Livermore, CA, May 1984.
- Burns, B. "Medium Caliber Anti-Armor Automatic Cannon (MC-AAAC) In-bore Projectile Technology." BRL-TR-02364, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, September 1981.
- Burns, B., and S. Wilkerson. Private communication. U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, September 25, 1990.
- Drysdale R., and B. Burns. "Structural Design of Projectiles." Gun Propulsion Technology, vol. 109, pp. 133-159, 1988.
- Drysdale, W. H., R. D. Kirkendall, and L. D. Kokinakis. "Structural Design Considerations for Minimum Weight Sabots." Presented at the Fifth International Symposium on Ballistics, Toulouse, France, April 1980.
- Hallquist, J., and R. Whirley. "DYNA3D Users Manual (Nonlinear Dynamic Analysis of Structures in Three Dimensions)." UCID-19592, rev. 5, Lawrence Livermore National Laboratory, Livermore, CA, May 1989.
- Held, B., and T. Erline. "Dynamics of the Balanced Breech System for the 120-mm Tank Main Gun." BRL-TR-3186, U.S. Army Ballistics Research Laboratory, Aberdeen Proving Ground, MD, January 1991.
- Hopkins D. A. "Predicting Dynamic Strain Amplification by Coupling a Finite Element Structural Analysis Code with a Gun Interior Ballistic Code." BRL-TR-3269, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, July 1990.
- Hopkins, D., and S. Wilkerson. "Modeling of Gun Systems Including Pressurization Effects." Poster Paper 14th International Symposium on Ballistics, Quebec, Canada, September 1993.
- Kaste, R., and S. Wilkerson. "An Improved Sabot Design and Analysis for the XM900E1 Kinetic Energy Projectile." BRL-TR-3359, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, June 1992.
- PDA Engineering. "PATRAN Plus User's Manual Release 2.4." Patran Division, Costa Mesa, CA, 1987a.
- PDA Engineering. "PAT/DYNA Interface Guide." Patran Division, Costa Mesa, CA, 1987b.

- Rabern, D. "Axially Accelerated Saboted Rods Subjected to Lateral Forces." Ph.D. Thesis. Dept. of Civil Engineering and Material Science, University of Arizona, AZ, 1988.
- Rabern, D. "Axially Accelerated Saboted Rods Subjected to Lateral Forces." LA-11494-MS, Los Alamos National Laboratory, Los Alamos, NM, March 1989.
- Rabern D., R. Parker, and J. McAfee. "A Numerical and Experimental Evaluation of the XM900E1 Sabot/Rod System During Launch." LA-11866-MS, Los Alamos National Laboratory, Los Alamos, NM, 1990.
- Rabern D. A., and M. W. Lewis. "Two and Three Dimensional Simulations of Moving Pressure Fronts in Gun Tubes." Journal of Pressure Vessel Technology, vol. 114, pp. 181-188, May 1992.
- Robbins, F., and S. Wilkerson. Private communication. U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, November 1994.
- Robbins, F., and S. Wilkerson. Private communication. U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, 25 September 1990.
- Wilkerson, S. "An Analysis of the In-bore Axial Loads on A generic Slug using the NIKE2D/DYNA2D Finite Element Programs." BRL-MR-3910, U.S. Army Ballistic Research Laboratory, Aberdeen Proving Ground, MD, May 1991.
- Wilkerson, S. "A Consistent Method for Determining Gun Tube Straightness on the M256 120-mm Gun." International Symposium on Gun Dynamics, Newport, RI, April 1993.
- Wilkerson, S. A., M. Berman, and T. Li. "A Modal Survey of the M1A1 Main Weapon System." Proceedings of the Seventh U.S. Army Symposium on Gun Dynamics, pp. 401-418, New-Port, RI, 11-13 May 1993.
- Wilkerson, S. A., V. Fulton, and J. Thiravong. "M256 Static Load Test." ARL-TR-182, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, August 1993.
- Wilkerson, S. A., and D. A. Hopkins. "Analysis of a Balanced Breech System for the M1A1 Main Gun System Using Finite Element Techniques." ARL-TR-608, U.S. Army Research Laboratory, Aberdeen Proving Ground, MD, November 1994.

NO. OF
COPIES ORGANIZATION

2 DEFENSE TECHNICAL INFO CTR
ATTN DTIC DDA
8725 JOHN J KINGMAN RD
STE 0944
FT BELVOIR VA 22060-6218

1 DIRECTOR
US ARMY RESEARCH LAB
ATTN AMSRL OP SD TA
2800 POWDER MILL RD
ADELPHI MD 20783-1145

3 DIRECTOR
US ARMY RESEARCH LAB
ATTN AMSRL OP SD TL
2800 POWDER MILL RD
ADELPHI MD 20783-1145

1 DIRECTOR
US ARMY RESEARCH LAB
ATTN AMSRL OP SD TP
2800 POWDER MILL RD
ADELPHI MD 20783-1145

ABERDEEN PROVING GROUND

5 DIR USARL
ATTN AMSRL OP AP L (305)

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	HQDA ATTN SARD TT DR F MILTON PENTAGON WASHINGTON DC 20310-0103
1	HQDA ATTN SARD TR DR R CHAIT PENTAGON WASHINGTON DC 20310-0103
1	HQDA ATTN SARD TR MS K KOMINOS PENTAGON WASHINGTON DC 201310-0103
1	DIRECTOR USARL ATTN AMSRL CP CA D SNIDER 2800 POWDER MILL RD ADELPHI MD 20783
1	COMMANDER US ARMY ARDEC ATTN SMCAR FSE T GORA PICATINNY ARSENAL NJ 07806-5000
3	COMMANDER US ARMY ARDEC ATTN SMCAR TD R PRICE V LINDNER C SPINELLI PICATINNY ARSENAL NJ 07806-5000
1	US ARMY TACOM ATTN AMSTA JSK S GOODMAN WARREN MI 48397-5000
1	COMMANDER US ARMY ARDEC ATTN F MCLAUGHLIN PICATINNY ARSENAL NJ 07806
4	COMMANDER US ARMY ARDEC ATTN SMCAR CCH T S MUSALLI P CHRISTIAN R CARR N KRASNOW PICATINNY ARSENAL NJ 07806-5000

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	COMMANDER US ARMY ARDEC ATTN SMCAR CCH V E FENNELL PICATINNY ARSENAL NJ 07806-5000
1	COMMANDER US ARMY ARDEC ATTN SMCAR CCH J DELORENZO PICATINNY ARSENAL NJ 07806-5000
2	COMMANDER US ARMY ARDEC ATTN SMCAR CC J HEDDERICH COL SINCLAIR PICATINNY ARSENAL NJ 07806-5000
1	COMMANDER US ARMY ARDEC ATTN SMCAR CCH P J LUTZ PICATINNY ARSENAL NJ 07806-5000
2	COMMANDER US ARMY ARDEC ATTN SMCAR FSA M D DEMELLA F DIORIO PICATINNY ARSENAL NJ 07806-5000
2	COMMANDER US ARMY ARDEC ATTN SMCAR FSA A WARNASH B MACHAK PICATINNY ARSENAL NJ 07806-5000
1	COMMANDER ATTN SMCWV QAE Q C HOWD BLDG 44 WATERVLIET ARSNL WATERVLIET NY 12189-4050
1	COMMANDER ATTN SMCWV SPM T MCCLOSKEY BLDG 25 3 WTRVLT ARSNL WATERVLIET NY 12189-4050

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
11	DIRECTOR BENET LABORATORIES ATTN AMSTA AR CCB C KITCHENS J KEANE J BATTAGLIA J VASILAKIS G PFLEGL G FRIAR V MONTVORI D PORTER J WRZOCHALSKI R HASENBEIN AMSTA AR CCB T S SOPOK WATERVLIET NY 12189
1	COMMANDER WATERVLIET ARSENAL ATTN SMCWV QA QS K INSCO WATERVLIET NY 12189-4050
1	COMMANDER PROD BASE MODERN ACTY US ARMY ARDEC ATTN AMSMC PBM K PICATINNY ARSENAL NJ 07806-5000
1	COMMANDER US ARMY BELVOIR RD&E CTR ATTN STRBE JBC FT BELVOIR VA 22060-5606
1	US ARMY COLD REGIONS RSCH & ENGINEERING LABORATORY ATTN P DUTTA 72 LYME RD HANOVER NH 03755
1	DIRECTOR USARL ATTN AMSRL WT L D WOODBURY 2800 POWDER MILL RD ADELPHI MD 20783-1145
2	US ARMY RESEARCH OFFICE ATTN A CROWSON J CHANDRA PO BOX 12211 RESEARCH TRIANGLE PARK NC 27709-2211

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
3	COMMANDER US ARMY MISSILE COMMAND ATTN AMSMI RD W MCCORKLE AMSMI RD ST P DOYLE AMSMI RD ST CN T VANDIVER REDSTONE ARSENAL AL 35898
3	US ARMY RESEARCH OFFICE ENGINEERING SCIENCES DIV ATTN R SINGLETON G ANDERSON K IYER PO BOX 12211 RESEARCH TRIANGLE PARK NC 27709-2211
2	PROJECT MANAGER SADARM PICATINNY ARSENAL NJ 07806-5000
2	PROJECT MANAGER TANK MAIN ARM SYS ATTN SFAE AR TMA COL BREGARD K KIMKER PICATINNY ARSENAL NJ 07806-5000
1	PROJECT MANAGER TANK MAIN ARM SYS ATTN SFAE AR TMA MD R KOWALSKI PICATINNY ARSENAL NJ 07806-5000
2	PEO FIELD ART SYS ATTN SFAE FAS PM D ADAMS T MCWILLIAMS PICATINNY ARSENAL NJ 07806-5000
1	PEO FIELD ART SYS ATTN SFAE FAS PM H GOLDMAN PICATINNY ARSENAL NJ 07806
2	PROJECT MANAGER AFAS ATTN G DELCOCO J SHIELDS PICATINNY ARSENAL NJ 07806-5000

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	NASA LANGLEY RESCH CTR MS 266 ATTN AMSRL VS W ELBER F BARTLETT JR HAMPTON VA 23681-0001
2	NAVAL SURFACE WARF CTR DAHLGREN DIV CODE G33 DAHLGREN VA 224488
1	OFFICE OF NAVAL RESCH MECH DIV CODE 1132SM ATTN YAPA RAJAPAKSE ARLINGTON VA 22217
1	NAVAL ORDNANCE STATION ADVANCED SYS TECH BR ATTN D HOLMES CODE 2011 LOUISVILLE KY 40214-5245
2	DAVID TAYLOR RSCH CTR ATTN R ROCKWELL W PHYLLAJER BETHESDA MD 20054-5000
1	DEFENSE NUCLEAR AGENCY INNOVATIVE CONCEPTS DIV ATTN DR R ROHR 6801 TELEGRAPH RD ALEXANDRIA VA 22310-3398
1	EXPED WARF DIV N85 ATTN DR FRANK SHOUP 2000 NAVY PENTAGON WASHINGTON DC 20350-2000
1	OFFICE OF NAVAL RESEARCH ATTN MR DAVID SIEGEL 351 800 N QUINCY ST ARLINGTON VA 22217-5660
1	NSWC ATTN JOSEPH H FRANCIS ATTN CODE G30 DAHLGREN VA 22448

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	NSWC ATTN JOHN FRAYSSE ATTN CODE G33 DAHLGREN VA 22448
1	DEFENSE NUCLEAR AGENCY INNOVATIVE CONCEPTS DIV ATTN LTC JYUJI D HEWITT 6801 TELEGRAPH RD ALEXANDRIA VA 22448
1	CDR NAVAL SEA SYSTEMS CMD ATTN D LIESE 2531 JEFFERSON DAVIS HWY ARLINGTON VA 22242-5160
1	NAVAL SURFACE WARFARE ATTN MARY E LACY CODE D4 17320 DAHLGREN RD DAHLGREN VA 22448
4	DIRECTOR L LIVERMORE NATL LAB ATTN R CHRISTENSEN S DETERESA F MAGNESS M FINGER PO BOX 808 LIVERMORE CA 94550
1	DIRECTOR LOS ALAMOS NATL LAB ATTN D RABERN MEE 13 MS J 576 PO BOX 1633 LOS ALAMOS NM 87545
1	LOS ALAMOS NATL LAB ATTN J REPPA MS F668 PO BOX 1663 LOS ALAMOS NM 87545
1	OAK RIDGE NATL LAB ATTN R M DAVIS PO BOX 2008 OAK RIDGE TN 37831-6195

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
6	DIRECTOR SANDIA NATL LAB APPLIED MECHANICS DEPT DIVISION 8241 ATTN C ROBINSON G BENEDETTI W KAWAHARA K PERANO D DAWSON P NIELAN PO BOX 969 LIVERMORE CA 94550-0096
1	BATTELLE ATTN C R HARGREAVES 505 KING AVE COLUMBUS OH 43201-2681
1	PACIFIC NORTHWEST LAB ATTN M SMITH PO BOX 999 RICHLAND WA 99352
1	L LIVERMORE NATL LAB ATTN M MURPHY PO BOX 808 L 282 LIVERMORE CA 94550
2	NORTH CAROLINA ST UNIV CIVIL ENGINEERING DEPT ATTN W RASDORF L SPAINHOUR PO BOX 7908 RALEIGH NC 27696-7908
1	PENNSYLVANIA ST UNIV ATTN RICHARD MCNITT 227 HAMMOND BLDG UNIVERSITY PARK PA 16802
1	UCLA MANE DEPT ENGR IV ATTN H THOMAS HAHN LOS ANGELES CA 90024-1597
2	UNIV OF DEL CTR FOR COMPOS MAT ATTN J GILLESPIE M SANTARE 201 SPENCER LABORATORY NEWARK DE 19716

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	UNIV OF TEXAS AT AUSTIN CENTER FOR ELECTROMECH ATTN J PRICE 10100 BURNET RD AUSTIN TX 78758-4497
1	AAI CORPORATION PO BOX 126 HUNT VALLEY MD 21030-0126
1	JOHN HEBERT PO BOX 1072 HUNT VALLEY MD 21030-0126
1	ARMTEC DEFENSE PROD ATTN STEVE DYER 85 901 AVE 53 PO BOX 848 COACHELLA CA 92236
1	SAIC ATTN DAN DAKIN 2200 POWELL ST STE 1090 EMERYVILLE CA 94608
1	SAIC ATTN MILES PALMER 2109 AIR PARK RD S E ALBUQUERQUE NM 87106
1	SAIC ATTN ROBERT ACEBAL 1225 JOHNSON FERRY RD STE 100 MARIETTA GA 30068
1	SAIC ATTN DR G CHRYSOMALLIS 3800 W 80th ST STE 1090 BLOOMINGTON MN 55431
4	ALLIANT TECHSYSTEMS INC ATTN C CANDLAND J BODE R BECKER K WARD 600 2ND ST NE HOPKINS MN 55343-8367

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	CHAMBERLAIN MANUF CORP RSCH & DEV DIV ATTN M TOWNSEND PO BOX 2545 550 ESTHER ST WATERLOO IA 50704
1	CUSTOM ANALYTCL ENG SYSTEMS INC ATTN A ALEXANDER STAR ROUTE BOX 4A FLINTSTONE MD 21530
1	PROJECTILE TECHNOLOGY INC 515 GILES ST HAVRE DE GRACE MD 21078
1	NOESIS INC ATTN ALLEN BOUTZ 1110 N GLEBE RD STE 250 ARLINGTON VA 22201-4795
1	ARROW TECH ASSO 1233 SHELBURNE RD STE D 8 SOUTH BURLINGTON VT 05403-7700
7	CIVIL ENGR RSCH FOUND ATTN H BERNSTEIN PRES C MAGNELL K ALMOND R BELLE M WILLETT E DELO B MATTES 1015 15TH ST NW STE 600 WASHINGTON DC 20005
1	GENERAL DYNAMICS LAND SYSTEMS DIVISION ATTN D BARTLE PO BOX 1901 WARREN MI 48090
3	INST FOR ADV TECH ATTN T KIEHNE H FAIR P SULLIVAN 4030 2 W BRAKER LN AUSTIN TX 78759

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	INST FOR ADV TECH UNIV OF TX AT AUSTIN ATTN DR W REINECKE 4320-2 W BRAKER LN AUSTIN TX 78759-5329
1	INTERFEROMETRICS INC ATTN R LARRIVA VICE PRES 8150 LEESBURG PIKE VIENNA VA 22100
1	KAMAN SCIENCES CORP PO BOX 7463 COLORADO SPRINGS CO 80933
1	PM ADVANCED CONCEPTS LORAL VOUGHT SYSTEMS ATTN R TAYLOR PO BOX 650003 MS WT 21 DALLAS TX 76265-0003
2	LORAL VOUGHT SYSTEMS ATTN G JACKSON K COOK 1701 W MARSHALL DR GRAND PRAIRIE TX 75051
1	BRIGS CO ATTN JOE BACKOFEN 2668 PETERBOROUGH ST HERDON VA 22071-2443
1	SOUTHWEST RSCH INST ENGINEERING & MAT SCI DIV ATTN JACK RIEGEL PO DRAWER 28510 SAN ANTONIO TX 78228-0510
1	ZERNOW TECHNICAL SERV ATTN DR LOUIS ZERNOW 425 W BONITA AVE SUITE 208 SAN DIMAS CA 91773
1	ROBERT EICHELBERGER CONSULTANT 409 W CATHERINE ST BEL AIR MD 21014-3613
1	DYNA EAST CORPORATION ATTN PEI CHI CHOU 3201 ARCH ST PHILADELPHIA PA 19104-2711

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
2	MARTIN MARIETTA CORP ATTN P DEWAR L SPONAR 230 EAST GODDARD BLVD KING OF PRUSSIA PA 19406
2	OLIN CORPORATION FLINCHBAUGH DIV ATTN E STEINER B STEWART PO BOX 127 RED LION PA 17356
1	OLIN CORPORATION ATTN L WHITMORE 10101 9TH ST NORTH ST PETERSBURG FL 33702
1	RENSSELAER POLYTECH INST ATTN R B PIPES PRES OFC PITTSBURGH BLDG TROY NY 12180-3590
1	SPARTA INC ATTN J GLATZ 9455 TOWNE CTR DRIVE SAN DIEGO CA 92121-1964
2	UNITED DEFENSE LP ATTN P PARA G THOMAS 1107 COLEMAN AVE BOX 367 SAN JOSE CA 95103
	<u>ABERDEEN PROVING GROUND</u>
60	DIR USARL ATTN AMSRL SC C MERMAGEN 394 AMSRL SC W STUREK 1121 AMSRL IS TP R KASTE 394 AMSRL SC S A MARK 309 AMSRL SL B P DIETZ 328 AMSRL SL BS D BELY 328

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
	AMSRL WT P A HORST 390A E SCHMIDT 390A AMSRL WT PA T MINOR 390 C LEVERITT 390 D KOOKER 390A AMSRL WT PB P PLOSTINS 390 D LYON 390A M BUNDY 390 P WEINACHT 390 AMSRL WT PC R FIFER 390A AMSRL WT PD B BURNS 390 W DRYSDALE 390 J BENDER 390 R MURRAY 390 R KIRKENDALL 390 T ERLINE 390 D HOPKINS 390 S WILKERSON 390 D HENRY 390 R KASTE 390 L BURTON 390 J TZENG 390 R LIEB 390 G GAZONAS 390 M LEADORE 390 C HOPPEL 390 AMSRL WT PD ALC A ABRAHAMIAN K BARNES M BERMAN A FRYDMAN T LI W MCINTOSH E SZYMANSKI AMSRL WT T W MORRISON 309 AMSRL WT TA W GILLICH 390 W BRUCHEY 390 AMSRL WT TC K KIMSEY 309 R COATES 309 W DE ROSSET 309

NO. OF
COPIES ORGANIZATION

AMSRL WT TD
D DIETRICH 309
G RANDERS PEHRSON 309
J HUFFINGTON 309
A DAS GUPTA 309
J SANTIAGO 309
AMSRL WT W
C MURPHY 120
AMSRL WT WA
H ROGERS 394
B MOORE 394
AMSRL WT WB
F BRANDON 120
W D AMICO 120
AMSRL WT WC
J BORNSTEIN 120
AMSRL WT WD
A ZIELINSKI 120
J POWELL 120
AMSRL WT WE
J LACETERA 120
J THOMAS 394

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	PETER N JONES DRA FORT HALSTEAD W7 DIVISION BLDG A20 SEVENOAKS KENT TN 147BP UNITED KINGDOM
1	FRANCOIS LESAGE DEFNS RSCH ESTAB VALCARTIER PO BOX 8800 COURCELETTE QUEBEC COA IRO CANADA
2	ROYAL MLTRY COLL OF SCI SHRIVENHAM ATTN DR DAVID BULMAN BRIAN LAWTON SWINDON WILTS SN6 8LA UNITED KINGDOM
1	SWISS FED ARM WORKS ATTN WALTER LANZ ALLMENDSTRASSE 86 3602 THUN SWITZERLAND
1	PROFESSOR SOL BODNER ISRAEL INST OF TECH FACULTY OF MECH ENG HAIFA 3200 ISRAEL
1	DSTO MAT RSCH LAB NORBERT BURMAN NAVAL PLATFORM VULN SCHIP STRUCT & MAT DIV PO BOX 50 ASCOT VALE VICTORIA AUSTRALIA 3032
1	PROF EDWARD CELENS ECOLE ROYAL MILITAIRE AVE DE LA RENAISSANCE 30 1040 BRUXELLE BELGIQUE

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	DEF RESEARCH ESTAB VALCARTIER ALAIN DUPUIS PO BOX 8800 COURCELETTE QUEBEC COA IRO CANADA
1	INST FRANCO ALLEMAND DE RECHERCHES DE SANIT LOUIS CLAUDE FAUQUIGNON 5 RUE DU GENERAL CASSAGNOU BOITE POSTALE 34 F 68301 SAINT-LOUIS CEDEX FRANCE
1	INST FRANCO ALLEMAND DE RECHERCHES DE SANIT LOUIS DE MARC GIRAUD 5 RUE DU GENERAL CASSAGNOU BOITE POSTALE 34 F 68301 SAINT LOUIS CEDEX FRANCE
1	TNO PRINS MAURITS LAB ROB IJSSELSTEIN LANGE KLEIWEG 137 PO BOX 45 2280 AA RIJSWIJK THE NETHERLANDS
1	FOA NAT L DEFNS RSCH ESTAB BO JANZON DIR DEPT OF WEAP & PROT S 172 90 STOCKHOLM SWEDEN
2	DEFNS TECH & PROC AGCY GRD GERHARD LAUBE GENERAL HERZOG HAUS 3602 THUN SWITZERLAND
1	ROYAL MLTRY COLL OF SCI J D MACKWORTH SHRIVENHAM SWINDON WILTS SN6 8LA UNITED KINGDOM

<u>NO. OF COPIES</u>	<u>ORGANIZATION</u>
1	MINISTRY OF DEFENCE RAFAEL MEIR MAYSELESS ARMAMENT DEV AUTH PO BOX 2250 HAIFA 31021 ISRAEL
1	AKE PERSSON DYNAMEC RESEARCH AB PARADISGRND 7 S 151 36 SODERTALJE SWEDEN
1	ERNST MACH INSTITUT EMI GUSTAV-ADOLF SCHRODER HAUPTSTRASSE 18 79576 WEIL AM RHEIN GERMANY
1	DRA DAVE SCOTT TECH MGR LAUNCH SYSTEMS FT HALSTEAD SEVENOAKS KENT TN14 7BP ENGLAND
1	ERNST MACH INSTITUT EMI ALOIS STILP ECKERSTRASSE 4 7800 FREIBURG GERMANY
1	IR HANS PASMAN TNO DEFENSE RESEARCH POSTBUS 6006 2600 JA DELFT THE NETHERLANDS
1	BITAN HIRSCH TACHKEMONY ST 6 NETAMUA 42611 ISRAEL
1	MANFRED HELD DEUTSCHE AEROSPACE AG DYNAMICS SYSTEMS PO BOX 1340 D 86523 SCHROBENHAUSEN GERMANY

USER EVALUATION SHEET/CHANGE OF ADDRESS

This Laboratory undertakes a continuing effort to improve the quality of the reports it publishes. Your comments/answers to the items/questions below will aid us in our efforts.

1. ARL Report Number ARL-TR-895 Date of Report November 1995

2. Date Report Received _____

3. Does this report satisfy a need? (Comment on purpose, related project, or other area of interest for which the report will be used.) _____

4. Specifically, how is the report being used? (Information source, design data, procedure, source of ideas, etc.) _____

5. Has the information in this report led to any quantitative savings as far as man-hours or dollars saved, operating costs avoided, or efficiencies achieved, etc? If so, please elaborate. _____

6. General Comments. What do you think should be changed to improve future reports? (Indicate changes to organization, technical content, format, etc.) _____

CURRENT
ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

7. If indicating a Change of Address or Address Correction, please provide the Current or Correct address above and the Old or Incorrect address below.

OLD
ADDRESS

Organization

Name

Street or P.O. Box No.

City, State, Zip Code

(Remove this sheet, fold as indicated, tape closed, and mail.)
(DO NOT STAPLE)

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 0001,APG,MD

POSTAGE WILL BE PAID BY ADDRESSEE

DIRECTOR
U.S. ARMY RESEARCH LABORATORY
ATTN: AMSRL-WT-PD
ABERDEEN PROVING GROUND, MD 21005-5066



NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

