

AAF Technical Report 5568

**TEST OF TWO CUSTER CHANNEL WINGS
HAVING A DIAMETER OF 37.2 INCHES
AND LENGTHS OF 43 AND 17.5 INCHES
(Five-Foot Wind Tunnel Test No. 545)**

19960522 034

APPROVED FOR PUBLIC RELEASE: DISTRIBUTION UNLIMITED

**ARMY AIR FORCES
AIR MATERIEL COMMAND**

Wright Field

Dayton, Ohio

DTIC QUALITY INSPECTED 1

DISCLAIMER NOTICE



**THIS DOCUMENT IS BEST
QUALITY AVAILABLE. THE
COPY FURNISHED TO DTIC
CONTAINED A SIGNIFICANT
NUMBER OF PAGES WHICH DO
NOT REPRODUCE LEGIBLY.**


NOTE

When drawings, specifications, and other data prepared by the War Department are furnished to manufacturers and others for use in the manufacture or purchase of supplies, or for any other purpose, the Government assumes no responsibility nor obligation whatever; and the furnishing of said data by the War Department is not to be regarded by implication or otherwise, or in any manner licensing the holder, or conveying any rights or permission to manufacture, use, or sell any patented inventions that may in any way be related thereto.

Espionage Act

Notice: This document contains information affecting the national defense of the United States within the meaning of the Espionage Act, 50 U. S. C., 31 and 32, as amended. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law. (AR 380-5, paragraph 23 b.)

STANDARD SYMBOLS, DEFINITIONS, AND AIRPLANE AXES

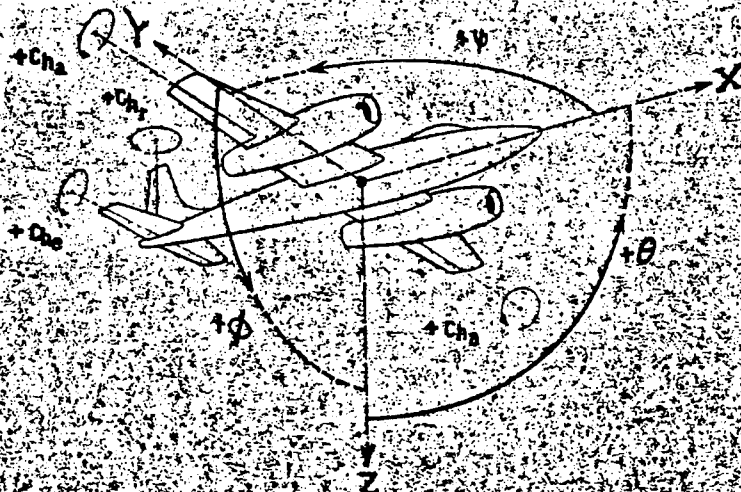

NOTE: Plus signs refer to the hinge moments resulting from the airloads.

Positive direction of control surfaces: is the same as for positive hinge moments, i. e.,

Aileron and tab attached, trailing edge below neutral position;

Stabilizer, elevator, and tab attached, trailing edge below neutral position;

Fin, rudder, and tab attached, trailing edge to left.

Terminology for Airplane Axes

Wind, or tunnel, axes: A system of axes in which the X axis always points along the relative wind, the Z axis lies in a vertical plane containing the X axis and is perpendicular to the X axis, and the Y axis is perpendicular to both the X and Z axes.

Stability axes: A system of axes in which the X axis is the intersection of the plane of symmetry of the airplane with a plane perpendicular to the plane of symmetry and parallel to the relative wind direction. The Y axis is perpendicular to the plane of symmetry, and the Z axis is in the plane of symmetry and perpendicular to the X axis.

Forces and Moments

AXIS		FORCE PARALLEL TO AXIS		MOMENT ABOUT AXIS			ANGLE		VELOCITY	
Designation	Symbol	Steady-state	Steady-state	Designation	Symbol	Positive Direction	Designation	Symbol	Linear Component Along Axis	Angular
Longitudinal	X	D	X	Rolling	L	Depresses right wing	Roll	ϕ	u	p
Lateral	Y	Y	Y	Pitching	M	Depresses tail	Pitch	θ	v	q
Normal	Z	L	Z	Yawing	N	Retards right wing	Yaw	ψ	w	r

(Continued on Inside of Back Cover)

U N C L A S S I F I E D

Report No. 5568
Date: 14 April 1947

WAR DEPARTMENT
ARMY AIR FORCES
AIR MATERIEL COMMAND
DAYTON, OHIO

AAF TECHNICAL REPORT
NO. 5568

TEST OF TWO CUSTER CHANNEL WINGS HAVING A DIAMETER
OF 37.2 INCHES AND LENGTHS OF 43 AND 17.5 INCHES

(FIVE-FOOT WIND TUNNEL TEST NO. 545)

By

D. W. Young
D. W. Young

Approved by:

C. K. Moore
C. K. MOORE, Colonel, Air Corps,
Chief, Aircraft Laboratory.

For the Commanding General:

S. R. Brentnall
S. R. BRENTNALL, Colonel, Air Corps,
Chief, Engineering Operations,
Engineering Division.

Branch No. TSEAC6-45811-4-
E. O. No. 458-384
No. of Pages 69
No. of Photos 20
No. of Graphs 26

DWY/lmm

U N C L A S S I F I E D

U N C L A S S I F I E D

TABLE OF CONTENTS

	PAGE NO.
SUMMARY	3
DATES AND PLACE OF TEST	4
OBJECT	4
DESCRIPTION OF MODEL AND BALANCE SET-UP	4
PROCEDURE	9
DISCUSSION OF RESULTS	9
CONCLUSIONS	11
RECOMMENDATION	11
LIST OF REFERENCES	11
TABULATED DATA	12
PLOTTED DATA	23
SKETCH NO. 1	49

U N C L A S S I F I E D

U N C L A S S I F I E D

TEST OF TWO CUSTER CHANNEL WINGS HAVING A DIAMETER OF 37.2 INCHES AND
LENGTHS OF 43 AND 17.5 INCHES

SUMMARY

The Custer Channel Wing is a wing-propeller arrangement designed to produce lift statically or to augment the normal lift when the vehicle has some forward velocity.

Flight tests of an airplane incorporating two of these channel wings were conducted first by the inventor.

The next test (ref. 1) was conducted by the Air Materiel Command in the Five-Foot Wind Tunnel on a 1/3-scale powered model of one channel. Additional static lift tests of this same model but with additional improvements were made by the inventor and witnessed by an Air Materiel Command representative. These results are reported in reference 2.

The last series of tests are those described in this report. Up to the time of this present series of tests both model and full scale tests of this arrangement were made under conditions which did not give accurate power input and thrust data. In this series of tests made on a 1/2-scale model, all variables such as lift, drag and thrust combination, pitching moment, power input and pressure distribution have been accurately obtained.

These tests which included 53 different model configurations were made on two different length channels, with two and three blade propellers of various planforms and blade angles. Tests were also made to determine the effect of placing auxiliary wings of various sizes and arrangements aft of the propeller-wing combination.

The results of these tests indicated the short channel was superior to the long channel in that the resultant of the thrust and lift forces was greater than for the long channel. In addition the pressure distribution over the short channel is more desirable than over the long channel.

The propeller which had a normal blade planform was slightly better than the one in which the blade planform had a reverse taper.

End plates mounted on the sides of the long channel were beneficial but not on the short one.

The general effect of auxiliary wings aft of the channel was to increase lift and decrease thrust in such a way that there was no net gain as regards resultant force. However, the direction of the resultant force is closer to vertical and hence would require smaller ground angles for vertical ascents. The deflection of auxiliary wings aft of the channel also causes a large diving moment that probably would be undesirable.

U N C L A S S I F I E D

DATES AND PLACE OF TESTS

These tests were conducted in the Five-Foot Wind Tunnel at Wright Field from 6 February to 22 May 1946.

OBJECT

The object of this test was to determine the resultant force in pounds/HP obtainable with Custer Channel Wing.

DESCRIPTION OF MODEL AND BALANCE SET-UP

The long channel used a Clark Y airfoil of 43-inch chord whose chord plane coincided with a half cylinder of $18\frac{5}{8}$ inches radius. Short wing sections of the same airfoil shape and chord were attached to the sides of the channel to form a U-shaped wing. The overall span was 72 inches. The short channel (17.5-inch chord) had the same radius but was not fitted with stub wings. Sketch No. 1 on page 49 shows the shape of the airfoil used on the short channel. The shape of the 25-inch chord auxiliary wing approximated an NACA 6309 section. Both sets of auxiliary wings were parted at the center line of the model so that the right and left halves could be set at different angles of incidence. The two methods of mounting are shown on photograph 208379. The plate was attached to the end of the wing while the angle bracket was attached to the upper surface of the wing. Both plates and brackets were in place when the above photograph was taken in order to show both attachments.

The propeller was mounted to a shaft which was supported at two positions by combination radial thrust bearings. These bearings were supported by 1-inch diameter steel rods which extended from the center of the channel to the wing tips, see photograph 208384. The propeller shaft was connected to the propeller balance shaft by means of a jack shaft which had a universal joint at either end. This provided the channel with freedom of movement vertically, so that the lift forces could be measured. This shafting assembly transmitted the torque and thrust from the channel to the propeller balance, where each was measured. A tension cable was used to reduce the weight of the channel wing on the lift scales and also to place the jack shaft in tension under all loading conditions. The lift forces were transmitted to the two lift balances by means of the tubular structure shown on photograph 208384. The attachment of these tubular structures to the channel wing was made by self aligning ball bearing assemblies and to the balance platform by means of universal joints. The model was restrained in yaw and side movement by means of a single steel ball, mounted at the top of each of four uprights shown in photograph 208384. These balls slid against a steel plate attached to the wing stubs at each corner of the wing assembly. Thus the model was restrained in yaw and side direction but free to move vertically or horizontally. Safety stops were provided in event of failure of any of the balance structure.

Pressure orifices were provided on the inner surface in the plane of symmetry at every 5 percent station of both short and long channels. Photograph 208373 shows the pressure distribution set up for the long channel.

The 53 different model configurations are tabulated below:

LIST OF MODEL CONFIGURATIONS

CUSTER CHANNEL WING

Condition No.	Channel Length Inches	Channel End Plates	Propeller No. (1)	Blade Angle°	Wing Chord	Auxiliary Wing Span	Auxiliary Wing Section	Auxiliary Wing (2) No. of Panels	Auxiliary Wing Position	Auxiliary Wing Angle	Auxiliary Wing Mounting Brkt	Auxiliary Wing Mounting Plate	Photograph Number
1	43	—	1	20-75	—	—	—	—	—	—	—	—	208376
2	43	—	1	—	—	—	—	—	—	—	—	—	—
3	43	—	2	20-75	—	—	—	—	—	—	—	—	208375&208383
4	43	—	1	—	—	—	—	—	—	—	—	—	—
5	43	—	2	20-75	—	—	—	—	—	—	—	—	208380&208382
6	43	—	2	20-75	—	—	—	—	—	—	—	—	—
7	43	—	2	20-75	—	—	—	—	—	—	—	—	—
8	43	—	2	20-75	—	—	—	—	—	—	—	—	—
9	43	—	2	20-75	—	—	—	—	—	—	—	—	—
10	43	—	2	20-75	—	—	—	—	—	—	—	—	—
11	43	—	2	20-75	—	—	—	—	—	—	—	—	—
12	43	—	2	20-75	—	—	—	—	—	—	—	—	—
13	43	—	2	20-75	—	—	—	—	—	—	—	—	208372& 208378
14	43	—	3	8.6-90	—	—	—	—	—	—	—	—	208379&208381
15	43	—	3	13.6-90	—	—	—	—	—	—	—	—	—
16	43	—	3	3.6-90	—	—	—	—	—	—	—	—	—
17	43	—	3	11.1-90	—	—	—	—	—	—	—	—	—
18	43	—	2	20-75	—	—	—	—	—	—	—	—	—
19	43	—	4	20-75	—	—	—	—	—	—	—	—	—
20	43	—	5	8.6-90	—	—	—	—	—	—	—	—	—

LIST OF MODEL CONFIGURATIONS CONT'D

Condition No.	Channel Length Inches	Channel End Plates	Propeller No. (1)	Blade Angle°	At % Radius	Audiliary Wing Chord	Audiliary Wing Span	Audiliary Wing Section	Audiliary Wing (2) No. of Panels	Audiliary Wing Position	Audiliary Wing Angle	Audiliary Wing Mounting Brkt	Audiliary Wing Mounting Plate	Photograph Number
21	43	ON	5	8.6-90	15	56	6309	4	T 12-1 B 12-7	L 42.5 R 55.0	ON	ON	—	—
22	43	ON	5	8.6-90	15	56	6309	2	12-7	L 42.5 R 55.0	ON	ON	—	—
23	43	ON	2	20-75	15	56	6309	4	T 12-1 B 12-7	L 42.5 R 55.0	ON	ON	—	—
24	43	ON	2	20-75	15	56	6309	4	T 12-1 B 12-14	L 43.0 R 55.0	ON	ON	208374&208384	—
25	43	ON	2	20-75	—	—	—	—	—	—	—	ON	ON	208370&208371 208373
26	17.5	—	2	20-75	—	—	—	—	—	—	—	—	—	—
27	17.5	ON	2	20-75	—	—	—	—	—	—	—	—	—	—
28	17.5	ON	2	20-75	15	56	6309	4	T 12-0 B 12-8	L 30 R 40	—	ON	—	—
29	17.5	ON	2	20-75	15	56	6309	4	T 12-0 B 12-8	L 25 R 40	—	ON	—	—
30	17.5	ON	2	20-75	15	56	6309	4	T 12-0 B 12-8	L 35 R 40	—	ON	—	—
31	17.5	ON	2	20-75	15	56	6309	4	T 12-0 B 12-8	L 35 R 50	—	ON	—	—
32	17.5	ON	2	20-75	15	56	6309	4	T 12-0 B 12-5	L 35 R 50	—	ON	—	—
33	17.5	ON	2	20-75	T-15(4) B-29	T-28 B-35	T-6309 B-4408	2	T 12-1 B 12-7	T 35 B 35	—	ON	—	—
34	17.5	ON	2	20-75	29 (5)	35.5	4408	1	12-7	40	—	—	ON	—
35	17.5	ON	5	8.6-90	—	—	—	—	—	—	—	—	—	—

LIST OF MODEL CONFIGURATIONS CONT'D

Condition No.	Channel Length Inches	Channel End Plates	Propeller No. (1)	Blade Angle° At % Radius	Auxiliary Wing Chord	Auxiliary Wing Span	Auxiliary Wing Section	Auxiliary Wing (2) No. of Panels	Auxiliary Wing Position	Auxiliary Wing Angle	Auxiliary Wing Mounting Brkt	Auxiliary Wing Mounting Plate	Photograph Number
36	17.5	ON	5	8.6-90	—	—	—	—	—	—	—	—	209513&209514
37	17.5	ON	5	8.6-90	—	—	—	—	—	—	—	—	211042
38	17.5	ON	5	8.6-90	—	—	—	—	—	—	—	—	211043
39	17.5	ON	5	11.1-90	—	—	—	—	—	—	—	—	211044
40	—	—	5	11.1-90	—	—	—	—	—	—	—	—	—
41	—	—	5	21.1-90	—	—	—	—	—	—	—	—	—
42	—	—	5	31.1-90	—	—	—	—	—	—	—	—	—
43	—	—	5	6.0-90	—	—	—	—	—	—	—	—	—
44	—	—	2	20-75	—	—	—	—	—	—	—	—	—
45	—	—	6	8-75	—	—	—	—	—	—	—	—	—
46	—	—	5	11.1-90	—	—	—	—	—	—	—	—	—
47	—	—	5	21.1-90	—	—	—	—	—	—	—	—	—
48	—	—	5	16.1-90	—	—	—	—	—	—	—	—	—
49	—	—	5	16.1-90	—	—	—	—	—	—	—	—	—
50	—	—	5	16.1-90	—	—	—	—	—	—	—	—	—
51	—	—	5	11.1-90	—	—	—	—	—	—	—	—	—
52	—	—	5	11.1-90	—	—	—	—	—	—	—	—	—
53	17.5	—	6	8-75	—	—	—	—	—	—	—	—	—

Note 1

Propeller No. 1 as shown on photograph 208374 was a three-blade adjustable-pitch type of metal construction. The blade planform was conventional and the tips were rounded.

Propeller No. 2 as shown on photograph 208375 was a two-blade, fixed-pitch type of wood construction. The airfoil section was the NACA 4400 series. The blade planform was conventional and the tips had a radius approximately equal to the radius of the channel.

Propeller No. 3 as shown on photograph 208379 was a three-blade, adjustable-pitch type of cast aluminum construction. The airfoil section was of the NACA 4400 series. The blade planform was unconventional in that it had reverse taper. The blade tips had a radius approximately equal to the radius of the channel.

Propeller No. 4 was very similar to No. 2 except for a thinner root section.

Propeller No. 5 was propeller No. 3 with the blades extended 0.5 inch. This permitted the propeller to be moved to the extreme aft position in the channel and still maintain small clearances with the inner surface of the channel.

Propeller No. 6 as shown on photograph 211042 was the same as propeller No. 2 except for blade angles. The 75 percent station was decreased from 20 to 8 degrees.

Note 2

The position of the auxiliary wings given in the table refer to the distance the axis of rotation or spar centerline was aft of the channel trailing edge and below the thrust centerline. For example, T 12-4 would mean the axis of rotation of the top auxiliary wing was 12 inches aft of the trailing edge and 4 inches below the thrust axis. The axis of rotation of the 25-inch chord wing was 6.10 inches aft of the leading edge and 1.03 inches above the chord plane. The axis of rotation of the 15-inch chord wing was 4.70 inches aft of the leading edge and .90 inches above the chord plane.

Note 3

Model condition 7 and 8 were run with several different settings of the auxiliary wing which were referred to as 7a, 7b, etc. The position and angles of the auxiliary wing were as follows:

7a	12-0	35°	7g	12-2	45°
7b	12-0	45°	7h	12-3	35°
7c	12-1	45°	7i	12-3	35°
7d	12-1	35°	7j	12-1	35°
7e	12-2	35°	7k	12-1	50°
7f	12-2	50°	7l	12-1	40°

		left	right			left	right
8a	12-2	15°	55°	8h	12-2	45°	55°
8b	12-2	15°	50°	8i	12-2	42.5	55°
8c	12-2	20°	55°	8j	12-2	42.5	60°
8d	12-2	25°	55°	8k	12-2	42.5	50°
8e	12-2	30°	55°	8l	12-2	42.5	55°
8f	12-2	35°	55°	8m	12-3	42.5	55°
8g	12-2	40°	55°	8n	12-4	42.5	55°

Note 4

Both top and bottom auxiliary wings were located in the left hand position.

Note 5

The one auxiliary wing was located in the left hand position.

PROCEDURE

The various model configurations were tested in the same order as the number given to the particular configuration. For any given condition, lift, (drag and thrust combination) pitching moment, torque and rpm were measured for a range of rpm from about 600 to 2800 in about 7 steps. The highest rpm in most cases represented a power input of about 10 HP. In some cases complete runs were not made. To obtain friction losses in the shafting, the propeller was removed and torque and rpm data were obtained. This procedure was followed at three different intervals of the test program. This loss in shafting represented about 5 percent of the gross power input. This loss was determined with and without a thrust load equal to that supplied by the propeller.

DISCUSSION OF RESULTS

The results of the test are given in tabular form on pages 12 to 22, due to the large number of model configurations. The data are also shown in graphical form on graphs 1 to 25. They have been separated into seven different groups for comparative purposes, and for simplification of the graphical presentation. The parameters used were the increment of force or moment per horsepower, absorbed by the propeller versus the horsepower divided by the square of the propeller diameter, (which is comparable to the unit disc loading).

The first group of conditions, 1, 3, 5, 18 and 20, plotted on graphs 1, 2, 3 and 4 shows the effect of different types of propellers and auxiliary wing mounting brackets. The results indicate that the two-blade propeller of conventional planform was the best in this grouping from the standpoint of thrust, lift and resultant force.

The second group of conditions, 7, 8, 9, 10 and 11, plotted on graphs 5, 6, 7 and 8 shows the effect of a simple auxiliary wing mounted aft of the channel at various positions and angles of incidence.

The third group of conditions, 13, 14, 15 and 16, plotted on graphs 9, 10, 11 and 12, shows the effect of changing the blade angle of the three-blade propeller which had a reverse taper, that is, wide tip and narrow root. Results of these tests indicate that an angle of 8.6 degrees at the 90 percent station is the optimum angle for this particular propeller.

The fourth group of conditions, 12, 21, 22, 23 and 24, plotted on graphs 13, 14, 15 and 16, shows the effect of various combinations of small-chord auxiliary wings and propellers. All of these conditions are inferior to the plain channel from the standpoint of resultant force. Although they do improve the lift force, it is at the expense of less thrust which is due to the blocking effect on the propeller and the drag of the auxiliary wings themselves.

The fifth group of conditions, 26, 27, 35, 37, 38 and 39, plotted on graphs 17, 18, 19 and 20 give the effect of a shorter channel with various propeller changes. This channel has a length of 17.5 inches compared to one of 43 inch length, used in all previous conditions.

The two-blade conventional planform propeller in conjunction with the short channel is superior to the other propellers which were tested. This is similar to the results of propeller changes made in conjunction with the long channel. The other conditions in this group were unsuccessful attempts to improve the propeller efficiencies by the use of spinners and hub fairings.

The sixth group of conditions, 28, 29, 30, 31, 32, 33 and 34, plotted on graphs 21, 22, 23 and 24 shows the effect the short chord auxiliary wings have on the characteristics when used in conjunction with the short channel. As was the case with the long channel, the auxiliary wings improve lift but decrease thrust. There was little or no gain in the resultant force.

The seventh group of conditions 40 through 52 and plotted on graph 25 were made without any channel. Only thrust and power input data were obtained. Here again the two-blade conventional planform propeller gave the greatest thrust per horsepower of all the propeller conditions that were tested.

The pressure distribution data for both the long and short channel is shown on graph 26. The important thing to note concerning the comparison of the two lengths of channels was that the negative pressure gradient increased with an increasing rate from the leading edge to the propeller disc, whereas the short channel had a more constant pressure over the entire length of the channel. By comparing these pressure gradients for the maximum slip condition, that is, full power and no forward velocity, with the condition of minimum slip, the effect of power on the pressure gradient should be much less for the short channel than for the long one. Therefore from the standpoint of change in trim of the aircraft with power, a design incorporating the short channel should have a distinct advantage over the long channel.

Auxiliary wings mounted aft of the channel do increase the lift.

force but they also decrease the thrust which results in about the same resultant force. They also cause a large diving moment which must be trimmed out by some means, probably by a negative tail load, if the tail is in the conventional position, thus resulting in a loss of lift.

CONCLUSIONS

1. The highest value of resultant force per horsepower obtained in these tests was 8.2. This corresponds to a value of horsepower divided by propeller diameter squared equal to one. (Condition No. 26)
2. The 17.5-inch chord channel was superior to the 43-inch chord channel as regards resultant force, moment and change in trim due to power change.
3. The auxiliary wings aft of the channel increase lift but decrease thrust, which results in no appreciable gain in resultant force.
4. The two-blade, conventional planform propeller was superior to the other types which were tested.

RECOMMENDATIONS

None ✓

LIST OF REFERENCES

1. "Test of 1/3-Scale Powered Model of Custer Channel Shaped Wing" (Five-Foot Wind Tunnel Test No. 487), by D. W. Young, AAF Technical Report No. 5142.
2. "Custer U-Shaped Channel Wing" by D. W. Young, AAF Memorandum Report No. TSEAL-2-4586-3-2.

TABLE NO. 1
GUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD FEBRUARY 1946

Condition No.	Lift (lb)	Thrust (lb)	Resultant (lb)	Moment (lb ft.)	H.P.	Lift H.P.	Thrust H.P.	Resultant H.P.	H.P. Dia. ²	RPM	Moment H.P.
1	1.5	2.7	3.1	-1.9	.12	12.6	22.4	26.00	.013	682	-15.8
	2.4	5.9	6.4	-3.0	.42	5.7	14.1	15.2	.044	1002	-7.1
	4.0	11.5	12.2	-5.7	1.15	3.5	10.0	10.6	.122	1397	-5.0
	6.1	16.0	17.1	-9.2	2.06	3.0	7.8	8.3	.218	1710	-4.5
	8.4	23.8	25.2	-13.1	3.83	2.2	6.2	6.6	.405	2070	-3.4
	10.6	30.7	32.5	---	5.35	2.0	5.7	6.1	.565	2310	---
	13.5	38.7	41.0	---	7.44	1.8	5.2	5.5	.787	2580	---
	17.0	45.3	48.5	---	9.61	1.8	4.7	5.1	1.015	2800	---
2		0			.24					1192	
		0			.37					1704	
		0			.52					2270	
		0			.56					2533	
		0			.63					2770	
		0			.67					2912	
3	2.3	4.6	5.2	-3.4	.09	25.6	51.1	57.8	.010	653	-37.8
	4.0	8.9	9.8	-6.8	.41	9.8	21.7	23.9	.043	955	-16.6
	7.8	15.5	17.4	-14.5	1.09	7.2	14.2	16.0	.115	1325	-13.3
	11.7	22.6	25.4	-22.3	2.01	5.8	11.2	12.6	.212	1630	-11.1
	18.1	34.6	39.1	-35.5	3.86	4.7	9.0	10.1	.407	1968	-9.2
	24.1	45.7	51.6	-46.5	5.71	4.2	8.0	9.0	.602	2246	-8.1
	33.7	55.9	65.2	-64.5	7.73	4.3	7.2	8.4	.816	2500	-8.3
4		10.1			.22					1171	
		10.1			.38					1689	
		24.2			.33					1744	
		25.4			.46					2267	
		46.0			.43					2280	
		46.0			.49					2560	

TABLE NO. 2
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD FEBRUARY 1946

Condition No.	Lift (lb)	Thrust (lb)	Resultant (lb)	Moment (Lb Ft)	H.P.	Lift H.P.	Thrust H.P.	Resultant H.P.	H.P. Dia. 2	RPM	Moment H.P.
5	2.2	4.2	4.7	—	.12	18.3	35.0	39.0	.013	715	—
	4.2	8.4	9.4	—	.39	10.8	21.5	24.1	.041	1000	—
	8.3	16.1	18.1	—	1.18	7.0	13.6	15.3	.124	1400	—
	12.0	24.5	27.3	—	2.18	5.0	11.3	12.5	.230	1678	—
	17.7	35.0	39.3	—	4.17	4.2	8.4	9.5	.440	2050	—
	24.0	45.5	51.5	—	5.94	4.1	7.7	8.7	.628	2315	—
	27.5	58.0	64.3	—	7.91	3.5	7.3	8.2	.835	2570	—
6	23.2	35.0	42.0	—	3.96	5.8	8.9	10.6	.418	2020	—
	24.2	45.6	51.5	—	5.74	4.2	8.0	9.0	.605	2310	—
	29.2	55.7	62.7	—	8.03	3.7	7.0	7.8	.848	2580	—
7	34.2	56.5	66.0	—	8.51	4.0	6.7	7.8	.898	2570	—
	40.6	54.5	68.0	—	8.62	4.7	6.4	7.9	.908	2600	—
	43.7	52.6	68.2	—	8.62	5.1	6.1	8.0	.908	2630	—
	34.5	58.6	68.0	—	9.02	3.8	6.5	7.6	.950	2610	—
	39.5	62.0	73.5	—	10.38	3.8	6.0	7.1	1.095	2780	—
	39.1	49.7	63.3	—	8.82	4.4	5.6	7.2	.932	2615	—
	39.0	50.1	63.5	—	8.04	4.9	6.2	7.9	.848	2550	—
	39.8	52.5	65.7	—	8.33	4.8	6.3	7.9	.880	2570	—
	34.0	55.7	65.0	—	8.52	4.0	6.6	7.6	.899	2591	—
	35.2	52.7	63.3	—	8.52	4.1	6.2	7.4	.899	2610	—
	38.1	52.9	65.2	—	8.72	4.4	6.1	7.5	.920	2612	—
	33.1	56.2	65.2	—	8.92	3.7	6.3	7.3	.940	2630	—
	39.1	49.7	63.3	—	8.72	4.5	5.7	7.3	.920	2640	—
	35.8	50.3	61.7	—	8.52	4.2	5.9	7.3	.899	2640	—
	35.5	51.7	62.7	—	8.47	4.2	6.1	7.4	.893	2630	—

TABLE NO. 3
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD FEBRUARY 1946

Condition No.	Lift (lb)	Thrust (lb)	Resultant (lb)	Moment (lb Ft.)	H.P.	Lift H.P.	Thrust H.P.	Resultant H.P.	H.P. Dia. ²	RPM	Moment H.P.
8	29.7	53.2	60.8	-57.6	8.24	3.6	6.5	7.4	.870	2547	-7.0
	27.9	56.4	63.0	-52.1	8.34	3.4	6.8	7.6	.880	2560	-6.3
	31.4	54.4	62.8	-63.3	8.44	3.7	6.5	7.5	.890	2570	-7.5
	32.4	54.0	63.0	-68.9	8.53	3.8	6.3	7.4	.900	2590	-8.1
	34.9	50.2	61.0	-79.1	8.43	4.1	5.9	7.2	.890	2580	-9.4
	36.2	50.6	62.2	-84.6	8.43	4.3	6.0	7.4	.890	2580	-10.0
	40.1	51.4	65.2	-97.8	8.53	4.7	6.0	7.6	.900	2580	-11.5
	39.7	47.9	62.2	-101.2	8.54	4.7	5.6	7.3	.900	2570	-11.8
	41.5	47.6	63.0	-102.1	8.64	4.8	5.5	7.3	.910	2570	-11.8
	38.7	48.2	61.7	-100.2	8.63	4.5	5.6	7.1	.910	2589	-11.6
	39.4	47.4	61.5	-97.8	8.63	4.6	5.5	7.1	.910	2590	-11.3
	39.6	49.9	63.5	-97.8	8.54	4.6	5.8	7.4	.900	2590	-11.4
	38.9	49.2	62.8	-97.9	8.54	4.6	5.8	7.4	.900	2590	-11.4
	39.4	50.0	63.5	-99.3	8.63	4.6	5.8	7.4	.910	2590	-11.5
9	3.6	3.3	4.9	-8.2	.09	40.0	36.8	54.5	.010	726	-91.0
	6.3	7.2	9.5	-14.8	.38	16.6	19.0	25.0	.043	1006	-38.9
	11.7	13.6	17.9	-28.2	1.11	10.5	12.3	16.1	.117	1378	-25.2
	16.4	19.4	25.4	-40.3	2.07	9.9	11.7	15.3	.218	1660	-19.5
	24.9	30.2	39.2	-61.5	4.04	6.2	7.5	9.7	.427	2035	-15.2
	32.6	38.3	50.4	-80.3	5.98	5.5	6.4	8.4	.630	2310	-13.4
	39.9	49.1	63.3	-99.3	8.37	4.8	5.9	7.6	.882	2590	-11.8
10	38.5	48.5	61.8	-98.9	8.59	4.5	5.7	7.2	.905	2610	-11.5
	39.1	50.1	63.6	-98.9	8.47	4.6	5.9	7.5	.895	2590	-11.7
11											
	3.2	2.3	3.9	-6.7	.11	29.1	20.9	35.5	.012	691	-61.0
	6.2	5.7	8.4	-13.2	.43	14.4	13.3	19.6	.045	992	-30.7
	11.4	12.1	16.6	-26.5	1.16	9.8	10.4	14.3	.123	1356	-22.8
	17.1	16.7	23.9	-39.9	2.07	8.3	8.1	11.6	.219	1640	-19.3
	27.0	26.7	38.0	-59.9	3.90	6.9	6.9	9.8	.412	2010	-15.3
	33.4	35.3	47.5	-80.0	5.62	5.9	6.3	8.5	.592	2270	-14.2
	39.6	51.3	65.0	-97.5	7.74	5.1	6.6	8.4	.818	2520	-12.6

TABLE NO. 4
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD MARCH 1946

Condition No.	Lift (Lb)	Thrust (Lb)	Resultant (Lb)	Moment (Lb Ft)	H.P.	Lift H.P.	Thrust H.P.	Resultant H.P.	H.P. Dia. ²	RPM	Moment H.P.
12	3.8	2.6	4.6	-8.9	.12	31.6	21.7	38.3	.012	720	-74.0
	6.7	5.7	8.3	-16.7	.40	15.2	14.3	20.8	.042	998	-41.8
	12.5	11.0	16.7	-32.1	1.12	11.2	9.8	14.9	.118	1365	-28.7
	18.2	15.7	24.2	-47.7	2.08	8.8	7.6	11.6	.219	1665	-22.9
	27.1	24.0	36.0	-70.0	3.92	6.9	6.1	9.2	.413	2020	-17.8
	36.5	31.0	49.8	-94.6	5.65	6.5	5.5	8.8	.596	2270	-16.8
	42.1	40.0	58.5	-114.4	7.79	5.4	5.1	7.5	.822	2520	-14.7
13	9.1	14.7	17.3	-16.1	1.16	7.8	12.7	14.9	.156	1505	-13.9
	13.0	21.4	25.0	-25.3	2.00	6.5	10.7	12.5	.251	1802	-12.7
	21.7	38.7	44.3	-42.9	5.30	4.1	7.3	8.4	.616	2430	-8.1
	26.7	47.8	54.8	-53.9	7.02	3.8	6.8	7.8	.805	2685	-7.7
14	2.2	4.4	4.9	-4.4	.14	15.7	31.4	35.0	.015	682	-31.4
	5.8	8.1	9.9	-9.8	.44	13.2	18.4	22.5	.047	946	-22.2
	8.6	14.7	17.0	-15.4	1.23	7.0	12.0	13.8	.130	1320	-12.5
	12.6	22.3	25.7	-24.2	2.23	5.6	10.0	11.5	.235	1592	-10.8
	17.9	34.0	38.4	-35.3	4.33	4.1	7.9	8.9	.457	1960	-8.2
	24.1	44.0	50.2	-48.6	6.40	3.8	6.9	7.8	.675	2235	-7.6
15	1.7	2.3	2.9	-3.2	.11	15.4	20.9	26.4	.012	832	-29.1
	4.6	5.9	7.5	-7.6	.37	12.4	21.0	20.2	.039	1220	-20.5
	7.2	12.1	14.0	-13.2	.96	7.5	12.6	14.6	.101	1681	-13.8
	9.3	16.9	19.3	-17.6	1.59	5.8	10.6	12.1	.167	2011	-11.1
	12.3	23.2	26.2	-24.2	2.56	4.8	9.1	10.2	.270	2360	-9.4
16	15.1	28.5	32.3	-30.9	3.40	4.4	8.4	9.5	.359	2584	-9.1
	1.6	3.4	3.8	-3.2	.14	11.4	24.2	27.2	.015	687	-22.9
	3.8	7.6	8.5	-7.7	.46	8.3	16.5	18.5	.049	991	-16.7
	8.7	14.9	17.3	-16.5	1.21	7.2	12.3	14.3	.127	1356	-13.6
	12.7	21.8	25.2	-25.3	2.18	5.8	10.0	11.6	.230	1643	-11.6
	17.2	32.3	36.6	-34.2	4.10	4.2	7.9	8.9	.432	2014	-8.3
	23.4	43.8	49.8	-47.4	5.94	3.9	7.4	8.4	.626	2290	-8.0
	28.2	52.6	59.5	-57.3	8.18	3.5	6.4	7.3	.862	2550	-7.0

TABLE NO. 5
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD APRIL 1946

Condition No.	Lift (Lb)	Thrust (Lb)	Resultant (Lb)	Moment (Lb Ft)	H.P.	Lift H.P.	Thrust H.P.	Resultant H.P.	H.P. Dia. ²	RPM	Moment H.P.
17	8.3	14.9	17.0	-16.5	1.21	6.9	12.3	14.1	.128	1305	-13.6
	11.2	22.9	25.4	-22.0	2.23	5.0	10.3	11.4	.235	1613	-9.9
	18.6	35.0	39.8	-36.4	4.21	4.4	8.4	9.5	.444	1990	-8.6
	24.2	45.4	51.4	-47.4	6.12	4.0	7.4	8.4	.645	2263	-7.7
	28.4	57.2	63.8	-55.1	8.56	3.3	6.7	7.5	.900	2535	-6.4
18	1.6	2.8	3.2	-3.3	.12	13.3	23.4	26.6	.013	618	-27.5
	3.4	6.5	7.3	-6.6	.43	7.9	15.1	17.0	.046	913	-15.3
	7.3	13.9	15.7	-14.3	1.17	6.2	11.9	13.4	.124	1282	-12.2
	10.4	21.6	23.9	-19.8	2.18	4.8	10.0	11.0	.230	1590	-9.1
	16.0	32.4	36.0	-30.9	4.20	3.8	7.7	8.6	.444	1955	-7.4
	20.5	43.4	48.0	-39.6	6.24	3.2	7.0	7.7	.660	2235	-6.3
	26.3	54.3	60.4	-51.8	9.28	2.8	5.9	6.5	.980	2535	-5.6
19	---	---	---	---	.27	---	---	---	---	1181	---
	---	---	---	---	.46	---	---	---	---	1747	---
	---	---	---	---	.61	---	---	---	---	2320	---
	---	---	---	---	.69	---	---	---	---	2611	---
20	1.1	2.3	2.5	-2.1	.09	12.2	25.6	27.8	.010	607	-23.4
	3.2	6.1	6.9	-6.4	.36	8.9	17.0	19.2	.038	962	-17.8
	6.3	13.7	15.1	-13.3	1.01	6.2	13.6	15.0	.107	1362	-13.1
	10.5	20.1	22.7	-22.1	1.86	5.6	10.8	12.2	.197	1700	-11.9
	15.8	29.8	33.8	-33.1	3.35	4.7	8.9	10.1	.354	2071	-9.9
	20.7	38.1	43.3	-43.0	4.99	4.2	7.6	8.7	.528	2335	-8.6
	24.4	47.1	53.0	-50.8	6.69	3.7	7.1	7.9	.707	2584	-7.6
21	2.0	2.3	3.0	-5.5	.10	20.0	23.0	30.5	.015	662	-55.0
	5.0	5.4	7.3	-14.5	.39	12.8	13.9	18.9	.041	1000	-37.2
	10.2	10.8	14.8	-29.0	.91	11.3	11.9	16.4	.096	1413	-31.9
	16.6	15.7	22.8	-45.6	1.98	8.4	7.9	11.6	.209	1734	-23.0
	22.9	24.1	33.3	-65.8	3.79	6.0	6.4	8.7	.400	2120	-17.4
	29.9	30.2	42.5	-84.6	5.27	5.7	5.7	8.1	.556	2377	-16.0
	36.4	37.3	52.1	-103.5	7.21	5.1	5.2	7.3	.761	2640	-14.3

TABLE NO. 6
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD MAY 1946

Condition No.	Lift (lb)	Thrust (lb)	Resultant (lb)	Moment (lb ft)	H.P.	Lift H.P.	Thrust H.P.	Resultant H.P.	H.P. Dia. ²	RPM	Moment H.P.
22	35.2	41.4	54.4	-95.5	7.53	4.7	5.5	7.2	.795	2650	-13.0
23	44.0	44.7	62.5	-124.6	8.98	4.9	5.0	7.0	.950	2588	-13.9
24	2.1 5.9 12.7 19.7 29.0 35.3 46.0	2.1 4.8 9.6 16.2 23.1 31.9 39.8	3.0 7.5 15.9 25.5 37.2 47.5 60.8	-6.7 -17.8 -37.9 -59.1 -88.0 -111.6 -142.7	.08 .34 1.04 2.05 3.98 5.79 8.34	26.3 17.4 12.2 9.6 7.3 6.1 5.5	26.3 14.1 9.2 7.9 5.8 5.5 4.8	37.2 22.4 15.3 12.4 9.3 8.2 7.3	.008 .036 .120 .216 .420 .611 .880	605 902 1272 1605 1977 2261 2530	-83.6 -52.3 -36.5 -28.8 -22.1 -19.3 -17.1
25	28.9	45.58	54.0	-55.0	8.20	3.5	5.6	6.6	.865	2497	-6.8
26	7.8 11.9 18.1 23.4 29.6	16.4 25.9 38.8 50.8 65.1	18.2 28.5 42.8 56.0 71.6	-15.4 -24.2 -36.4 -47.4 -60.7	1.12 2.07 4.04 5.84 8.33	7.0 5.8 4.5 4.0 3.6	14.7 12.5 9.6 8.7 7.8	16.3 13.8 10.6 9.6 8.6	.118 .218 .427 .617 .880	1299 1601 1962 2230 2501	-13.7 -11.7 -9.0 -8.1 -7.3
27	7.8 12.3 18.1 23.1 29.9	16.1 25.7 32.3 49.3 63.1	17.9 28.5 37.0 54.5 69.8	-15.4 -24.4 -35.3 -45.1 -58.4	1.11 2.03 3.96 5.63 8.00	7.0 6.1 4.6 4.1 3.7	14.5 12.6 9.7 8.8 7.9	16.1 14.0 10.7 9.6 8.7	.117 .214 .417 .594 .845	1272 1573 1946 2211 2469	-13.9 -12.0 -8.9 -8.0 -7.3
28	11.5 16.9 21.8 30.6 39.9	15.8 23.2 35.5 47.1 57.2	19.6 28.7 41.5 56.0 69.6	-31.1 -44.4 -57.8 -80.0 -104.3	1.09 2.02 3.90 5.71 8.03	10.6 8.4 5.6 5.4 5.0	14.5 11.5 9.1 8.3 7.1	18.0 14.2 10.7 9.8 8.7	.115 .213 .411 .602 .841	1308 1592 1960 2229 2488	-28.5 -22.0 -14.8 -14.0 -13.0

TABLE NO. 7
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
MAY 1946
WRIGHT FIELD

Condition No.	Lift (lb)	Thrust (lb)	Resultant (lb)	Moment (lb ft)	H.P.	Lift H.P.	Thrust H.P.	Resultant H.P.	H.P. Dia. ²	RPM	Moment H.P.
29	24.2	36.9	44.0	-61.1	4.11	5.9	9.0	10.8	.433	1988	-14.8
	30.8	48.1	57.1	-77.7	6.07	5.1	8.0	9.4	.640	2264	-12.8
	39.7	59.9	72.0	-99.8	8.56	4.7	7.0	8.4	.902	2548	-11.6
30	25.7	33.2	41.9	-70.0	4.02	6.4	8.3	10.5	.423	1946	-17.4
	33.6	44.2	55.5	-91.1	5.95	5.7	7.4	9.3	.628	2234	-15.3
	44.0	55.5	70.8	-117.8	8.28	5.3	6.7	8.6	.874	2500	-14.2
31	27.3	33.0	42.8	-76.7	4.40	6.2	7.5	9.7	.464	1981	-17.4
	34.9	42.7	54.0	-99.0	6.03	5.8	7.1	9.0	.636	2259	-16.4
	45.0	53.9	70.3	-125.6	8.54	5.3	6.3	8.2	.900	2534	-14.7
32	30.1	30.3	42.8	-86.8	4.18	7.2	7.3	10.2	.441	1991	-20.7
	38.2	40.7	55.8	-113.7	6.18	6.2	6.6	9.0	.652	2270	-18.4
	51.2	50.9	72.2	-148.1	8.76	5.8	5.8	8.2	.926	2550	-16.9
33	12.0	14.7	19.0	-30.0	1.14	10.5	12.9	16.7	.120	1303	-26.3
	17.6	23.1	29.0	-44.4	2.13	8.3	10.9	13.6	.225	1624	-20.7
	26.7	35.2	44.2	-67.7	4.27	6.3	8.3	10.4	.451	1996	-15.9
34	34.1	46.6	57.8	-86.5	6.23	5.5	7.5	9.3	.657	2279	-13.9
	43.0	58.2	72.3	-109.9	8.93	4.8	6.5	8.1	.942	2568	-12.3
	27.8	33.5	43.6	-73.4	4.27	6.5	7.9	10.2	.451	1997	-17.2
35	35.0	44.2	56.3	-94.5	6.27	5.6	7.1	9.0	.662	2278	-15.1
	46.1	56.4	73.0	-122.2	8.99	5.1	6.3	8.2	.949	2562	-13.6
	7.7	16.9	18.5	-15.4	1.09	7.1	15.5	17.0	.115	1456	-14.1
35	11.6	24.6	27.2	-24.3	2.02	5.8	12.2	13.5	.213	1770	-12.0
	16.3	36.6	40.0	-34.1	3.79	4.3	9.7	10.6	.400	2151	-9.0
	22.1	46.6	51.5	-46.3	5.39	4.1	8.6	9.6	.568	2408	-8.6
35	27.3	57.3	63.5	-57.3	7.25	3.8	7.9	8.8	.764	2664	-7.9

TABLE NO. 8
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
MAY 1946
WRIGHT FIELD

Condition No.	Lift (Lb)	Thrust (Lb)	Resultant (Lb)	Moment (Lb Ft)	H.P.	Lift H.P.	Thrust H.P.	Resultant H.P.	H.P. Dia. ²	RPM	Moment H.P.
36	2.5	3.7	4.5	-4.4	.08	31.2	46.2	56.2	.008	710	-55.0
	4.5	8.0	9.2	-8.8	.35	12.9	22.9	26.3	.037	1030	-25.2
	7.9	15.6	17.5	-17.4	1.05	7.5	14.9	16.7	.110	1433	-16.5
	11.6	22.7	25.5	-23.1	1.89	6.1	12.0	13.5	.199	1737	-12.2
	16.3	33.5	37.3	-33.1	3.57	4.6	9.4	10.5	.376	2093	-9.3
	20.6	42.4	47.2	-41.9	5.02	4.1	8.4	9.4	.529	2350	-8.3
	25.2	51.4	57.2	-50.6	6.84	3.7	7.5	8.4	.720	2602	-7.4
37 ✓	16.7	33.7	37.6	-35.3	3.58	4.7	9.4	10.5	.378	2090	-9.9
	22.0	42.4	47.8	-44.1	4.91	4.5	8.6	8.7	.518	2344	-9.0
	28.0	50.9	58.0	-55.0	6.56	4.3	7.8	8.8	.692	2595	-8.4
38 ✓	8.0	16.4	18.3	-16.6	1.09	7.3	15.1	16.8	.115	1446	-15.2
	12.2	24.0	26.9	-24.2	1.97	6.2	12.2	13.7	.208	1766	-12.3
	18.0	34.5	39.0	-36.4	3.42	5.3	10.1	11.4	.361	2141	-10.6
	22.7	43.8	49.5	-46.3	5.27	4.3	8.3	9.4	.557	2404	-8.8
	29.0	54.4	61.6	-58.4	6.91	4.2	7.9	8.9	.730	2667	-8.4
39 ✓	8.0	16.3	18.2	-16.6	1.11	7.2	14.7	16.4	.117	1322	-15.0
	12.2	24.9	27.7	-25.4	2.05	6.0	12.1	13.5	.216	1621	-12.4
	18.7	36.8	41.3	-38.6	3.96	4.7	9.3	10.4	.417	1994	-9.7
	23.9	47.7	53.4	-49.6	5.76	4.2	8.3	9.3	.608	2247	-8.6
	29.6	60.0	66.8	-62.9	8.10	3.7	7.4	8.3	.854	2516	-7.8

TABLE NO. 9
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD MAY 1946

Condition No.	Thrust (Lb)	H.P.	Thrust H.P.	H.P. Dia. ²	RPM
40	17.9	1.14	15.7	.120	1328
	26.6	2.09	12.7	.220	1615
	40.3	4.01	10.1	.423	1973
	52.0	5.80	9.0	.612	2239
	65.6	8.05	8.2	.850	2507
41	16.1	1.13	14.2	.119	1067
	25.9	2.32	11.2	.245	1320
	41.9	4.57	9.2	.482	1646
	57.1	7.28	7.9	.768	1927
42	5.5	.36	15.3	.038	608
	10.9	1.09	10.0	.115	847
	17.2	2.24	7.7	.236	1052
	28.8	4.57	6.3	.482	1334
43	16.0	1.03	15.5	.108	1488
	24.2	1.84	13.2	.194	1820
	34.5	3.09	11.2	.326	2174
	43.6	4.52	9.6	.476	2421
44 X	18.2	1.09	16.7	.115	1333
	27.3	2.04	13.4	.215	1634
	40.5	3.89	10.4	.411	1999
	53.3	5.74	9.3	.606	2254
	66.0	8.00	8.3	.844	2510
45 X	8.6	.32	26.9	.036	1052
	17.9	.97	18.5	.102	1482
	25.5	1.75	14.6	.185	1797
	36.7	2.96	12.4	.314	2148
	46.3	4.40	10.5	.465	2394
	55.9	5.69	9.8	.602	2620

TABLE NO. 10
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD MAY 1946

Condition No.	Thrust (Lb)	H.P.	<u>Thrust</u> H.P.	<u>H.P.</u> Dia. 2	RPM
46	4.2	.08	52.5	.008	753
	9.2	.35	26.2	.037	1106
	17.1	1.00	17.1	.106	1512
	23.9	1.74	13.8	.184	1829
	35.1	3.03	11.6	.320	2175
	44.1	4.47	9.9	.472	2417
47	9.0	.42	21.4	.044	816
	18.2	1.21	15.0	.128	1171
	28.0	2.29	12.2	.242	1432
	42.1	4.45	9.5	.469	1777
	54.6	6.82	8.1	.720	2052
48	9.5	.41	23.2	.043	937
	18.3	1.15	15.9	.121	1317
	26.9	2.10	12.8	.222	1616
	42.7	4.01	10.7	.423	1953
	51.1	5.82	8.8	.614	2217
49	9.5	.41	23.2	.043	947
	18.3	1.15	15.9	.121	1326
	27.0	2.08	13.0	.220	1607
	41.1	4.01	10.3	.423	1960
	52.7	5.82	9.1	.613	2218
	66.7	8.11	8.2	.856	2484
50	9.4	.37	25.4	.039	950
	18.5	1.09	17.0	.115	1313
	26.7	2.02	12.7	.224	1605

TABLE NO. 11
CUSTER CHANNEL WING
FIVE-FOOT WIND TUNNEL TEST NO. 545
WRIGHT FIELD MAY 1946

Condition No.	Thrust (lb)	H.P.	$\frac{\text{Thrust}}{\text{H.P.}}$	$\frac{\text{H.P.}}{\text{Dia.}^2}$	RPM
51	9.2	.37	24.9	.039	939
	18.0	1.10	16.4	.116	1330
	26.6	2.01	13.2	.212	1611
	39.6	3.84	10.3	.411	1957
	50.8	5.57	9.1	.588	2214
	63.0	7.69	8.2	.811	2475
52	9.2	.37	24.8	.039	932
	18.4	1.10	16.7	.116	1311
	27.8	2.09	13.3	.220	1604
	42.1	4.14	10.2	.437	1985
	55.6	6.09	9.1	.642	2253
	70.4	8.74	8.1	.922	2547
53 X	3.7	.08	46.3	.008	739
	8.3	.36	23.0	.038	1075
	16.8	.99	17.0	.104	1481
	24.0	1.76	13.6	.186	1789
	34.6	3.09	11.2	.326	2153
	44.2	4.55	9.7	.480	2391
	52.0	5.90	8.8 ✓	.622	2617

2.5 3 4 5 6 7 8 9 1 1.5 2 2.5 3


LIFT VARIATION DUE TO TYPE OF PROPELLER AND EFFECT OF AUXILIARY WING MOUNTING BRACKETS

CUSTER CHANNEL WING


5 FT. WIND TUNNEL
WRIGHT FIELD
TEST NO. 545
FEBRUARY AND APRIL 1946

- 3 BLADE CONVENTIONAL ROUND TIP METAL PROP, $\beta = 20^\circ$ @ 75%, CHANNEL END PLATES OFF
- △ 2 BLADE THICK HUB WOODEN PROP, $\beta = 20^\circ$ @ 75%, CHANNEL END PLATES OFF
- 2 BLADE THICK HUB WOODEN PROP, $\beta = 20^\circ$ @ 75%, CHANNEL END PLATES ON, AUX. WING MOUNTING PLATES ON
- ◇ 2 BLADE THIN HUB WOODEN PROP, $\beta = 20^\circ$ @ 75%, CHANNEL END PLATES ON, AUX. WING MOUNTING PLATES & BRACKETS ON
- + 3 BLADE WIDE TIP METAL PROP, $\beta = 8.6^\circ$ @ 90% CHANNEL END PLATES ON, AUX. WING MOUNTING PLATES & BRACKETS ON, PROP MOVED 1/2 IN. AFT AND PROP DIAMETER INCREASED 1/2 IN.

23
LIFT/H.P.

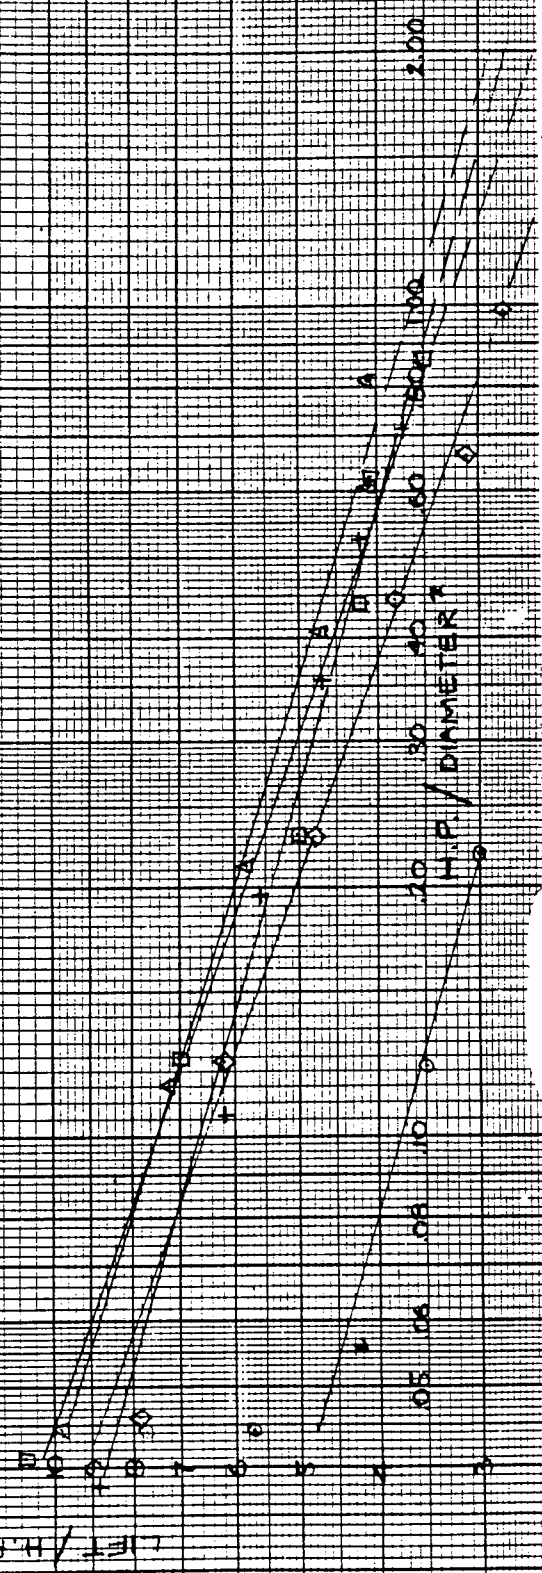


GRAPH 1

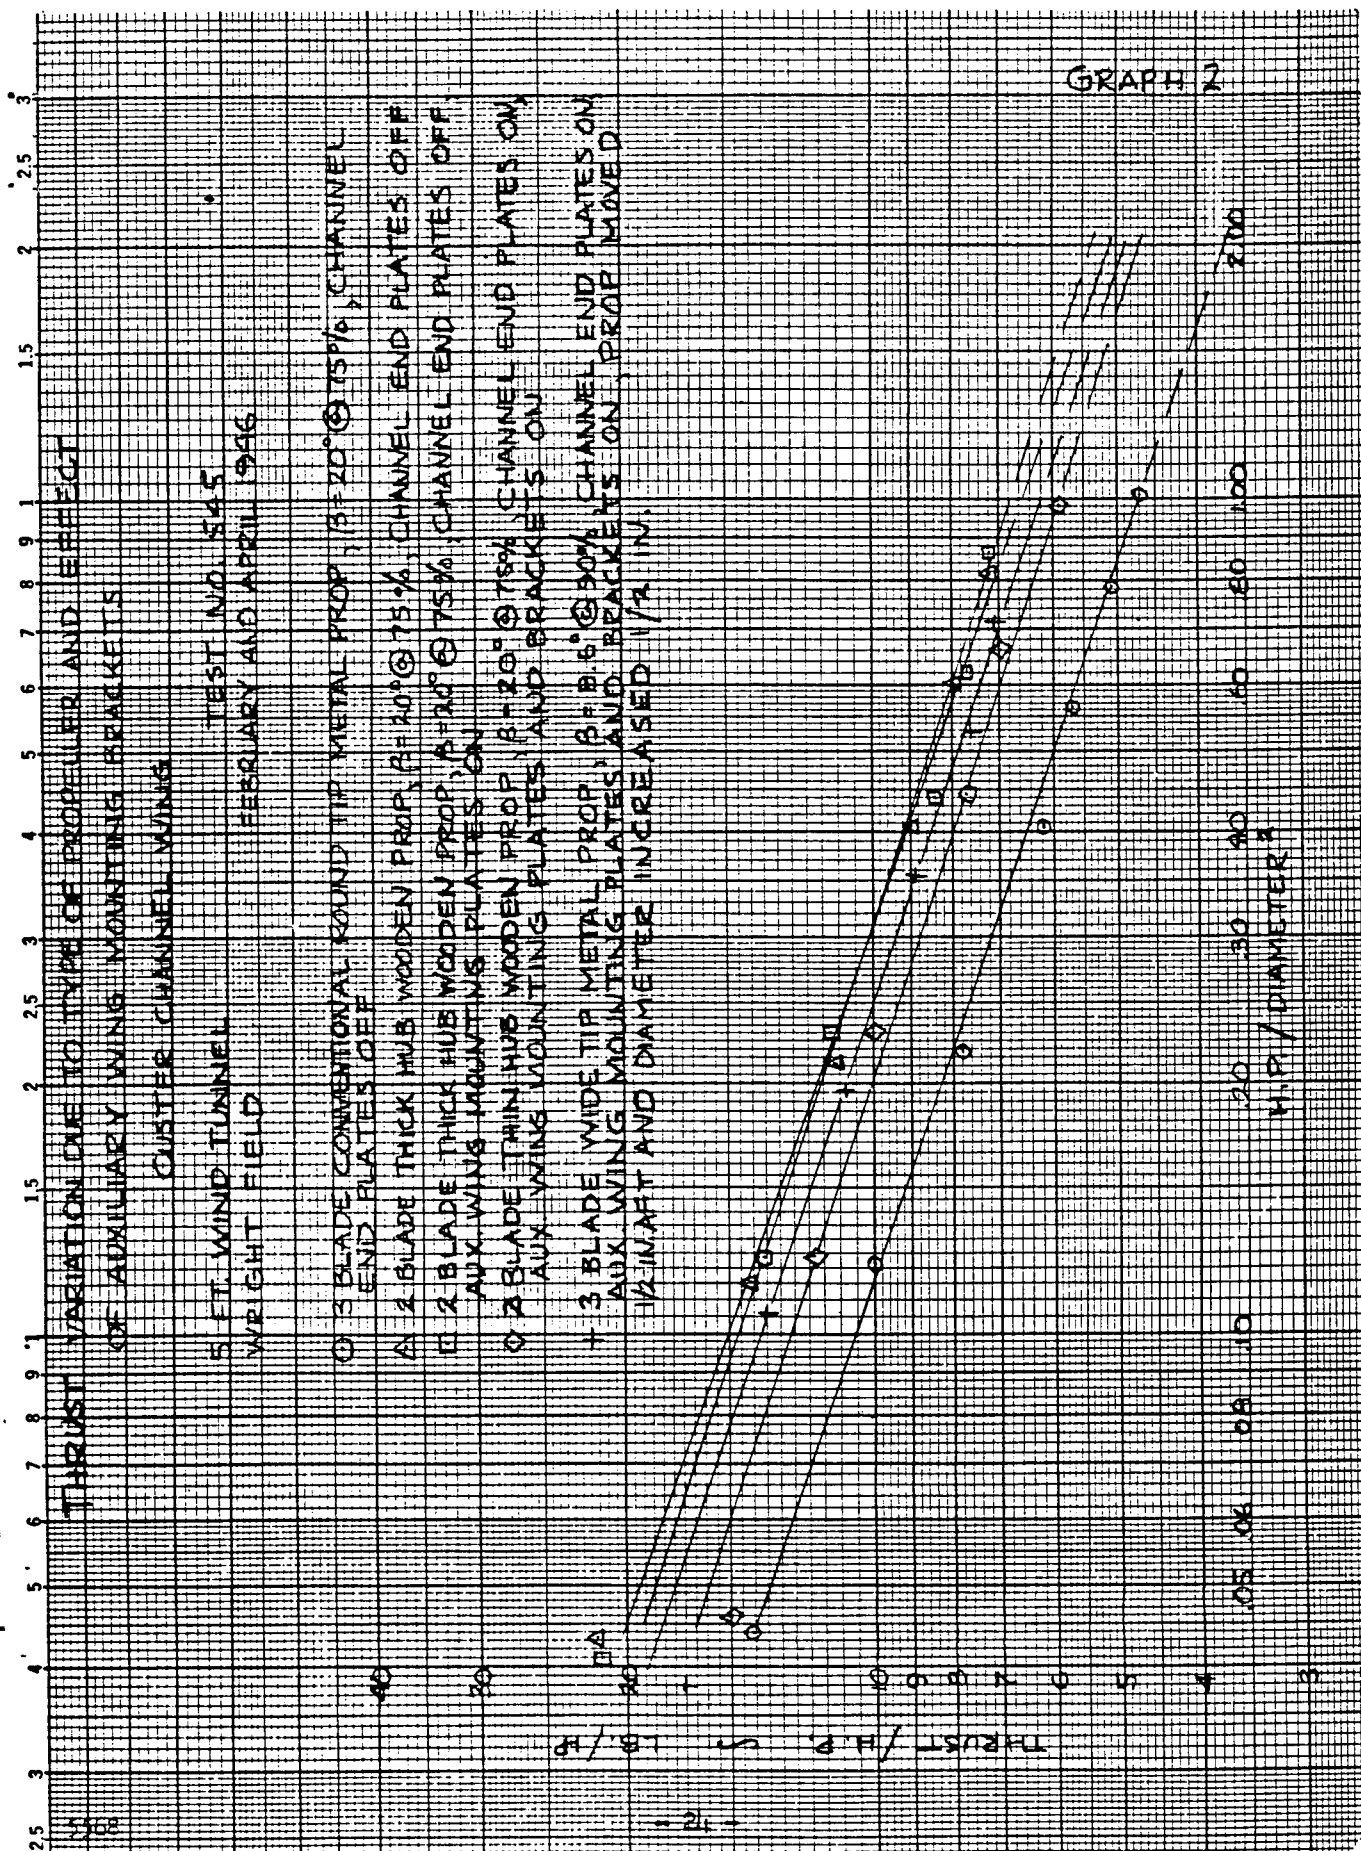

THRUST VARIATION DUE TO TYPE OF PROPELLER AND EFFECT OF AUXILIARY WING MOUNTING BRACKETS

OUTER CHANNEL WING

5 FT. WIND TUNNEL TEST NO. 545
WRIGHT FIELD FEBRUARY AND APRIL 1946

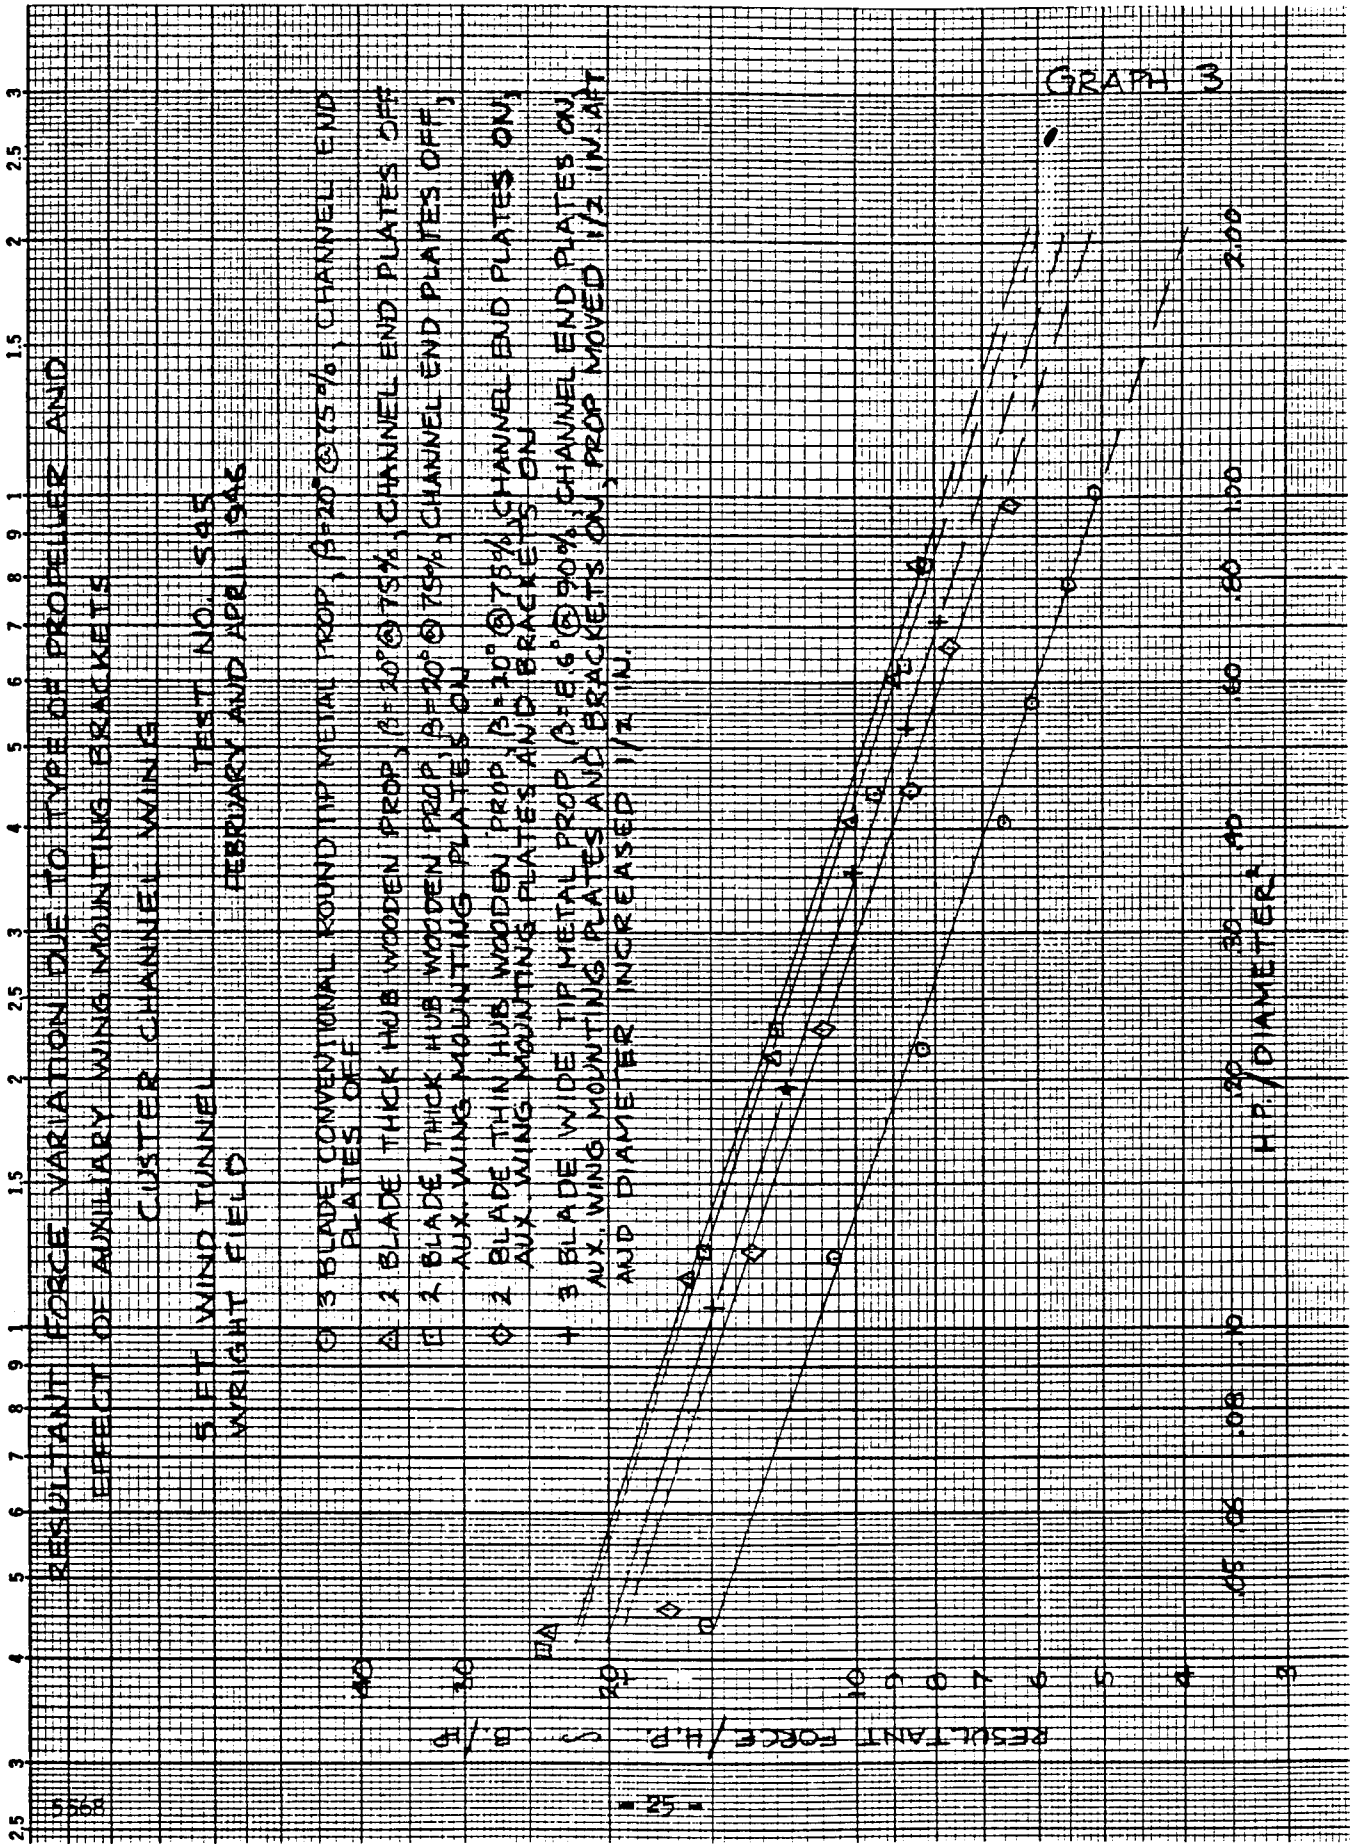

2.5 3 4 5 6 7 8 9 1 1.5 2 2.5 3


PITCHING MOMENT VARIATION DUE TO TYPE OF PROPELLER AND EFFECT OF AUXILIARY WING MOUNTING BRACKETS

CLUSTER CHANNEL WING

SET WIND TUNNEL
WRIGHT FIELD
TEST NO. 545
FEBRUARY AND APRIL 1946


- 1 3 BLADE CONVENTIONAL ROUND TIP METAL PROP. $\beta = 20^\circ @ 75\%$, CHANNEL END PLATES OFF
- 2 BLADE THICK HUB WOODEN PROP. $\beta = 20^\circ @ 75\%$, CHANNEL END PLATES OFF
- 3 BLADE THICK HUB WOODEN PROP. $\beta = 20^\circ @ 75\%$, CHANNEL END PLATES OFF, AUX. WING MOUNTING PLATES ON
- 4 BLADE THIN HUB WOODEN PROP. $\beta = 20^\circ @ 75\%$, CHANNEL END PLATES ON, AUX. WING MOUNTING PLATES AND BRACKETS ON
- 5 BLADE WIDE TIP METAL PROP. $\beta = 85^\circ @ 50\%$, CHANNEL END PLATES ON, AUX. WING MOUNTING PLATES AND BRACKETS ON, PROP MOVED $1/2$ IN. AFT AND DIAMETER INCREASED $1/2$ IN.

PITCHING MOMENT / H.P. $\times$ FT. LB. / FT.

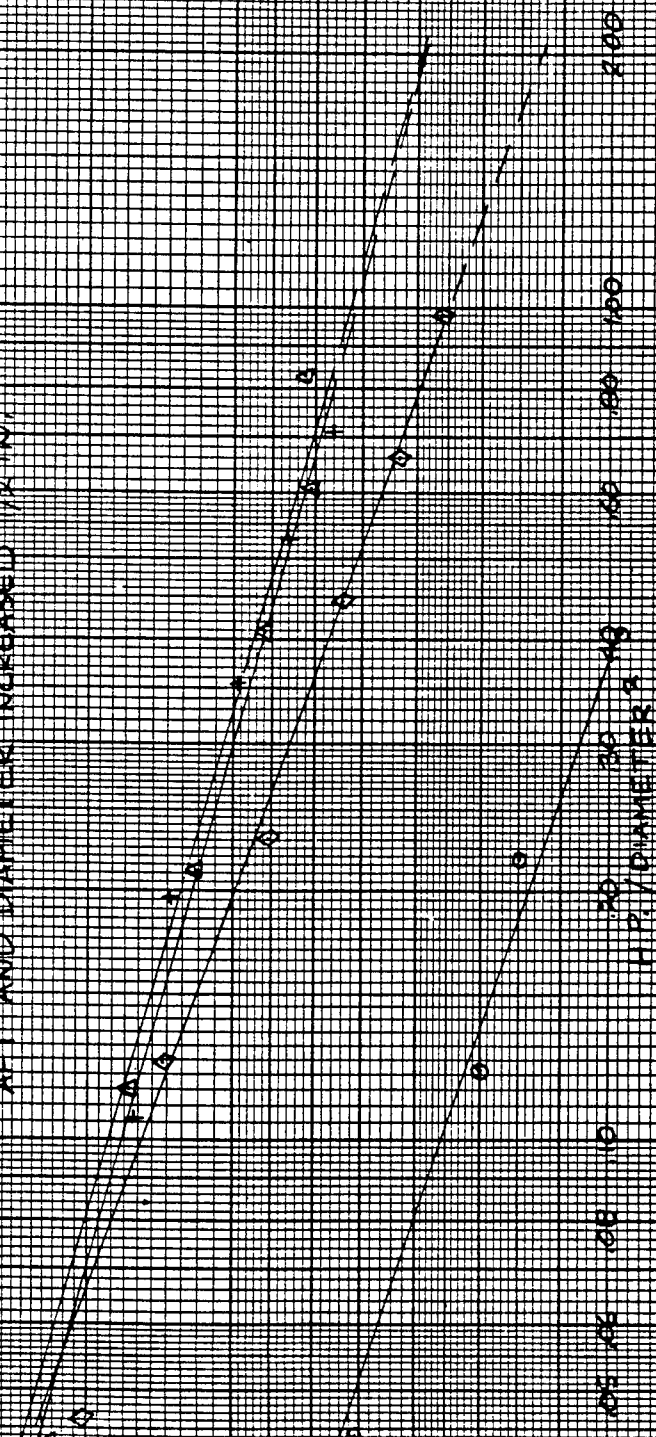


GRAPH A

H.P. / DIAMETER²

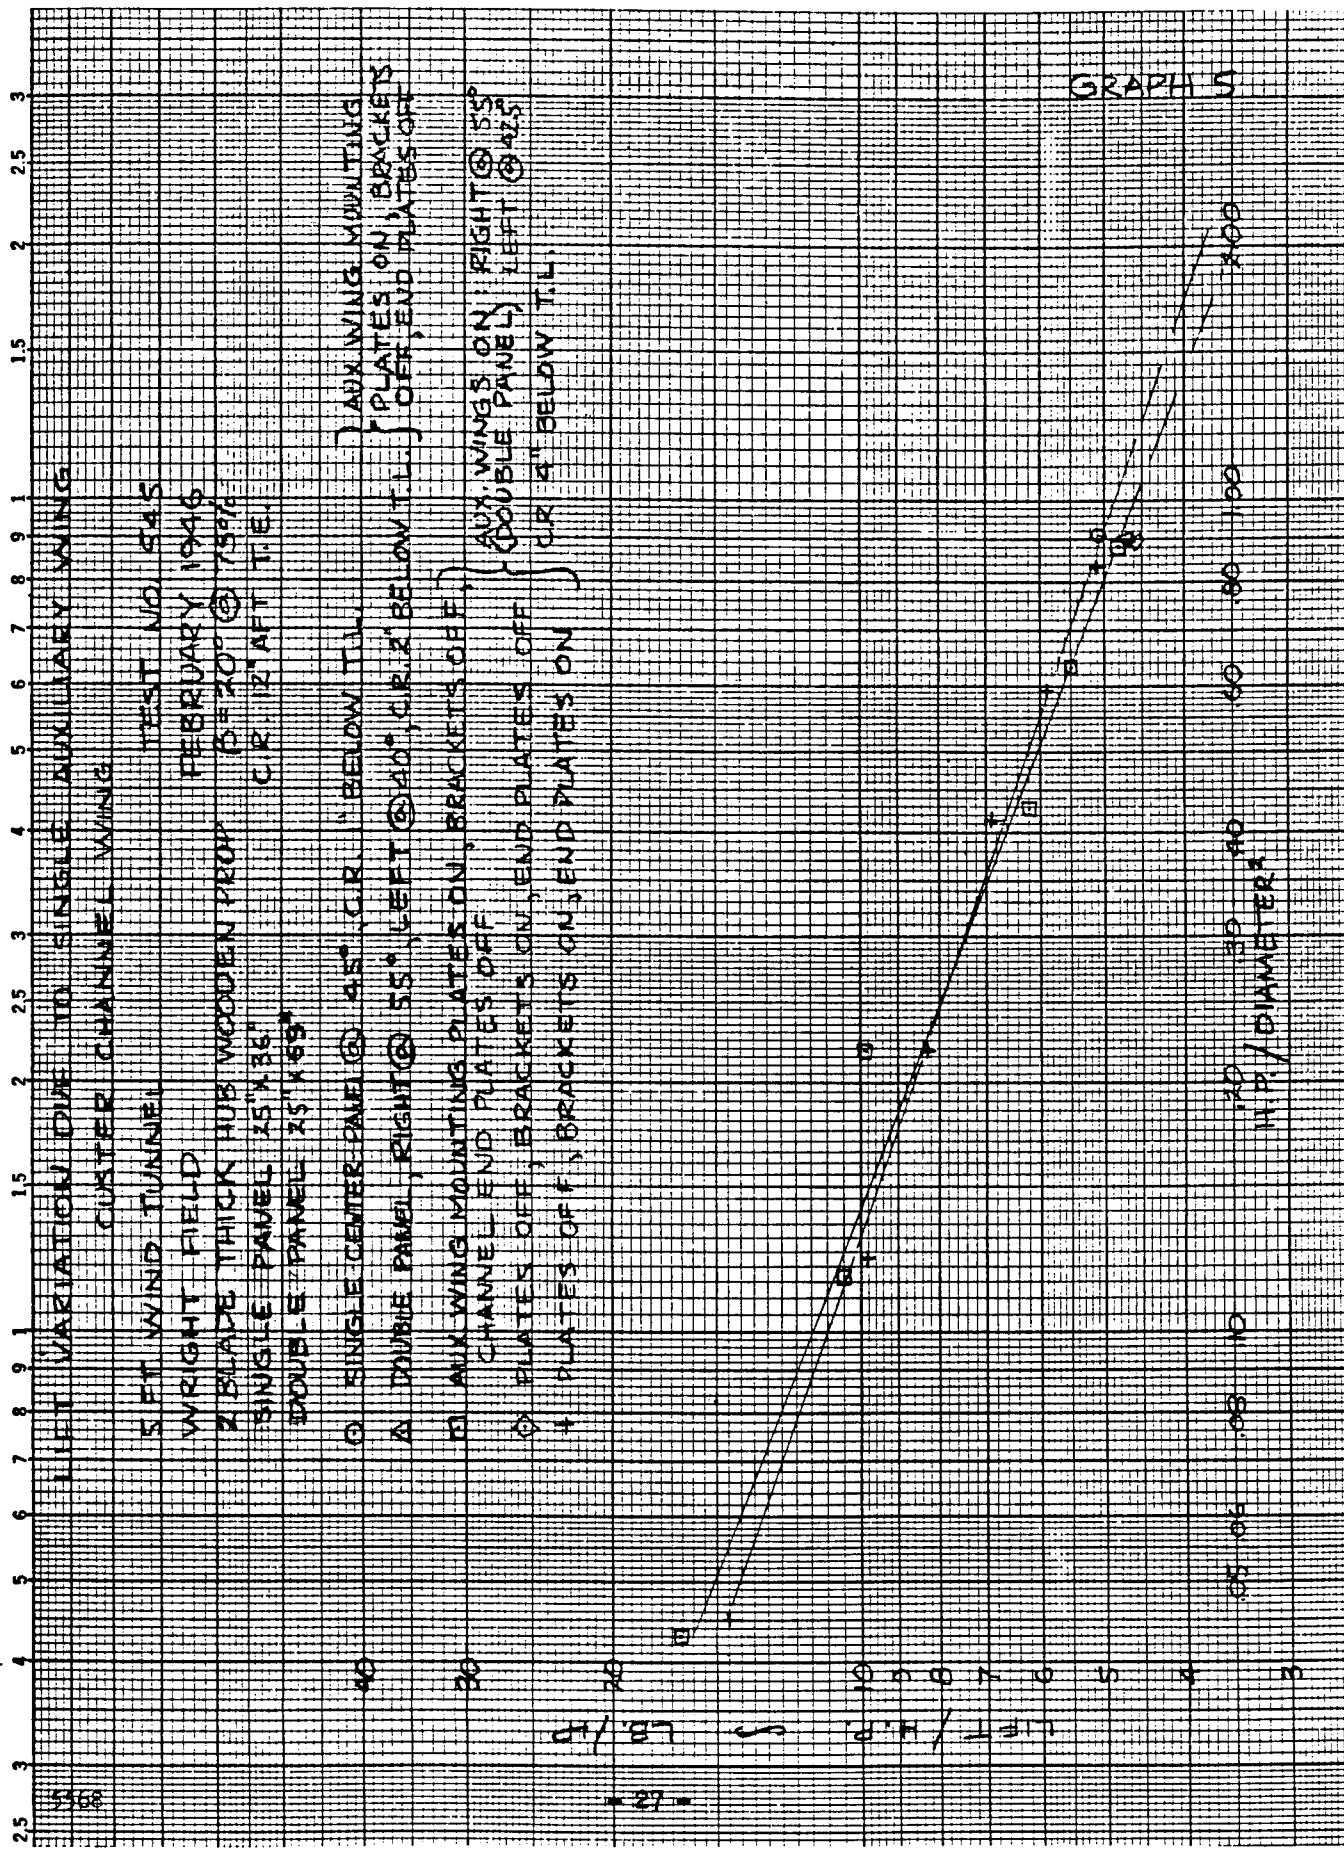

5 FT WIND TUNNEL
 WRIGHT FIELD
 2 BLADE THICK HUB WOODEN PROP
 SINGLE PANEL 15" X 36"
 DOUBLE PANEL 15" X 69"
 0 SINGLE CENTER PANEL @ 45° C.R. 1" BELOW T.L.
 A DOUBLE PANEL, RIGHT @ 55° LEFT @ 40°, C.R. 2" BELOW T.L.
 D1 AUX WING MOUNTING PLATES ON, BRACKETS OFF,
 CHANNEL END PLATES OFF
 2 PLATES OFF, BRACKETS ON, END PLATES OFF
 4 PLATES OFF, BRACKETS ON, END PLATES ON

LIFT VARIATION DUE TO SINGLE AUXILIARY WING
 CUSTER CHANNEL WING
 TEST NO. 545
 FEBRUARY 1946
 5 = 20° @ 75%
 C.R. 12" AFT T.E.
 AUX WING MOUNTING
 PLATES ON, BRACKETS
 OFF, END PLATES OFF
 AUX WINGS ON: RIGHT @ 55°
 (DOUBLE PANEL) LEFT @ 40°
 C.R. 4" BELOW T.L.

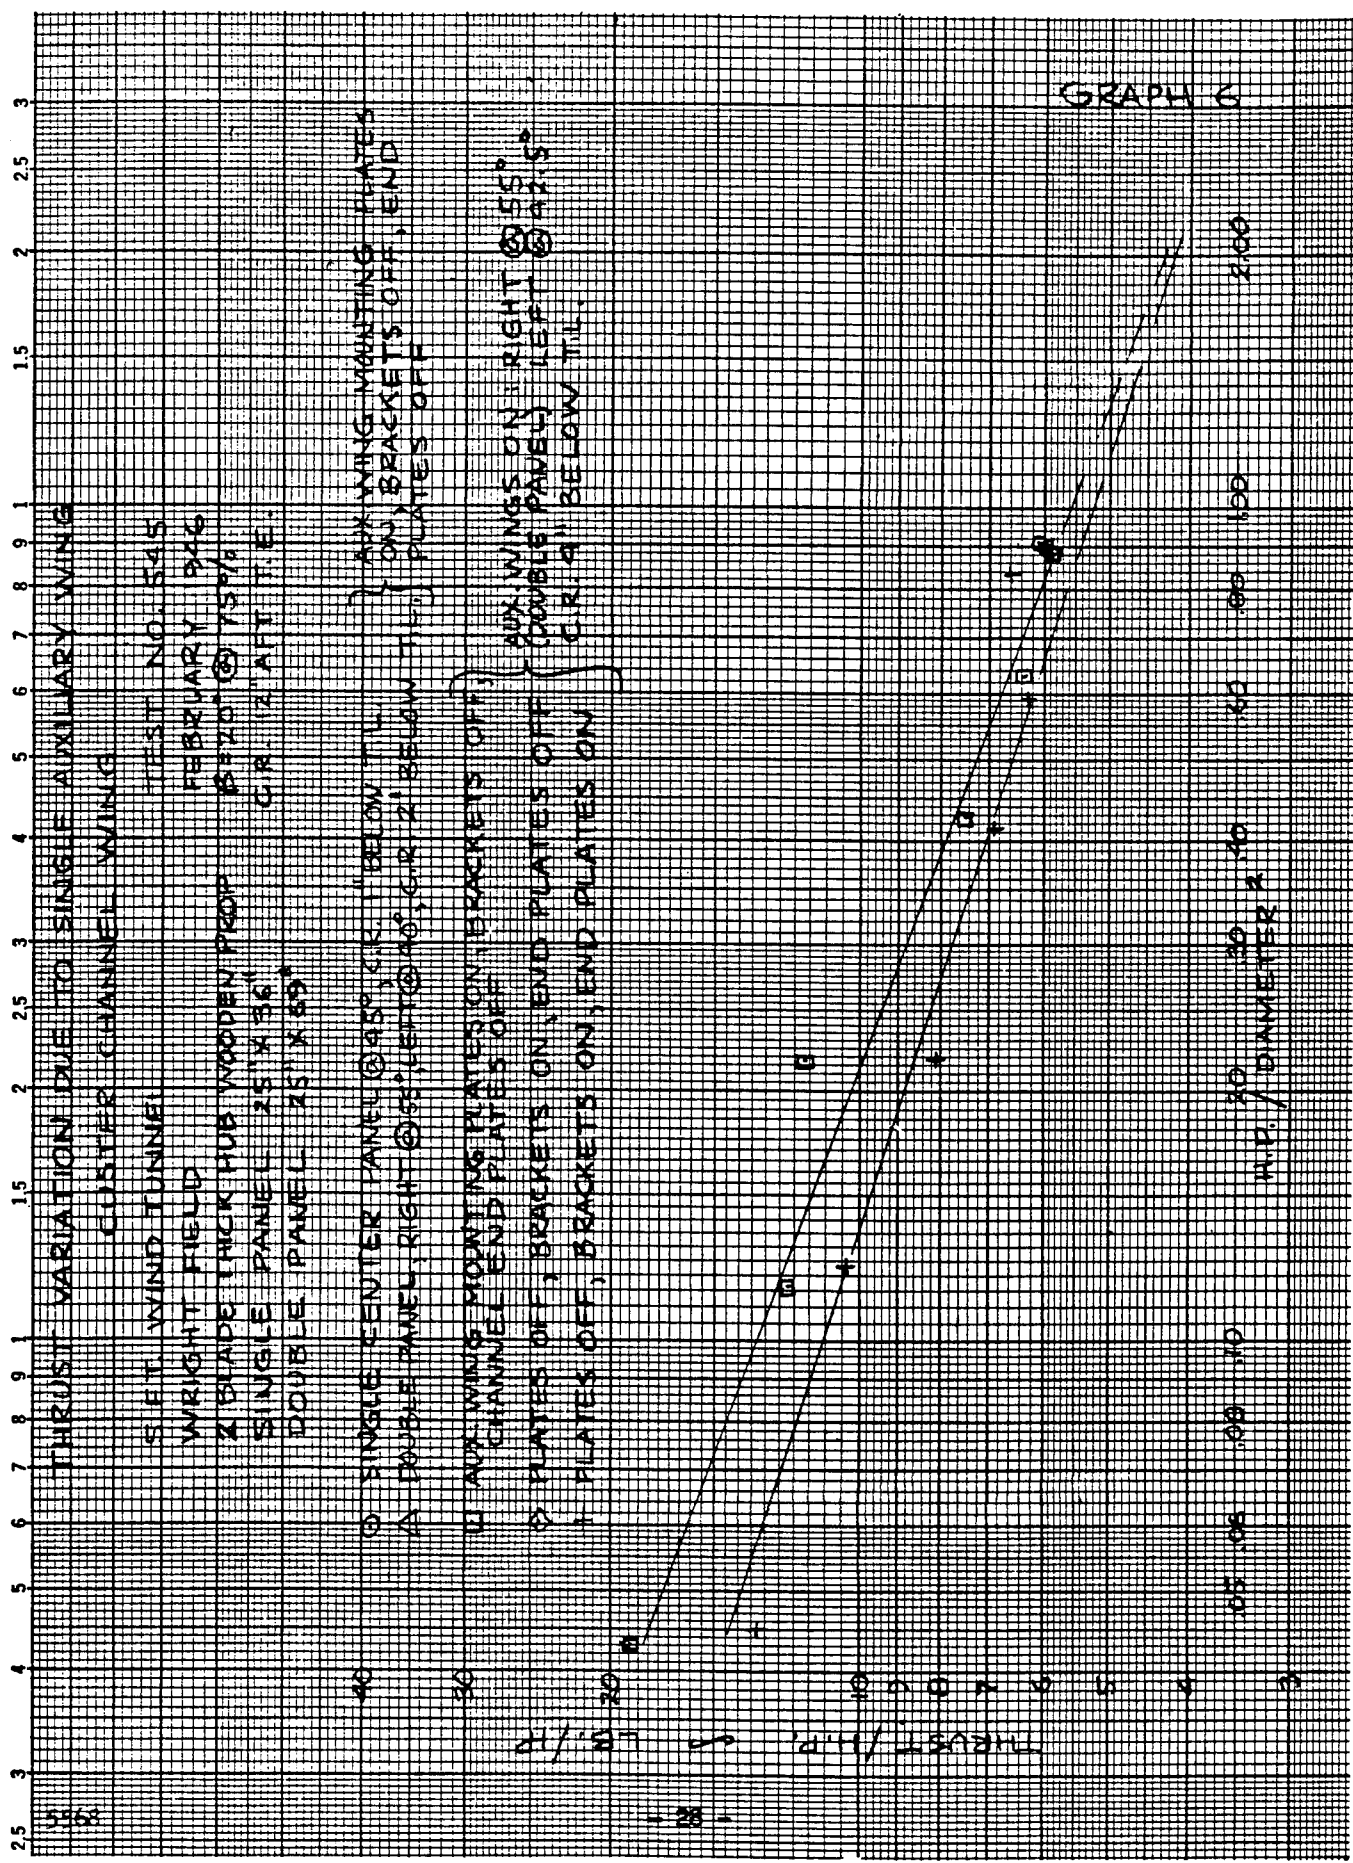

GRAPH G

O SINGLE CENTER PANEL @ 45°, C.R. 1' BELOW T.L. } AUX WING MOUNTING PLATES
 A DOUBLE PANEL, RIGHT @ 55°, LEFT @ 40°, C.R. 2' BELOW T.L. } ON, BRACKETS OFF, END
 PLATES OFF, BRACKETS ON, END PLATES OFF } PLATES OFF
 PLATES OFF, BRACKETS ON, END PLATES ON } C.R. 2' BELOW T.L.
 O AUX WING MOUNTING PLATES ON, BRACKETS OFF }
 CHANNEL END PLATES OFF }
 O PLATES OFF, BRACKETS ON, END PLATES OFF }
 PLATES OFF, BRACKETS ON, END PLATES ON }

25	3	4	5	6	7	8	9	1	15	2	25	3	4	5	6	7	8	9	1	15	2	25	3
----	---	---	---	---	---	---	---	---	----	---	----	---	---	---	---	---	---	---	---	----	---	----	---

RESULTANT FORCE VARIATION DUE TO SINGLE AUXILIARY WING

WILLIAMSON

SET, WIND, TUNNEL

TEST NO. 545

DELIGHT

NO
A
A
-
Y
D
A
N
B
E
L

2 BLADE THICK WOODEN DROP

0.52 @ 0.25

SINGLE PAVE L 25" X 36"

C.R. 12 "AFT" T.E.

DOUBLE PANEL 75" X 60"

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

ON AX WING MOUNTING PLATE

3	1
2	1
3	0
4	0
5	0
6	0
7	0
8	0
9	0
10	0
11	0
12	0
13	0
14	0
15	0
16	0
17	0
18	0
19	0
20	0
21	0
22	0
23	0
24	0
25	0
26	0
27	0
28	0
29	0
30	0
31	0
32	0
33	0
34	0
35	0
36	0
37	0
38	0
39	0
40	0
41	0
42	0
43	0
44	0
45	0
46	0
47	0
48	0
49	0
50	0
51	0
52	0
53	0
54	0
55	0
56	0
57	0
58	0
59	0
60	0
61	0
62	0
63	0
64	0
65	0
66	0
67	0
68	0
69	0
70	0
71	0
72	0
73	0
74	0
75	0
76	0
77	0
78	0
79	0
80	0
81	0
82	0
83	0
84	0
85	0
86	0
87	0
88	0
89	0
90	0
91	0
92	0
93	0
94	0
95	0
96	0
97	0
98	0
99	0
100	0

2025 AUG 11 11 04 AM

DOUBLE PANEL

UNITED STATES OF AMERICA

15. AUXILIARY MOUNTING PLATES ON BRACKETS OF


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----

CHANCELLER PLATES DE

0
1
2
3
4
5
6
7
8
9
A
B
C
D
E
F
G
H
I
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

FLUTES OFF, BRACKLES ON, END FLUTES ON

1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11. 12. 13. 14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840.

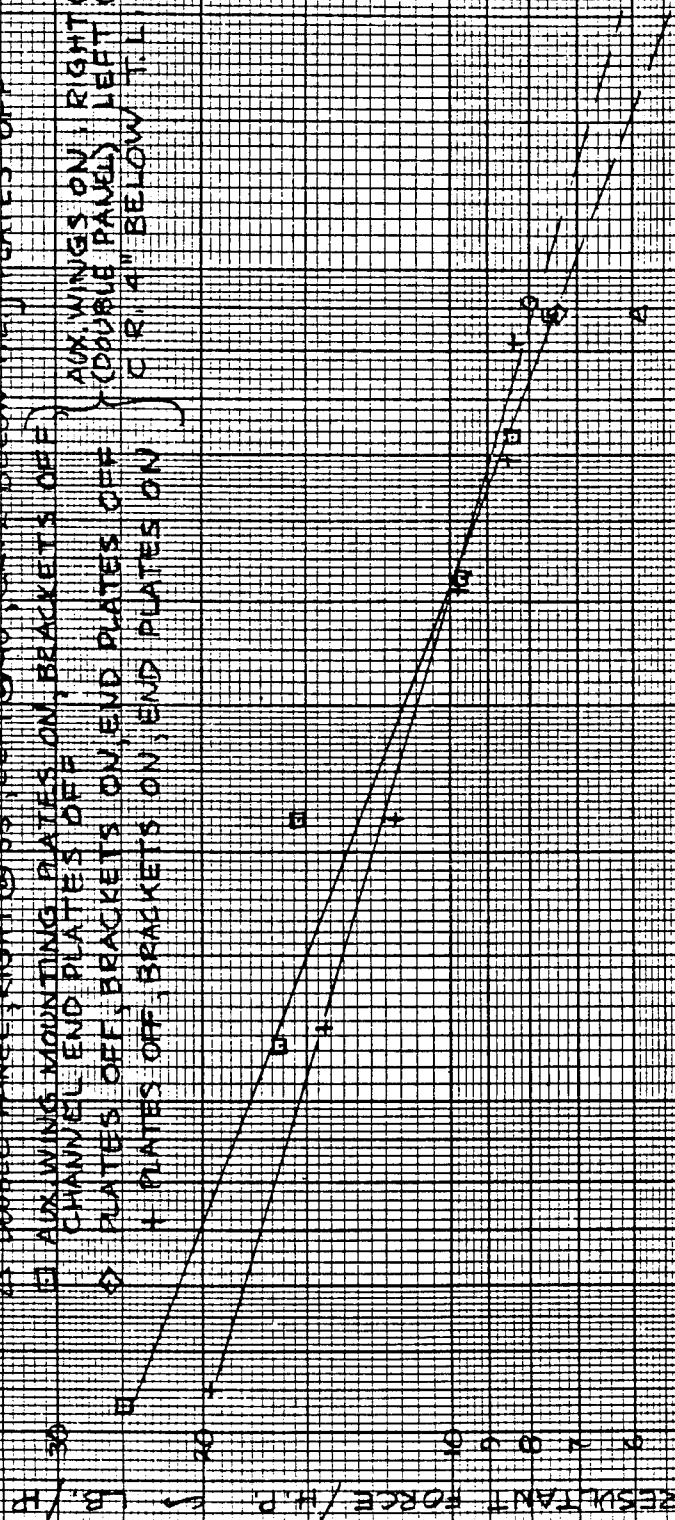



GRAPH 7

40 30
PH. 3 / DIAMETER

[illegible]

92

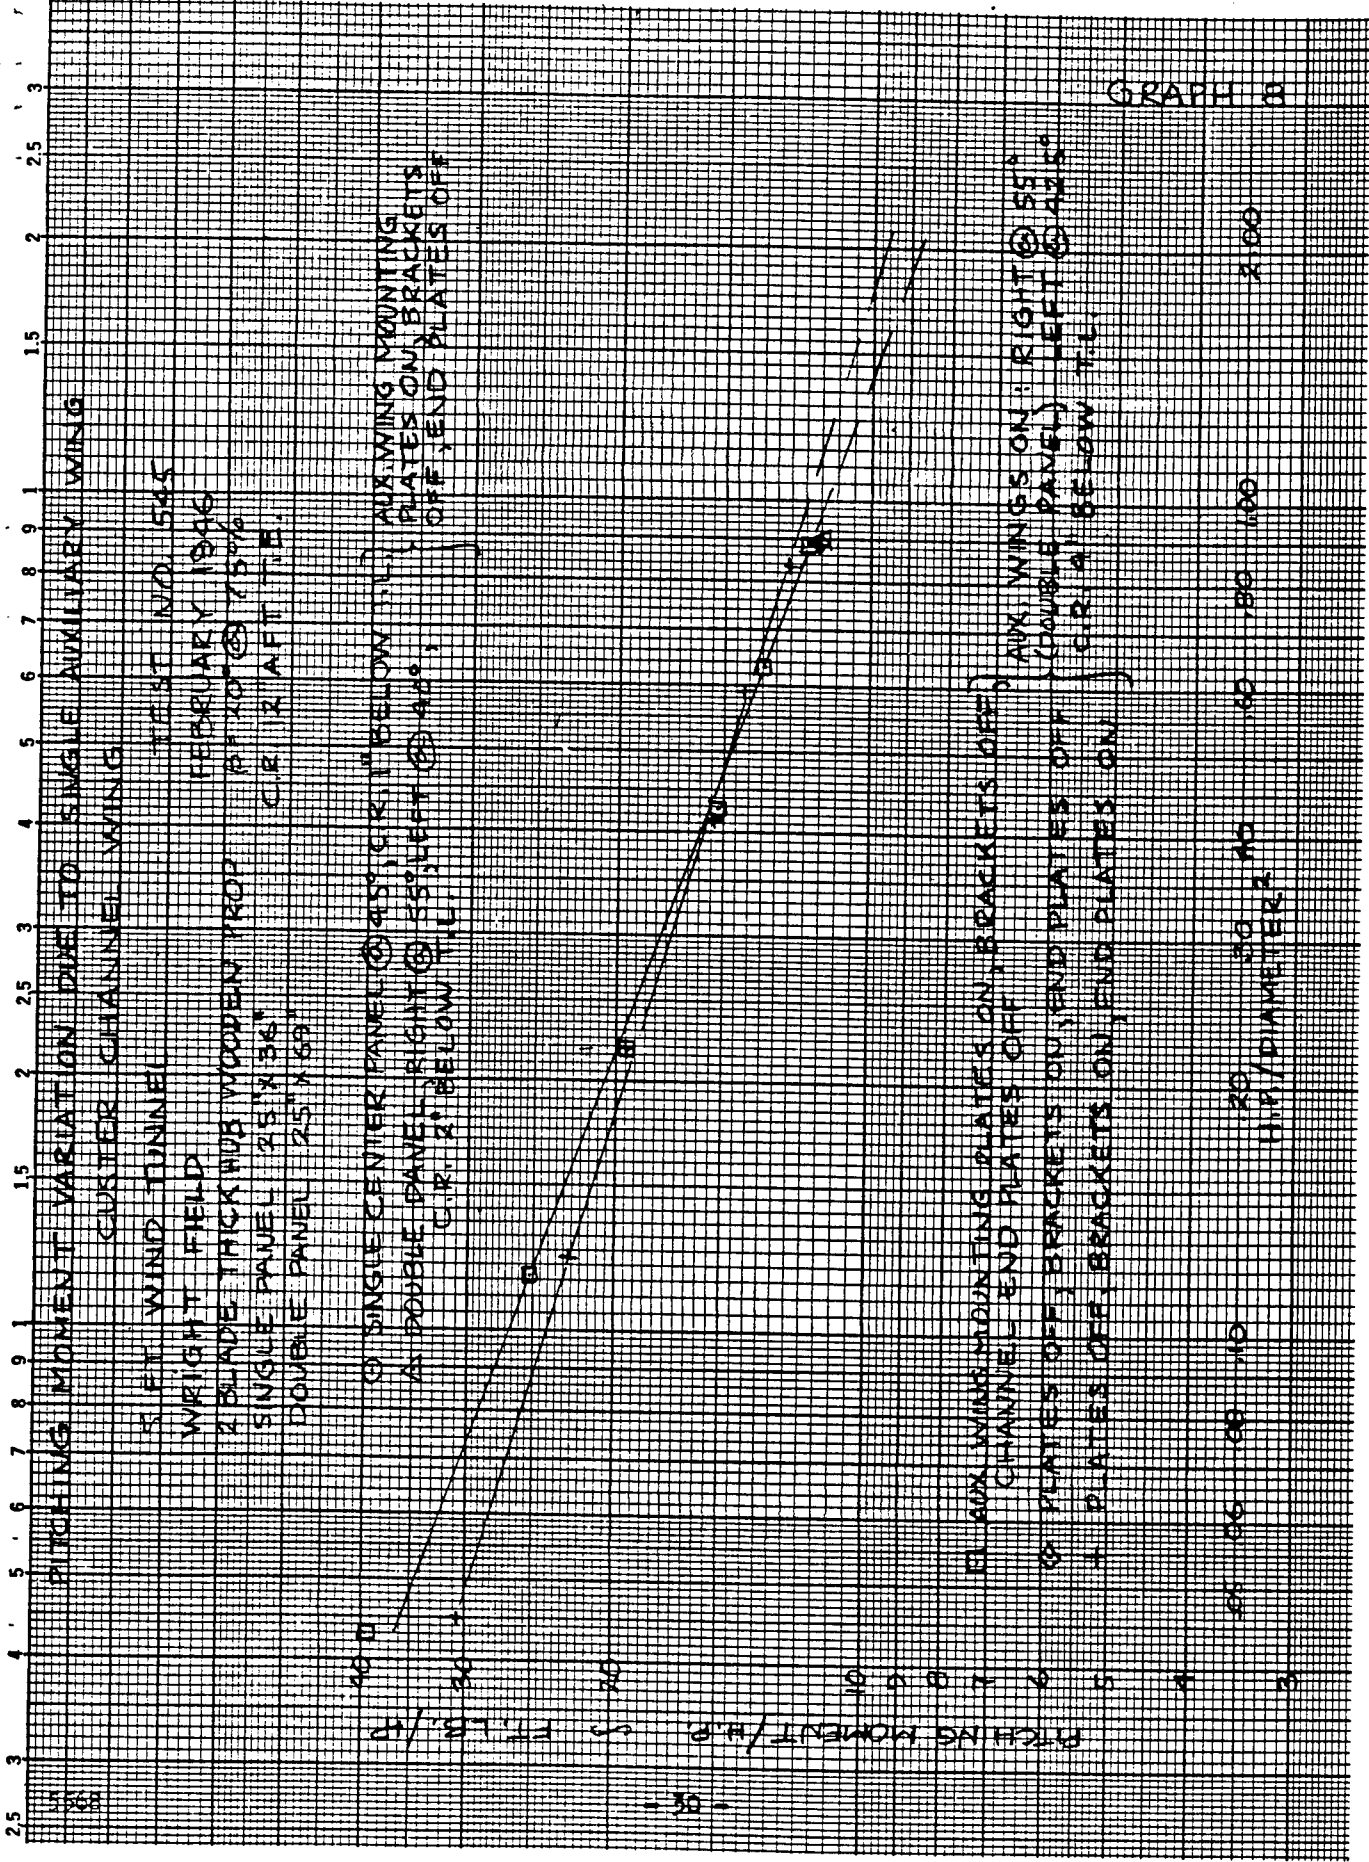

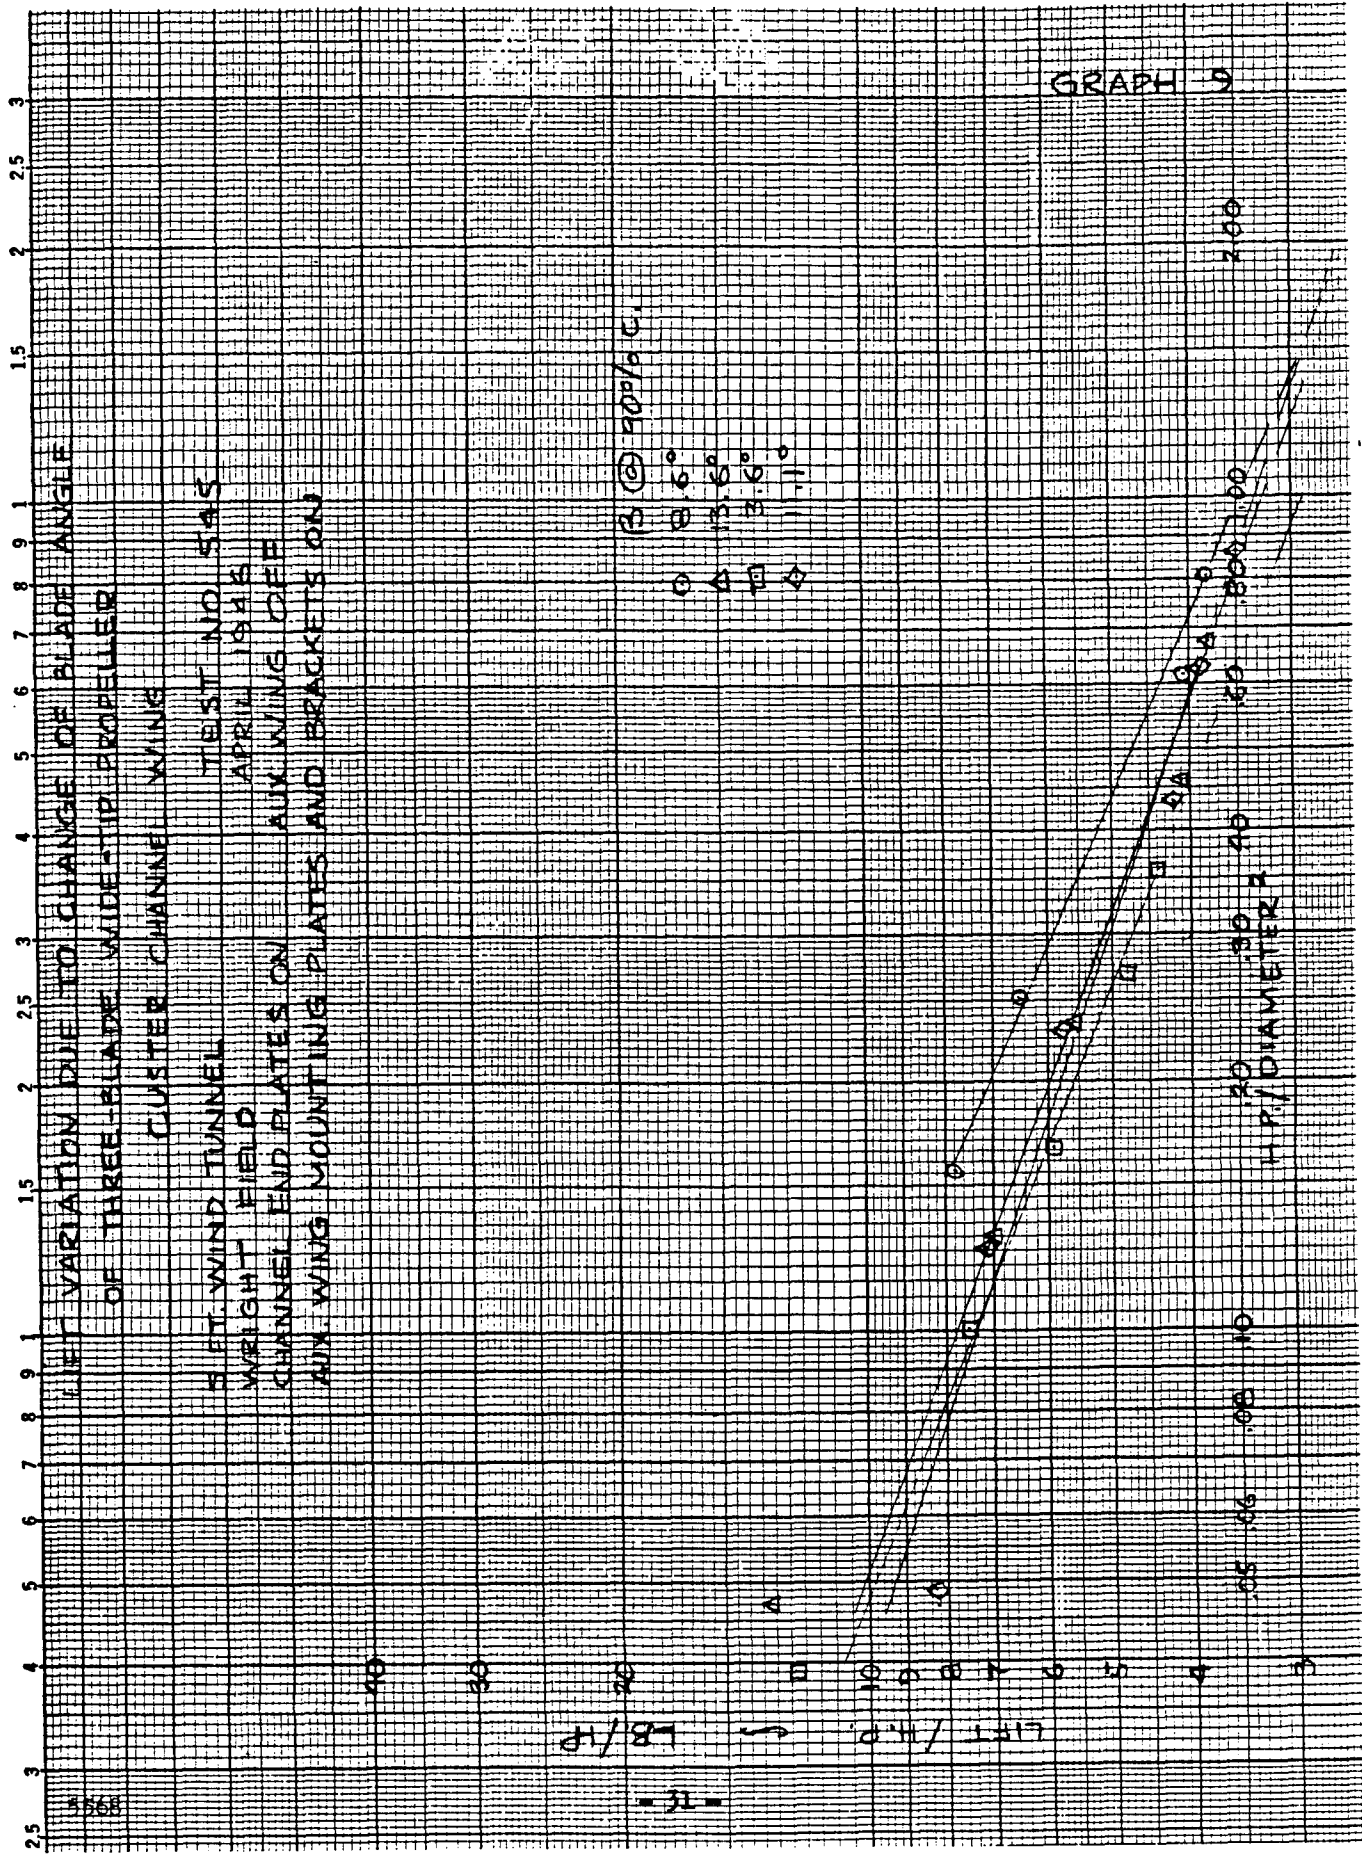



5 FT. WIND TUNNEL
 WRIGHT FIELD
 CHANNEL END PLATES ON
 AUX. WING MOUNTING PLATES AND BRACKETS ON


TEST NO. 545
 APRIL 1945
 AUX. WING OFF


2.5 3 4 5 6 7 8 9 1 1.5 2 2.5 3

5568

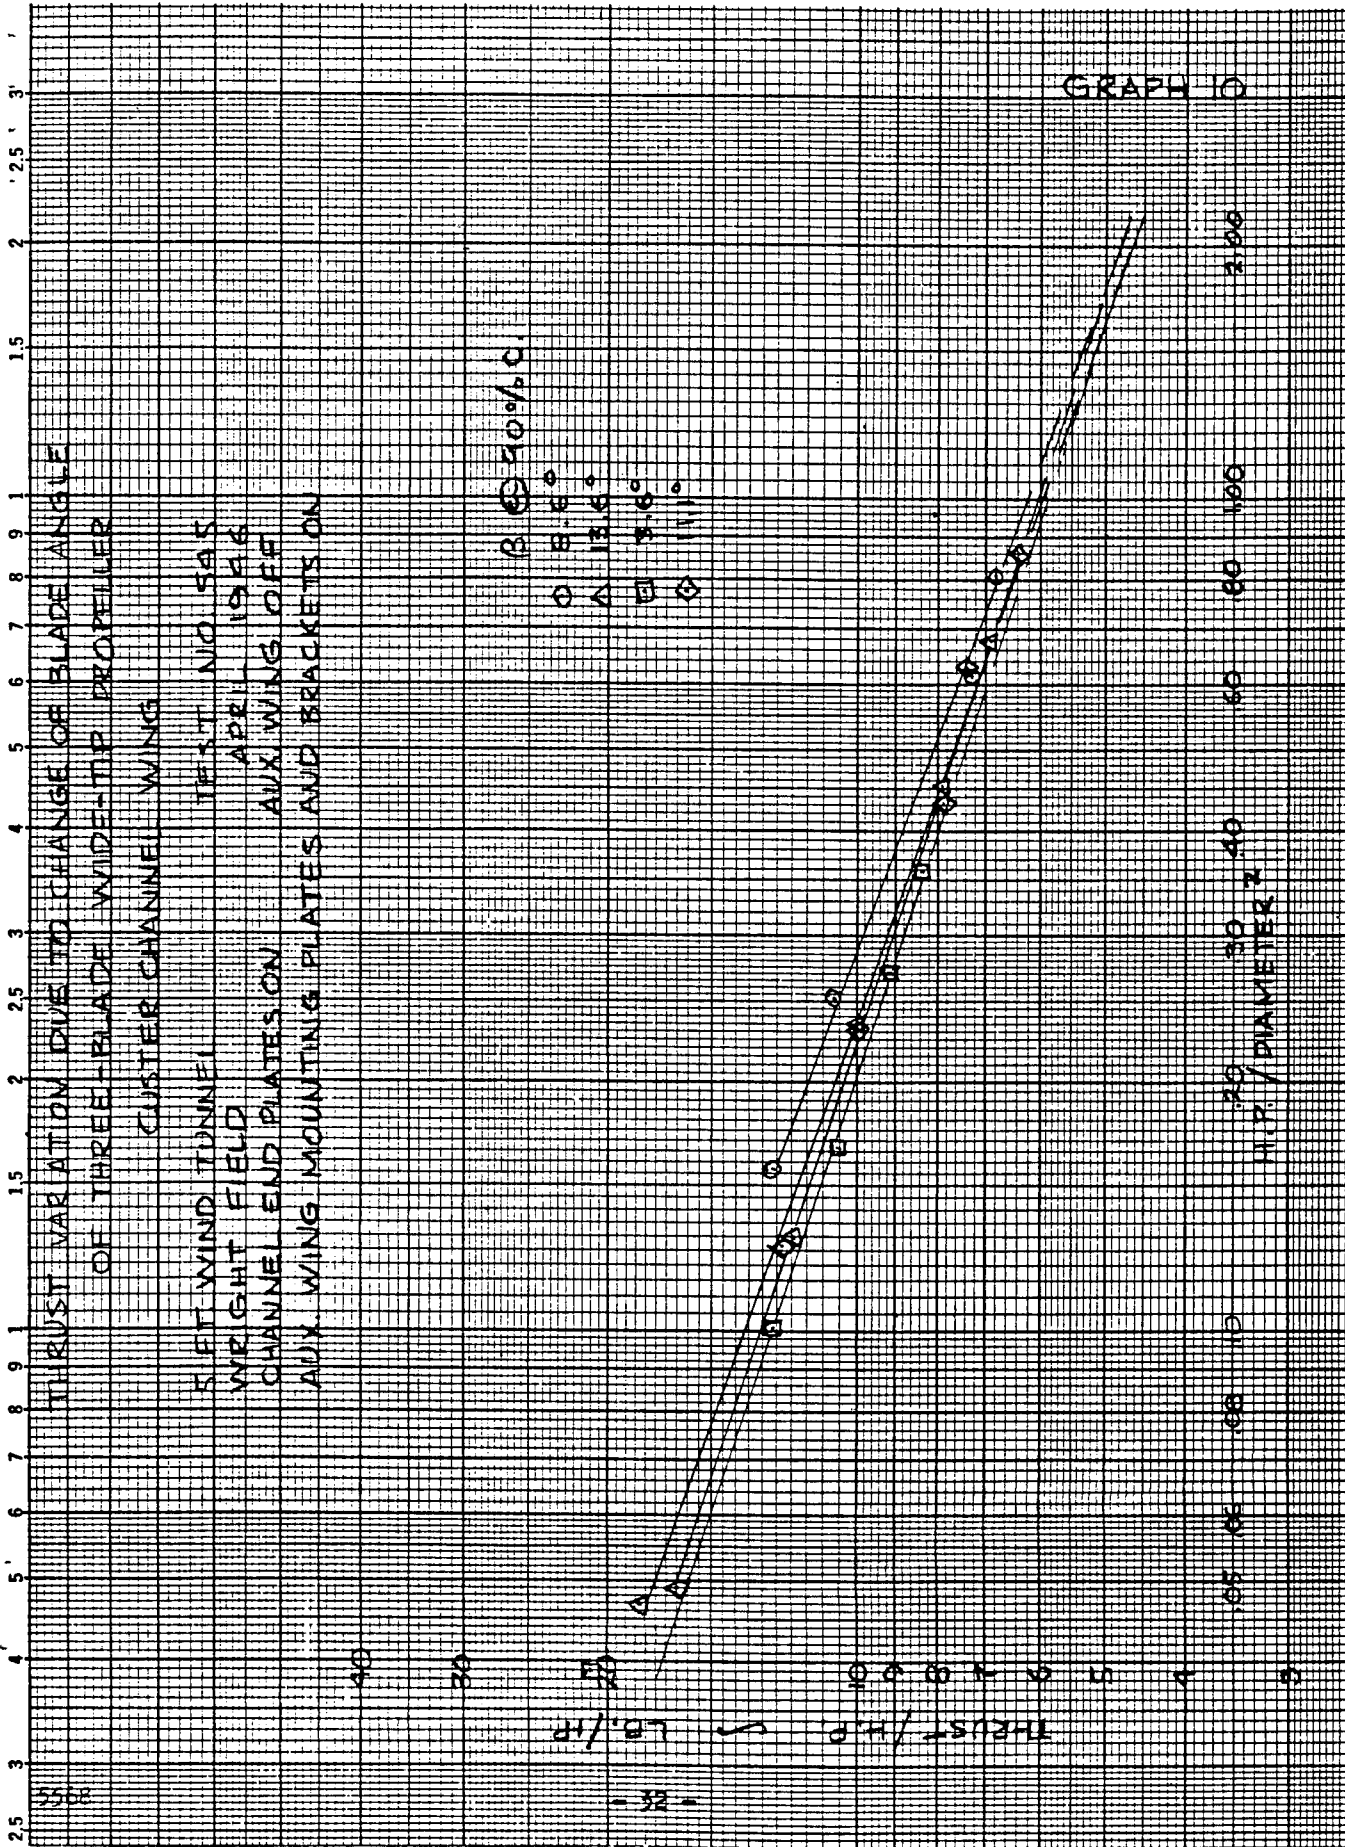

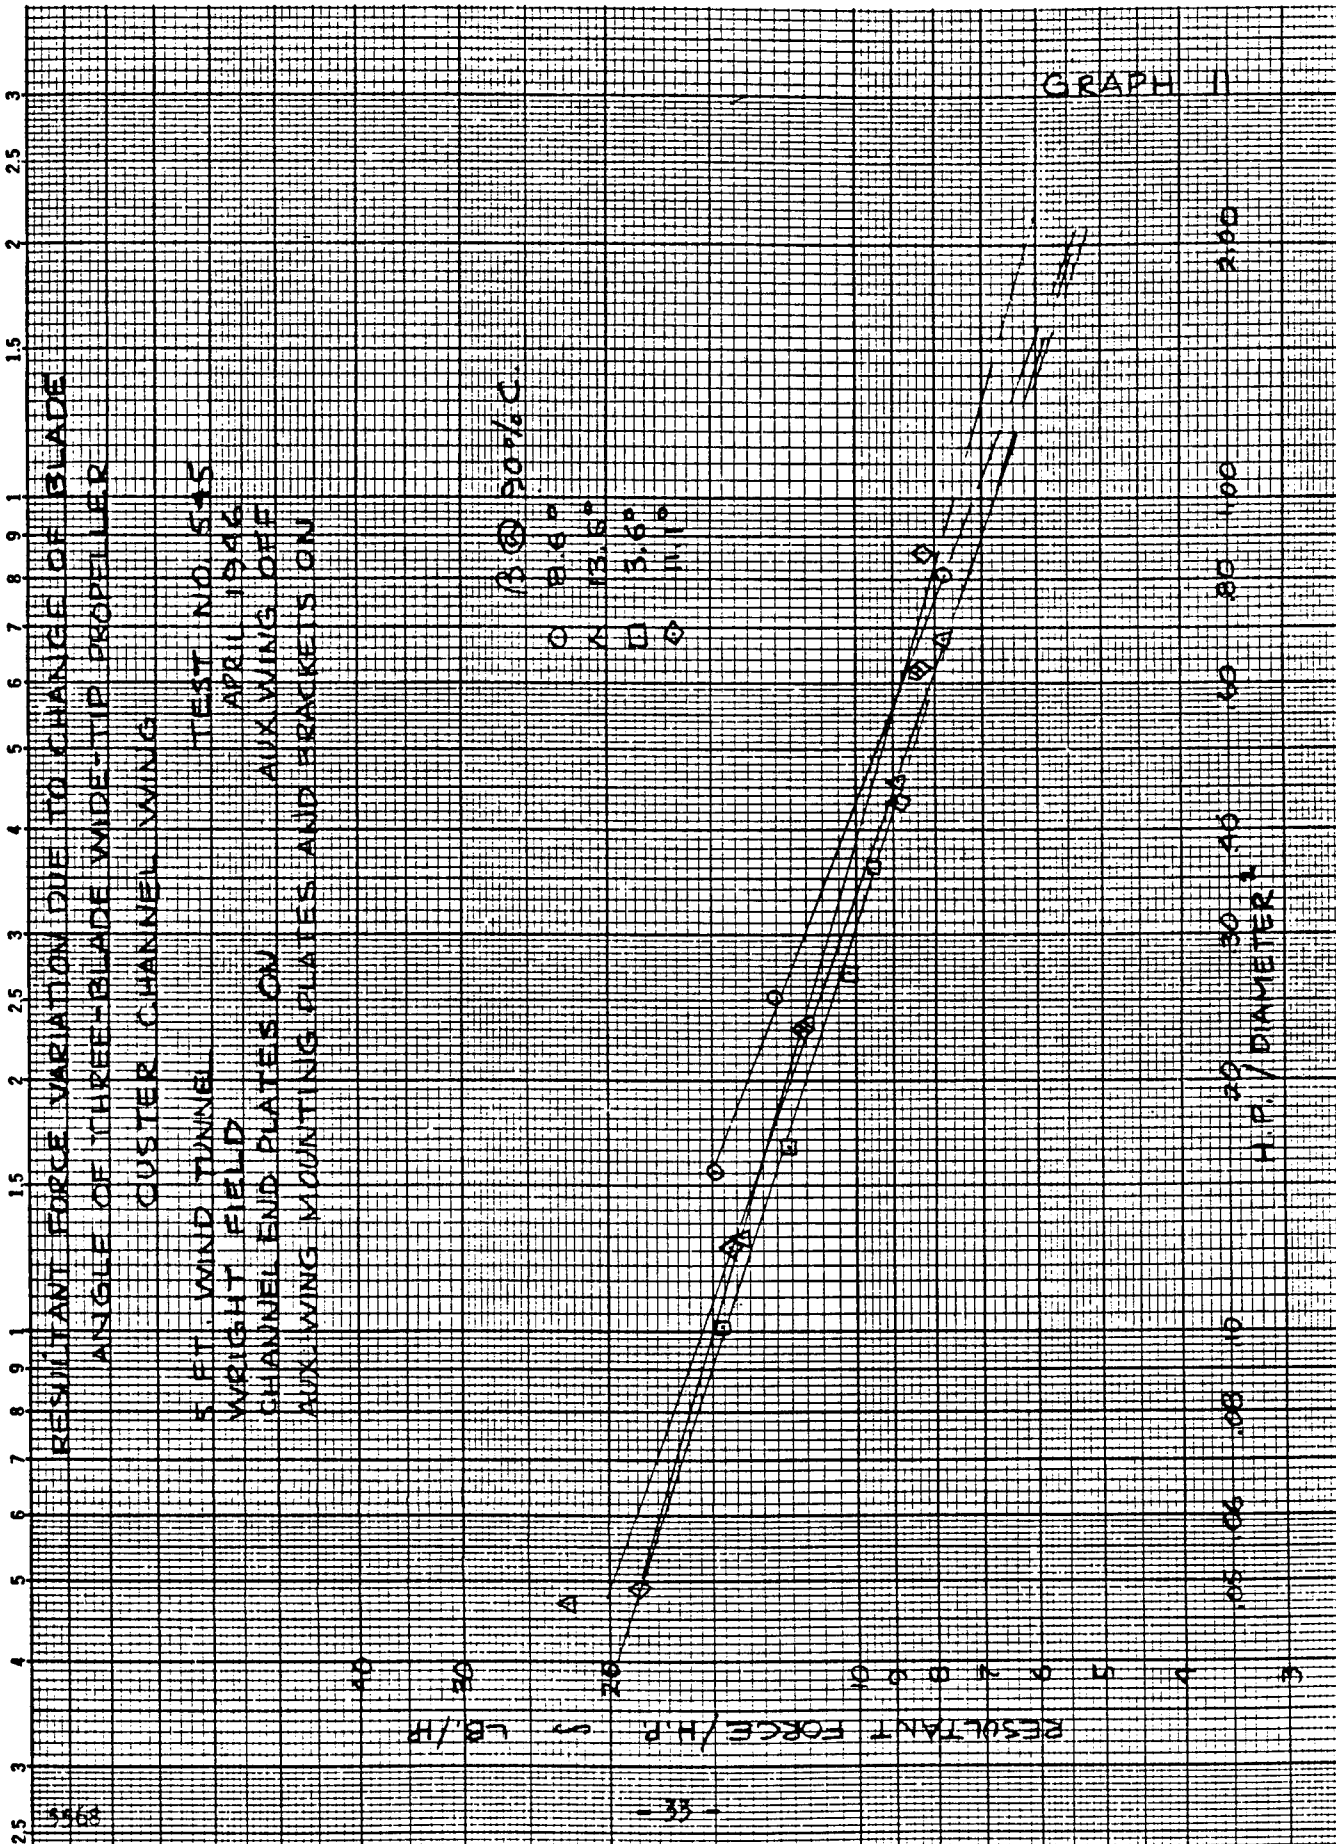

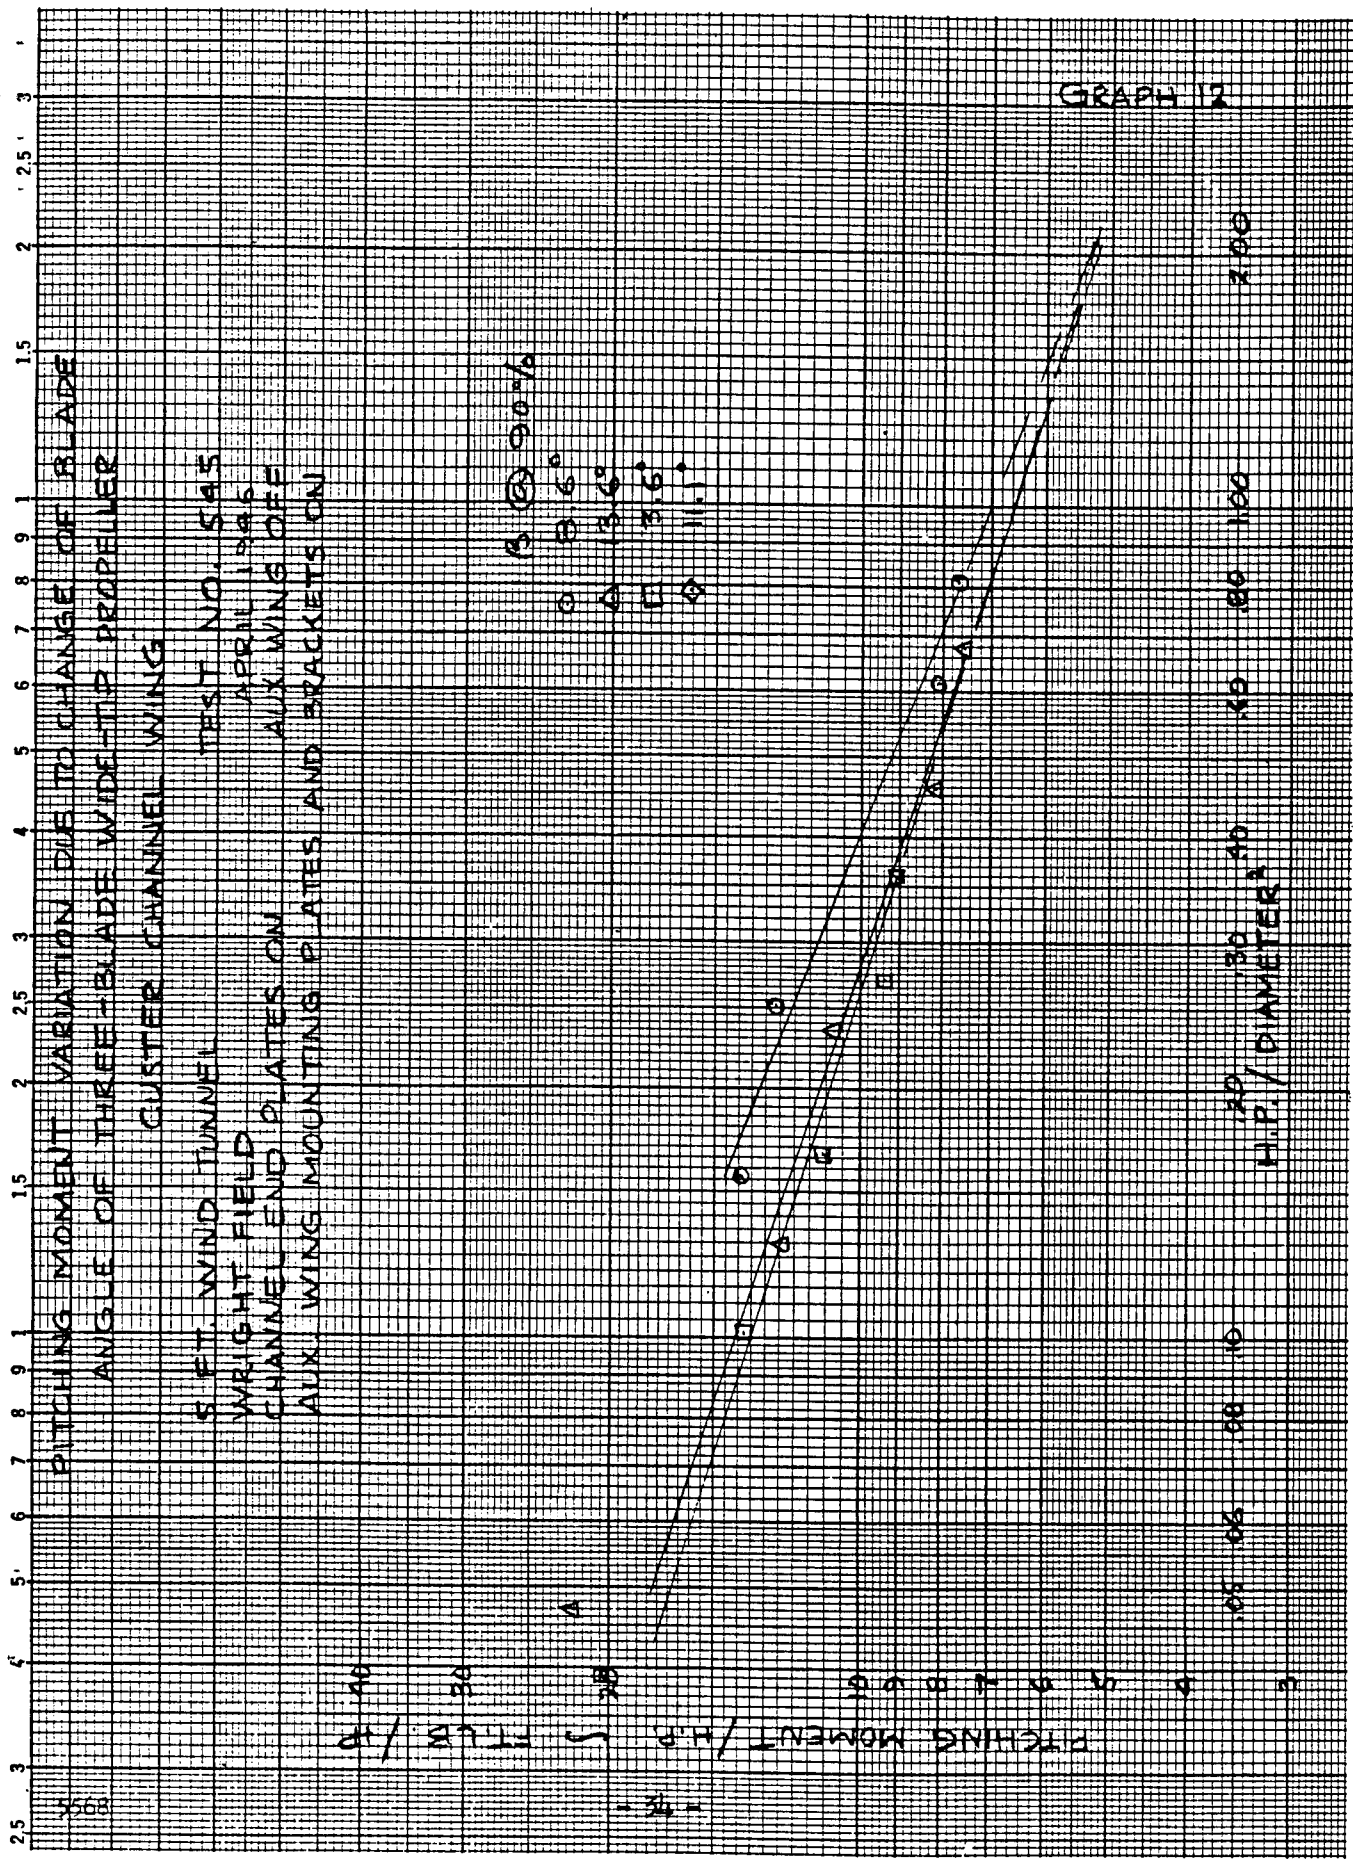

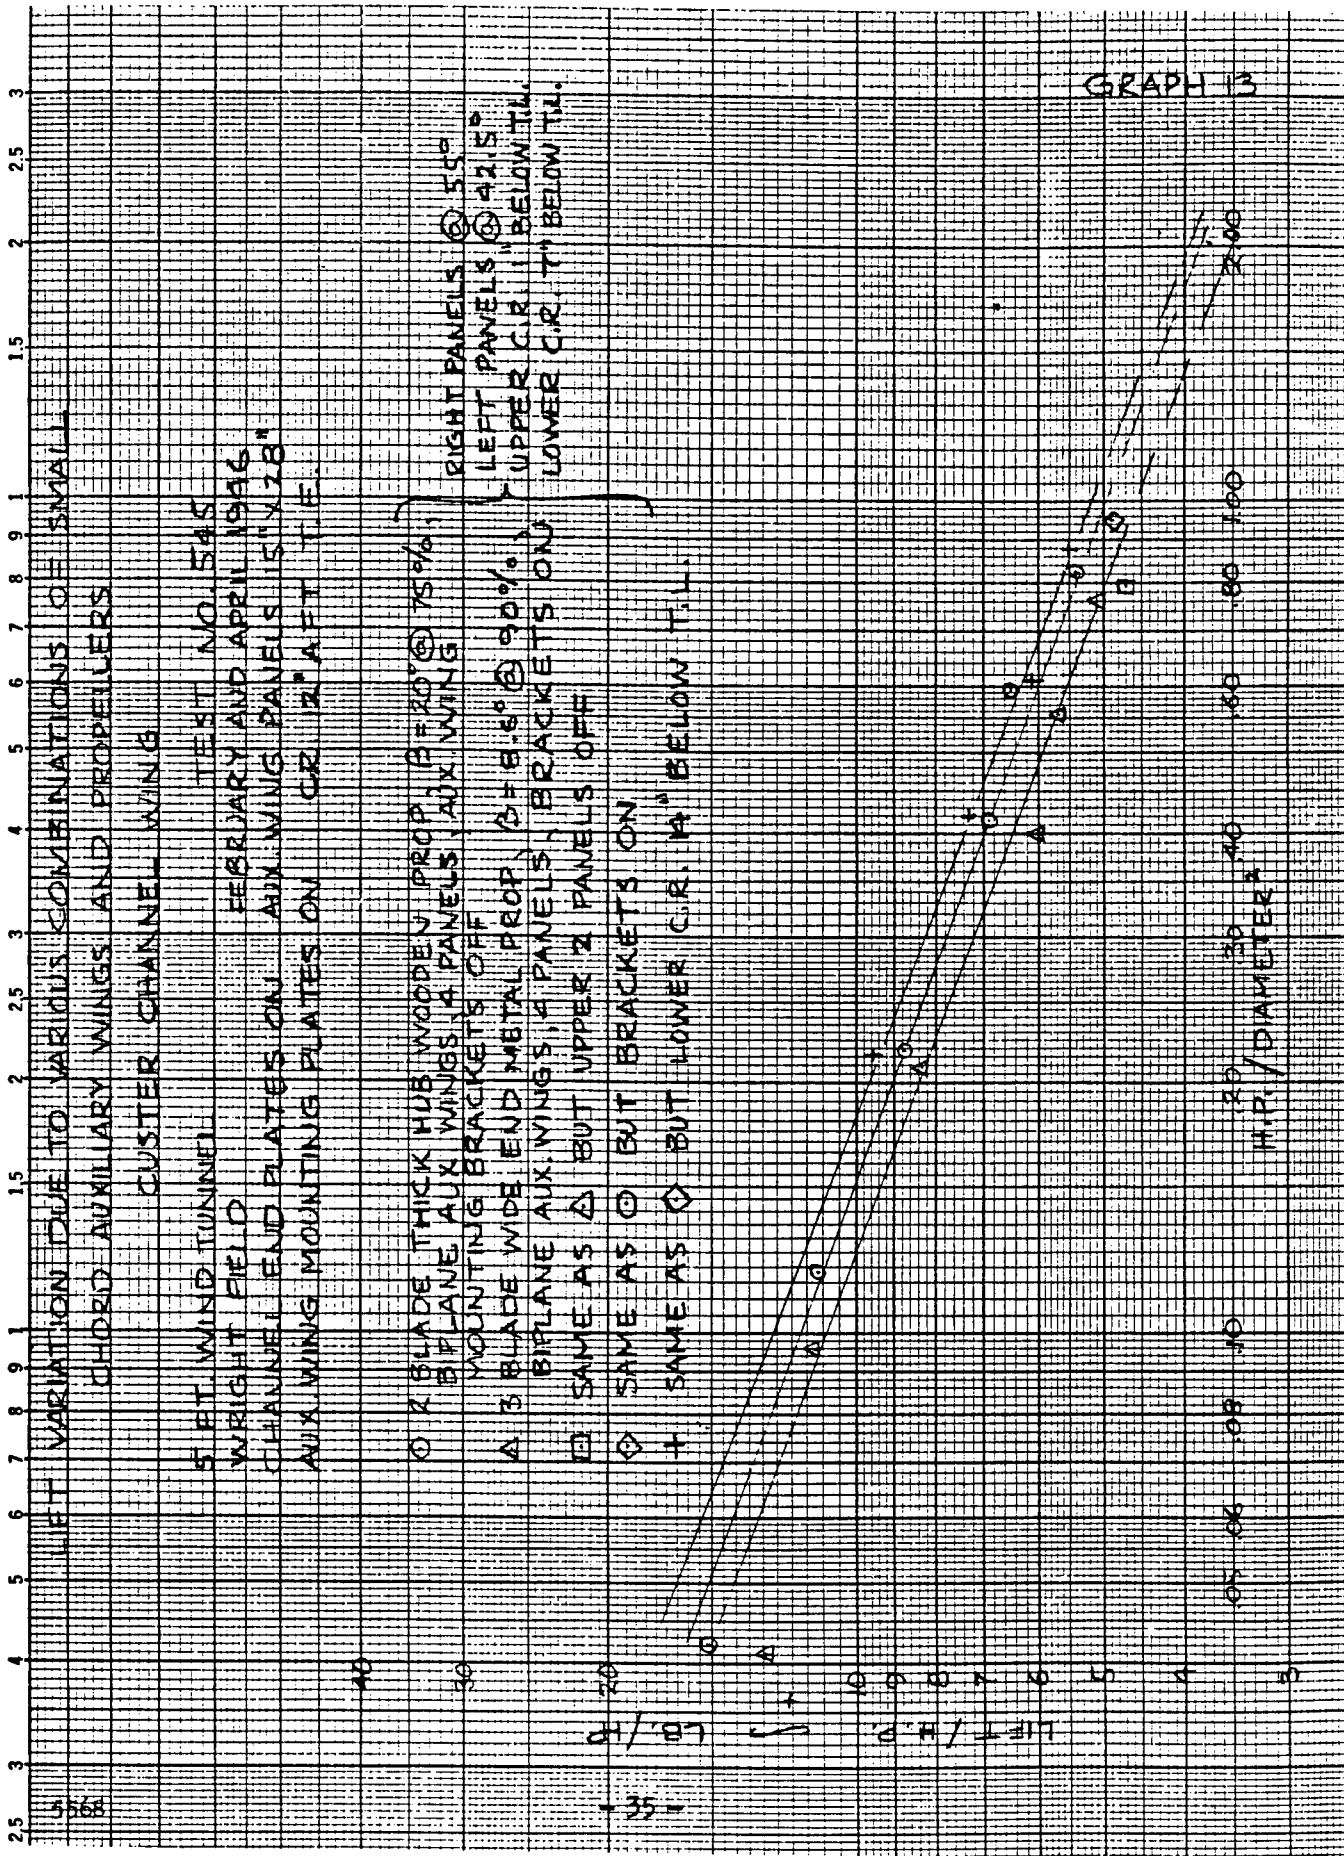

THRUST VARIATION DUE TO VARIOUS COMBINATIONS OF SMALL CHORD AUXILIARY WINGS AND PROPELLERS

CUSTER CHANNEL WING


SIFT WIND TUNNEL TEST NO 545
WRIGHT FIELD FEBRUARY AND APRIL 1946
CHANNEL END PLATES ON AUX WING PANELS 15" X 28"
AUX WING MOUNTING PLATES ON C.R. 2" AFT TLE

- 2 BLADE THICK HUB WOODEN PROP, $\beta = 20^\circ$ ○ 75%
BIPLANE AUX WINGS 4 PANELS, AUX WING
MOUNTING BRACKETS OFF
- △ 3 BLADE WIDE TIP METAL PROP, $\beta = 8.6^\circ$ ○ 90%
BIPLANE AUX WINGS 4 PANELS, BRACKETS ON
- SAME AS △ BUT UPPER 2 PANELS OFF
- SAME AS ○ BUT BRACKETS ON
- △ SAME AS ○ BUT LOWER C.R. 16" BELOW TL


RIGHT PANELS @ 55"
LEFT PANELS @ 42.5"

UPPER C.R. 1" BELOW TL
LOWER C.R. 7" BELOW TL

THRUST / HP

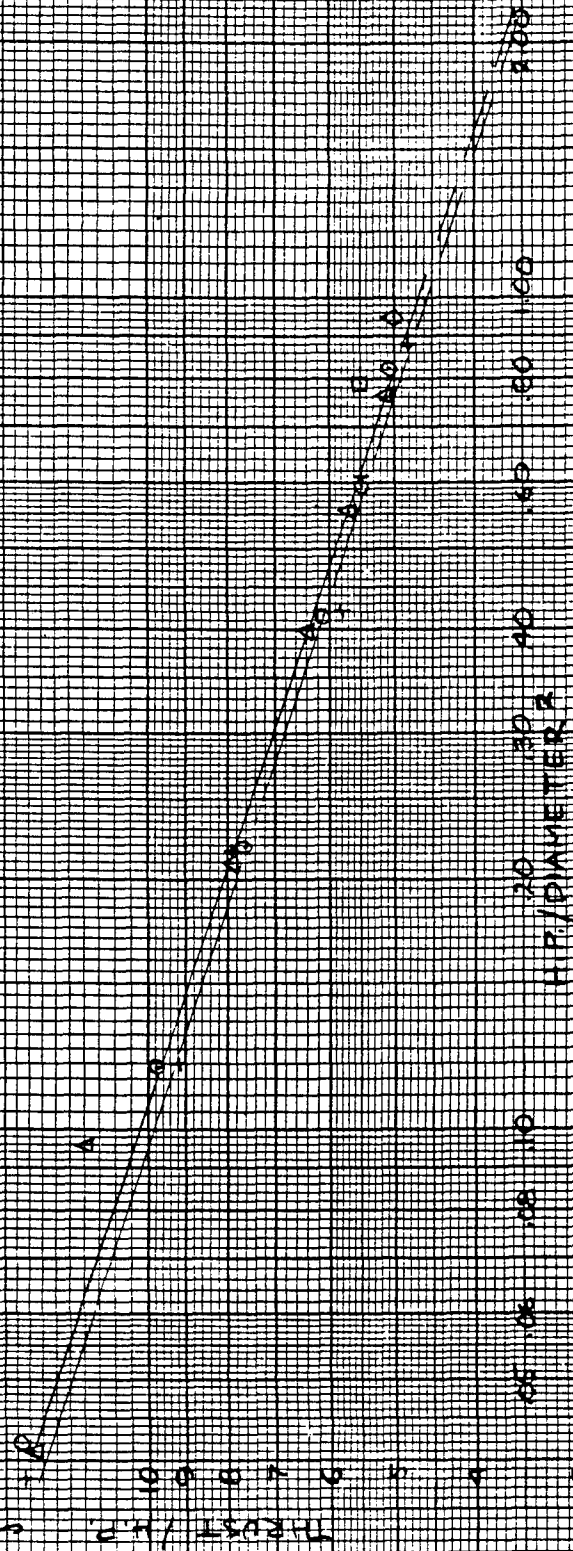

GRAPH K

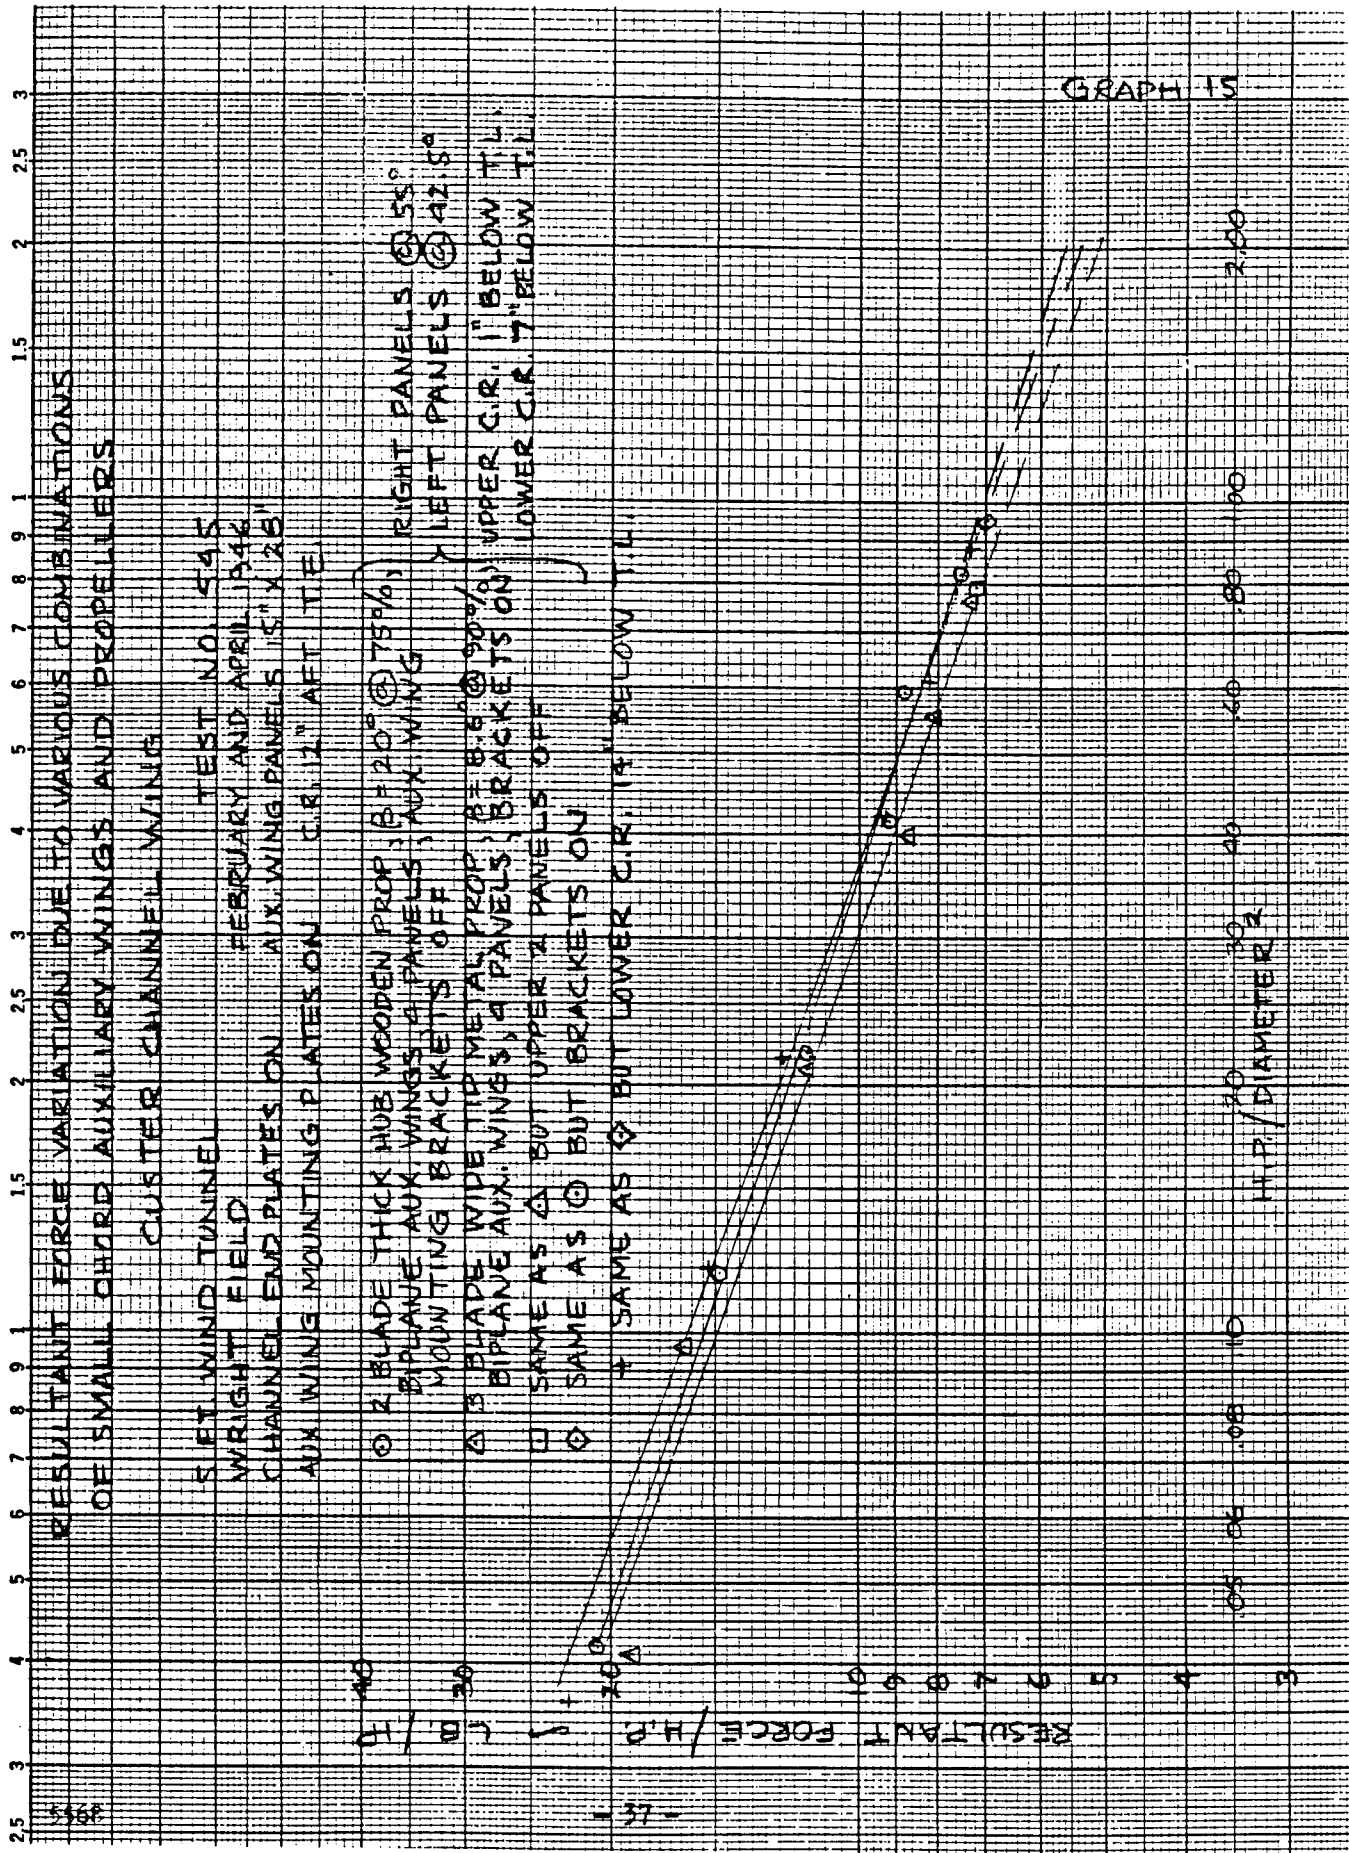

2.5 3 4 5 6 7 8 9 1 1.5 2 2.5 3

PITCHING MOMENT VARIATION DUE TO VARIOUS COMBINATIONS
OF SMALL CHORD AUXILIARY WINGS AND PROPELLERS

CLUSTER CHANNEL WING


SET WIND TUNNEL
WRIGHT FIELD
CHANNEL END PLATES ON
AUX WING MOUNTING PLATES ON CR 12" AFT TIE

TEST NO 595

FEBRUARY AND APRIL 1946

AUX WING PANELS 18" X 28"

CR 12" AFT TIE

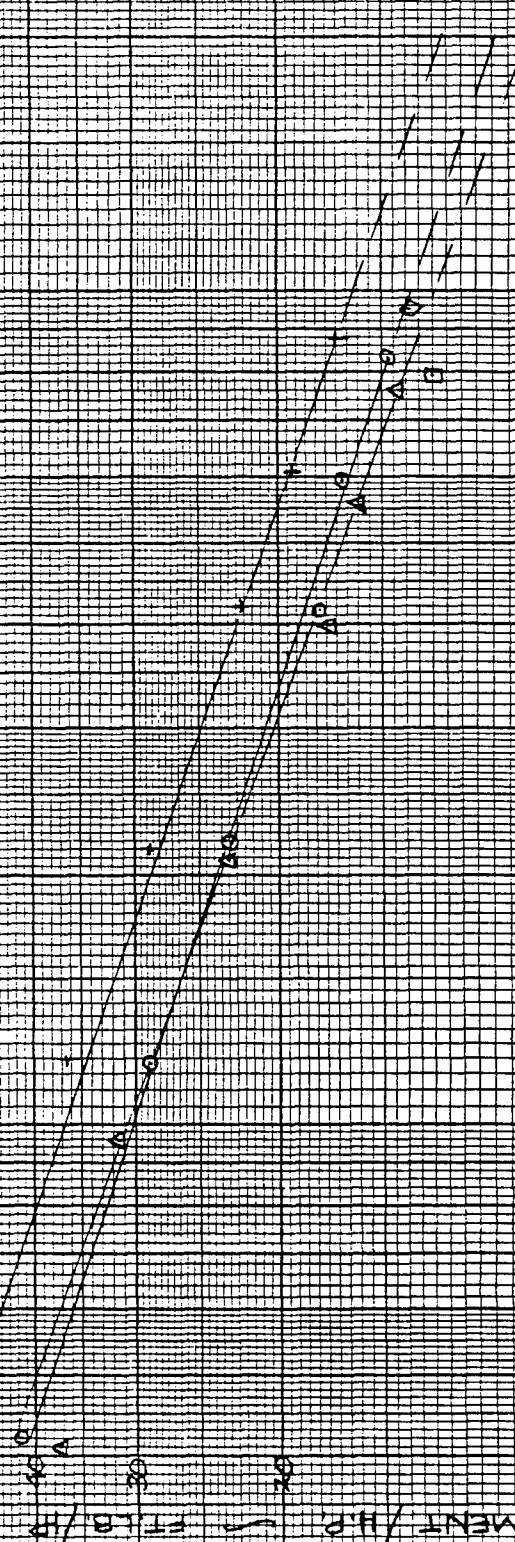

10 0 2 BLADE JACK HUB WOODEN PROP. $\beta = 10^\circ$ @ 75%

9 0 BIPLANE AUX. WINGS, 4 PANELS, AUX. WING

8 0 MOUNTING BRACKETS OFF

7 A 3 BLADE WIDE TIP METAL PROP., $\beta = 8.6^\circ$ @ 80%

6 BIPLANE AUX. WINGS, 4 PANELS, BRACKETS ON

5 B SAME AS 4 BUT UPPER 2 PANELS OFF

4 C SAME AS 4 BUT BRACKETS ON

3 D SAME AS 4 BUT LOWER CR 12" BELOW TL

RIGHT PANELS @ 55°
LEFT PANELS @ 42.5°
UPPER CR 12" BELOW TL
LOWER CR 12" BELOW TL

H.P. / DIAMETER²

GRAPH K

5568

- 38 -

| | | | | | | | | | | | | | | | | | | | | | | | |
|----|---|---|---|---|---|---|---|---|----|---|----|---|---|---|---|---|---|---|---|----|---|----|---|
| 25 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 15 | 2 | 25 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 15 | 2 | 25 | 3 |
|----|---|---|---|---|---|---|---|---|----|---|----|---|---|---|---|---|---|---|---|----|---|----|---|

SLIP-STREAM VARIATIONS DUE TO SHORT CHANNEL AND PROPELLER CHANGES

U
Z
3
L
H
2
2
4
T
C
M
B
I
S
C

THE VINDICATED TURK

b6
b7C
b7D
Q
A
W

WRIGHT FIELD

ALL DAY LONG

WING MOUNTING PLAYS & BRACKETS OFF

STORIE CHANNEL 1725 010010

6-2 BLADE THICK HUB WOODEN PROP 3-20" @ 75%
CLINING LINE 3" WIDER SEE

CHANNEL END PLATES OFF

2013年12月

4-06 ③ 3.8 11 2 1

1.
 2.
 3.
 4.
 5.
 6.
 7.
 8.
 9.
 10.
 11.
 12.
 13.
 14.
 15.
 16.
 17.
 18.
 19.
 20.
 21.
 22.
 23.
 24.
 25.
 26.
 27.
 28.
 29.
 30.
 31.
 32.
 33.
 34.
 35.
 36.
 37.
 38.
 39.
 40.
 41.
 42.
 43.
 44.
 45.
 46.
 47.
 48.
 49.
 50.
 51.
 52.
 53.
 54.
 55.
 56.
 57.
 58.
 59.
 60.
 61.
 62.
 63.
 64.
 65.
 66.
 67.
 68.
 69.
 70.
 71.
 72.
 73.
 74.
 75.
 76.
 77.
 78.
 79.
 80.
 81.
 82.
 83.
 84.
 85.
 86.
 87.
 88.
 89.
 90.
 91.
 92.
 93.
 94.
 95.
 96.
 97.
 98.
 99.
 100.

[illegible][illegible]

二
 三
 四
 五
 六
 七
 八
 九
 十
 十一
 十二
 十三
 十四
 十五
 十六
 十七
 十八
 十九
 二十
 二十一
 二十二
 二十三
 二十四
 二十五
 二十六
 二十七
 二十八
 二十九
 三十
 三十一
 三十二
 三十三
 三十四
 三十五
 三十六
 三十七
 三十八
 三十九
 四十
 四十一
 四十二
 四十三
 四十四
 四十五
 四十六
 四十七
 四十八
 四十九
 五十
 五十一
 五十二
 五十三
 五十四
 五十五
 五十六
 五十七
 五十八
 五十九
 六十
 六十一
 六十二
 六十三
 六十四
 六十五
 六十六
 六十七
 六十八
 六十九
 七十
 七十一
 七十二
 七十三
 七十四
 七十五
 七十六
 七十七
 七十八
 七十九
 八十
 八十一
 八十二
 八十三
 八十四
 八十五
 八十六
 八十七
 八十八
 八十九
 九十
 九十一
 九十二
 九十三
 九十四
 九十五
 九十六
 九十七
 九十八
 九十九
 一百

[illegible]

4
3
2
1
0
+
x
x
x
x
x
x

* * * 30% *
DISC OFF, 1/4" TIP CLEARANCE)
MAKING OFF, 1/4" TIP CLEARANCE)


BLADE WDG TIP
METAL PROP,
CHANNEL END
PLATES ON

LIFT / a.p.

30 30 2
T.P. / DIAMETER

Q
Q
DC

GRAPH 17

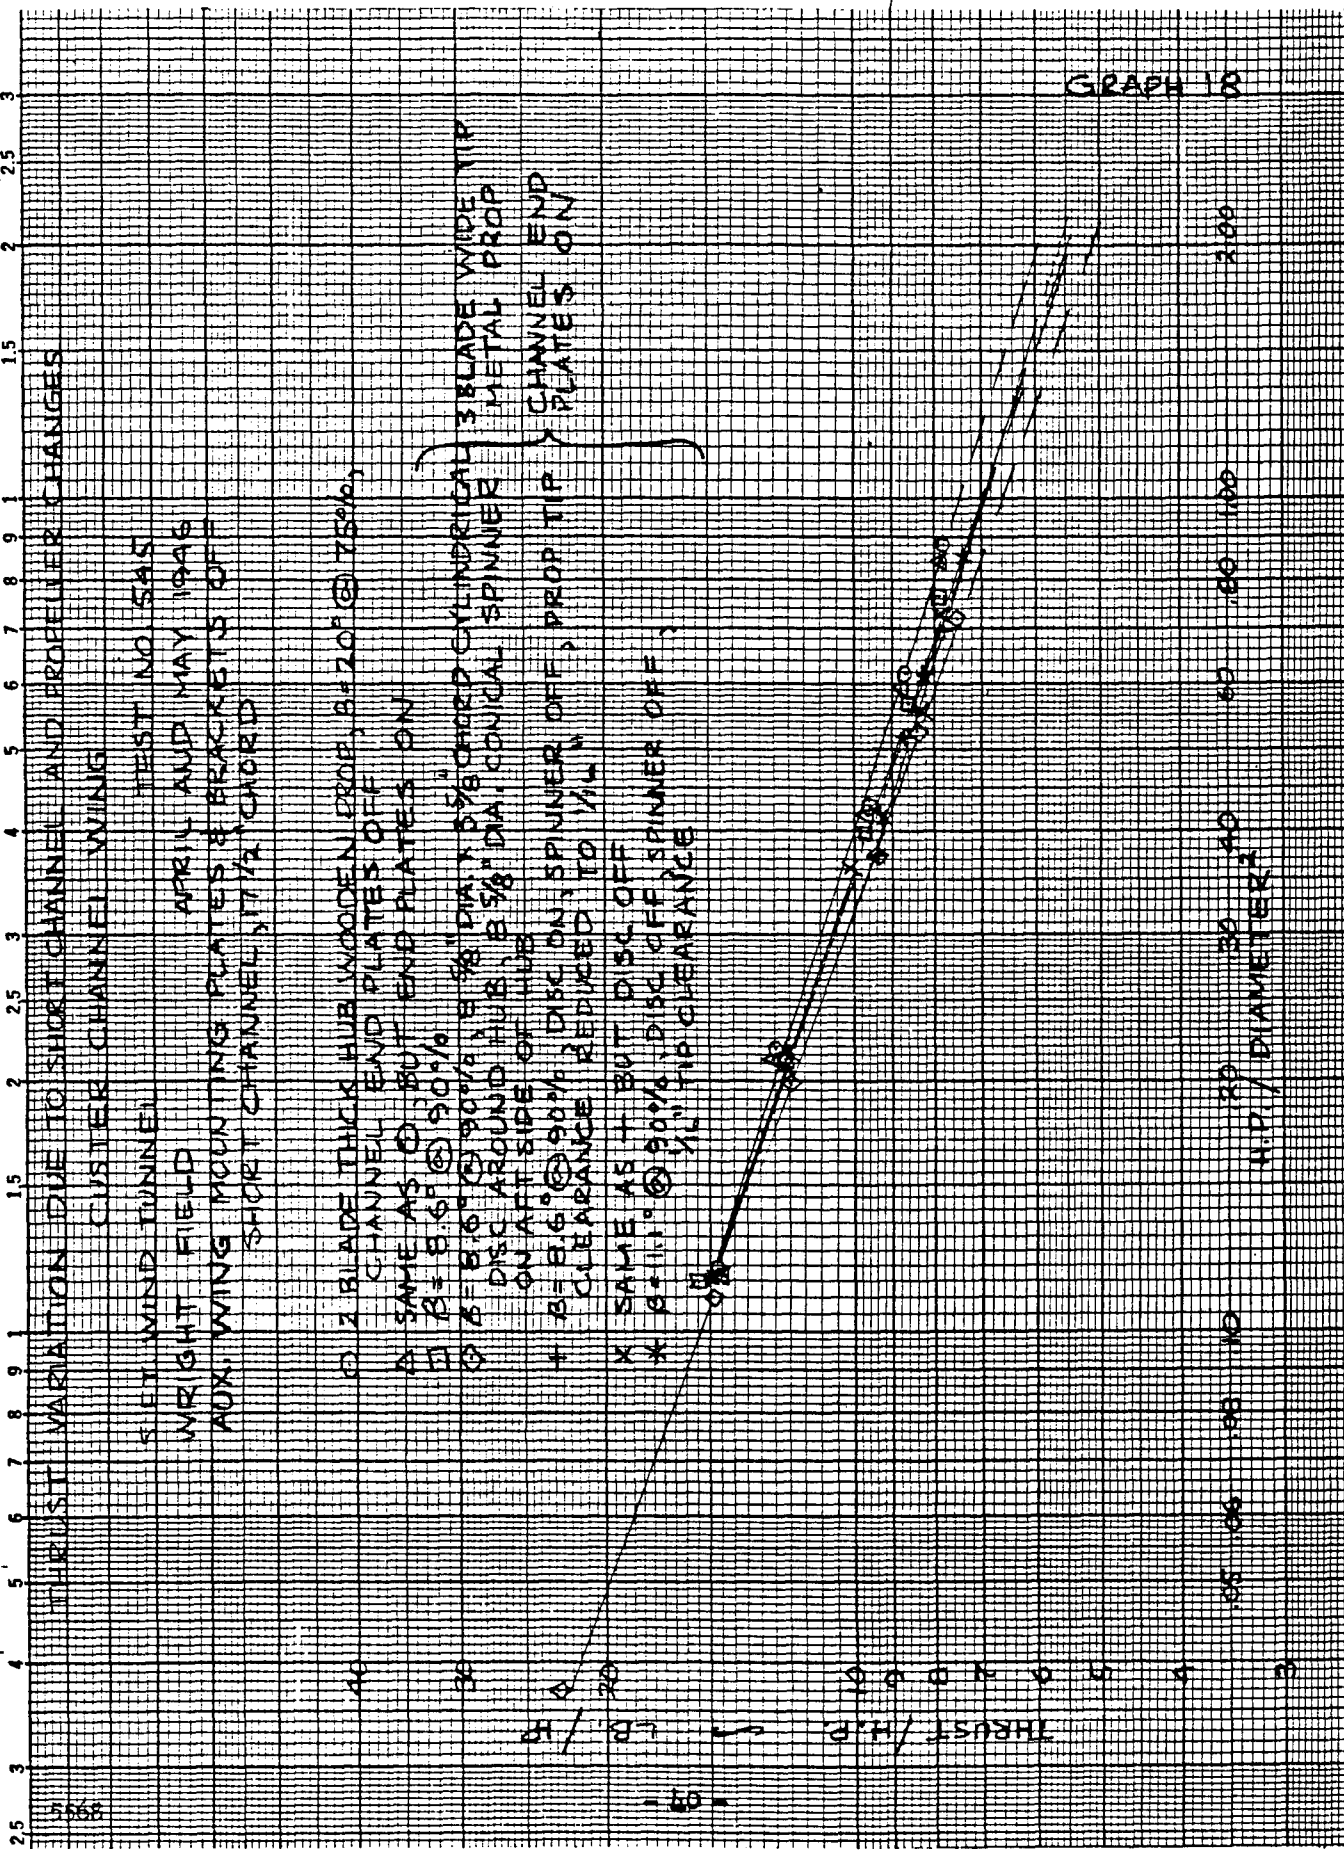

THRUST VARIATION DUE TO SHORT CHANNEL AND PROPELLER CHANGES
CLUSTER CHANNEL WING

LEFT WIND TUNNEL TEST NO. 545
WRIGHT FIELD APRIL AND MAY 1946
AUX. WING MOUNTING PLATES & BRACKETS OFF
SHORT CHANNEL, 17 1/2" CAGED

- 2 BLADE THICK HUB WOODEN PROP. B=20" @ 75%
CHANNEL END PLATES OFF
- △ SAME AS ○ BUT END PLATES ON
- B=8.6" @ 50%
- B=8.6" @ 90% 3/8" DIA. CYLINDRICAL 3 BLADE WIDE TIP
DISC AROUND HUB, 3 5/8" DIA. CONICAL SPINNER
ON ART. SIDE OF HUB
- + B=8.6" @ 90% DISC ON, SPINNER OFF, PROP TIP
CLEARANCE REDUCED TO 1/16" CHANNEL END
PLATES ON
- X SAME AS + BUT DISC OFF
- * B=11" @ 90% DISC OFF SPINNER OFF,
1/16" TIP CLEARANCE

2.5 3 4 5 6 7 8 9 1 2 2.5 3 1.5 2 2.5 3

RESULTANT FORCE VARIATION DUE TO SHORT CHANNEL AND PROPELLER CHANGES

CUSTER CHANNEL WING

4 FT WIND TUNNEL TEST NO. 545

WRIGHT FIELD

APRIL AND MAY 1946

AUX WING MOUNTING PLATES & BRACKETS OFF

SHORT CHANNEL, 17 1/2" CHORD

1 Z BLADE THICK HUB WOODEN PROP, $\beta = 20^\circ$ @ 750 RPM

CHANNEL END PLATES OFF

2 SAME AS 1, BUT END PLATES ON

3 $\beta = 8.6^\circ$ @ 90%
DISC AROUND HUB, 8 5/8" DIA. X 3 5/8" CHORD CYLINDRICAL

4 $\beta = 8.6^\circ$ @ 90%
ON AFT SIDE OF AVE

5 $\beta = 8.6^\circ$ @ 90%
DISC ON SPINNER OFF, PROP TIP

6 SAME AS 5 BUT DISC OFF


7 $\beta = 11.1^\circ$ @ 90%
DISC OFF, SPINNER OFF,

1/16" TIP CLEARANCE

3 BLADE WIDE TIP
METAL PROP,
CHANNEL END
PLATES ON

LB./HP

RESULTANT FORCE / H.P.

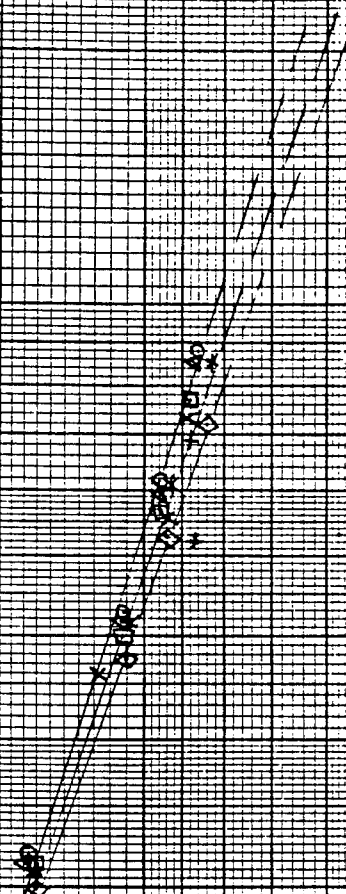

GRAPH 19

85 90 95 100

100 150 200

200

H.P. / DIAMETER²

S 8 FT WIND TUNNEL TEST NO. 945
WRIGHT FIELD APRIL AND MAY 1946
AUX. WING MOUNTING PLATES & BRACKETS OFF
SHORT CHANNEL 17 1/2 CHORD

② 2 BLADE THICK HUB WOODEN PROP, $B = 10^{\circ}$ ③ 15% 3 CHANNELLED SLATS OFF

20
W
H
F
A
L
D
Z
E
T
S
M
O
W
S
U
S
V
C

$$P = 8.6 \times 10^{-9} \%$$


♦ B=66" @ 90° 1/8" DIA x 3 5/8" OVER CYLINDER CAT
DISC AROUND HUB, 3 5/8" DIA CONICAL SPINNER
ON AFT SIDE OF HUB

0
 1
 2
 3
 4
 5
 6
 7
 8
 9
 10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 5

北の山に上る


* $\beta = 11.1^\circ @ 90\%$, DISC OFF, SPINNER OFF;
1/8" TIP CLEARANCE

3 BLADE WIDE TIP
METAL PROP,
CHANNEL END
PLATES ON

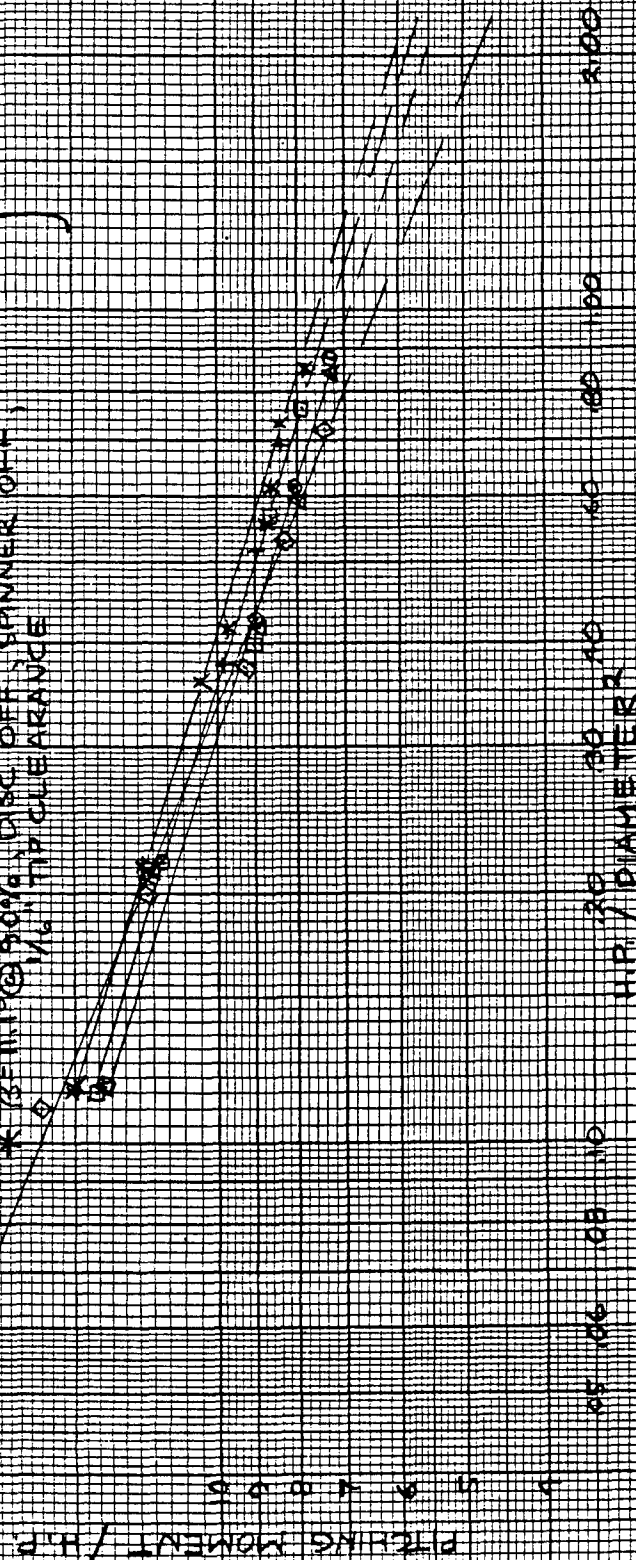

GRAPH 20

GRAPH 2

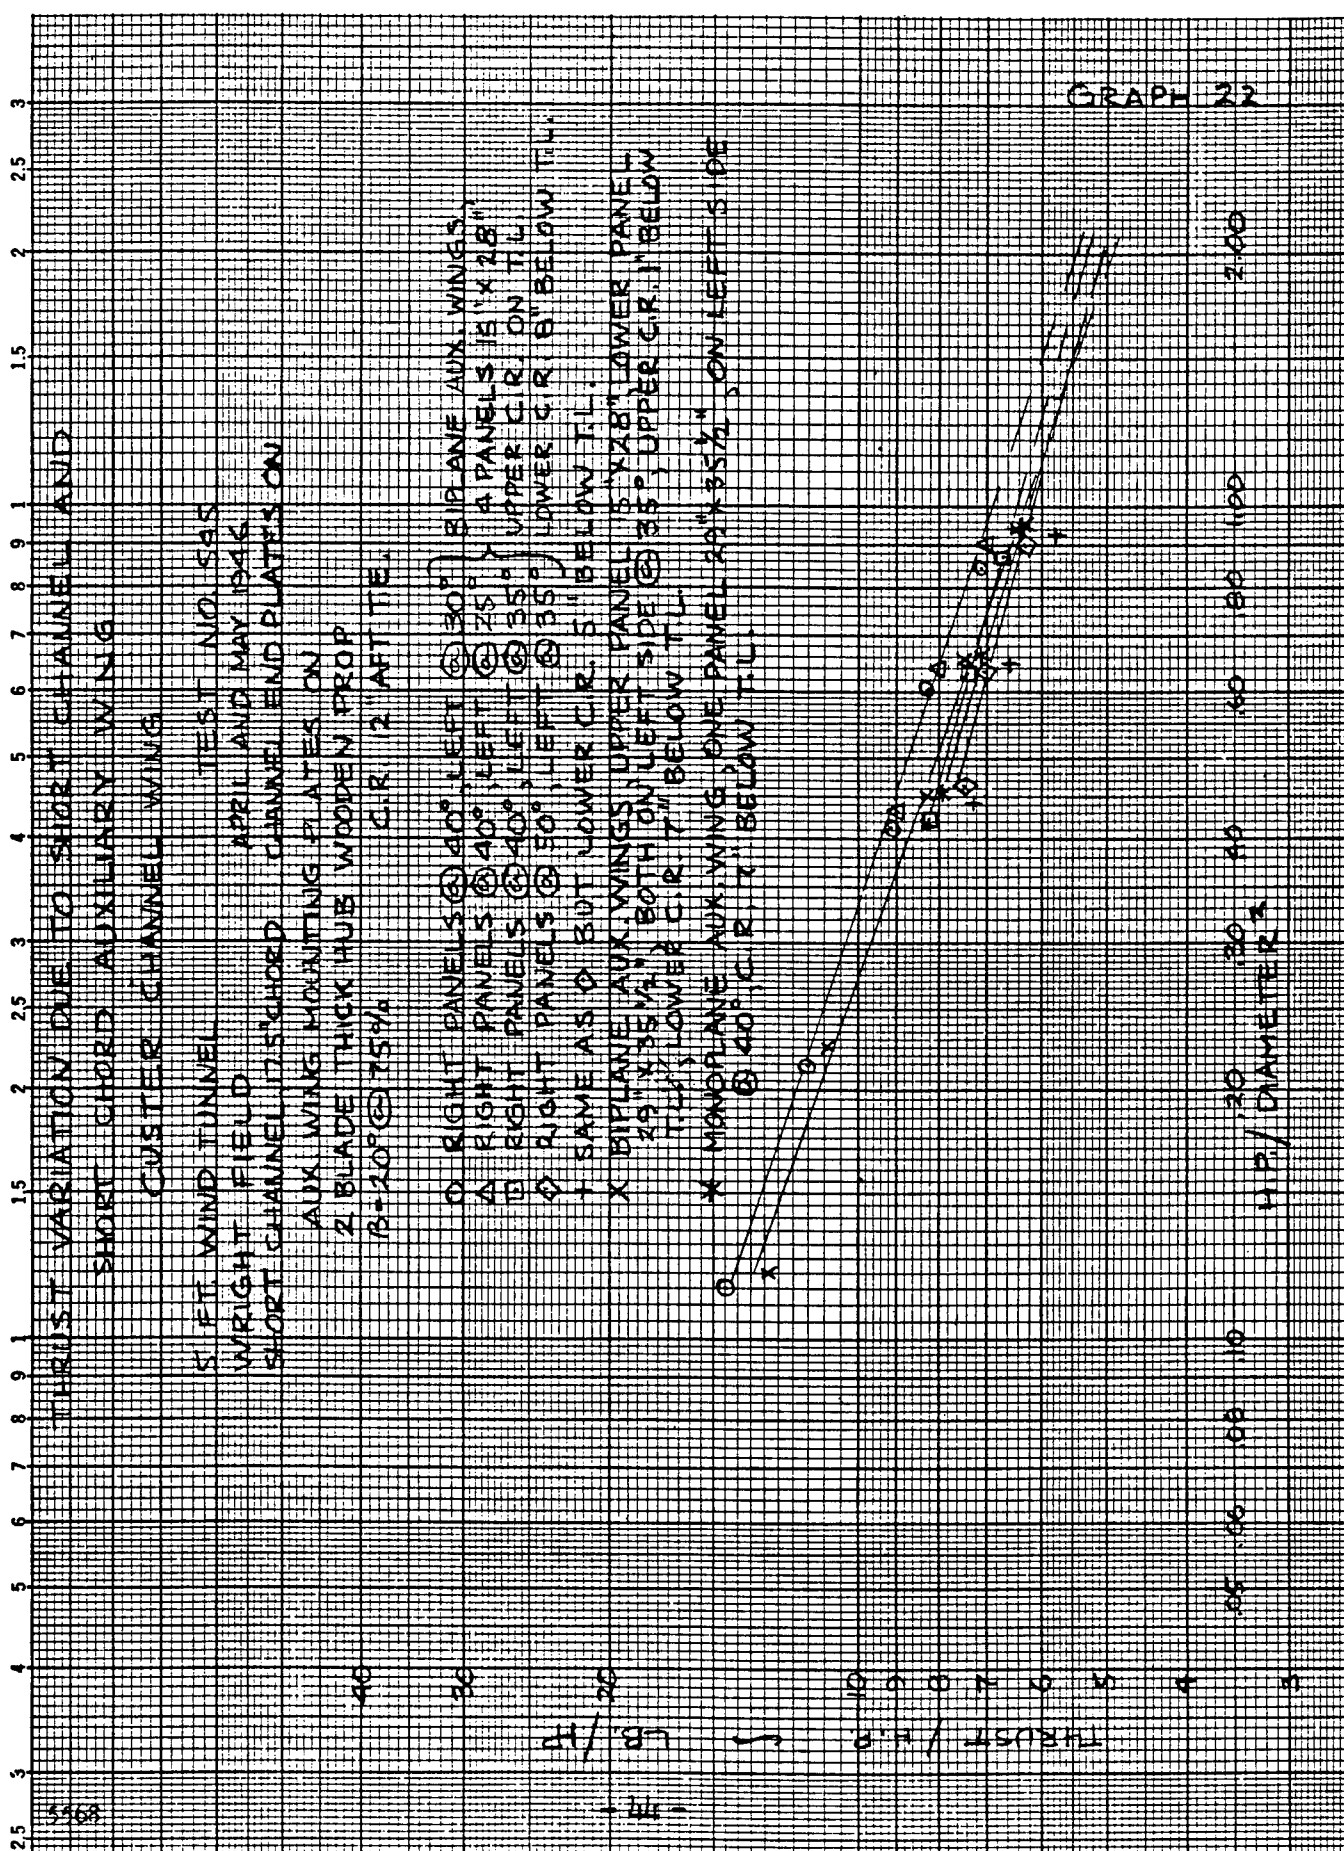

25 3 4 5 6 7 8 9 1 1.5 2 2.5 3

RESULTANT FORCE VARIATION DUE TO SHORT CHANNEL
AND SHORT CHORD AUXILIARY WING

CUSTER CHANNEL WINGS


5 FT WIND TUNNEL
WRIGHT FIELD
SHORT CHANNEL 175' CHORD
AUX. WING MOUNTING PLATES ON
2 BLADE THICK HUB WOODEN PROP
B = 20" @ 75%
C.R. 12" AFT TE

TEST NO. 548
APRIL AND MAY 1946

○ RIGHT PANELS @ 40°, LEFT @ 30° BIPLANE AUX. WINGS,
4 PANELS 15" X 28"
△ RIGHT PANELS @ 40°, LEFT @ 25° }
□ RIGHT PANELS @ 40°, LEFT @ 35° } UPPER C.R. 0.0 T.L.
◇ RIGHT PANELS @ 50°, LEFT @ 35° } LOWER C.R. 8" BELOW T.L.
I SAME AS ◇ BUT LOWER C.R. 5" BELOW T.L.

40
30
20
10
0
-10
-20
-30
-40
-50

RESULTANT FORCE / H.P.

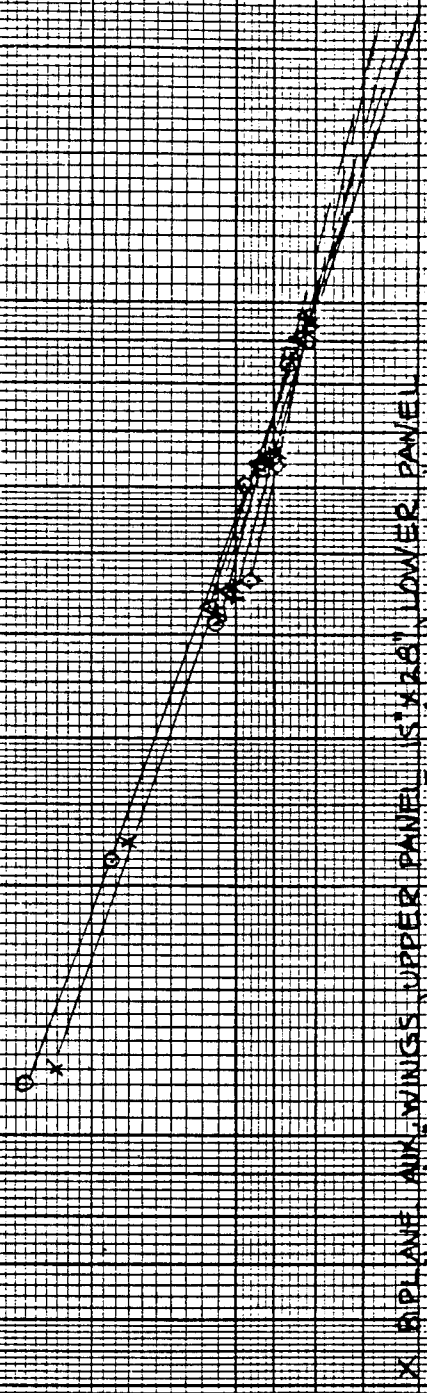

X BIPLANE AUX. WINGS UPPER PANEL 15" X 28" LOWER PANEL
29" X 35 1/2" BOTH ON LEFT SIDE @ 35°, UPPER C.R. 1" BELOW T.L.,
LOWER C.R. 7" BELOW T.L.

* MONOPLANE AUX. WING ONE PANEL 29" X 35 1/2" ON LEFT SIDE @ 40°,
C.R. 7" BELOW T.L.

H.P. / DIAMETER

GRAPH 23


25 3 4 5 6 7 8 9 1 2 2.5 3

PITCHING MOMENT VARIATION DUE TO SHORT CHANNEL
AND SHORT CHORD AUXILIARY WING
CUTTER CHANNEL WING

5 FT WIND TUNNEL
WRIGHT FIELD
SHORT CHANNEL ITS CHORD CHANNEL END PLATES ON
AUX WING MOUNTING PLATES ON
2 BLADE THICK WOODEN PROP
R=20° @ 75% CR 12" AFF TE

PITCHING MOMENT / W.B. / H

40 30 20 10 0

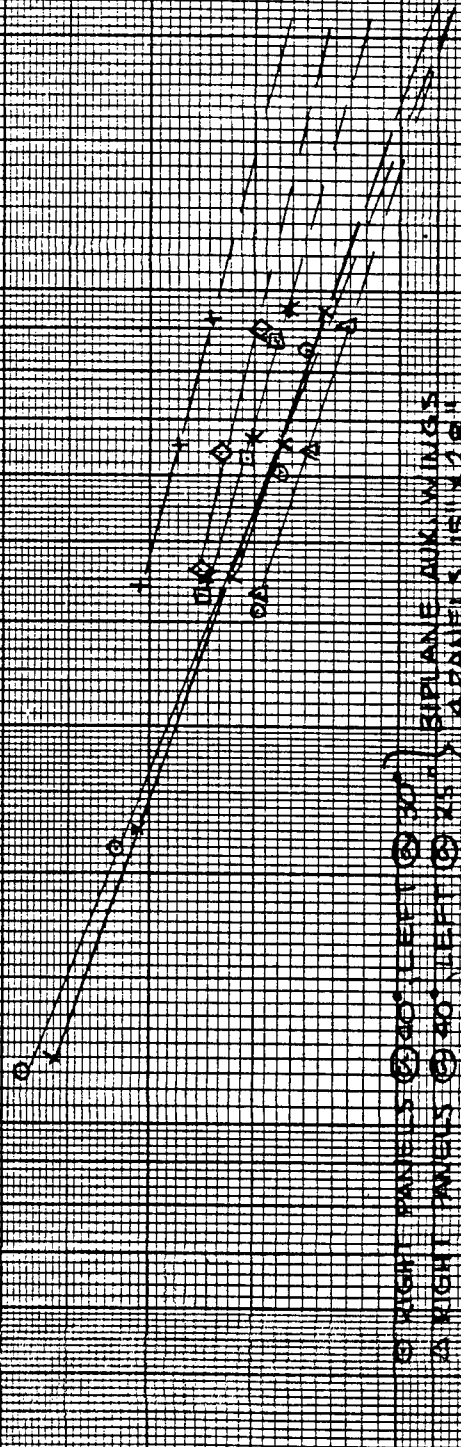

GRAPH 24

RIGHT PANELS @ 30° LEFT @ 30° BIPLANE AUX WINGS
RIGHT PANELS @ 40° LEFT @ 40° BIPLANE AUX WINGS
RIGHT PANELS @ 45° LEFT @ 45° BIPLANE AUX WINGS
RIGHT PANELS @ 50° LEFT @ 50° BIPLANE AUX WINGS
SAME AS 50° BUT LOWER C.R. 5" BELOW T.L.
BIPLANE AUX WINGS UPPER PANEL 15" X 28" LOWER
PANEL 25" X 35" BOTH ON LEFT SIDE @ 35° UPPER CR
5" BELOW T.L. LOWER C.R. 7" BELOW T.L.
MONOPLANE AUX WING ONE PANEL 20" X 35" ON LEFT
SIDE @ 40° C.R. 7" BELOW T.L.

0.5 0.6 0.8 1.0 1.5 2.0 2.5 3.0
H.P. / DIAMETER 2

PRESSURE DISTRIBUTION OVER CENTER CHANNEL WINGS
 2-FT. TWIN TUNNEL
 TEST NO. 545
 MAY, 1946


0 CONDITION 25 --- LONG CHANNEL, 43" CHORD, 2-BLADE WOOD PROP, $\beta = 20^\circ$, 75%

HP/DIA² = 865, RPM = 2497

4 A CONDITION 53 --- SHORT CHANNEL, 175" CHORD, 2-BLADE WOOD PROP, $\beta = 20^\circ$, 75%

HP/DIA² = 480, RPM = 2391

PRESSURE --- INCHES OF WATER

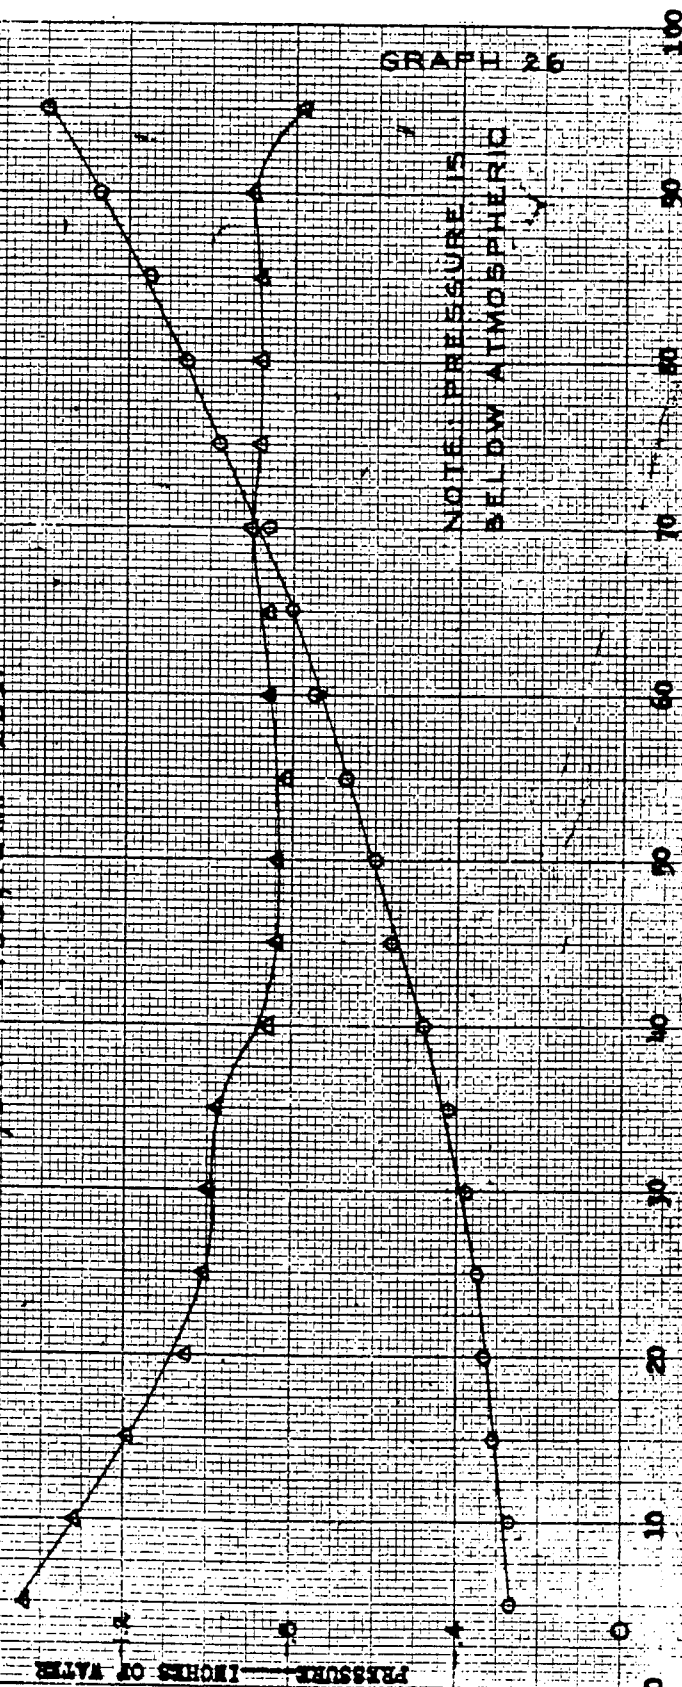


GRAPH 26

NOTE: PRESSURE IS
 BELOW ATMOSPHERIC

FIVE STATION --- FIVE CHORD

DATUM LINE

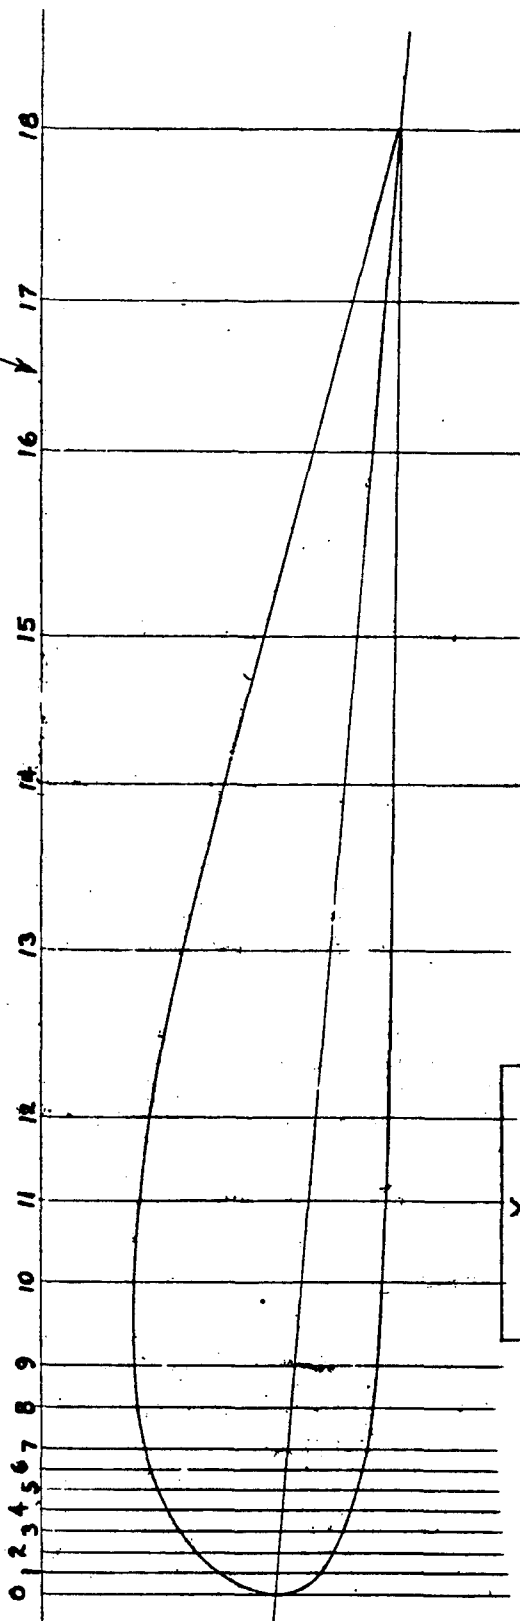

| STATION | X | | Y | |
|---------|--------|-------|-------|-------|
| | UPPER | LOWER | UPPER | LOWER |
| 0 | 0 | 2.824 | 2.824 | 2.824 |
| 1 | .250 | 2.147 | 3.368 | 3.368 |
| 2 | .500 | 1.880 | 3.520 | 3.520 |
| 3 | .750 | 1.676 | 3.634 | 3.634 |
| 4 | 1.000 | 1.529 | 3.721 | 3.721 |
| 5 | 1.250 | 1.421 | 3.805 | 3.805 |
| 6 | 1.500 | 1.326 | 3.862 | 3.862 |
| 7 | 1.750 | 1.249 | 3.916 | 3.916 |
| 8 | 2.250 | 1.161 | 3.985 | 3.985 |
| 9 | 2.750 | 1.124 | 4.038 | 4.038 |
| 10 | 3.750 | 1.124 | 4.110 | 4.110 |
| 11 | 4.750 | 1.204 | 4.170 | 4.170 |
| 12 | 5.750 | 1.288 | 4.201 | 4.201 |
| 13 | 7.750 | 1.707 | 4.216 | 4.216 |
| 14 | 9.750 | 2.192 | 4.240 | 4.240 |
| 15 | 11.750 | 2.683 | 4.266 | 4.266 |
| 16 | 13.750 | 3.194 | 4.275 | 4.275 |
| 17 | 15.750 | 3.733 | 4.285 | 4.285 |
| 18 | 17.571 | 4.297 | 4.337 | 4.337 |

NOTE:

DRAWING IS 1/2-SIZE
DIMENSIONS ARE FULL
SIZE

SKETCH NO.1
CUSTER CHANNEL WING
17.5-INCH CHORD



Photo 208370 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust, Chordwise Pressure Distribution, and Power, Wing
Condition No. 25, 43 Inch Chord Channel, R. H. Lower $3/4$ Rear Close-Up

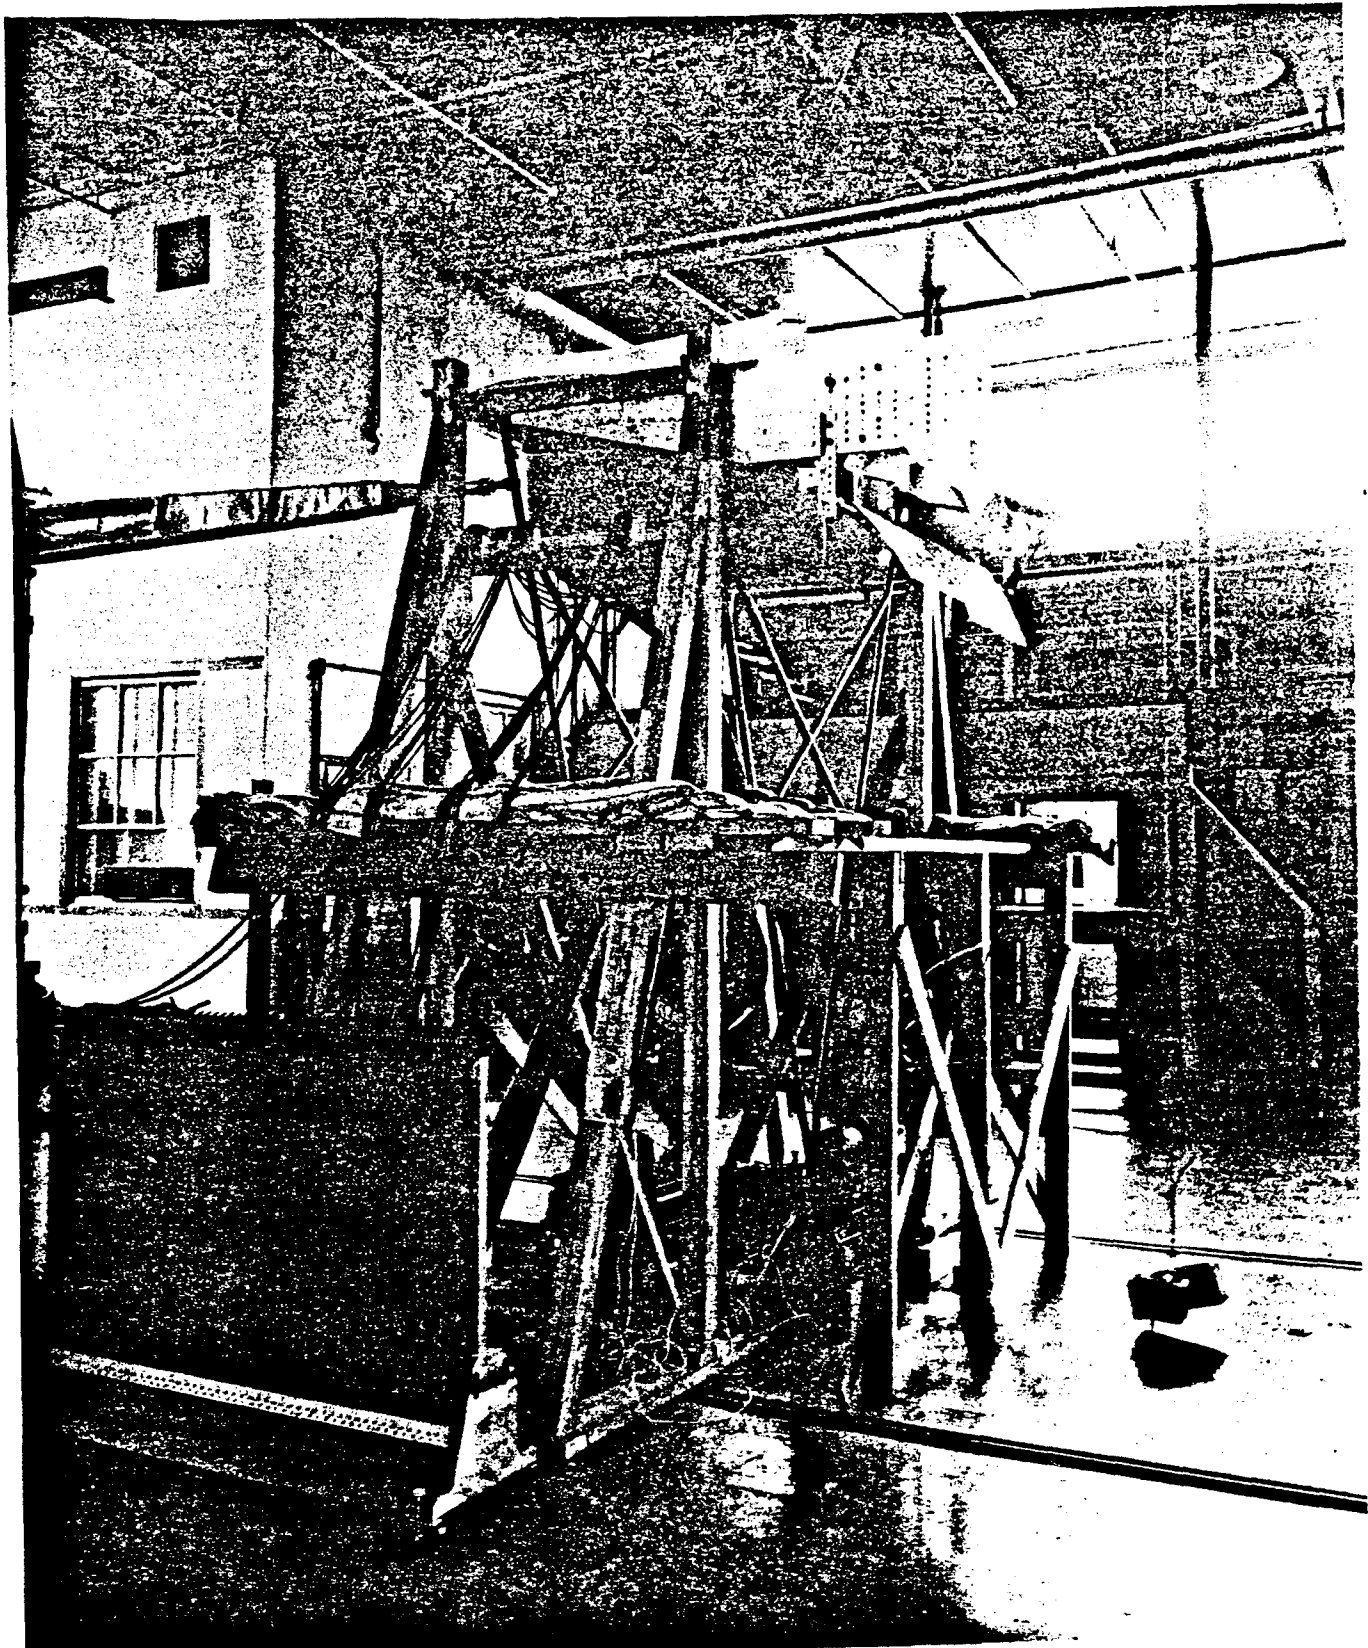


Photo 208371 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for Obtaining Static Lift, Thrust, Chordwise Pressure Distribution, and Power, Wing Condition No. 25, 43 Inch Chord Channel, L. H. Rear 3/4 View

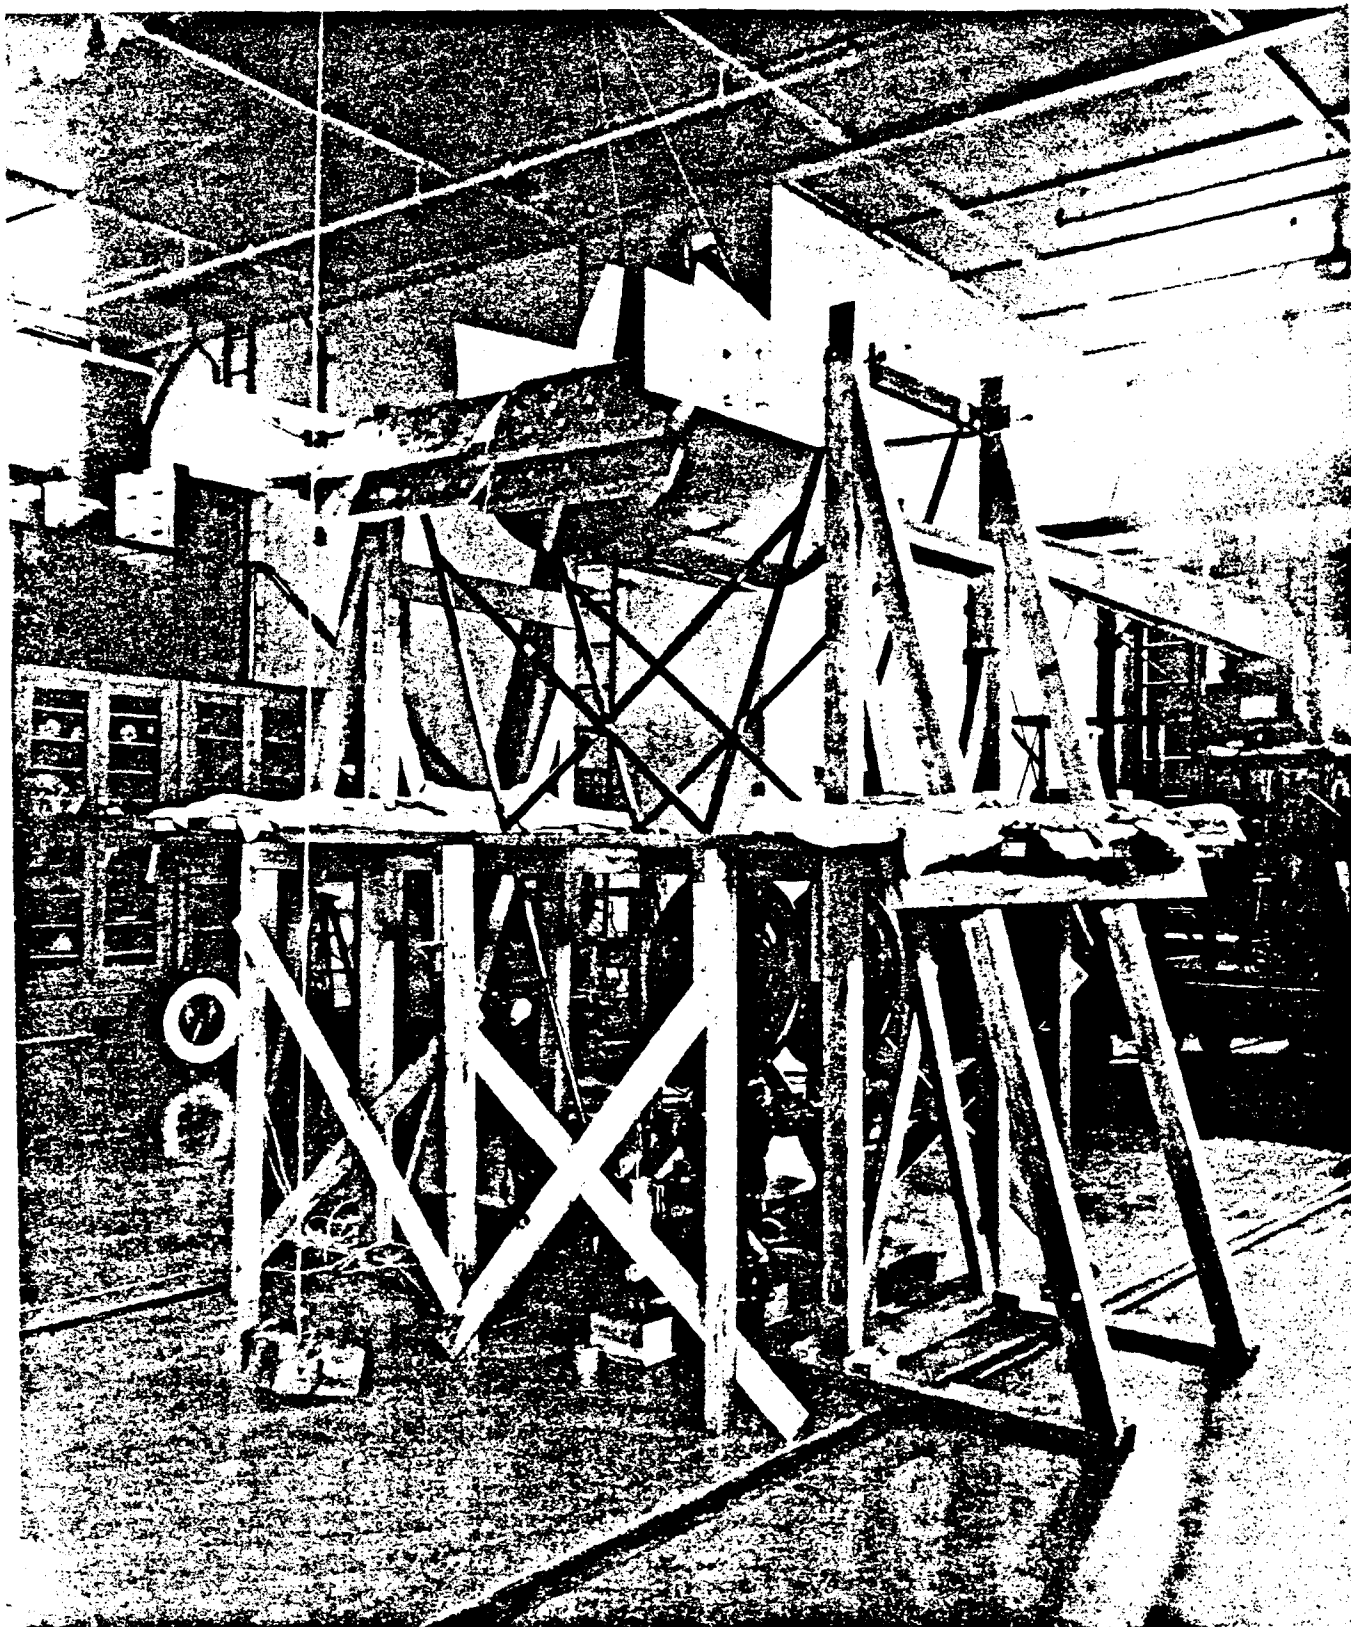


Photo 208372 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust, and Power, Wing Condition No. 12,
43 Inch Chord Channel, R. H. $3/4$ Rear View

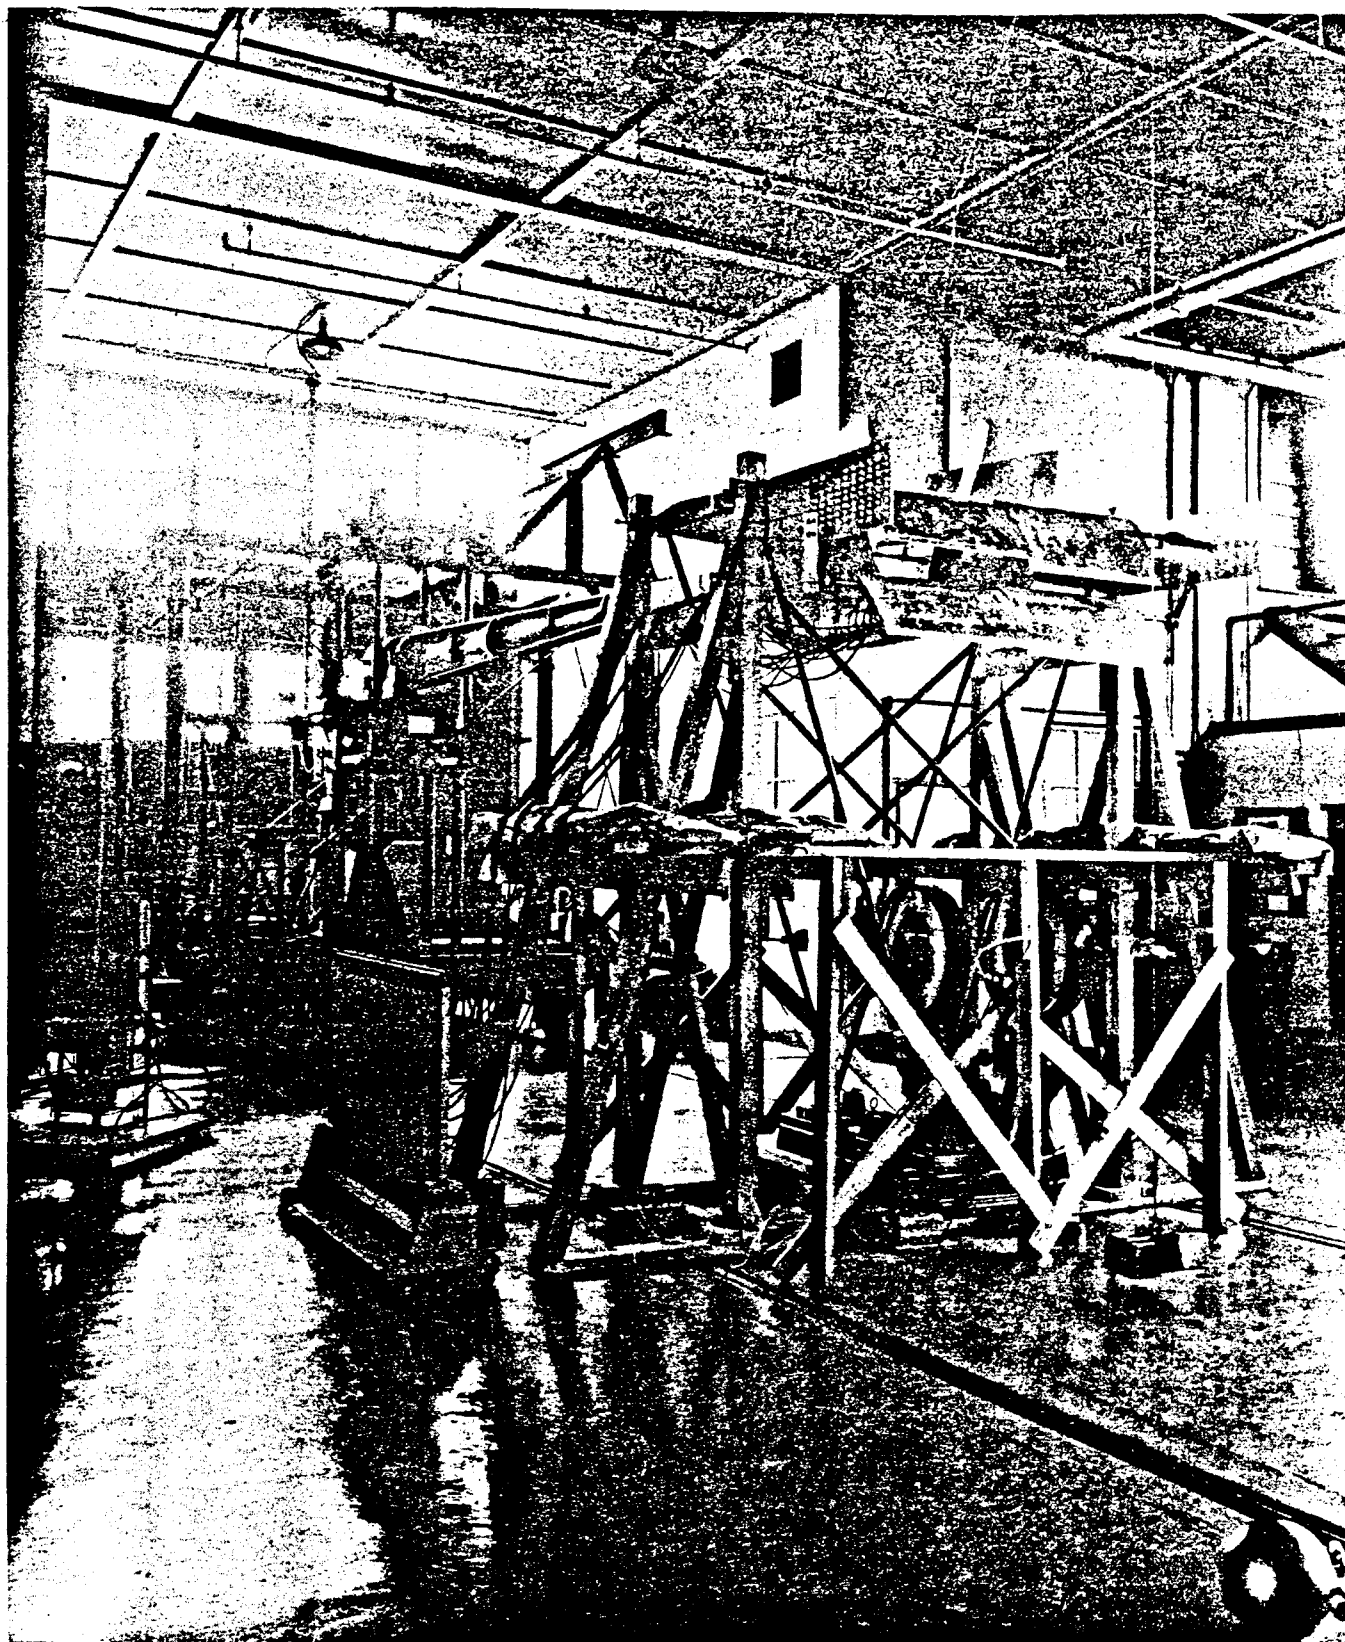


Photo 208373 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for Obtaining Static Lift, Thrust, Chordwise Pressure Distribution and Power, Wing Condition No. 25, 43 Inch Chord Channel, L. H. $\frac{3}{4}$ Rear View

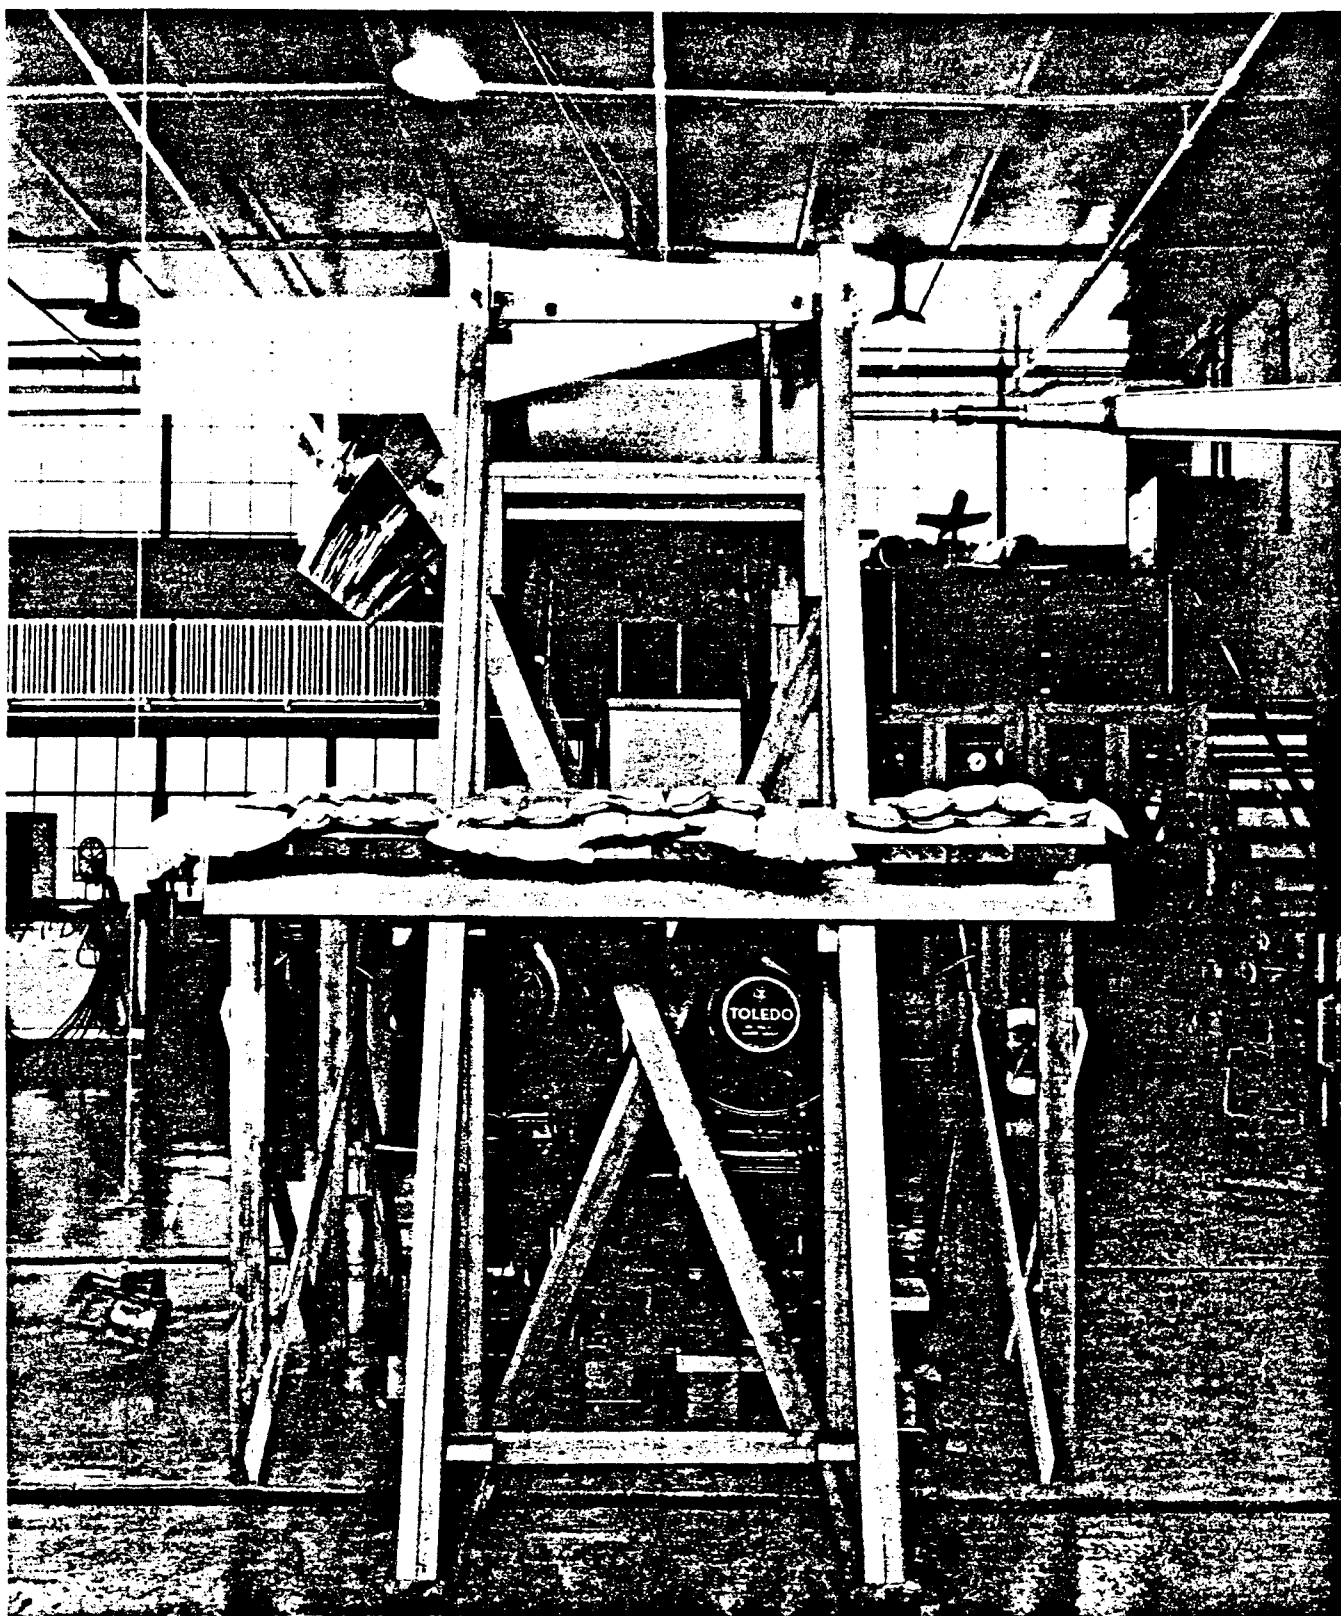


Photo 208374 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 24,
43 Inch Chord Channel, R. H. Side View

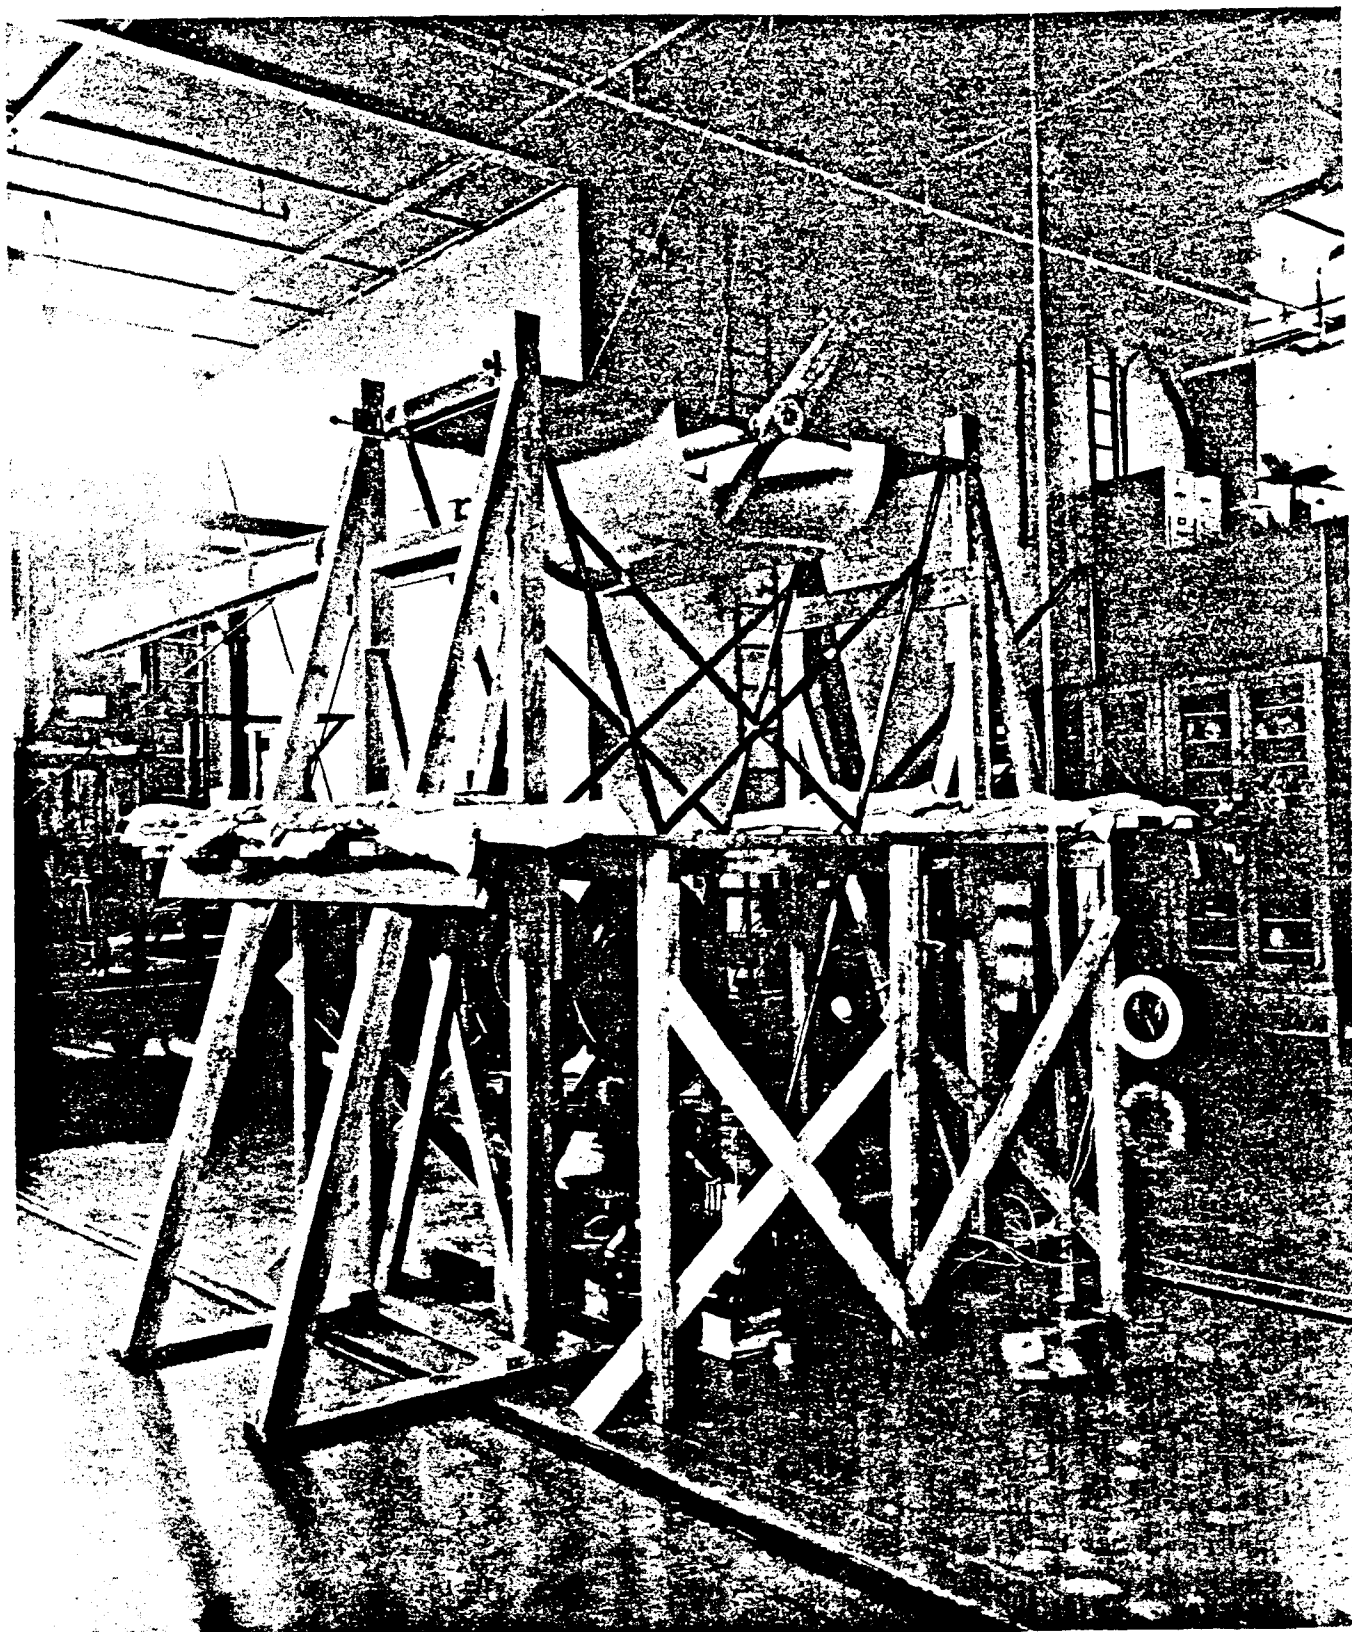


Photo 208375 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 3,
43 Inch Chord Channel, R. H. $\frac{3}{4}$ Rear View

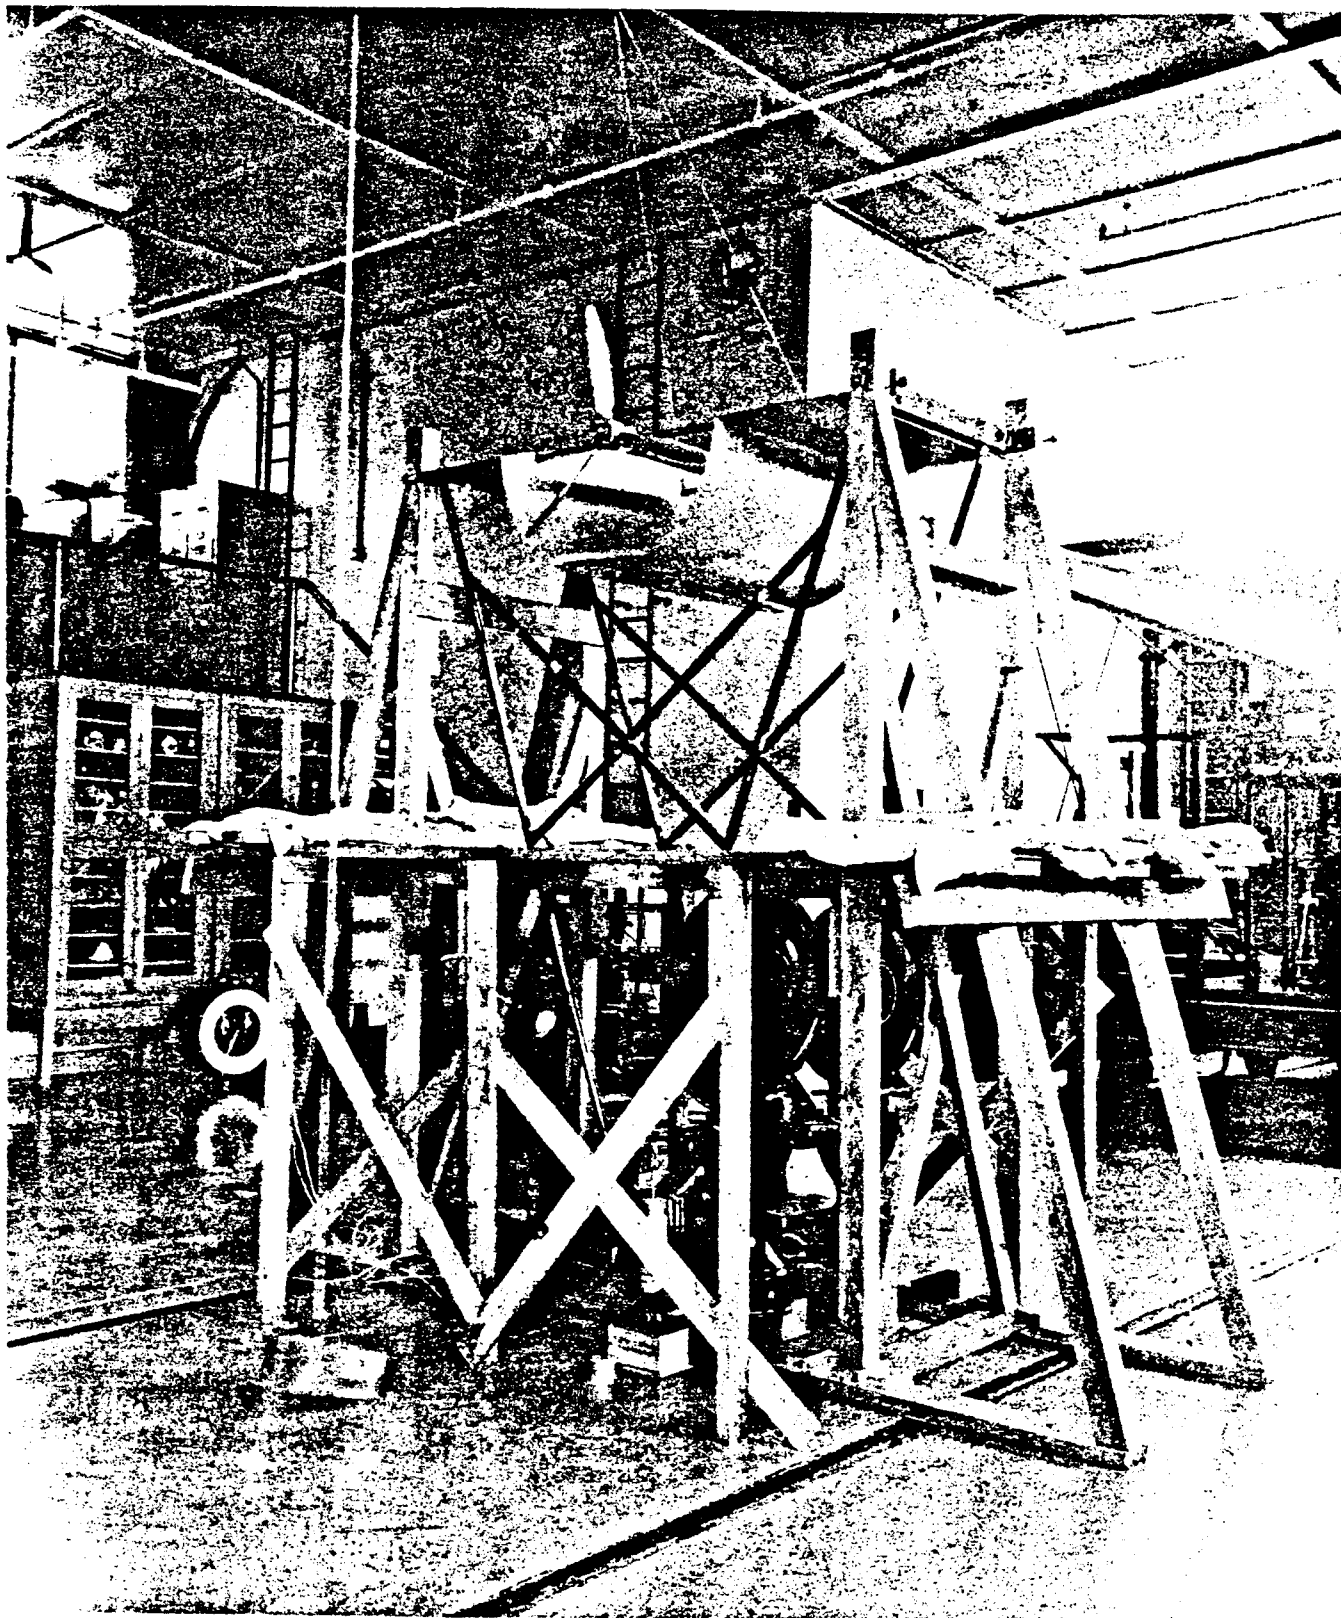


Photo 208376 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 1
43 Inch Chord Channel, R. H. $3/4$ Rear View

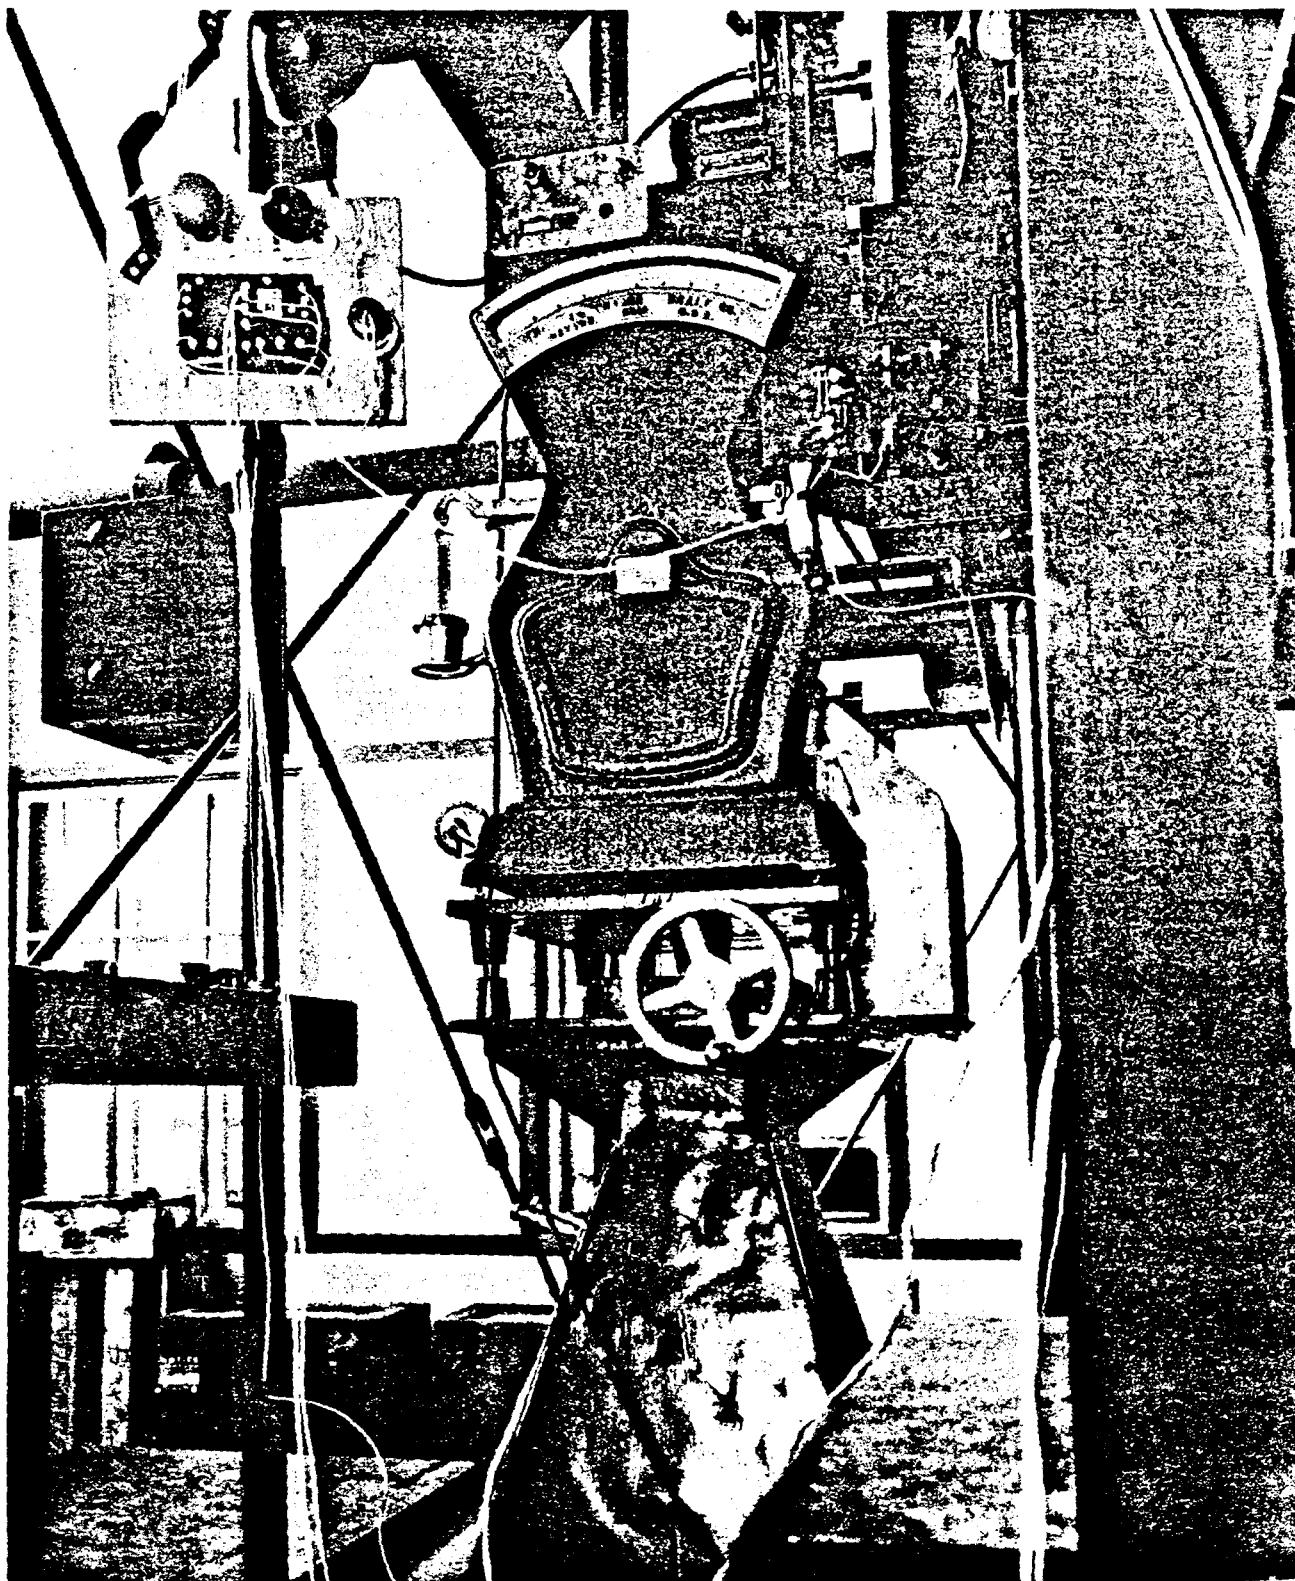


Photo 208377 - Scale Arrangement for Obtaining Thrust, During Static Lift, Thrust and Power Tests on 43 Inch Chord Custer Channel Wing

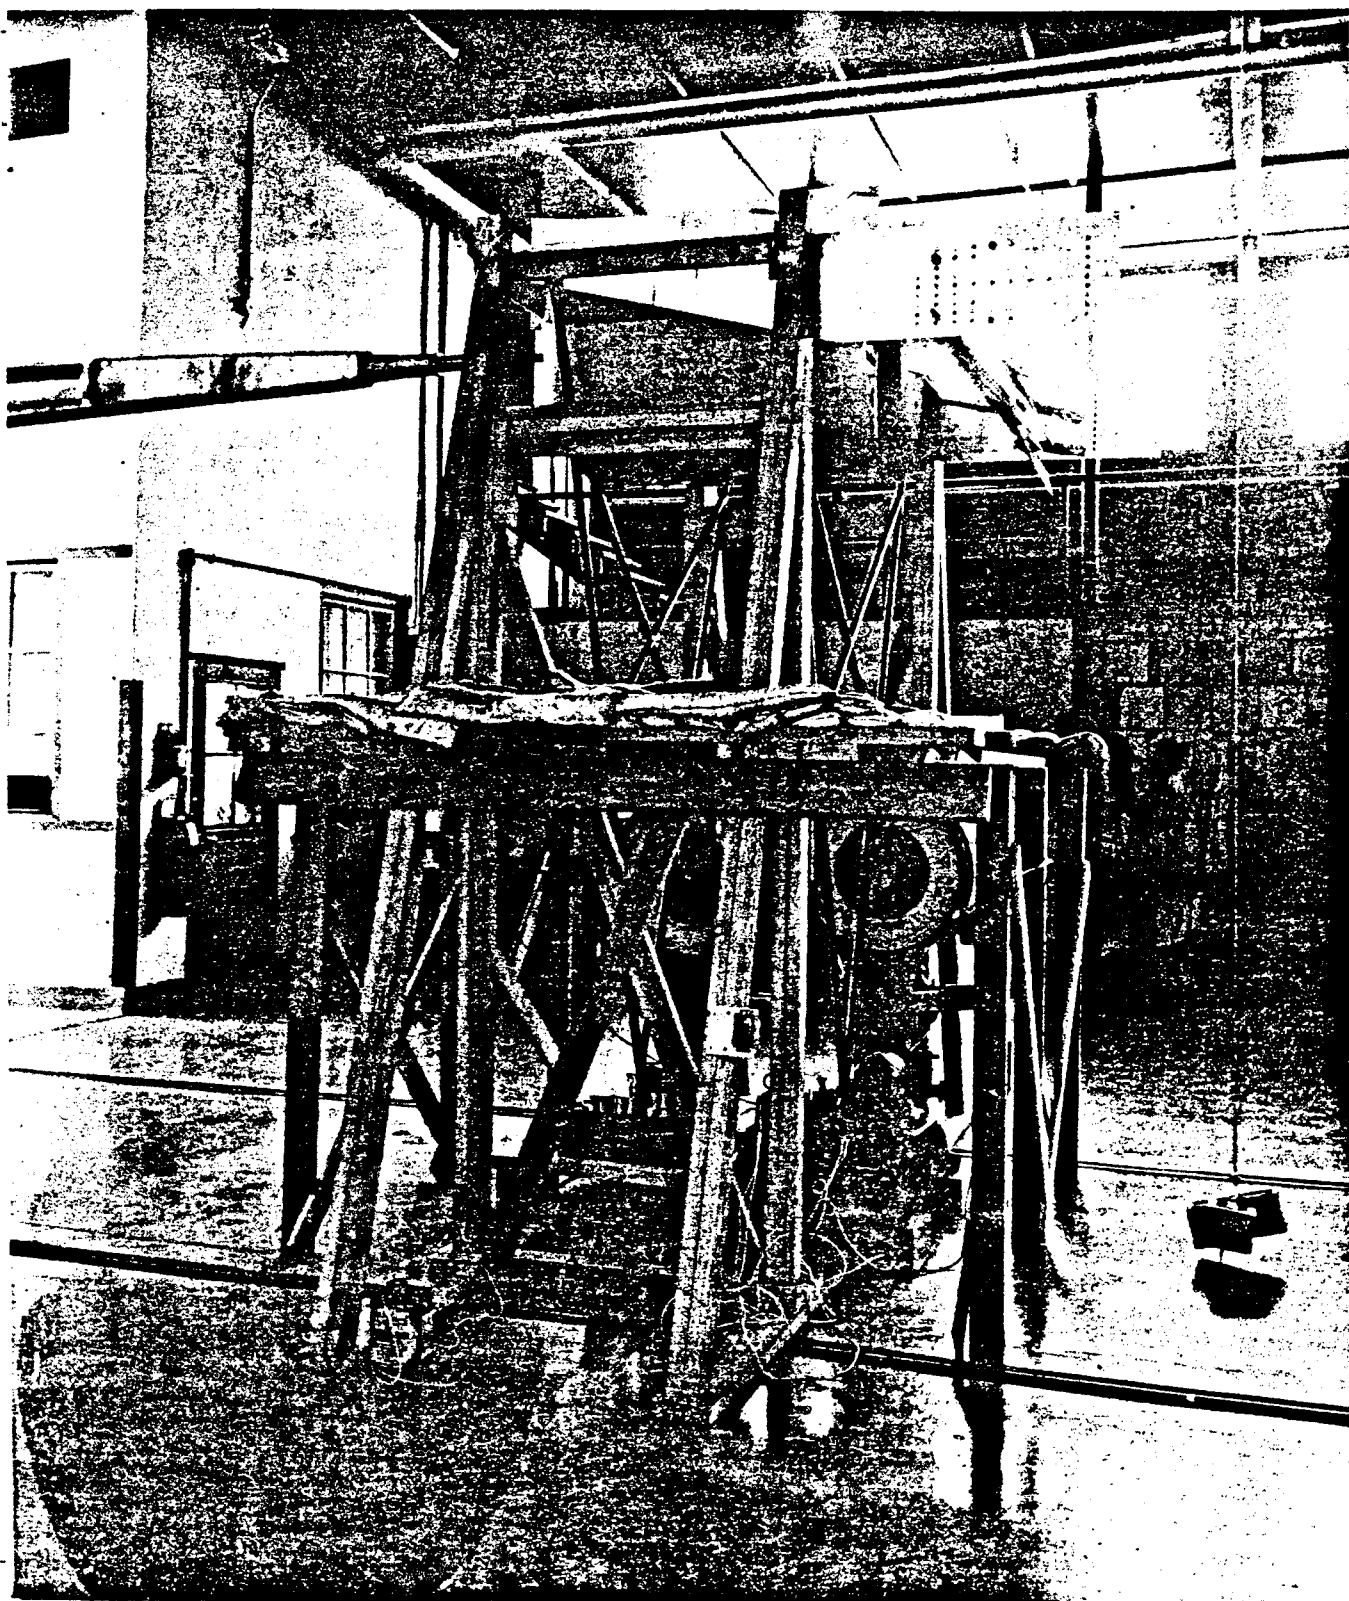


Photo 208378 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 12,
43 Inch Chord Channel, L. H. Side View

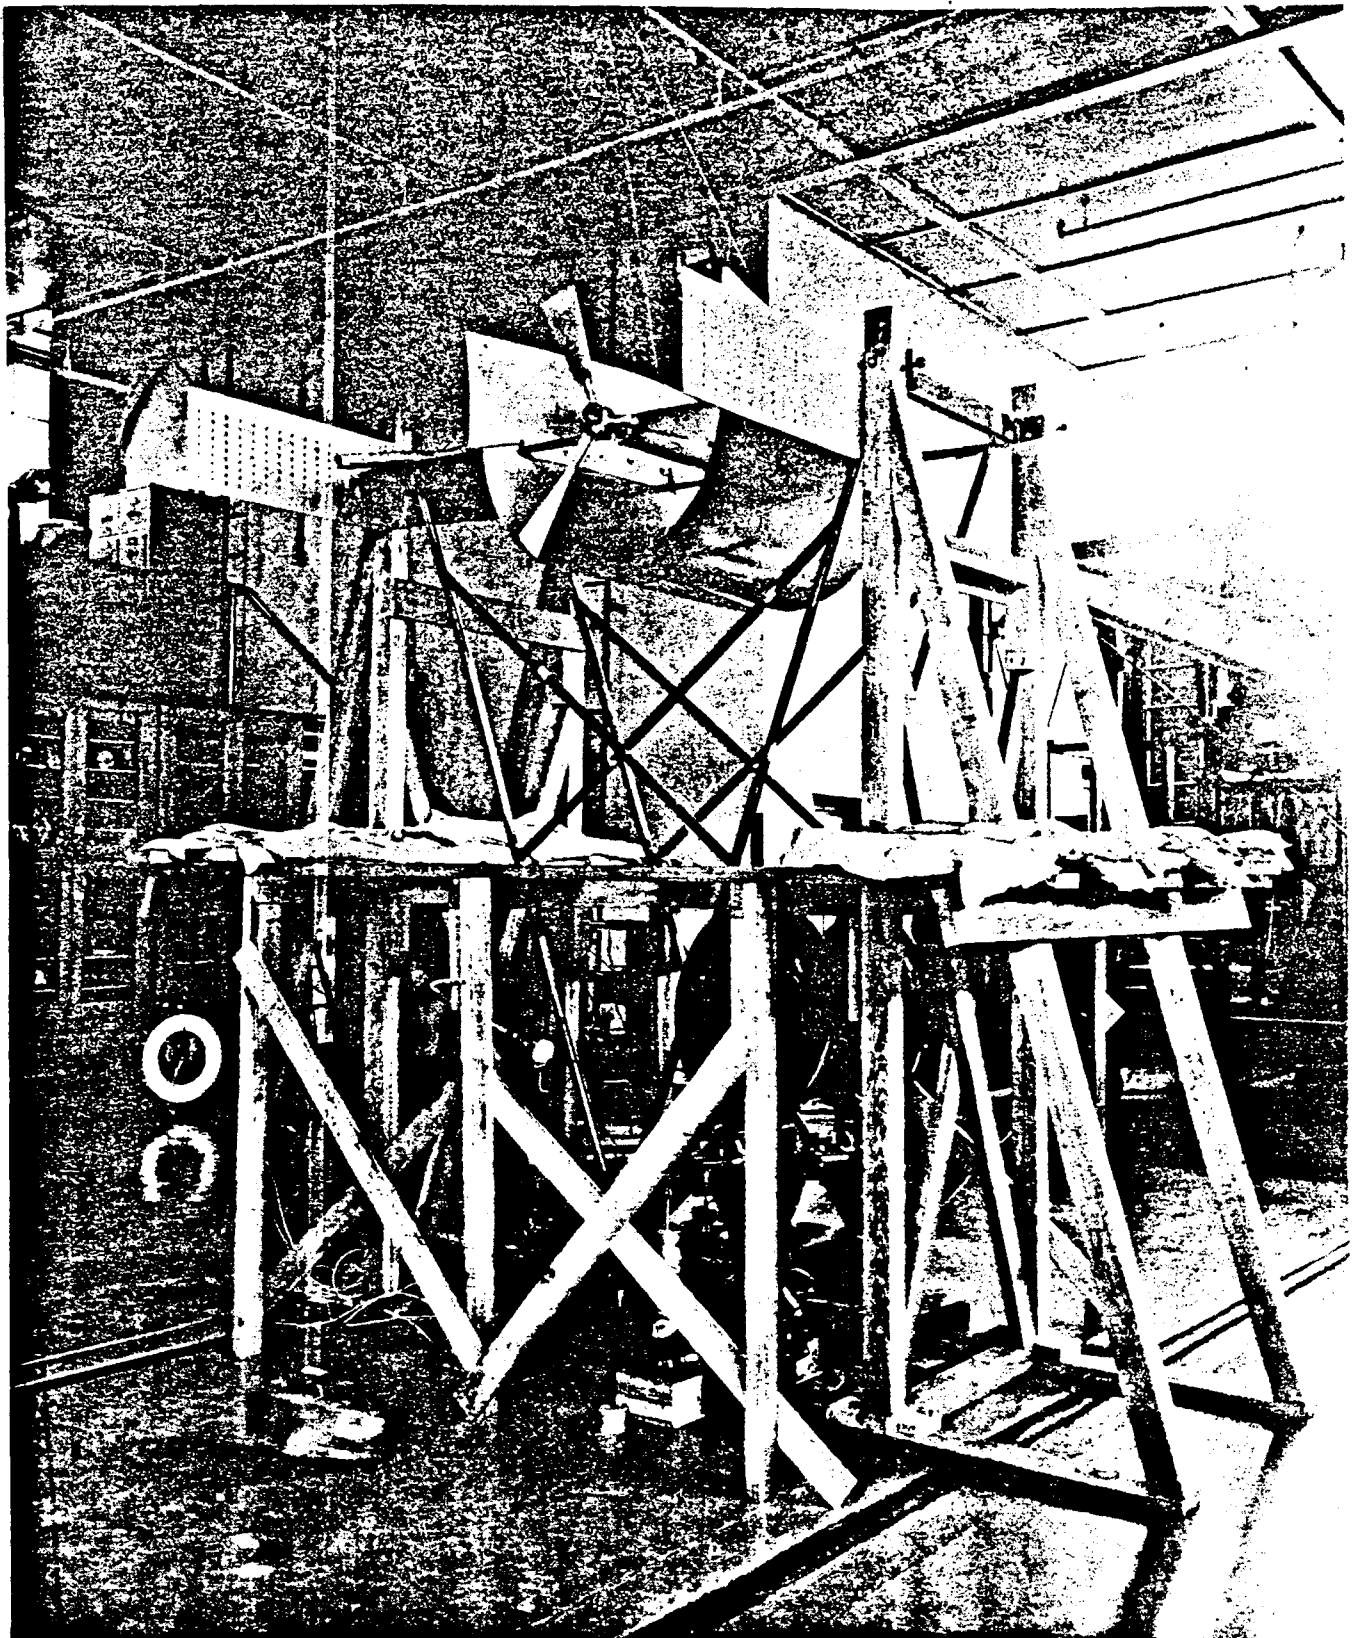


Photo 208379 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 13,
43 Inch Chord Channel, R. H. $\frac{3}{4}$ Rear View

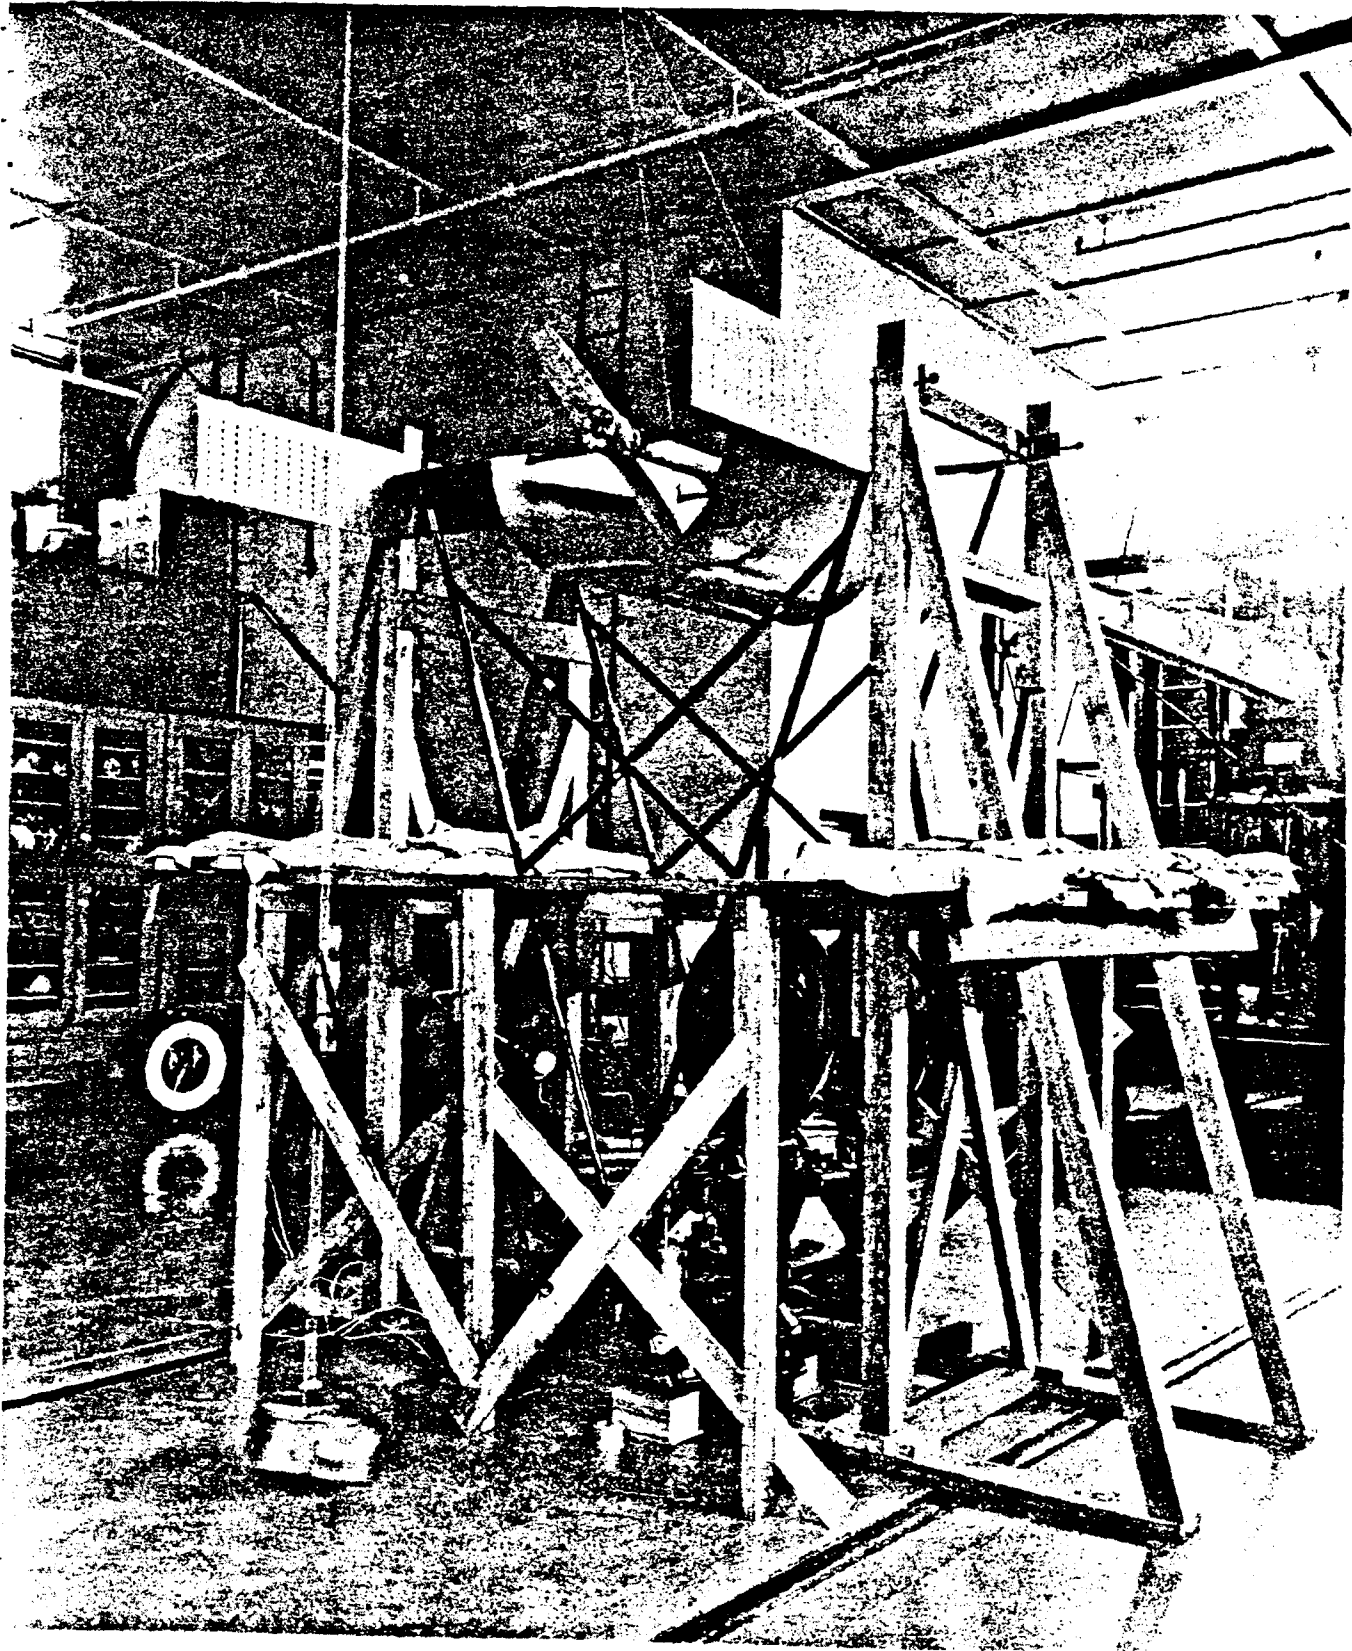


Photo 208380 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 5,
43 Inch Chord Channel, R. H. $\frac{3}{4}$ Rear View

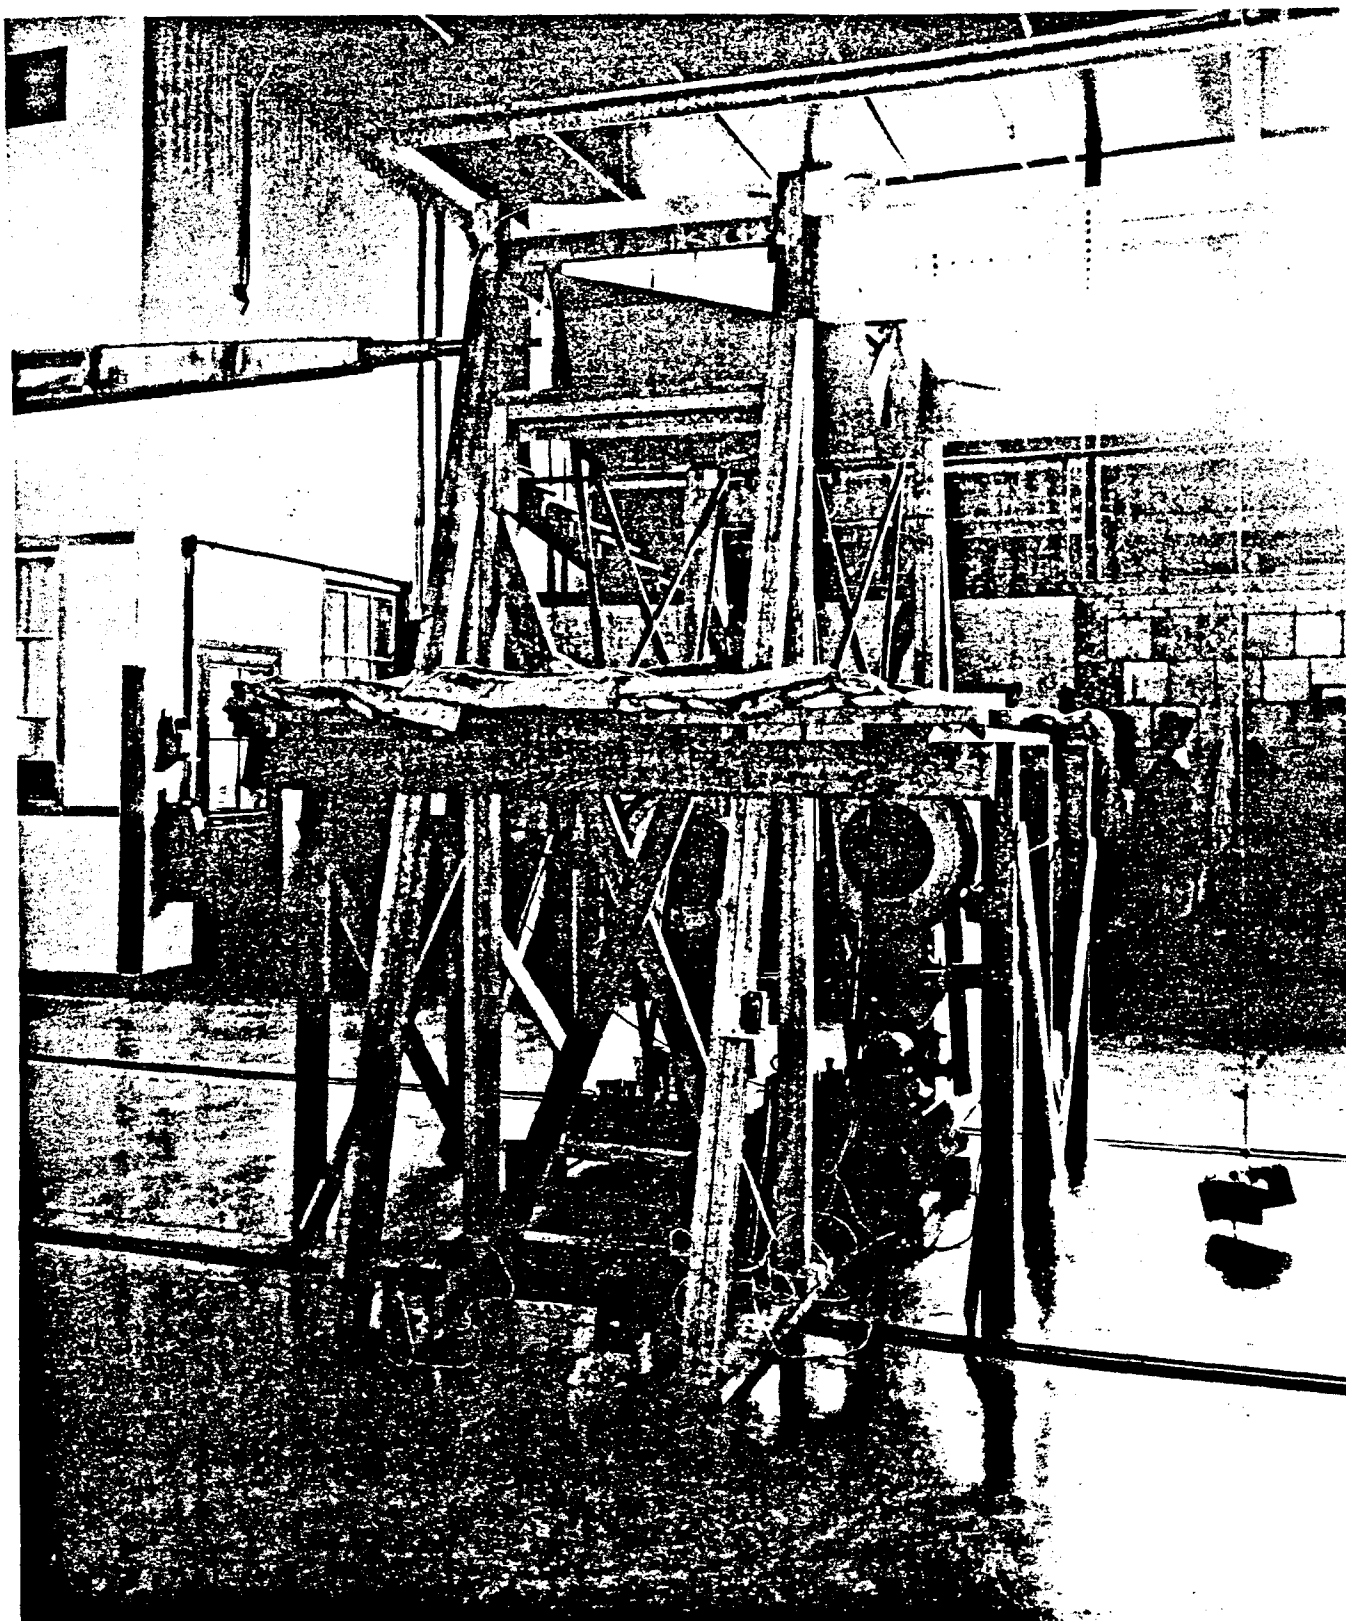


Photo 208381 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 13,
43 Inch Chord Channel, L. H. Side View

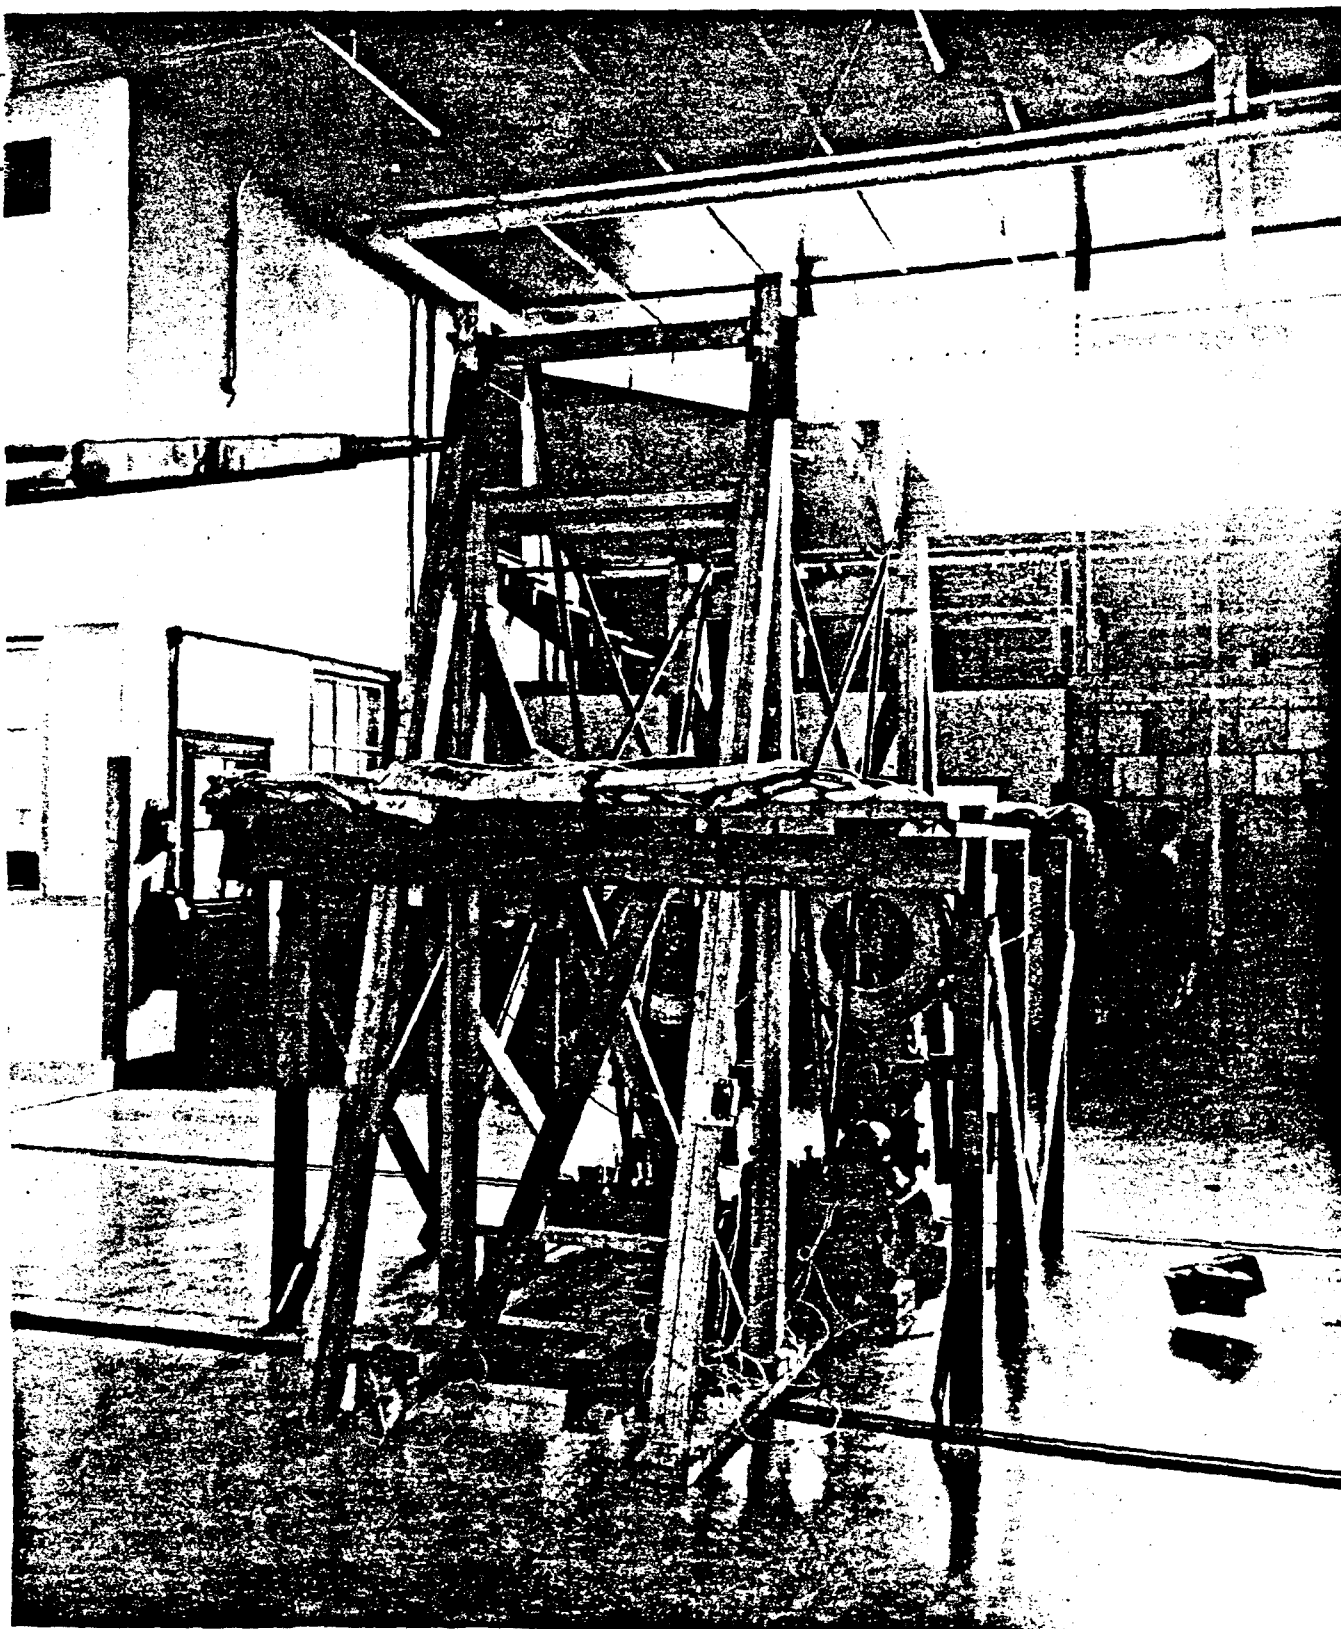


Photo 208382 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 5,
43 Inch Chord Channel, L. H. Side View

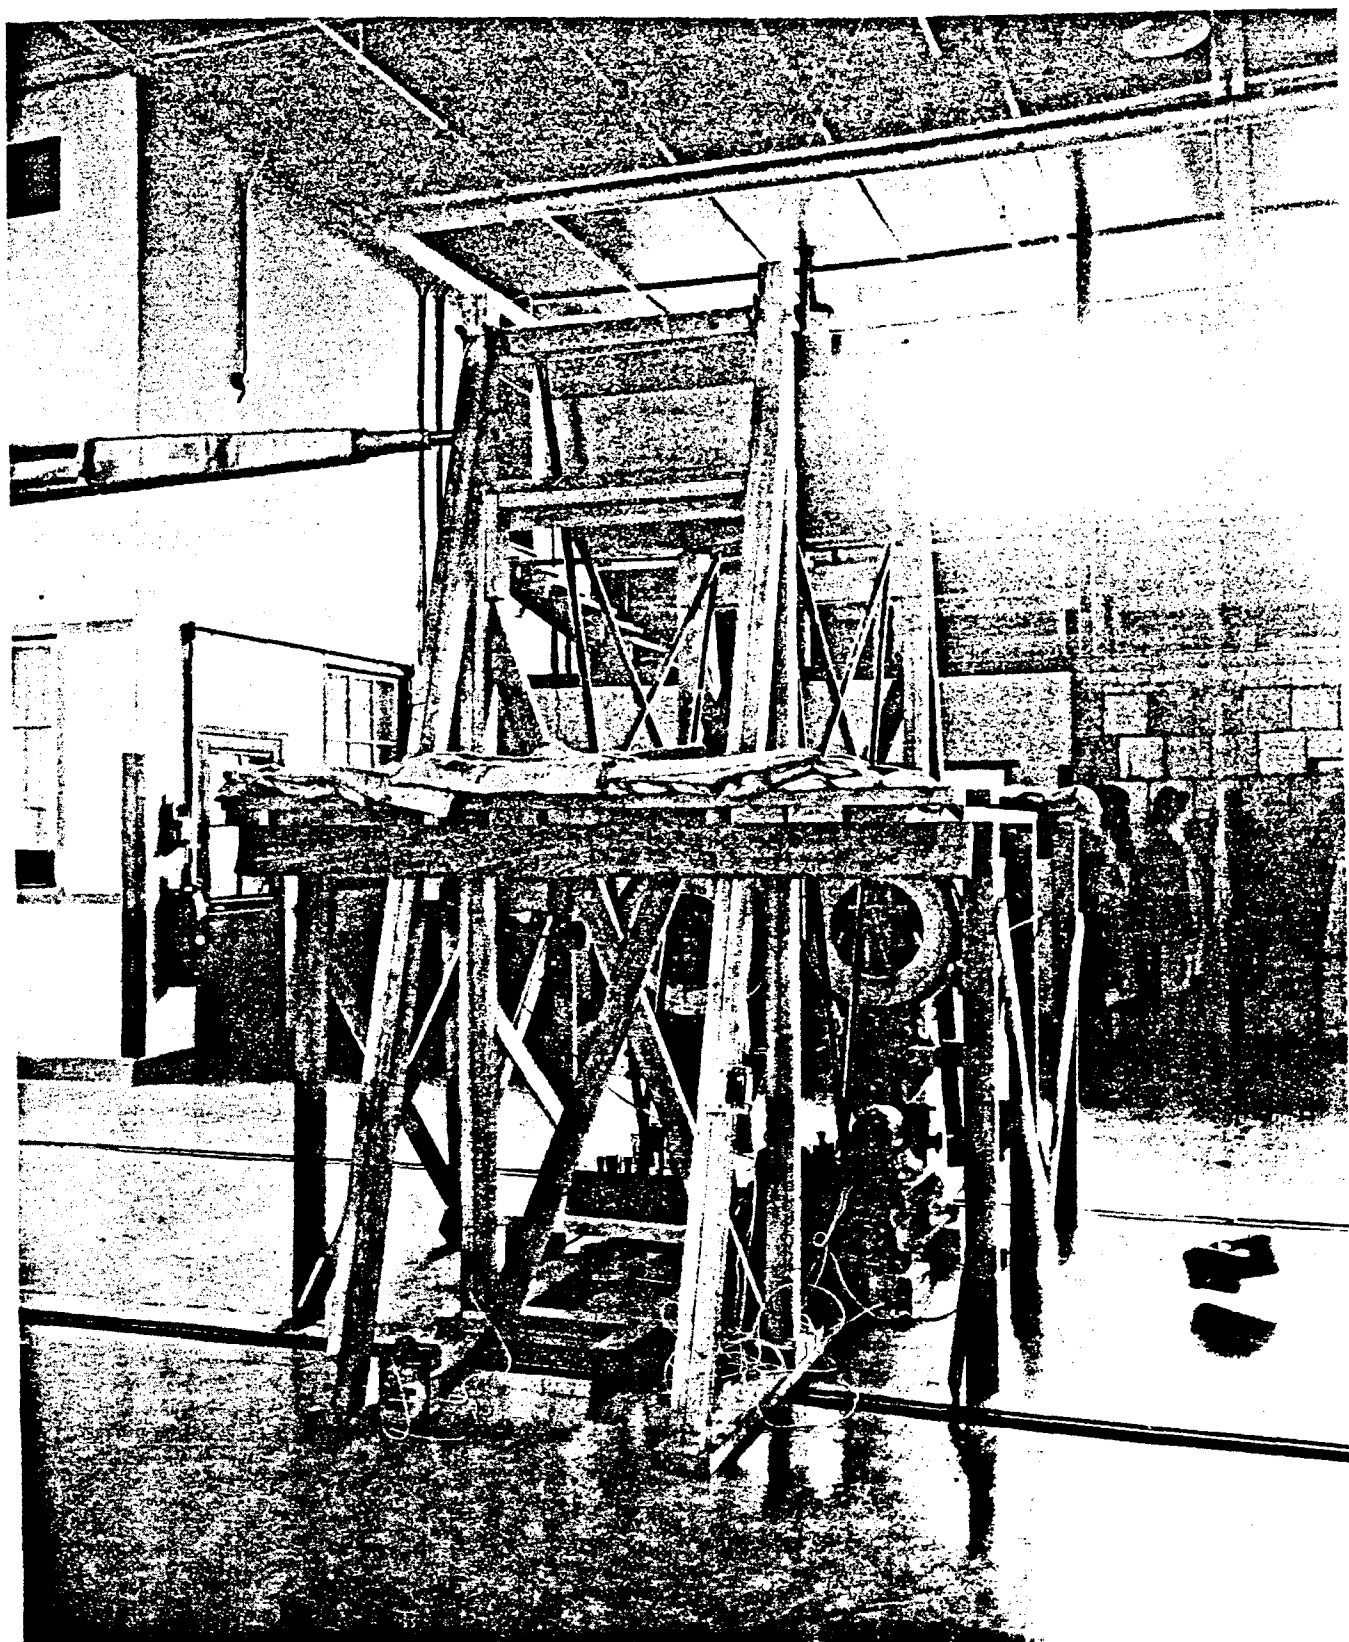


Photo 208383 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 3,
43 Inch Chord Channel, L. H. Side View

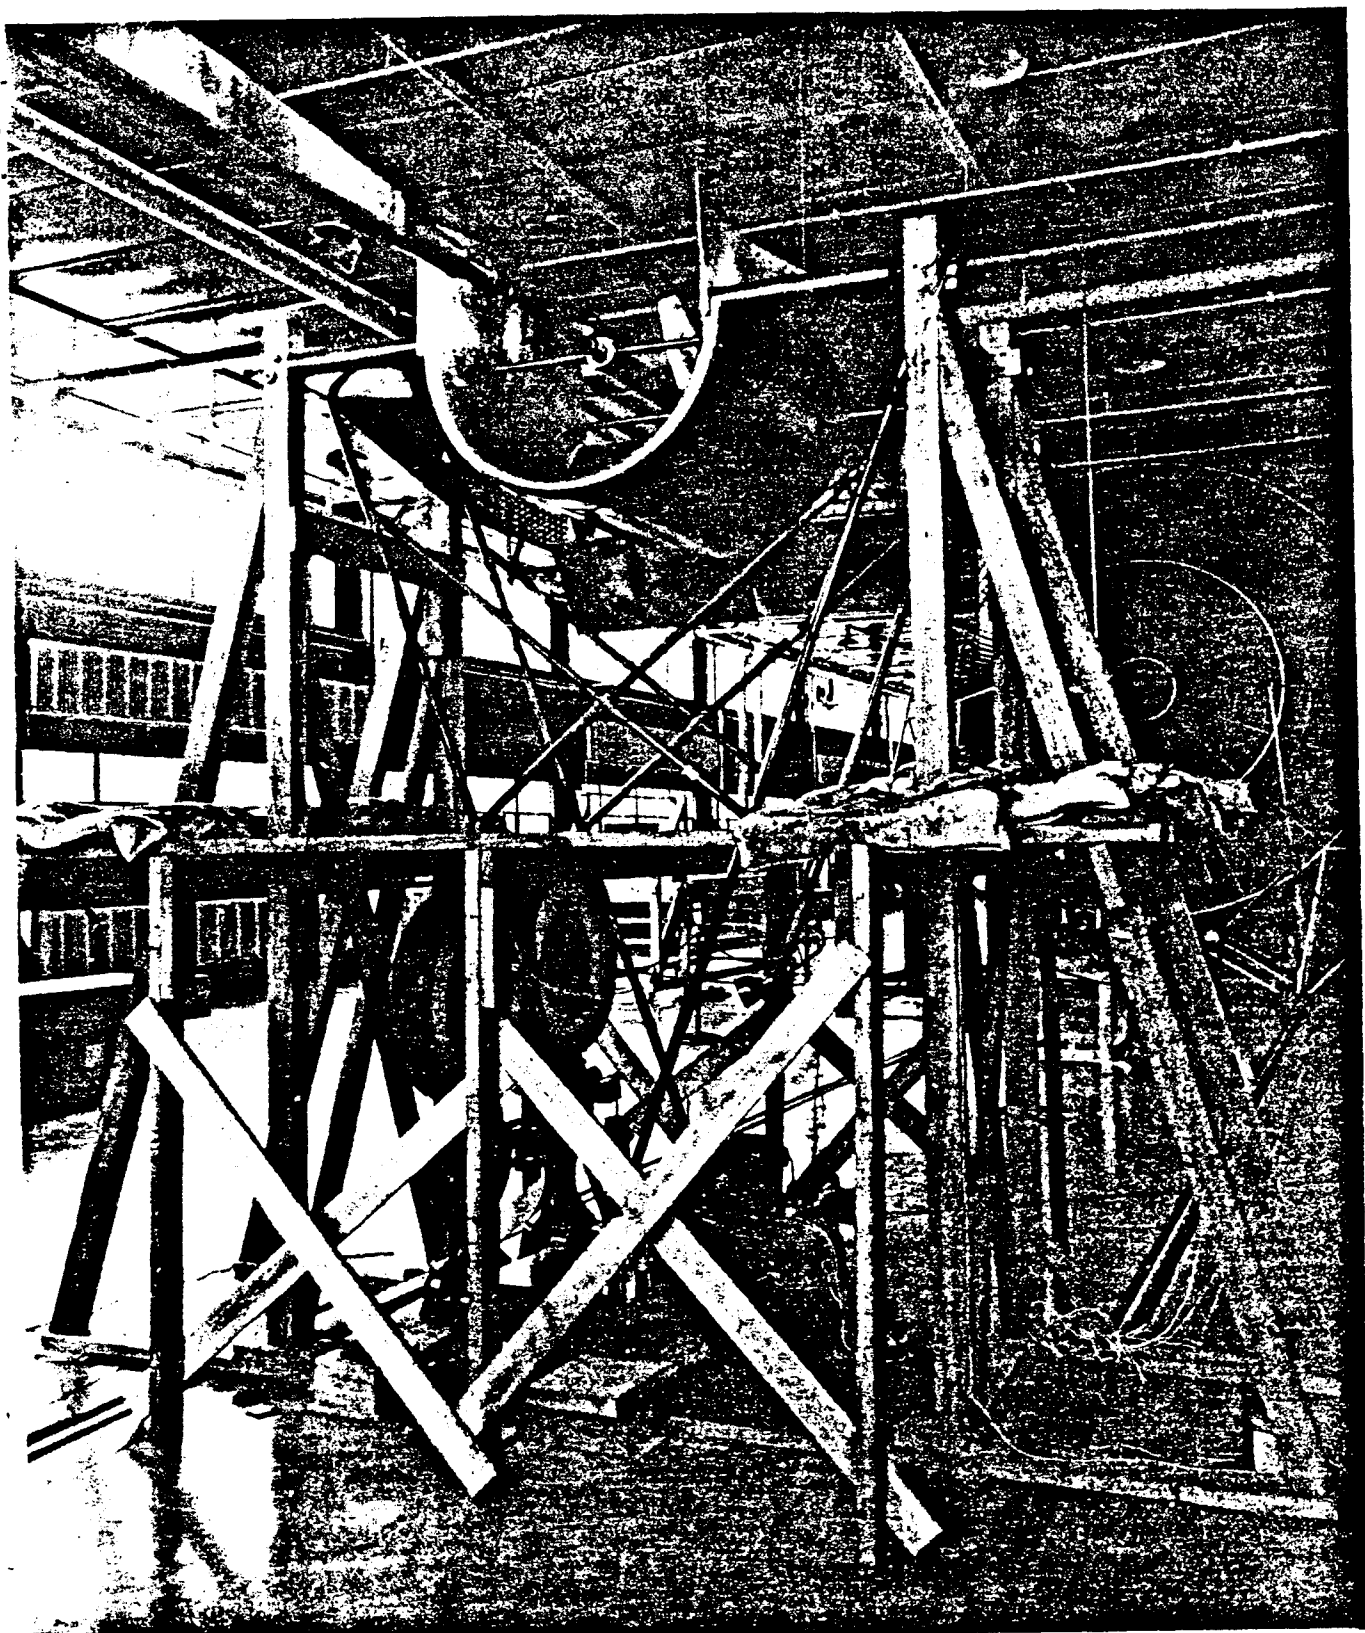


Photo 208384 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 24,
43 Inch Chord Channel, L. H. $3/4$ Front View

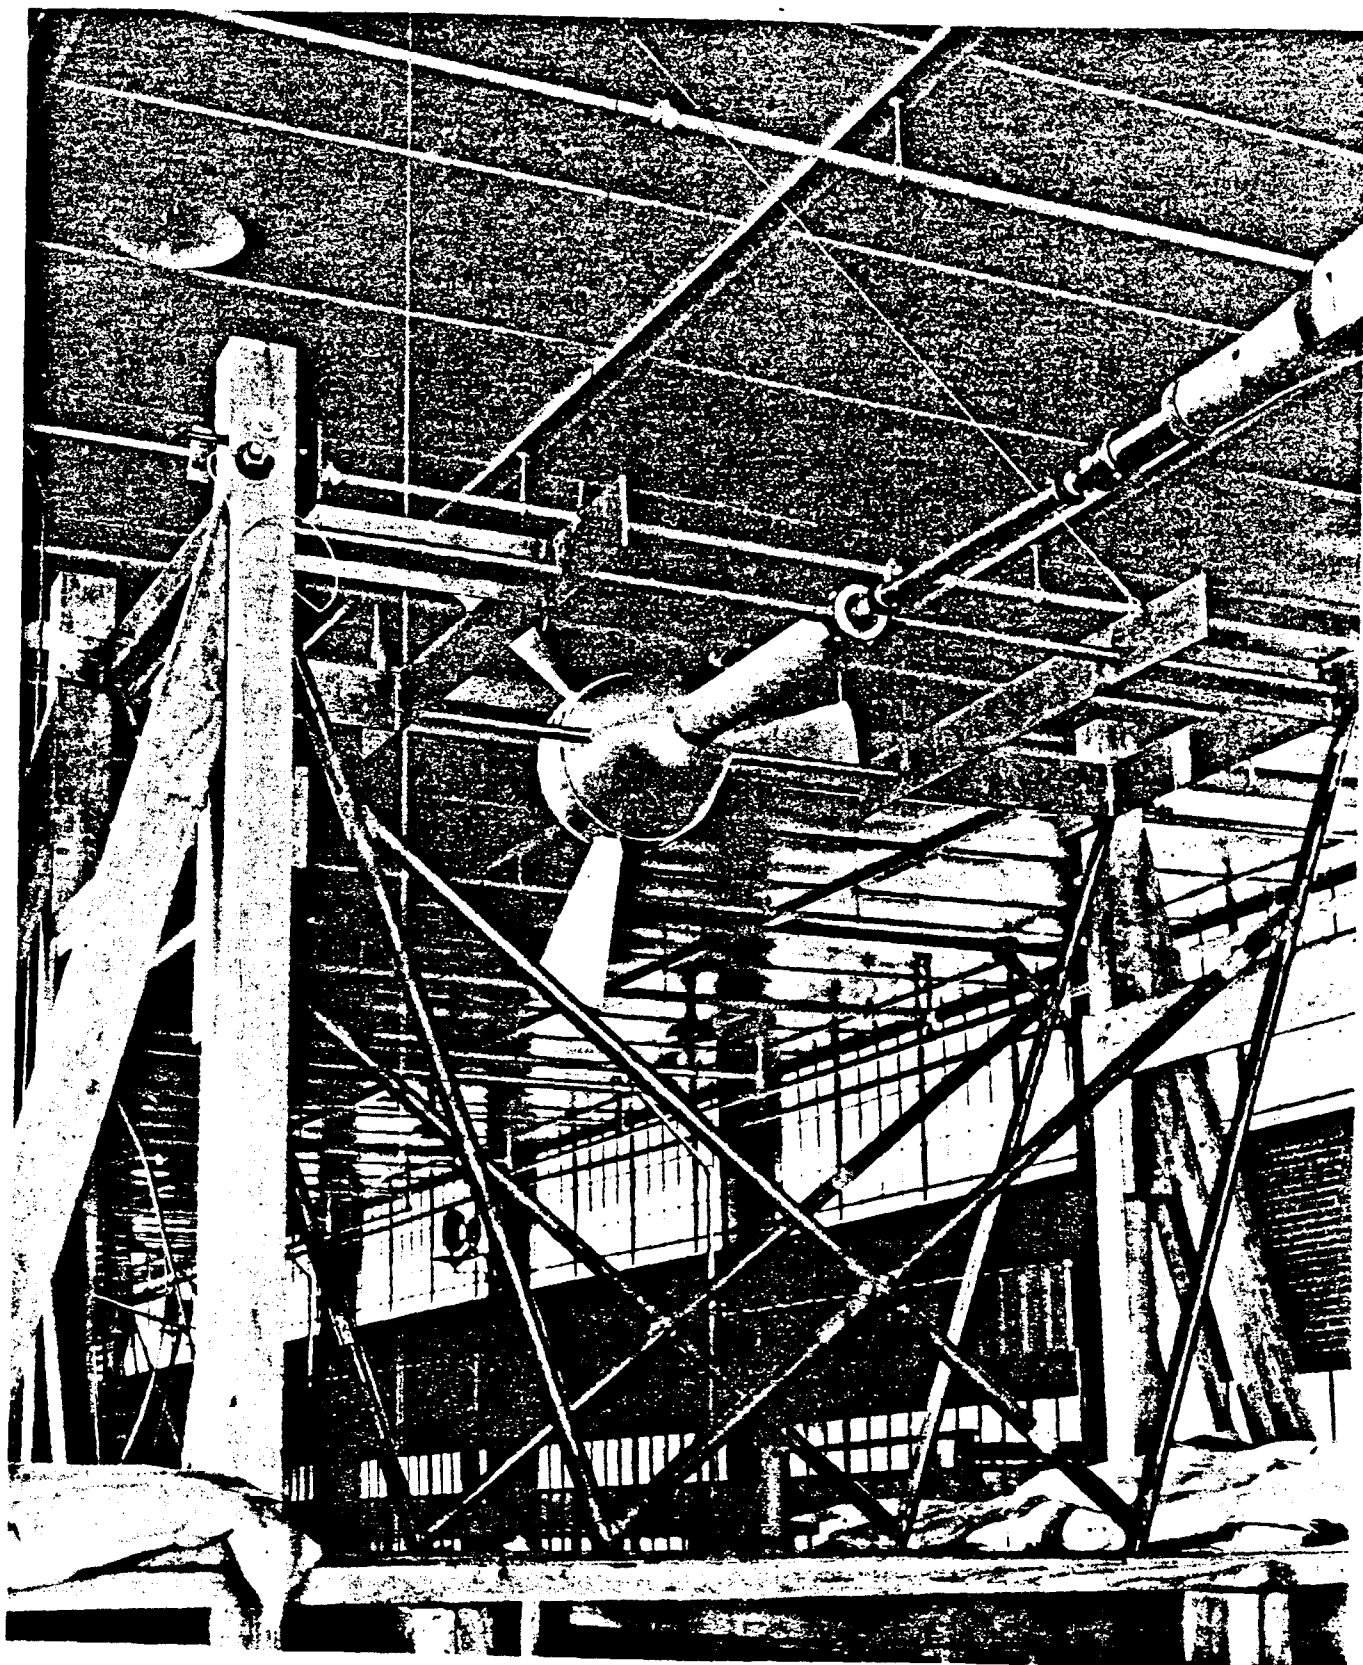


Photo 209513 - Five-Foot Wind Tunnel Set-Up for Obtaining Static Lift, Thrust
and Power During Tests of Custer Channel Wing, Wing Condition No. 50,
3/4 Front View

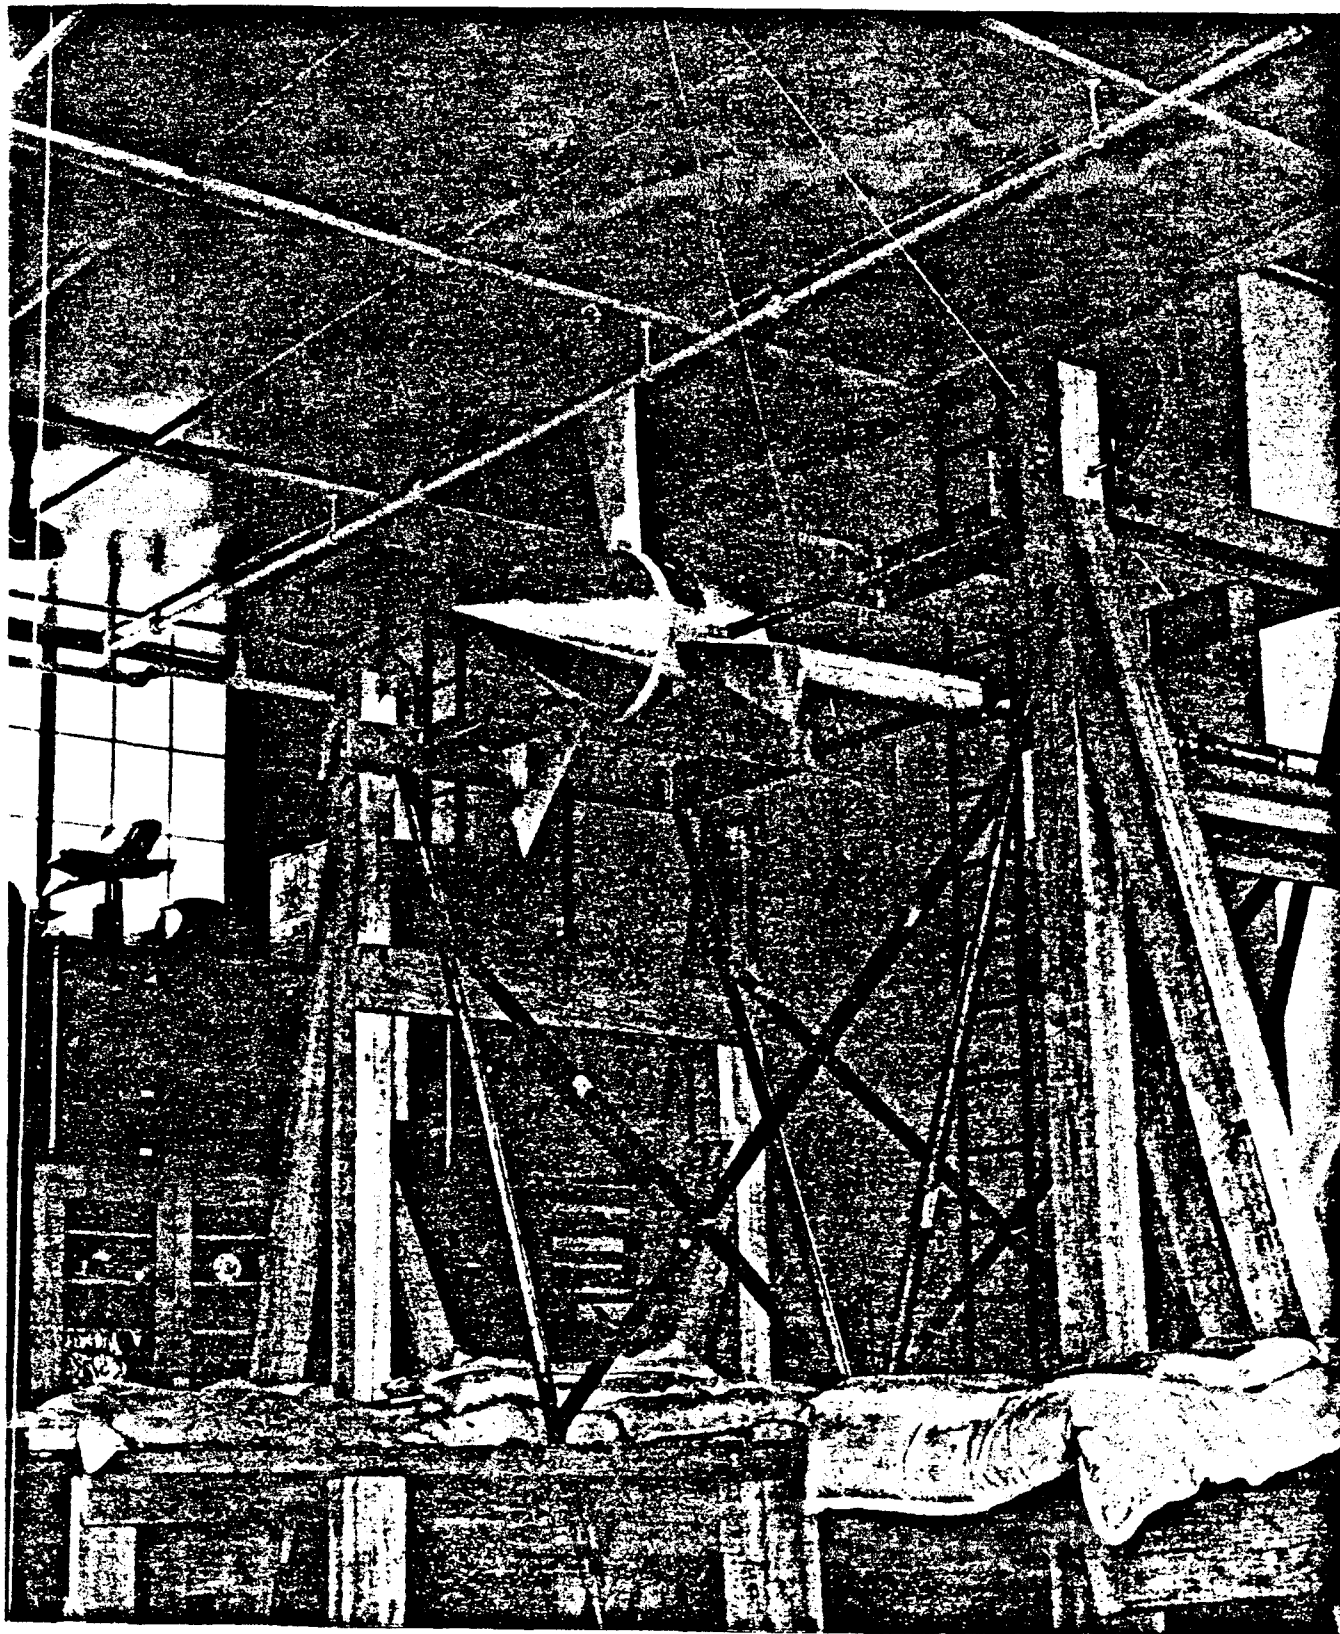


Photo 209514 - Five-Foot Wind Tunnel Set-Up for Obtaining Static Lift,
Thrust and Power During Tests of Custer Channel Wing,
Wing Condition No. 50, 3/4 Rear View

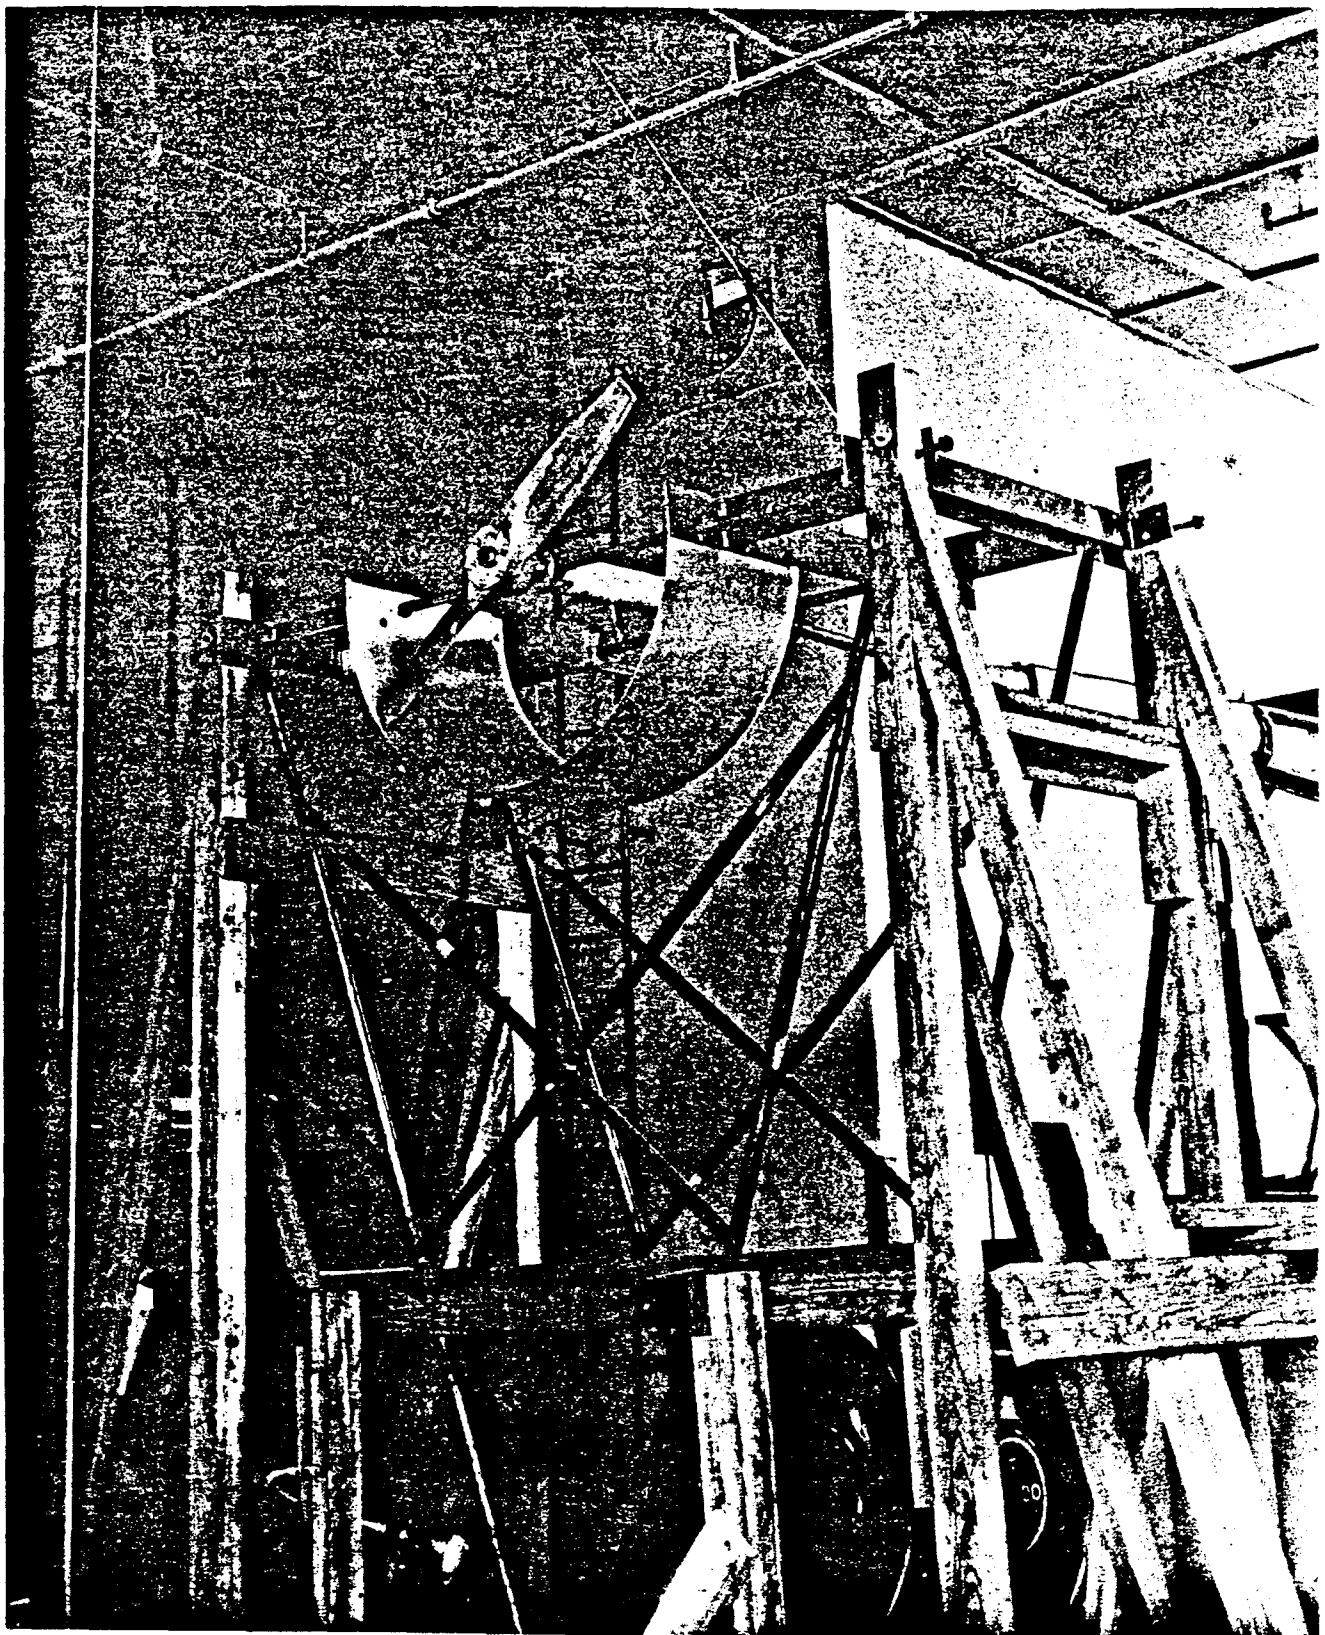


Photo 211042 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 53,
17.5 Inch Chord Channel, 3/4 Rear View

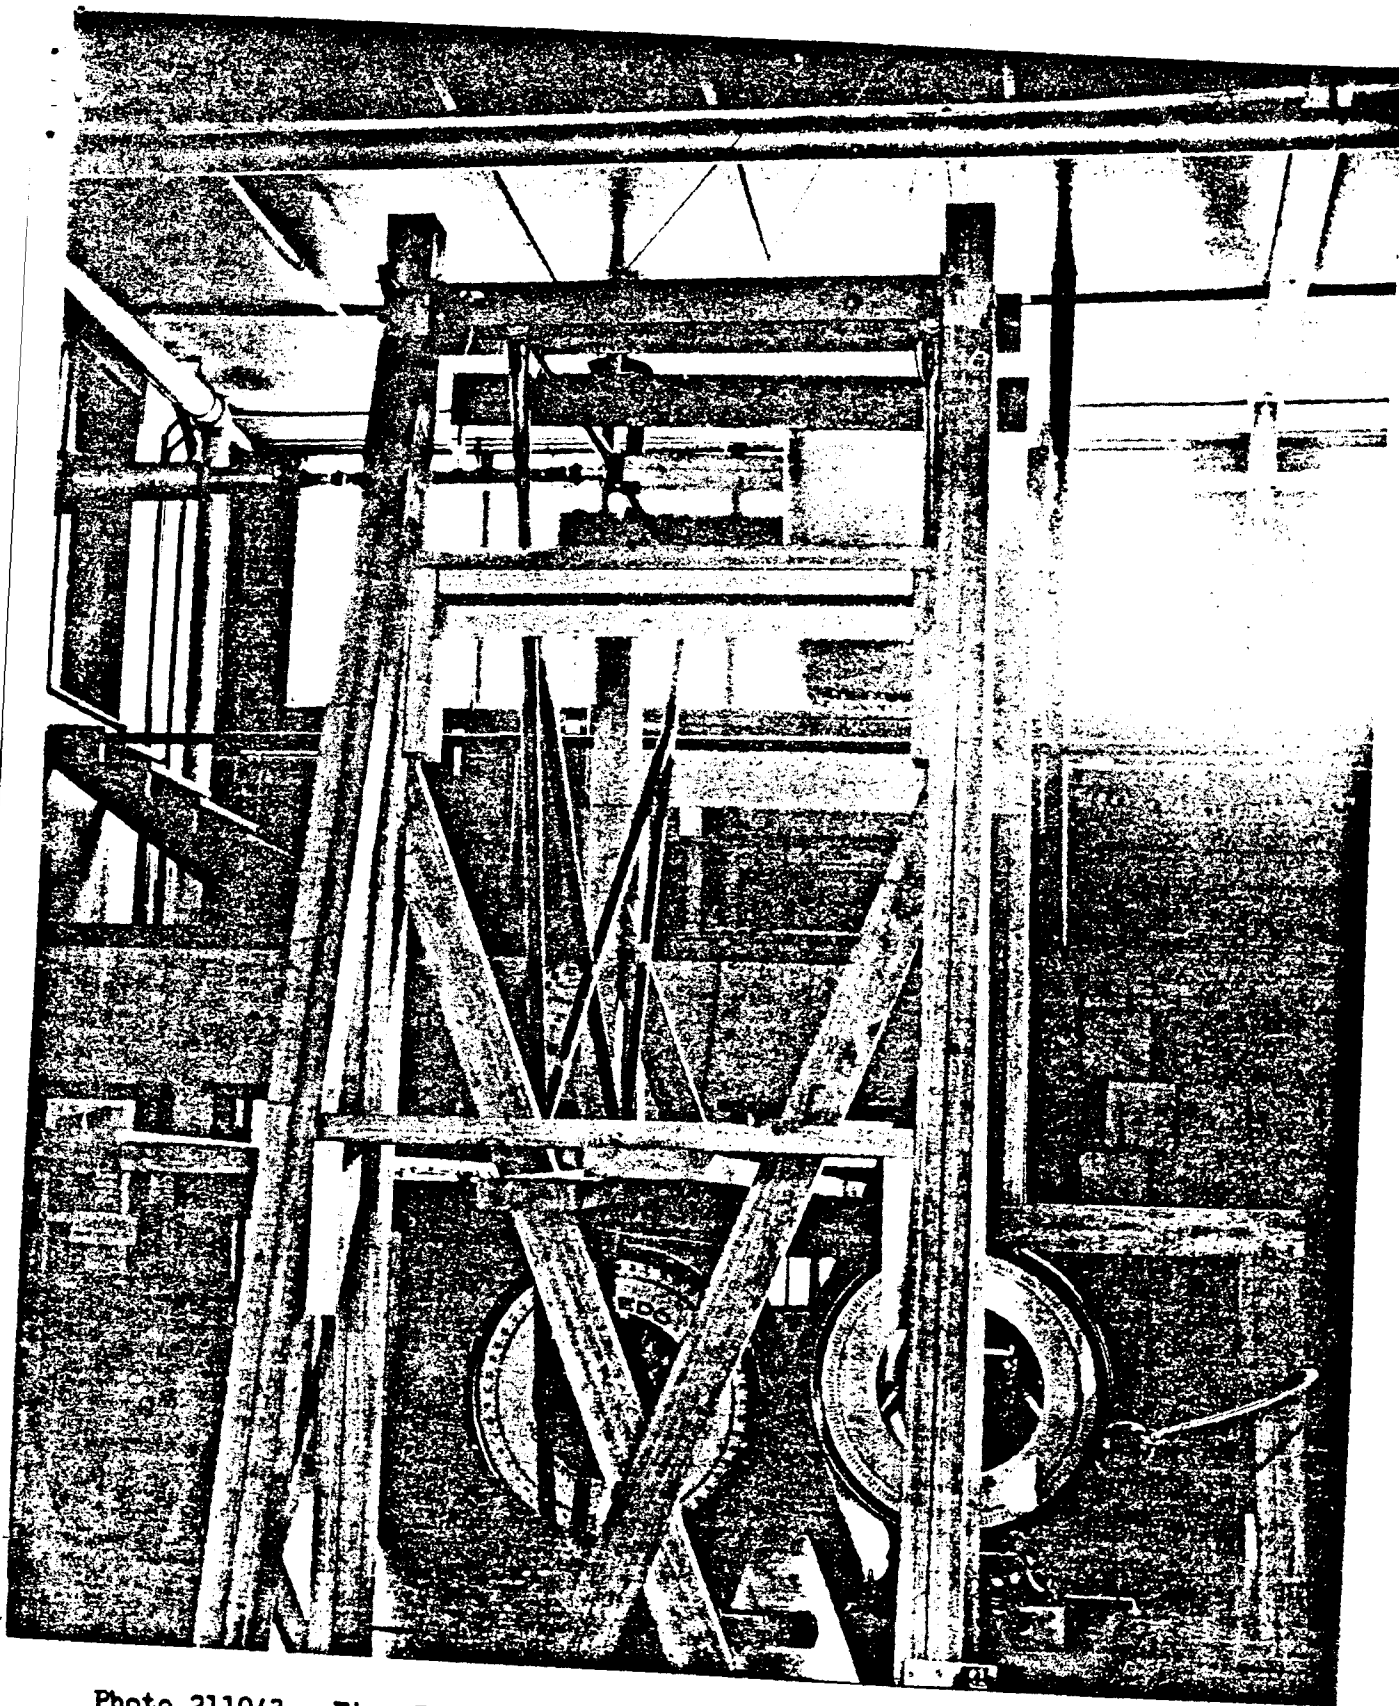


Photo 211043 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 53,
17.5 Inch Chord Channel, Side View

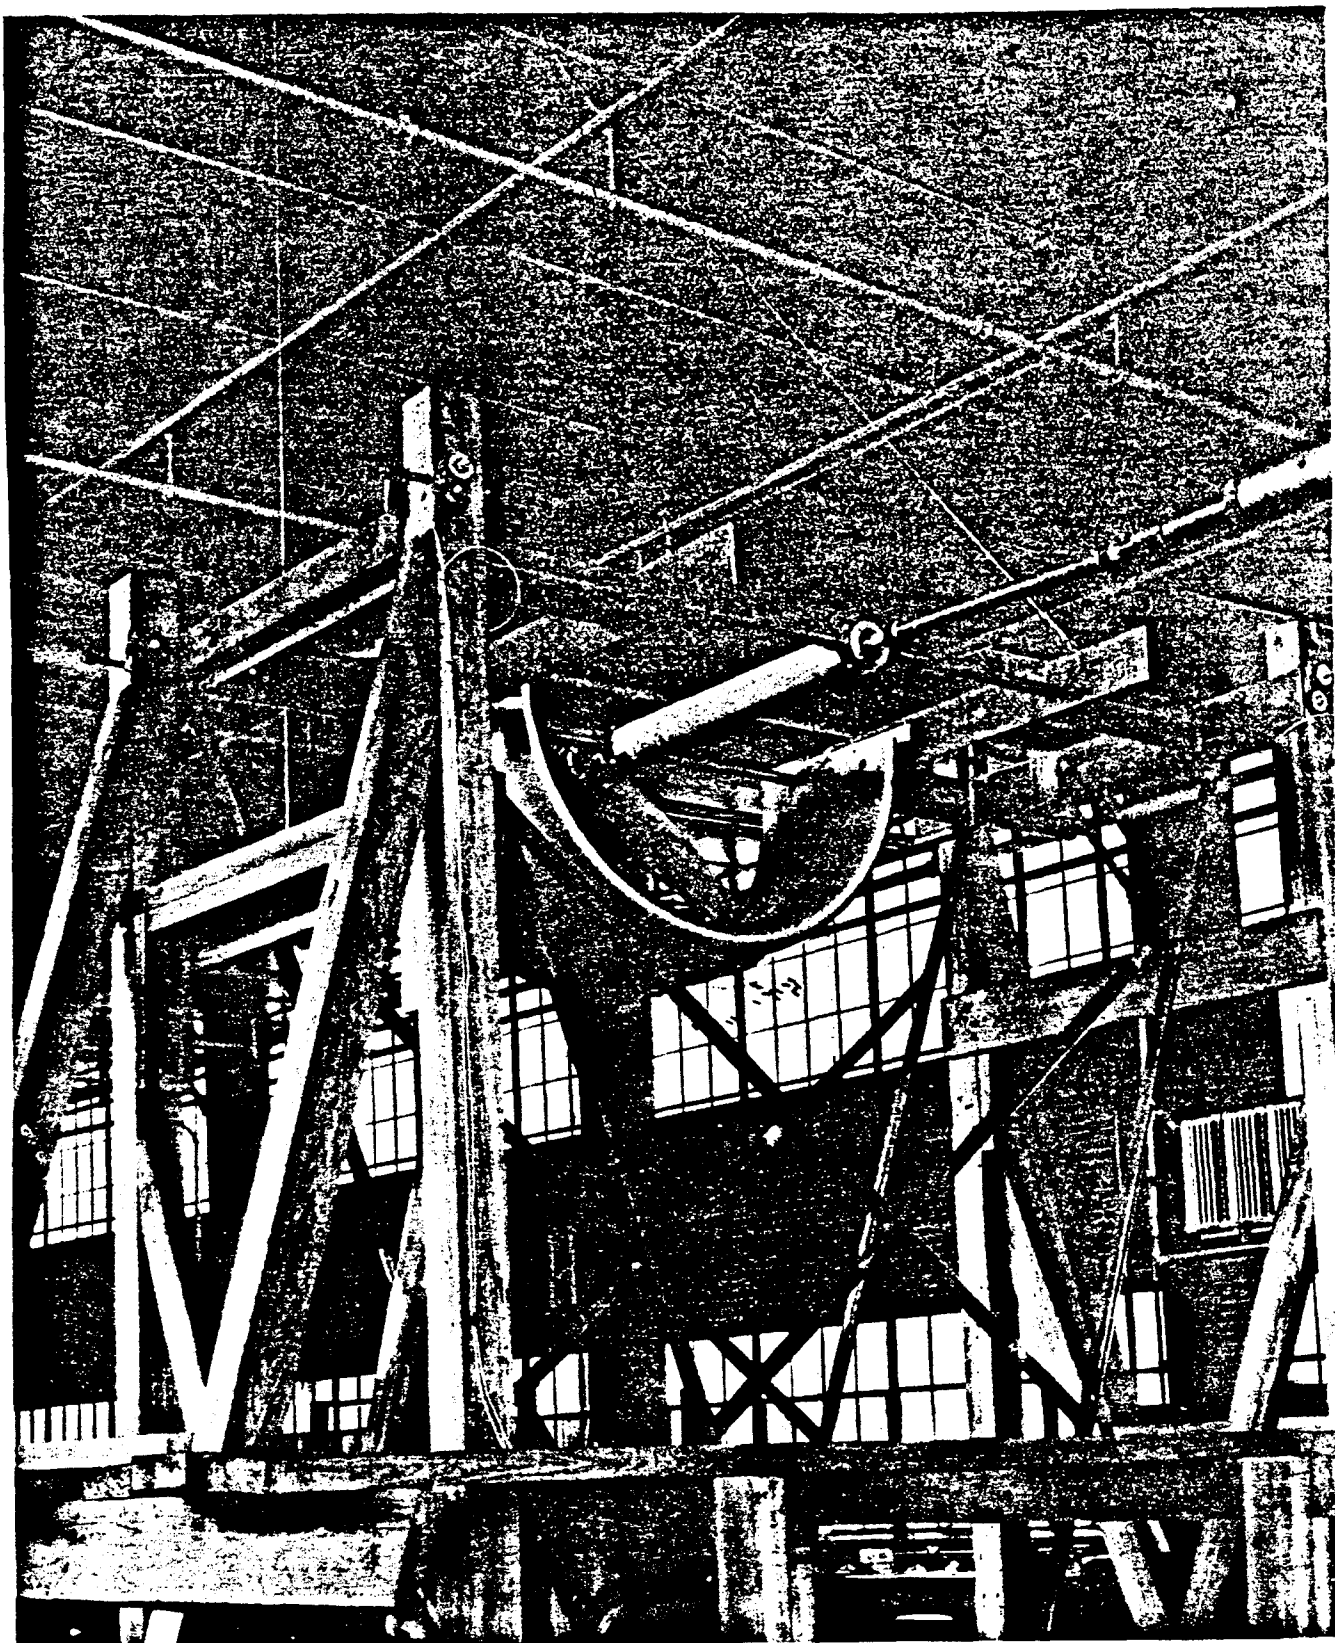


Photo 211044 - Five-Foot Wind Tunnel Model Custer Channel Wing Mounted for
Obtaining Static Lift, Thrust and Power, Wing Condition No. 53,
17.5 Inch Chord Channel, 3/4 Front View

STANDARD SYMBOLS, DEFINITIONS, AND AIRPLANE AXES

Forces and Moments (Continued from inside of front cover)

$C_L = L/qS$ lift coefficient
 L lift

$C_D = D/qS$ drag coefficient
 D drag

Section coefficients are lower case:

c_l , lift; c_d , drag; etc.

$C_Y = Y/qS$ lateral force coefficient
 Y lateral force

$C_m = M/qcS$ pitching-moment coefficient
 M pitching moment

$C_n = N/qbS$ yawing-moment coefficient
 N yawing moment

$C_l = L/qbS$ rolling-moment coefficient
 L rolling moment

$C_h = H/qSc$ hinge-moment coefficient

where

H hinge moment

S area of hinged surface back of hinge line

c root-mean-square chord back of hinge line

General Aerodynamic Symbols

$\bar{M}$, A. C. mean aerodynamic chord

c. g. center of gravity.

b span

S area

c chord

A aspect ratio (b^2/S)

W weight

m mass (W/g)

g acceleration of gravity

I moment of inertia (mk^2). Indicate radius of gyration k by proper subscript, k_x , k_y , k_z

α angle of attack of reference line in plane of symmetry

β angle of control surface relative to neutral position.

Add subscript for surface, β_a , aileron; β_r , rudder, etc.

θ angle between wing reference line and reference line in plane of symmetry (usually the thrust line)

δ angle of stabilizer relative to reference line in plane of symmetry (usually the thrust line)

V airspeed

a velocity of sound

M Mach number (V/a)

l linear dimension

μ coefficient of viscosity

ρ density (mass per unit volume). Density of dry air at 15°C and 29.92 in. Hg is 0.002378 lb.-ft.⁻³

ν kinematic viscosity (μ/ρ). For standard air, 1.564×10^{-4} ft.²/sec.

R Reynolds number (VL/ν)

q dynamic pressure ($\frac{1}{2} \rho V^2$)

q_i impact pressure ($\frac{1}{2} \rho V^2 F_o$)

F_o compressibility factor ($1 + \frac{1}{2} M^2 + \dots$)

p static pressure

p_o pressure in free stream

H total pressure (tunnel)

p_t total pressure (flight)

C_p pressure coefficient ($\frac{p - p_o}{\frac{1}{2} \rho V^2}$)

T absolute temperature

Propeller Symbols

D propeller diameter

r propeller radius

p propeller pitch

p/D pitch ratio

n revolutions per second

J advance-diameter ratio (V/nD)

β propeller blade angle at designated radius

ϕ effective helix angle ($\tan^{-1} V/2\pi r$)

η efficiency

$C_p = P/\rho n^3 D^5$ power coefficient

P power

$C_q = Q/\rho n^3 D^5$ torque coefficient

Q torque

$C_{sp} = \frac{\sqrt{P}}{\sqrt{\rho n^3 D^5}}$ speed-power coefficient

T propeller thrust, crankshaft tension

ΔD drag increase due to propeller slipstream

T_e effective propeller thrust ($T - \Delta D$)

$C_T = T_e/\rho n^3 D^4$ thrust coefficient

$T_d = T_e/\rho V^2 D^4$ thrust disk-loading coefficient

$T'_e = T_e/qS$ effective thrust coefficient based on wing area

$C_Q = Q/\rho V^2 D^5$ torque coefficient

originating agency, in which case a corresponding note
is abstract on the catalog card.

AD A 308434 FILMED

| | | | | | |
|---|----------|--|--------------|---------------------|------------------------|
| TSOH FORM 88 (13 MAR 47) | | DIVISION: Aerodynamics (2) | | ATI- 21145 | |
| Young, D. W. | | SECTION: Wings and Airfoils (6) | | ORIG. AGENCY NUMBER | |
| AUTHOR(S) | | CROSS REFERENCES: Wings, Channel - Aerodynamics (99252.3)
(99252.3) | | R-5568 | |
| | | | | REVISION | |
| AMER. TITLE: Test of two Custer channel wings having a diameter of 37.2 inches and lengths of 43 and 17.5 inches (Five foot wind tunnel test No. 545) | | | | | |
| FORG'N. TITLE: | | | | | |
| ORIGINATING AGENCY: Air Materiel Command, Wright Field, Dayton, O. | | | | | |
| TRANSLATION: | | | | | |
| COUNTRY | LANGUAGE | FORG'N CLASS | U. S. CLASS. | DATE | PAGES |
| U.S. | Eng. | | Unclass. | Apr '47 | 72 |
| | | | | ILLUS. | FEATURES |
| | | | | | photos, tables, graphs |
| ABSTRACT | | | | | |
| Tests were made to determine the resultant force in pounds hp obtainable with Custer channel wing (a wing-propeller arrangement). Fifty-three different model configurations were used in two different length channels, with two- and three-bladed propellers of various planforms and blade angles. The resultant of the thrust and lift forces was greater for the short channel than for the long one. The normal blade planform was slightly better than reverse taper planform. | | | | | |
| AD-B804 961 | | | | | |
| T-2, HQ., AIR MATERIEL | | | | | |
| FIELD, OHIO, USAAF | | | | | |
| WF-O-21 MAR 47 2000 | | | | | |

012450

Aerodynamic Slots PY3 25 Channel Wing

CANCLING