



EXPERIMENTAL DEMONSTRATION OF WEAVER'S MODEL OF MAGNETIC FIELDS FROM OCEAN WAVES

Tech. NADC

Andrew R. Ochadlick, Jr.
Sensors and Avionics Technology Directorate
NAVAL AIR DEVELOPMENT CENTER
Warminster, Pennsylvania 18974

12 NOVEMBER 1980

Approved for Public Release; Distribution Unlimited

DTIC QUALITY INSPECTED 5

Prepared for
NAVAL AIR SYSTEMS COMMAND
Department of the Navy
Washington, DC 20361

19920604004

8600/86

NOTICES

REPORT NUMBERING SYSTEM - The numbering of technical project reports issued by the Naval Air Development Center is arranged for specific identification purposes. Each number consists of the Center acronym, the calendar year in which the number was assigned, the sequence number of the report within the specific calendar year, and the official 2-digit correspondence code of the Command Office or the Functional Directorate responsible for the report. For example: Report No. NADC-78015-20 indicates the fifteenth Center report for the year 1978, and prepared by the Systems Directorate. The numerical codes are as follows:

CODE	OFFICE OR DIRECTORATE
00	Commander, Naval Air Development Center
01	Technical Director, Naval Air Development Center
02	Comptroller
10	Directorate Command Projects
20	Systems Directorate
30	Sensors & Avionics Technology Directorate
40	Communication & Navigation Technology Directorate
50	Software Computer Directorate
60	Aircraft & Crew Systems Technology Directorate
70	Planning Assessment Resources
80	Engineering Support Group

PRODUCT ENDORSEMENT - The discussion or instructions concerning commercial products herein do not constitute an endorsement by the Government nor do they convey or imply the license or right to use such products.

CAUTION - NATIONAL SECURITY INFORMATION. UNAUTHORIZED DISCLOSURE SUBJECT TO CRIMINAL SANCTIONS.

APPROVED BY:

Edward J. Gannuzi

DATE:

4/15/81

EXPERIMENTAL DEMONSTRATION OF WEAVER'S MODEL
OF MAGNETIC FIELDS FROM OCEAN WAVES

12 NOVEMBER 1980

Prepared by:

Andrew R. Ochadlick, Jr.
Sensors and Avionics Technology Directorate
NAVAL AIR DEVELOPMENT CENTER
Warminster, Pennsylvania 18974

Prepared for:

NAVAL AIR SYSTEMS COMMAND
Department of the Navy
Washington, DC 20361

DTIC QUALITY INSPECTED 8

19970604 004

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER NADC-80163-30	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Experimental Demonstration of Weaver's Model of Magnetic Fields From Ocean Waves		5. TYPE OF REPORT & PERIOD COVERED Final Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) Andrew R. Ochadlick, Jr.		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Sensors and Avionics Technology Directorate (Code 30), Naval Air Development Center Warminster, PA 18974		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62711N, MAD Technology and Measurements
11. CONTROLLING OFFICE NAME AND ADDRESS Naval Air Systems Command (Code AIR-370E) Washington, DC 20361		12. REPORT DATE 12 November 1980
		13. NUMBER OF PAGES 15
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) Unclassified
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for Public Release; Distribution Unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Ocean Wave Noise Magnetism Weaver's Model Noise Magnetometer Gravity Waves		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Magnetic measurements have been made above ocean waves from a stable platform at sea. The results are consistent with the theory of magnetic fields associated with ocean waves as developed by J.T. Weaver (Journal of Geophysical Research, Vol. 70, No. 8, pages 1921-1929, 1965). The theory offers the potential to reduce or eliminate ocean wave noise in MAD (Magnetic Anomaly Detection).		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-LF-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

TABLE OF CONTENTS

	<u>Page</u>
LIST OF FIGURES	iii
LIST OF SYMBOLS	iv
LIST OF ACRONYMS	v
EXECUTIVE SUMMARY	1
Introduction	1
Summary of Results	1
Conclusions	1
Recommendations	2
BACKGROUND ON MAD NOISE	3
REVIEW OF WEAVER'S MODEL	4
EXPERIMENTAL METHOD	8
ANALYSIS OF EXPERIMENTAL RESULTS	11
WEAVER'S THEORETICAL VALUE	11
COMPARISON OF EXPERIMENTAL AND THEORETICAL RESULTS	12
DISCUSSION	12
ACKNOWLEDGEMENT	14
REFERENCES	15

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
1	Geometry of Weaver's Ocean Wave Model (From Reference (1))	5
2	Plot of Weaver's Ocean Wave Equation	7
3	Photograph of NOSC's Oceanographic Tower	9
4	Example of the Correlation of the Magnetic Fields Induced by Ocean Waves with Wave Height (Part of original chart record)	10

LIST OF SYMBOLS

a	Amplitude of ocean wave (cm)
$\exp()$	The exponential $e = 2.718 \dots$ raised to the $()$ power (dimensionless)
F	Magnitude of earth's magnetic field (gauss)
$\vec{F}$	Earth's magnetic field vector (gauss)
g	Acceleration due to gravity (cm/sec^2)
$h'_{ }$	Component of ocean wave's magnetic field that is parallel to the earth's magnetic field (gauss)
$h'_{ }/a$	Magnetic field per meter wave amplitude (nT/m)
$\hat{i}$	Unit vector in +x direction
I	Earth's field dip angle (degrees)
$\hat{j}$	Unit vector in +y direction
$\hat{k}$	Unit vector in +z direction
s	Height above mean sea surface (cm)
x	x coordinate (cm)
y	y coordinate (cm)
z	z coordinate (cm)
σ	Conductivity of sea water (emu)
π	$3.14 \dots$
θ	Eastward inclination of the direction of wave propagation measured from the magnetic meridian

Comment on Units: The symbols used are those of other authors. To preserve clarity, they are shown with the units used by those authors. The final results of this report and all diagrams in this report use mks units with the SI convention that $T(\text{tesla}) = 1 \text{ weber}/\text{m}^2$ so that $10^{-5} \text{ gauss} (= 1 \text{ gamma}) = 1 \text{ nT}$. To avoid confusion with the standard symbol s used for altitude, the abbreviation used for time in seconds is sec instead of s .

LIST OF ACRONYMS

AN/ASQ-81(V)	Designation of MAD Sensor
MAD	Magnetic Anomaly Detection
NAVAIRDEVCON	Naval Air Development Center
NOSC	Naval Ocean Systems Center
SUNYA	State University of New York at Albany

EXECUTIVE SUMMARY

INTRODUCTION

The purpose of this report is to compare an existing theoretical model of the magnetic fields generated by ocean waves developed by Weaver (1) with an experimental measurement of such magnetic fields.

"Ocean wave noise" is the term used in the MAD (Magnetic Anomaly Detection) literature to describe the magnetic fields associated with ocean surface waves that are capable of lowering MAD performance. The source of the ocean wave noise is electric currents flowing in the sea due to the motion of the sea by waves in the presence of the earth's magnetic field. The process of generating the current is similar to the current producing process of an electric generator. The net result being that an electric current is produced in the sea that has an associated magnetic field.

Any form of magnetic noise that exceeds the MAD sensor sensitivity can reduce MAD capability. At an altitude of 150 m above the ocean, ocean waves with an amplitude of 0.5 m (1 m peak-to-peak) and a period of 15 sec will produce a peak-to-peak magnetic noise that is about a factor of ten above the MAD sensor sensitivity of 0.01 nT.

SUMMARY OF RESULTS

The theoretical value of ocean wave noise was found to be in good agreement with the measured value. (The percent difference between the theoretical and the averaged measured value is less than 6%.)

CONCLUSIONS

The theoretical model developed by Weaver to predict the magnetic fields of surface ocean waves is supported by an experimental measurement.

RECOMMENDATIONS

1. Methods to satisfactorily implement Weaver's ocean wave model into a MAD signal processing scheme to reduce or eliminate ocean wave noise should be developed.
2. Data collection of ocean wave noise with an airborne magnetometer should be initiated to support potential signal processing schemes of ocean wave noise removal.

BACKGROUND ON MAD NOISE

Ocean wave noise is one of several noise types detectable with the AN/ASQ-81(V) MAD sensor. (See (2) for details of sensor.) These noise types are briefly discussed below as to their origin and their negative effect on MAD.

Environmental types of magnetic noise that can limit MAD capability include geologic, geomagnetic and ocean wave noise. Geologic noise (3) is the magnetic anomalies in the earth's magnetic field caused by crustal magnetization. Geomagnetic noise (4,5) is the result of a complex solar terrestrial relationship. It originates in electric currents in the earth's upper atmosphere that cause temporal variations in the earth's magnetic field. The currents are due to an interaction of solar particles and solar electromagnetic radiation with the earth's upper atmosphere. Ocean wave noise is a magnetic field originating from electric currents induced in the sea and is elegantly described by Weaver's (1) theoretical formulas. The currents are a result of the wave motion of the sea, a conducting medium, moving across the magnetic field lines of the earth. The process of generating the current is similar to the current producing process of an electric generator.

Along with the environmental type noise, MAD is also influenced by platform noise and gradient noise. Platform noise is a result of incomplete reduction of the platform's magnetic field. Horizontal magnetic field gradients can produce noise during a turn. Vertical gradients can produce noise during an altitude change.

The sensor noise is the basic noise level of the MAD sensor. If any of the noise sources are in the bandpass of the MAD sensor and exceed the basic sensor noise level, it will be detected with a resultant loss in MAD capability due to a reduced signal-to-noise ratio.

Kraichman (6) lists magnetic noise contributions in the following order based on the percent of time each is present enough to influence MAD performance in important operating areas:

1. geologic noise
2. aircraft noise

3. ocean wave noise
4. geomagnetic noise

The use of models to reduce any of these noise sources will offer an improved MAD performance by increasing the signal-to-noise ratio. Such models must be verified in the real world before being implemented. This report deals with an experimental verification of a theoretical ocean wave noise model developed by Weaver (1). The following reviews Weaver's model, the experimental method to verify it at sea, and an analysis and discussion of the results.

REVIEW OF WEAVER'S MODEL

The geometry used by Weaver to calculate the magnetic field induced by the motion of the seawater across the earth's magnetic field is shown in Figure 1. The ocean wave shown corresponds to a gravity wave of angular frequency ω moving in the $+x$ direction. The amplitude of the wave above and below the mean free surface is represented by a . The $+z$ axis is taken vertically down and the $+y$ axis is oriented parallel to a line along the waves crests in a direction to form a right-handed rectangular coordinate system. The angle between the direction of magnetic north and the $+x$ axis measured in an eastward direction to the $+x$ axis is represented by θ . The earth's magnetic field vector is represented by $\vec{F}$, and is taken as constant in time and space. It lies in planes perpendicular to the $x y$ plane and parallel to the direction of magnetic north. The angle that $\vec{F}$ makes with the direction of magnetic north is the earth's field dip angle, I . The conductivity of the sea water is represented by σ .

Details of the theoretical formulation can be found in (1). Briefly, Weaver makes the usual assumptions that the seawater is incompressible and the velocity of seawater due to a surface wave is irrotational. This allows the introduction of a velocity potential that satisfies Laplace's equation. The solution of Laplace's equation results in a velocity potential that describes a pure gravity wave. Weaver then obtains the velocity vector of the seawater from

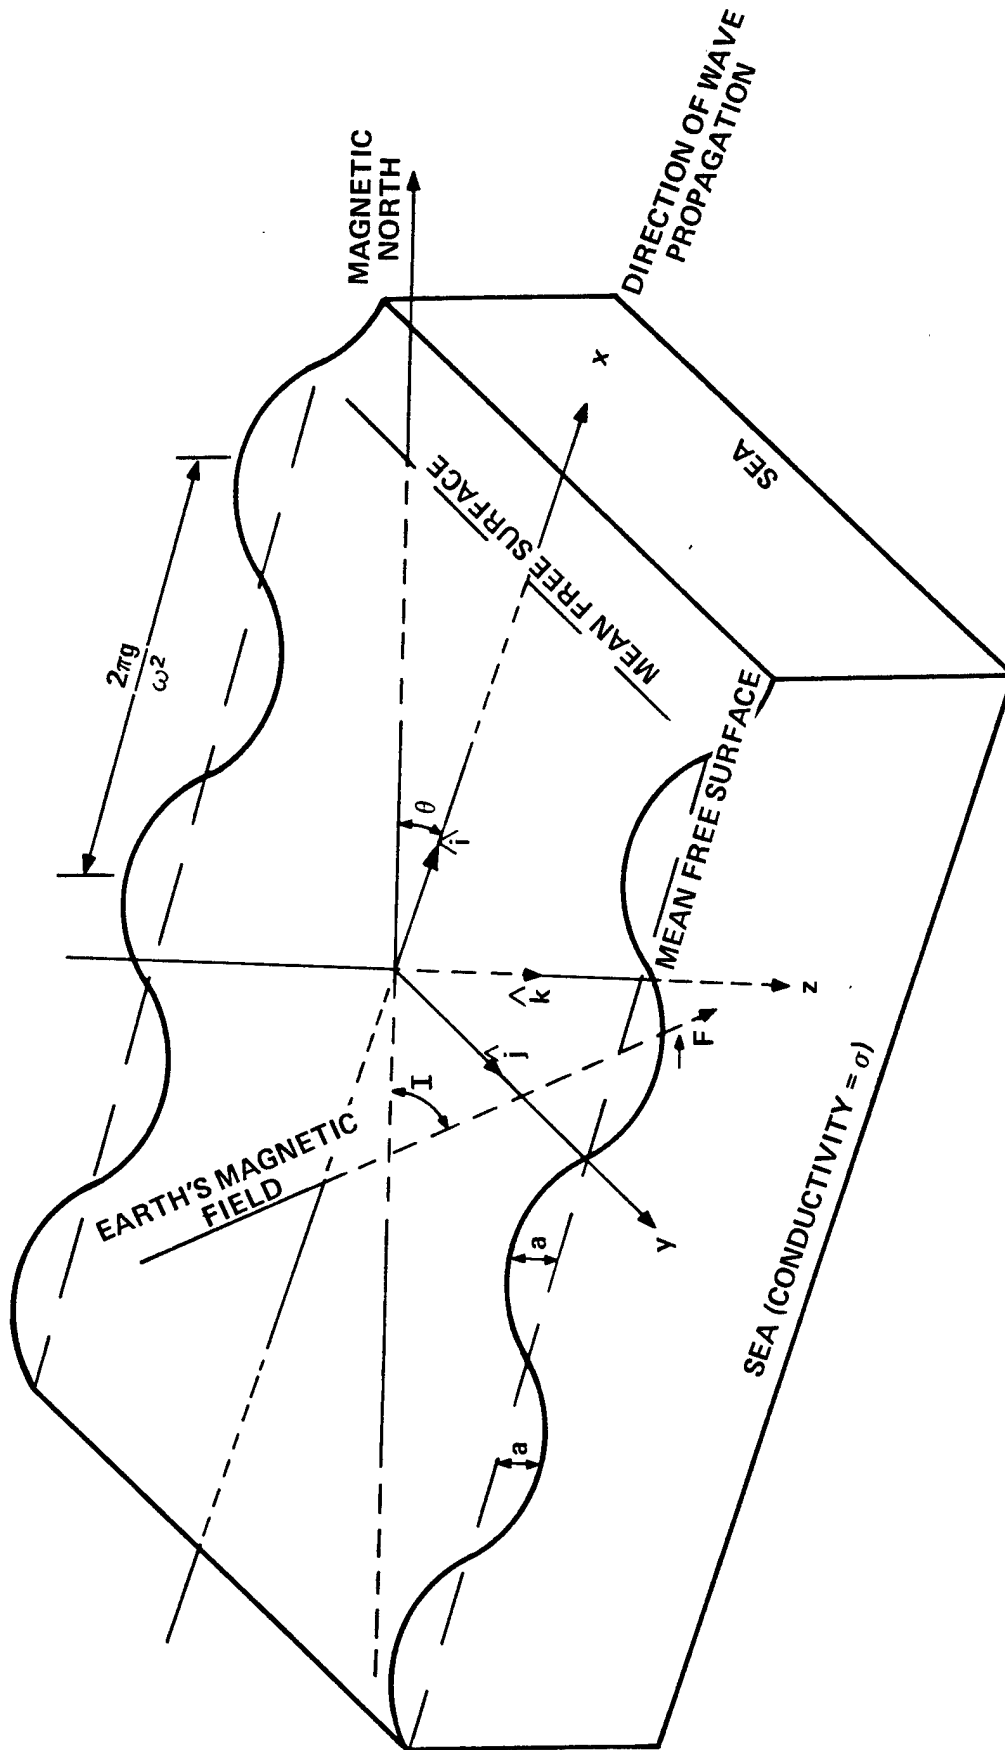


FIGURE 1 - geometry of Weaver's ocean wave model (from Reference (1))

the velocity potential. The vector cross-product of the velocity vector and the earth's magnetic field vector represents an induced electric field vector in the seawater. Using the induced electric field vector in Maxwell's equation, Weaver obtains a solution for the magnetic field vector after applying the boundary conditions. He then obtains approximate forms of the solution by making valid assumptions. The final step determines the component of the magnetic field, induced by the seawater, that is parallel to the earth's magnetic field vector. As pointed out by Weaver, that is the component measured by a total field magnetometer. In Weaver's notation the amplitude of this component is $h'_{||} = (\pi a \sigma F g / \omega) (\sin^2 I + \cos^2 I \cos^2 \Theta) \exp(-s\omega^2/g)$ (1)

where

- $h'_{||}$: amplitude of component of ocean wave's magnetic field parallel to the earth's magnetic field (gauss)
- a : amplitude of ocean wave (cm)
- σ : conductivity of seawater (emu)
- F : magnitude of earth's magnetic field (gauss)
- g : acceleration due to gravity (cm/sec²)
- ω : angular frequency of ocean waves (radians per sec)
- I : earth's field dip angle (degrees)
- Θ : eastward inclination of the direction of wave propagation from the magnetic meridian (degrees)
- s : height above sea (cm).

This is the expression to be compared with the experimental results obtained with a total field magnetometer. It is plotted in Figure 2 for various parameters. Following Weaver (1), it is plotted as magnetic field per meter wave height vs. altitude. Notice that the magnetic field is dependent on the period of the waves and on their amplitude. In the next section, an experimental method used to determine $h'_{||}$ is explained.

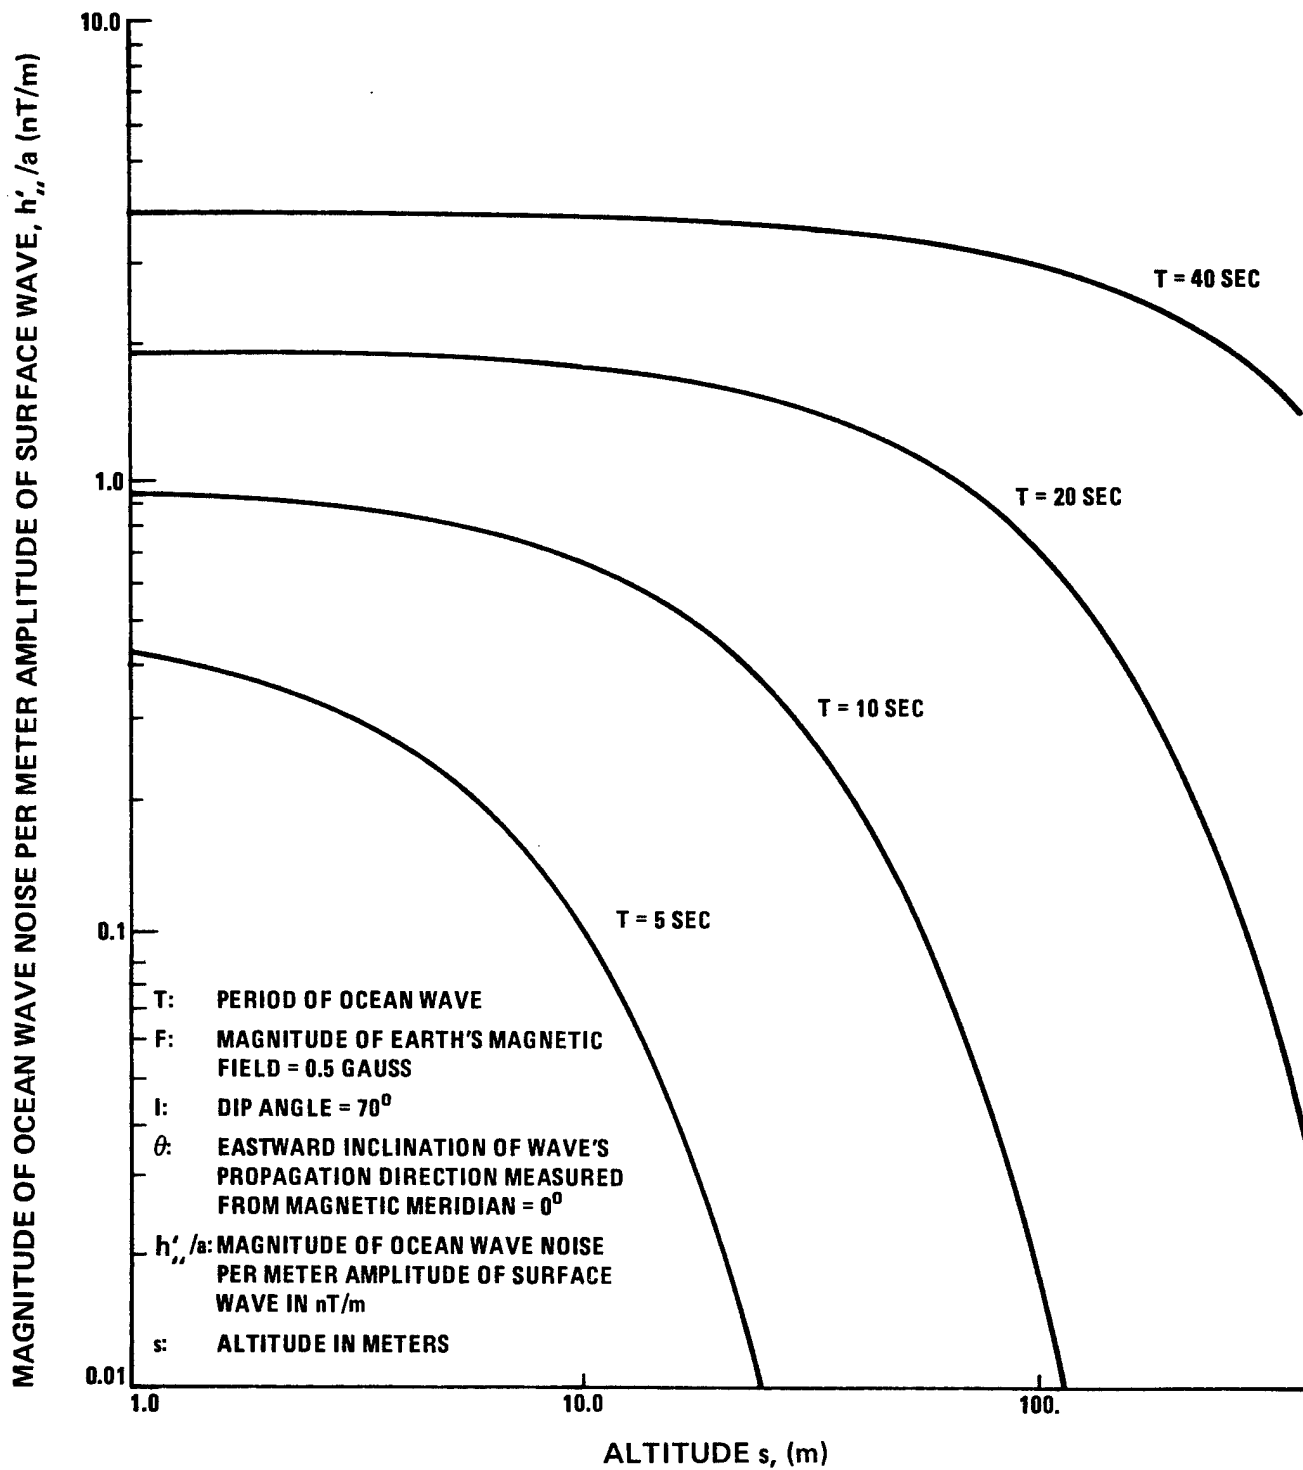


FIGURE 2 - plot of Weaver's ocean wave equation

EXPERIMENTAL METHOD

In order to test the theoretical model, the height of the ocean waves and the magnetic field above the ocean were measured simultaneously from the NOSC (Naval Ocean Systems Center) oceanographic tower located about 1.61 km off the San Diego coast in about 20 m of water. The oceanographic tower was equipped with a non-magnetic boom of about 20 m in length for magnetic measurements away from the tower. A photograph of the tower and boom arrangement is shown in Figure 3.

In his paper (1), Weaver points out that the motion of a sea platform makes reliable magnetic measurements over the ocean surface difficult. Fortunately, the motion of the platform was not a problem in this experiment. The stability of the boom-tower arrangement had been previously considered (7) to offer a satisfactory platform for the measurements of ocean wave noise. This was confirmed by sensitive tilt measurements (8) of the boom-tower combination. The boom orientation at the magnetic sensor is stable to 5 seconds of arc (9). Magnetic measurements of the tower can be found in (10).

The magnetic field measurements of the ocean waves, h'_w , were made as a function of time with a total field magnetometer (the AN/ASQ-81(V) MAD sensor) located near the end of the boom. The magnetometer's sensitivity is 0.01 nT (10^{-7} gauss) in a 0.04- to 0.60-Hz bandpass. The wave height measurements, a , were obtained as a function of time from a pressure transducer located below the ocean surface. The angular frequency, ω , of the ocean wave was determined from the period of the wave height oscillation. The analog signals of both the pressure transducer (wave height) and the magnetometer output were displayed simultaneously on a paper chart recorder. An example is shown in Figure 4. The correlation of the magnetometer output with the transducer output is apparent. The slight phase shift is due to a spatial separation of the pressure transducer with respect to a point directly below the magnetometer and the different filtering used on both instruments.


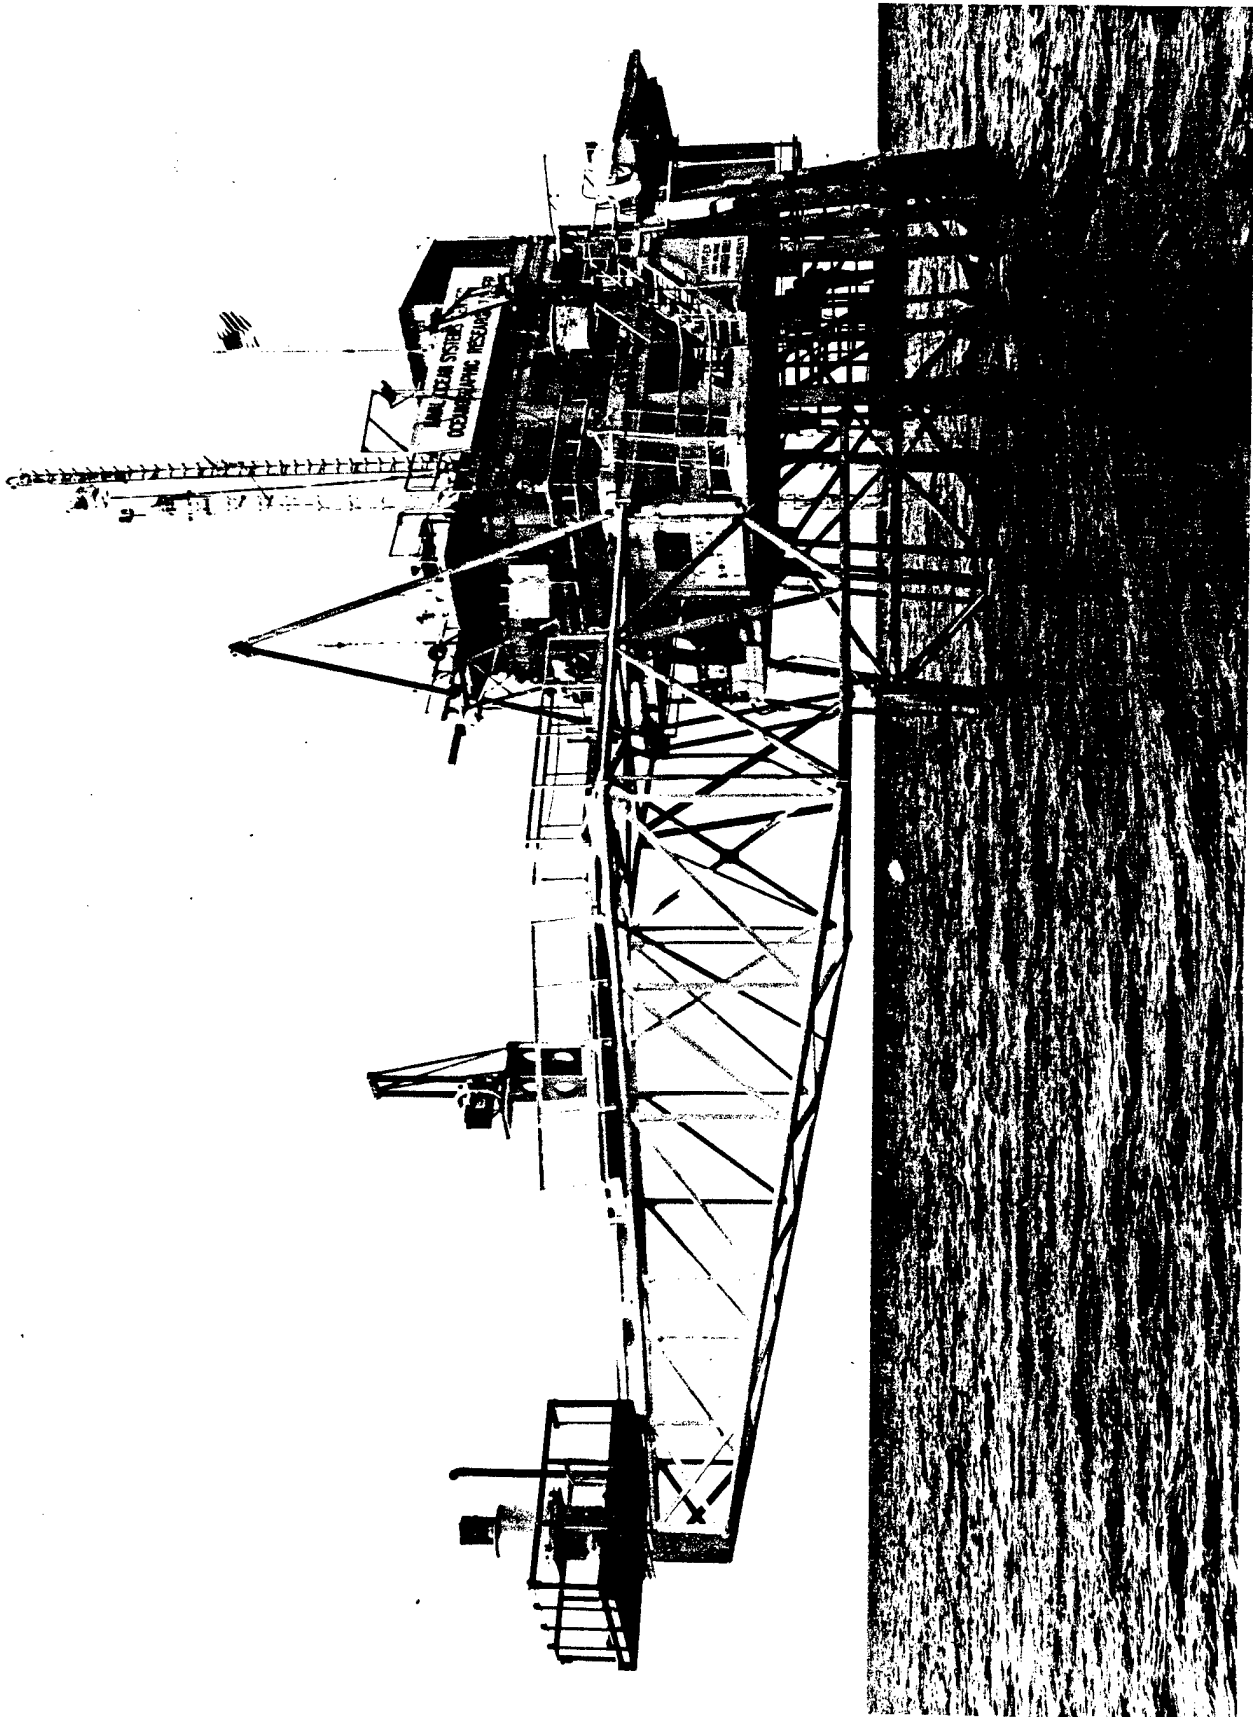


FIGURE 3 - photograph of NOSC's oceanographic tower

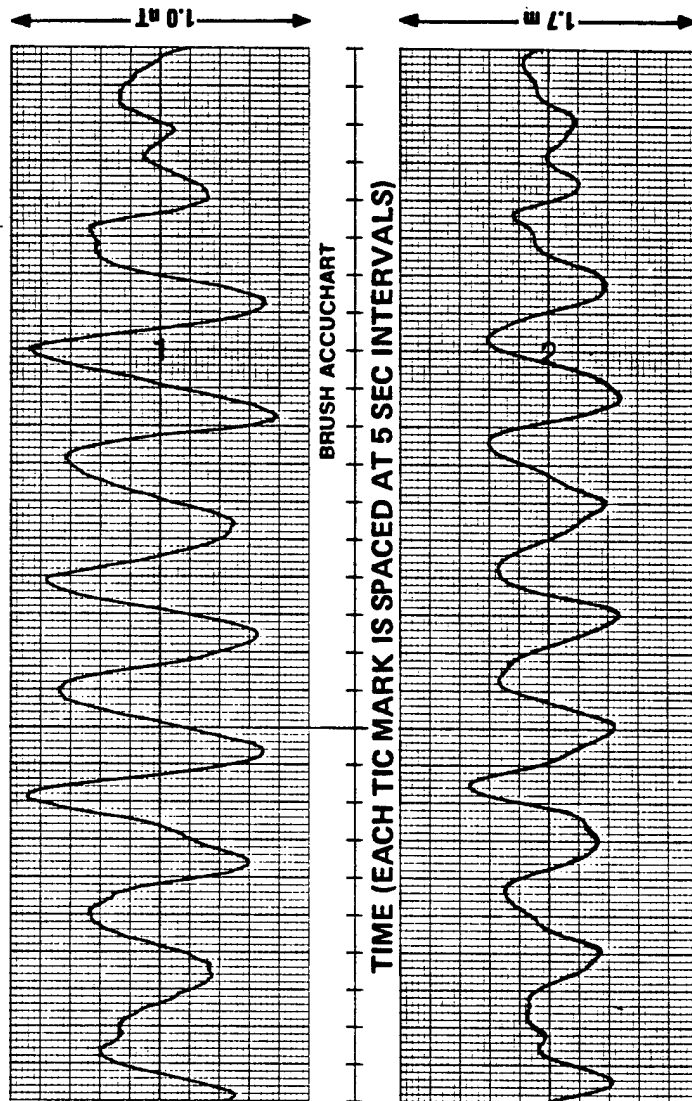

MAGNETOMETER OUTPUT 1.0 nT FULL SCALE
(0.04 TO 0.6 Hz BAND PASS)

OSCILLATING SIGNAL DUE TO OCEAN SURFACE WAVE
INDUCING A MAGNETIC FIELD DETECTED BY THE
MAGNETOMETER

PRESSURE TRANSDUCER OUTPUT CORRESPONDS
TO WAVE HEIGHT OF ABOUT 1.7 m FULL SCALE
(0.3 Hz LOW PASS FILTER)

OSCILLATING SIGNAL DUE TO OCEAN SURFACE WAVE
HEIGHT VARIATIONS AS DETECTED BY THE PRESSURE
TRANSDUCER

FIGURE 4 - example of the correlation of the magnetic fields induced by ocean waves
with wave height (part of original chart record)

ANALYSIS OF EXPERIMENTAL RESULTS

Following the procedure of Maclure et al. (11), values of the magnetic field per meter amplitude of the ocean wave were determined for the dominant wave period during the measurement period that lasted from 0900 hours PDT June 1, 1978 until 0700 hours PDT on June 2, 1978. The dominant frequency was found to be 15 sec. Choosing only data at this frequency that was, in addition, represented by smooth and sinusoidal oscillations of at least three complete oscillations of the same amplitude, resulted in a total of seven data points. The average of the seven data points resulted in an experimental value of $h'_{\parallel}/a = 0.88$ nT/m (magnetic field per meter wave height) with a standard deviation of 0.05 nT/m. In the next section Weaver's theoretical value is determined.

WEAVER'S THEORETICAL VALUE

The parameters in Weaver's equation (1) during the relevant time of the experiment were:

$$\omega = 2\pi (1/15) \text{ rad/sec}$$

$$I = 58^{\circ}$$

$$\theta = 90^{\circ}$$

$$\sigma = 4.0 \times 10^{-11} \text{ emu}$$

$$F = 0.492 \text{ gauss}$$

$$g = 980 \text{ cm/sec}^2$$

$$s = 600 \text{ cm}$$

Substituting these quantities into equation (1), solving for $h'_{\parallel}/a$, and converting into mks units results in $h'_{\parallel}/a = 0.93$ nT/m. In the next section this value is compared with the experimental value.

COMPARISON OF EXPERIMENTAL AND THEORETICAL RESULTS

Weaver's theoretical formula, equation (1), predicts a value of $h'_{\parallel}/a = 0.93$ nT/m for the experimental conditions. The experimental measured value has been shown to be $h'_{\parallel}/a = (0.88 \pm 0.05)$ nT/m. The theoretical value falls within the uncertainty of the experimental value. Furthermore, the theoretical value agrees to within better than 6% of the average experimental value. A discussion of certain aspects of the experiment, theory and results is given in the following discussion section.

DISCUSSION

The agreement between theory and this experiment was tested for only one set of parameters such as a specific value of altitude, dip angle, magnitude of earth's magnetic field, wave period and direction of wave propagation. This is because the experiment was performed at only one location, resulting in the specific value for the magnitude of the earth's field and dip angle. Furthermore, nature provided only one usable wave frequency and one direction of wave propagation. Additional experimental work could be performed with an airborne magnetometer and data collection system including supporting ground truth data taken at various locations to change the parameters.

It should be mentioned that airborne magnetometer data of ocean wave noise will undergo an apparent frequency change due to the horizontal velocity of the aircraft. Weaver's paper (1) includes the equation (his equation (29)) to describe the frequency shift.

The results of Weaver's ocean wave model (1) are in good agreement with 1) the experimental results of Maclure et al. (11) in deep water obtained below the ocean, and 2) the results presented in this report obtained above the ocean. Hence, the application of Weaver's ocean wave model to the removal of ocean

wave noise from MAD data by signal processing techniques is valid and offers the potential to reduce and possibly eliminate ocean wave noise. Such processing is envisioned to involve appropriate wave profile measurements from the MAD aircraft. The wave profile would be used in Weaver's model to determine the expected ocean wave noise. This expected value could then be subtracted from the MAD data. Technology exists (for example, reference 12) to provide a low flying aircraft with the ocean wave profile.

ACKNOWLEDGEMENT

The author wishes to thank Mr. Dale Good of NOSC for his help and cooperation in all aspects of the experiment and for supplying the photograph used in this report. A special thanks goes to Mr. Jack Olson of NOSC for providing transportation, assistance with equipment, supplies, technical assistance, search for a potential site for gathering magnetic data at Point Loma, and for safe shipment of equipment to NADC. The author also wishes to thank Dr. W. Podney of Physical Dynamics, Inc. for his cooperation during the experiment, and for his many helpful discussions before, during, and after the experiment. The author wishes to thank Dr. H. Story of SUNYA for his review of this report. A special thanks goes to Miss P. Attanaseo of SUNYA for typing the original manuscript.

REFERENCES

- (1) Weaver, J.T., Journal of Geophysical Research, Vol. 70, 1965, pp. 1921-1929.
- (2) Preliminary Manual, Magnetic Detecting Set AN/ASQ-81(V)2, NAVAIR 16-30 ASQ81-500, 1 November 1977, Naval Air Systems Command.
- (3) Proceedings of the NAVSURWPNCEN Workshop on Ship/Environment Magneto Electric Signatures, July 1975, NSWC/WOL/X151, Naval Surface Weapons Center/White Oak Laboratory.
- (4) Matsushita and Campbell, Physics of Geomagnetic Phenomena, Vols. 1 and 2, Academic Press, 1967.
- (5) Ratcliff, J. A., An Introduction to the Ionosphere and Magnetosphere, Cambridge Press, 1972.
- (6) Kraichman, M. B., "A Comparison of Ocean Wave and Geomagnetic Noise in the MAD Passband with Application to the Reduction of Geomagnetic Noise (U)," 26 January 1973, Confidential report, NOLTR 73-26, Naval Ordnance Laboratory.
- (7) Ochadlick, A. R., "Ocean Wave Noise and Geomagnetic Noise", Report of Trip, NAVAIRDEVCEN - 202219, 31 July 1976.
- (8) Personal communication with Dr. Walter Podney of Physical Dynamics, May 1978.
- (9) Podney, W., and Sager, R., Science, Vol. 205, 28 September 1979, p. 1381.
- (10) Gillespie, G. H., and Podney, W. N., "The Magnetic Field and Magnetic Gradients of the NUC Oceanographic Research Tower", May 1976, RADC-TR-77-101, Rome Air Development Center.
- (11) Maclure, K. C., Hafer, R. A., and Weaver, J. T., Nature, Vol. 204, 1964, pp. 1290-1291.
- (12) Ross, D. B., Cardone, V. J., and Conaway, J. W., Jr., IEEE Transactions on Geoscience Electronics, Vol. GE-8, No. 4, October 1970.

	<u>No. of Copies</u>
Naval Underwater System Center.	1
New London Laboratory, New London, CT 06320	
(1 for E. Soderberg)	
Physical Dynamics.	2
P.O. Box 556, LaJolla, CA 92038	
(2 for W. Podney)	
State University of New York at Albany.	1
1400 Washington Avenue, Albany, NY 12222	
(1 for H. Story Physics Department)	
Science Applications Incorporated.	1
8400 Westpark Drive, McLean, VA	
(1 for J. Czika)	
SRI International.	1
33 Ravenwood Ave., Menlo Park, C	
(1 for D. Bubenik)	
Texas Instruments Inc.	2
Box 6015, Mail Station 332, Dallas,	
(1 for D. Beckman)	
(1 for D. King)	