


19980513 174

A Facsimile Report



Reproduced by

**UNITED STATES
DEPARTMENT OF ENERGY**

Office of Scientific and Technical Information

Post Office Box 62

Oak Ridge, Tennessee 37831

DISTRIBUTION STATEMENT A

Approved for public release;
Distribution Unlimited

PLEASE RETURN TO:

**BMD TECHNICAL INFORMATION CENTER
BALLISTIC MISSILE DEFENSE ORGANIZATION
7100 DEFENSE PENTAGON
WASHINGTON D.C. 20301-7100**

DTIC QUALITY INSPECTED 4

U2901

Accession Number: 2901

Publication Date: Sep 10, 1990

Title: Linear Accelerator in Space: The Beam Experiment Aboard Rocket (Paper)

Personal Author: O'Shea, P.G.; Butler, T.A.; Lynch, M.T.; et al.

Corporate Author Or Publisher: Los Alamos National Laboratory, Los Alamos, NM 87545 Report Number: LA-UR-90-3441

Comments on Document: Presented at th 1990 Linear Accelerator Conference, Albuquerque, NM, Sept 10-14, 1990.

Descriptors, Keywords: BEAR NPB Space Accelerator Propagate Exoatmosphere Experiment

Pages: 00004

Cataloged Date: May 10, 1991

Document Type: HC

Number of Copies In Library: 000001

Original Source Number: DE91-002347

Record ID: 21984

Source of Document: NTIS

Los Alamos National Laboratory is operated by the University of California for the United States Department of Energy under contract W-7405-ENG-36


**TITLE: A LINEAR ACCELERATOR IN SPACE--THE BEAM EXPERIMENT
ABOARD ROCKET**

LA-UR--90-3441

AUTHOR(S): Patrick G. O'Shea
Thomas A. Butler
Michael T. Lynch
Kenneth F. McKenna
Morris B. Pongratz

Thomas J. Zaugg

DE91 002347

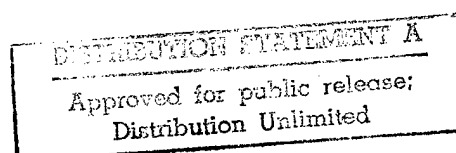

SUBMITTED TO: 1990 Linear Accelerator Conference, Albuquerque, NM, Sept. 10-14, 1990

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Received by OSTI

NOV 05 1990

By acceptance of this article, the publisher recognizes that the U.S. Government retains a nonexclusive, royalty-free license to publish or reproduce the published form of this contribution, or to allow others to do so, for U.S. Government purposes.

The Los Alamos National Laboratory requests that the publisher identify this article as work performed under the auspices of the U.S. Department of Energy

Los Alamos

Los Alamos National Laboratory
Los Alamos, New Mexico 87545

MASTER

A LINEAR ACCELERATOR IN SPACE - THE BEAM EXPERIMENT ABOARD ROCKET

P. G. O'Shea, T. A. Butler, M. T. Lynch, K. F. McKenna, M. B. Pongratz, T. J. Zaugg
Los Alamos National Laboratory, Los Alamos, NM 87545

Abstract

On July 13, 1989 the BEAM experiment Aboard Rocket (BEAR) linear accelerator was successfully launched and operated in space. The flight demonstrated that a neutral hydrogen beam could be successfully propagated in an exoatmospheric environment. The accelerator, which was the result of an extensive collaboration between Los Alamos National Laboratory and industrial partners, was designed to produce a 10 mA (equivalent), 1 MeV neutral hydrogen beam in 50 μ s pulses at 5 Hz. The major components were a 30 keV H⁻ injector, a 1 MeV radio frequency quadrupole, two 425 MHz RF amplifiers, a gas cell neutralizer, beam optics, vacuum system and controls. The design was strongly constrained by the need for a light-weight rugged system that would survive the rigors of launch and operate autonomously. Following the flight the accelerator was recovered and operated again on the laboratory.

Introduction

Neutral particle beam (NPB) technology is considered to be one of the most promising concepts under development for the United States Strategic Defense Initiative. The BEAR project was the first test in space of the critical low energy accelerator technology that will be built upon in future systems. The principal aims of the project were to successfully operate a particle accelerator in space and to study the propagation of a

neutral hydrogen beam, and to examine the effects of spacecraft charging.

The three main sections of the spacecraft are (figure 1): a) the Telemetry and Physics section, containing communications equipment and a number of experimental packages to study spacecraft charging and the nearby plasma environment; b) the Accelerator section, where the H⁻ beam is generated accelerated and neutralized; c) the Beam Diagnostics section, which contains beam sensors, and cameras for beam tracking.

Accelerator

A conceptual view of the accelerator is shown in figure 2. The main components were as follows: an H⁻ ion source with 30-kV extraction, a low-energy beam transport (LEBT) quadrupole system; a radio frequency quadrupole (RFQ) and RF system to accelerate the beam to 1 MeV, a high-energy beam transport (HEBT) system to collimate the beam; and a xenon gas cell neutralizer. The general design parameters are given in table 1.

The accelerator conceptual and physics design were carried out by Los Alamos National Laboratory. The major industrial partners involved in the accelerator engineering were: McDonnell Douglas (injector, HEBT and vacuum system); Grumman Aerospace (RFQ); and Westinghouse Electric (RF amplifiers).

The launch and flight environments required that all accelerator components be both rugged and light weight to a

BEAR PAYLOAD SYSTEM

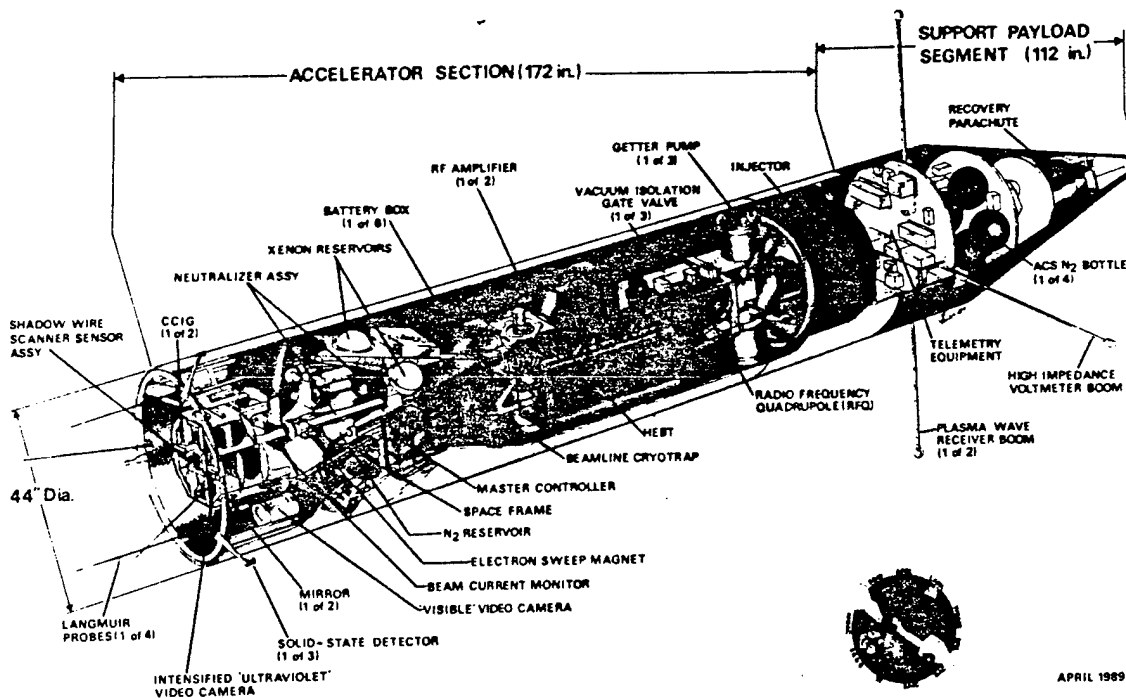


Fig. 1. The BEAR payload after booster separation.

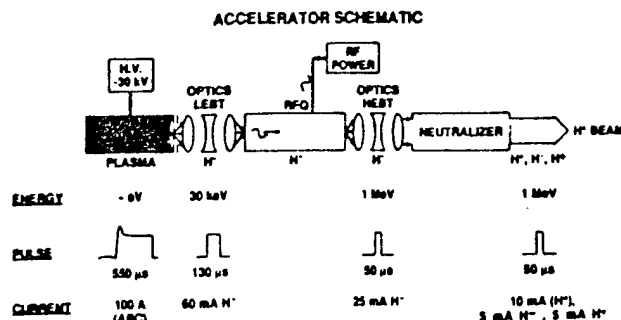


Fig. 2. A conceptual view of the accelerator.

Table 1. Bear Accelerator Performance.

	Design 1985	Test Stand** (10/88)	Payload (3/89)	PAD T-5 min	Flight
H ⁺ Extraction Voltage (kV)	30	34	35	35	35
H ⁺ Current from LEPT (mA)	40	60	55	54	40
Emittance at RFQ X (π cm-mrad)	0.007	0.007	-	-	-
(RMS) Y (π cm-mrad)	0.014	0.015	-	-	-
RMS Beam Diam into RFQ (mm)	1.5	2	-	-	-
Current out of RFQ (mA)	26	27	20	17	13
Rep Rate (Hz)	5	5	5	5	5
Beam Pulse from RFQ (μs)	50	50	50	50	50
Energy out of RFQ (MeV)	1	1	-	-	-
Emittance out of RFQ (π cm-mrad)	0.011	0.012	-	-	-
Current out of HEPT (mA)	23	25	18	15	11
H ⁰ Particle Current (mA)	10	12*	7	-	5
Beam Divergence (mrad, rms)	21	21	21	-	21
Beam Diameter (mm, rms)	11	10	10	-	10
H ⁰ Beam Brightness (A/(π mrad) ² , rms)	1 x 10 ¹²	1.2 x 10 ¹²	0.7 x 10 ¹²	-	0.5 x 10 ¹²

*Not measured in flight configuration

**Without shadow wire

**Prototype injector

degree unnecessary for ground based systems. The payload capacity of the Aries booster limited the accelerator weight to 700 kg.

The H⁺ ion source is a modified Penning-Dudnikov source¹. Cesium is contained in a plenum inside the source in the form of Cs₂Cr₂O₇ mixed with Ti powder. The cesium is delivered to the plasma region by thermal decomposition on heating the anode and cathode. The anode and cathode are a self aligning coaxial structure. The source housing is made of aluminum, the cathode solid molybdenum, and the anode is stainless steel with a molybdenum insert. Hydrogen gas is pulsed into the plasma region by a piezoelectric valve at in 350 μs long pulses at 5 Hz. The average flow rate is 0.04 torr l/s. Extraction of the H⁺ at 30 kV across a single gap through a 4 x 1 mm² slit.

The LEPT, which focuses the H⁺ beam from the source to the RFQ, consists of a quadrupole triplet made of NdFeB permanent magnet blocks. This was designed to be a fixed focus system with no on-line adjustment of quadrupole strength or position. The match in to the RFQ is adjusted by varying the extraction voltage from the ion source and by controlling the plasma neutralization in the LEPT region through the addition of Xenon gas¹. This has resulted in a less than ideal but stable and reliable match in to the RFQ.^{2,3}

The vacuum system for the source/LEPT region consists of two specially modified SORB-AC^{um4} getter pumps, which have an effective pumping speed of 600 l/s for hydrogen and zero for Xenon. The only xenon pumping from the LEPT is 0.6 l/s through the RFQ orifice to a 2000 l/s helium cryo condensation pump located between the HEPT and the neutralizer. This provides a means of allowing a high partial pressure of xenon and a low partial pressure of hydrogen, which is desirable for optimum operation. The beam passes through the cryopump, which is a coaxial hollow Dewar containing super critical helium, with one of the vacuum walls being the condensation surface. All gases except H₂, He and Ne are pumped by the cryopump. The cryopump is assisted by a getter pump attached to the HEPT housing. Little electrical power is required

by the vacuum system. For example, the getter pumps require less than 6 watts each to maintain a pumping temperature of 80°C.

The RFQ cavity, which weighs only 55 kg, is an electroformed aluminum-copper structure⁵ with no RF or mechanical joints. The cavity walls are copper plated on aluminum, with the vane tips being bare aluminum. The minimum aperture diameter is 2.4 mm. The design intervane voltage is 44 kV (1.8 Kp). It is designed to accelerate 25 mA of H⁺ with a copper power requirement of 70 kW and 1 kW per mA of accelerated beam. The low duty factor of 0.025%, along with frequency control of the RF amplifier, precluded the need for cooling.

The RF power^{6,7} is provided by two solid-state amplifiers, each capable of producing 60 kW pulses, 60 μs long, at 5 Hz with a frequency of 425 +/- 0.5 MHz. The resonant frequency of the RFQ is automatically tracked to within 0.02 MHz, which eliminates the need for temperature stabilization. The BEAR accelerator is the first to be operated exclusively with solid-state amplifiers.

The HEPT is a quadrupole triplet similar to the LEPT. It collimates the beam from the RFQ, giving a divergence of 1 mrad rms and a beam diameter of 11 mm rms.

The neutralizer is designed to be approximately 50% efficient. Xenon gas is the neutralizing agent which is injected into the beamline by a piezo-electric valve. The efficiency of the neutralizer and the net current produced can be varied by adjusting the amount of gas injected. For normal operation the one obtains approximately 50% H⁰, and 25% each of H⁻ and H⁺.

After the neutralizer the beam exits the spacecraft via a gate valve. Beyond this is a shadow wire scanner which measures the beam profile and divergence.

Details of the performance of the accelerator during ground testing have been presented elsewhere,⁸ and are summarized in table 1. The accelerator is shown in figure 3 in its flight configuration with the payload skins removed.



Fig. 3. The accelerator in its flight configuration. The injector is at the top of the picture.

Flight

The BEAR accelerator was launched into space on July 13, 1989. Details of the pre-programmed accelerator and payload activities are given in table 2, and the nominal flight profile is shown in figure 4. The accelerator systems were maintained in a fully operational state until 155 seconds before launch. At this time the injector extraction high voltage and the RF power to the RFQ were switched off. The H^- ion source remained on through launch. By T+127 seconds all accelerator systems were operational. The beamline exit valve opened at T+128 s and the beam was injected into space. The neutralizer had been programmed to produce a slightly net negative current of approximately 1 mA with individual species currents of

Table 2. Bear Flight Timeline

Time (seconds)	Event
T = 0	Launch (Ion source on)
T + 85	Booster separation
T + 91	Extractor high voltage on
T + 105	RF system on Beam out of RFQ
T + 127	Neutralizer on
T + 128	Beamline exit gate valve open Beam injected into space (Net current -0.8 mA)
T + 260 - 270 and 322 - 332	Neutralizer off (Net current -10 mA)
T + 360 - 390	Overneutralize (Net current + 1.4 mA)
T + 390	Beamline gatevalve closed Accelerator off

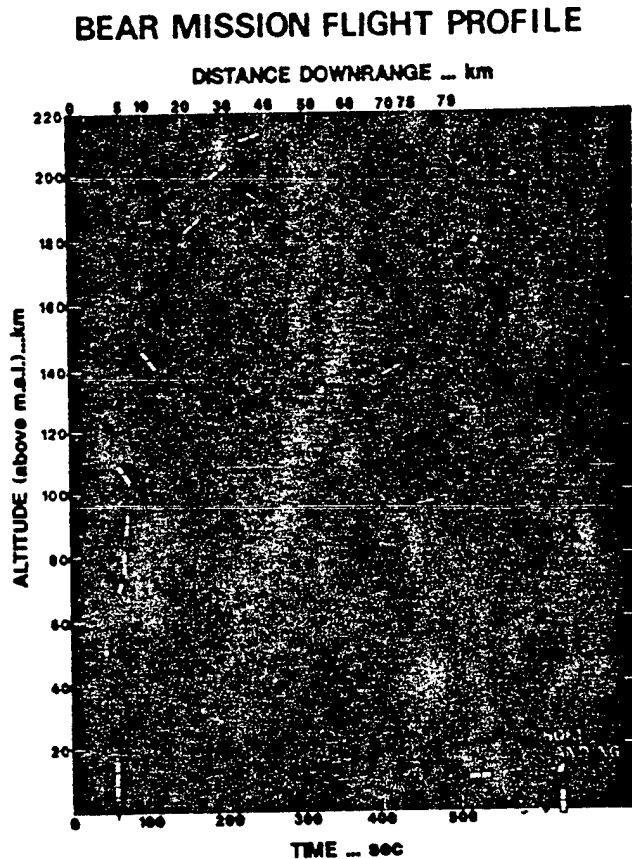


Fig. 4. Mission flight profile.

$H^+ \approx 2$ mA, $H^0 \approx 5$ mA and $H^- \approx 3$ mA. During the two periods when the neutralizer was switched off a net negative current of -10 mA of H^- was emitted. Late in the flight excess xenon was injected into the beam producing a net positive beam current of +1.4 mA. The three issues that were addressed by the BEAR flight were answered as follows:

Accelerator performance: Figure 5 shows the beam divergence as the beam left the payload for various ground tests and for the flight. The divergence of 1.05 mrad during flight was comparable to the best results obtained on the ground.

BEAR Beam Divergence
(System-level Ground Test and Flight Data)

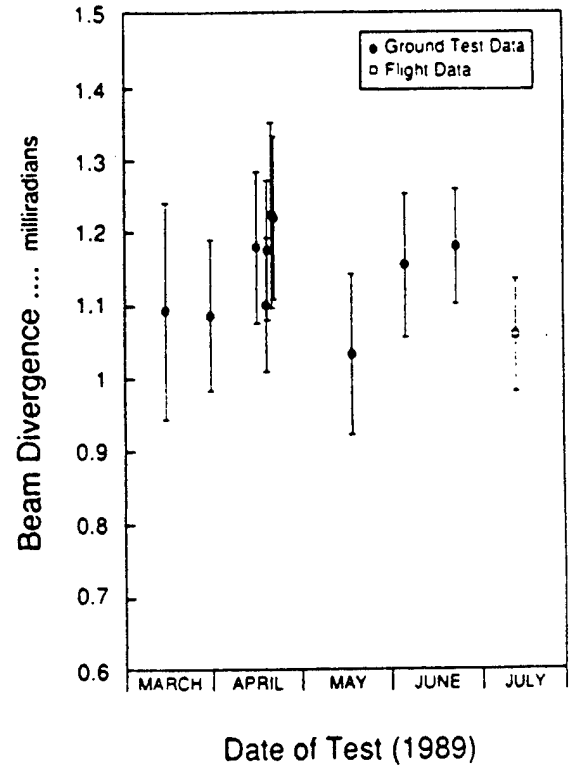


Fig. 5. Beam divergence history of the neutral beam.

NPB propagation: Figure 6 shows the beam propagating in space as seen by one of the onboard cameras. There was no evidence of any unexpected beam behavior such as



Fig. 6. Neutral beam (vertical line) propagating away from the spacecraft as viewed from an onboard wide-angle camera whose line of sight is almost parallel to the beam. The beam exits the accelerator at the bottom of the picture.