

**FOREIGN
BROADCAST
INFORMATION
SERVICE**

JPRS Report

Science & Technology

China

DISTRIBUTION STATEMENT A

**Approved for public release;
Distribution Unlimited**

DTIC QUALITY INSPECTED 3

19980529 107

JPRS-CST-89-005

23 FEBRUARY 1989

SCIENCE & TECHNOLOGY

CHINA

CONTENTS

SCIENCE & TECHNOLOGY POLICY

Policy on Technology Imports By Ordnance Industry Reviewed [ZHONGGUO JIXIE BAO, 27 Sep 88]	1
Development Strategy for High Technology in China's Colleges and Universities [Su Fei, et al.; KEYAN GUANLI, No 4, Oct 88]	6
Granting Research Institutes Power To Select Projects [Yi Shanfeng; KEYAN GUANLI, No 4, Oct 88]	9

AEROSPACE

Study of Self-Tuning α - β Filter To Improve Tracking Accuracy of Maneuvering Targets [Liu Yongtan, et al.; YUHANG XUEBAO, No 3, 31 Jul 88]	11
Nonlinear Time-Optimal Control of Spacecraft Large-Angle Attitude Maneuvers With Reaction Wheels [Jin Liang; YUHANG XUEBAO, No 3, 31 Jul 88]	12
Numerical Calculation of Hypersonic Nonequilibrium Viscous Shock-Layer Flow Over Slender Body With Blunt Nose [Shen Jianwei, et al.; YUHANG XUEBAO, No 3, 31 Jul 88]	13
Optimal Guidance Law With First Order Lag Loop for Bank-to-Turn Missile [Luan Zewei, et al.; YUHANG XUEBAO, No 3, 31 Jul 88]	14

Difference Scheme With Autocontrol Artificial Viscosity to Predict Ablated Nosetip Shape /Yang Maozhao; YUHANg XUEBAO, No 3, 31 Jul 88/	15
Study of Pretreatment, Superplasticity of Industrial Superhigh Strength Aluminum Alloy LC9 /Yang Jinfeng, et al.; YUHANg XUEBAO, No 3, 31 Jul 88/	16
Power Division, Optimum System Design Method of Dual-Frequency System /He Zhenghua; YUHANg XUEBAO, No 3, 31 Jul 88/	18
China Launches Its First Meteorological Satellite /HANGKONG ZHISHI, No 10, Oct 88/	20
Weather Satellite Returns Photographs /HANGKONG ZHISHI, No 10, Oct 88/	21
Scientific Probe and Technical Experiment Satellite /HANGKONG ZHISHI, No 10, Oct 88/	22
China's Heavy Launch Vehicles /HANGKONG ZHISHI, No 10, Oct 88/	23
High-Altitude Experimental Balloons /HANGKONG ZHISHI, No 10, Oct 88/	24
ADVANCED MATERIALS	
Determination of Hydrogen, Deuterium, Tritium, Helium, Oxygen, Nitrogen, Carbon Monoxide in Gas Mixture by GC-GCMS /Deng Zhongguo, et al.; HE HUAXUE YU FANGSHE HUAXUE, No 3, Aug 88/	25
BIOTECHNOLOGY	
New HBeAg Immune Binding Sites Found by Mc-anti-HBe /Zhang Zheng, et al.; CHINESE MEDICAL JOURNAL, No 7, Jul 88/	36
Investigation of Prevalence of Hepatitis A Outbreak in Minhang District, Shanghai /Han Xiangyang, et al.; SHANGHAI YIKE DAXUE XUEBAO, No 5, Jul 88/	39
Seroepidemiological Survey of Viral Hepatitis A During Epidemic in Shanghai /Wang Jianxiang, et al.; SHANGHAI YIKE DAXUE XUEBAO, No 5, Jul 88/	41

Isolation, Identification of Toxins Contained in Microcystis Aeruginosa From Donghu Lake, Wuhan*	
/He Jiawan, et al.; HAIYANG YU HUZHAO, No 5, Sep 88/	43
Effects of Proteinase Inhibitors on Coagulative Activity of Chinese Agkistrodon Acutus Venom	
/Deng Chengqi, et al.; ZHONGHUA XUEYEXUE ZAZHI, No 9, Sep 88/	45
Disseminated Intravascular Coagulation-like Syndrome in Patients Envenomated by Agkistrodon Acutus Bite	
/Wen Shangwu, et al.; ZHONGHUA XUEYEXUE ZAZHI, No 9, Sep 88/	46
Studies on Protoplast Culture of Rice (<i>Oryza sativa</i> L.), Plant Regeneration From Protoplast-Derived Calli	
/Li Liangcai, et al.; YICHUAN XUEBAO, No 5, Oct 88/	48
Induction of Dihaploid Plants From Unpollinated Ovaries of Potato In Vitro	
/Tao Zirong, et al.; YICHUAN XUEBAO, No 5, Oct 88/	50
Study of Identification of Male Sterile Cytoplasms Using Analysis of Mitochondrial DNAs in Maize	
/Xie Youju, et al.; YICHUAN XUEBAO, No 5, Oct 88/	52
Study of Breeding, Cytogenetics of Octoploid <i>Triticale</i> s With Different Cytoplasms	
/Wang Guizhi, et al.; YICHUAN XUEBAO, No 5, Oct 88/	53
Structural Variance Analysis of Mitochondria COI, COII Genes From Normal, Cytoplasmic Male-Sterile Varieties of Rice (<i>Oryza sativa</i>)	
/Liu Yansheng, et al.; YICHUAN XUEBAO, No 5, Oct 88/	55
Synthesis, Cloning of Lengthy cDNA Segments of 3'-Poly(A) RNA Virus	
/Xu Naizheng, et al.; YICHUAN XUEBAO, No 5, Oct 88/	57
Significance, Measurements of Areas, DNA Contents of Micronucleus Induced by Different Mutagens, Spindle Poisons	
/Cao Jia, et al.; ZHONGGUO HUANJING KEXUE, No 5, Oct 88/	58
Detection of Salmonella Typhi Vi-Antigen by Chemiluminescent Immunoassay. I. Solid Phase Chemiluminescent Immunoassay	
/Qian Weihua, et al.; ZHONGHUA WEISHENGWUXUE HE MIANYIXUE ZAZHI, No 5, Oct 88/	59
Investigation of Methods of Detection, Quality Control of HBsAg RIA Kit Prepared With Monoclonal Antibodies	
/Guo Wei, et al.; ZHONGHUA WEISHENGWUXUE HE MIANYIXUE ZAZHI, No 5, Oct 88/	61

Establishment of Hybridoma Cells Producing Monoclonal Antibody to Pre-S (2) Epitope of HBV, Its Preliminary Clinical Use /Han Fenglian, et al.; JIEFANGJUN YIXUE ZAZHI, No 5, Oct 88/	62
COMPUTERS	
New AI Tool for Combat Command Described /Wang Junling, Gao Guangfeng; XIAOXING WEIXING JISUANJI XITONG, No 10, Oct 88/	64
LASERS, SENSORS, OPTICS	
Experimental Investigation of Compton Free Electron Laser /Fu Ensheng, et al.; ZHONGGUO JIGUANG, No 9, 20 Sep 88/	71
Two-Wave Mixing Gain Enhanced in Photoconductive Photorefractive Materials With Alternating Electric Fields--A New Approach /Ye Shounian, et al.; YINGYONG JIGUANG, No 2, Oct 88/	76
Fast Q Switch Theory Tested Experimentally /Wu Hongxing, et al.; YINGYONG JIGUANG, No 5, Oct 88/ ...	77
Branch-Selected CO-CO ₂ Compound Laser /Gui Zhenxing, et al.; GUANGXUE XUEBAO, No 10, Oct 88/	79
Seven-Channel FIR HCN Laser Interferometer for Determining Electron Density Profile on HT-6M Tokamak /Tong Xingde, et al.; GUANGXUE XUEBAO, No 10, Oct 88/	80
Second Harmonic Space Resolved Spectrum Initiated by Laser Produced Plasma Filament /Gu Min, et al.; GUANGXUE XUEBAO, No 10, Oct 88/	81
MICROELECTRONICS	
Optical Investigation of InGaAs-GaAs Strained Layer Quantum Well Structures /Xu Zhongying, et al.; BANDAOTI XUEBAO, No 6, Nov 88/	83
TELECOMMUNICATIONS R&D	
Briefs	
Fiber-Optic Communications Pilot Projects	84
New All-Solid-State Satcom Station Equipment	84
New Digital Microwave Project	84
New DMW Communications System	85
Statistics Released on Optical Cable	85
Military Tactical Communications Equipment	86
Fiber-Optic Industry Develops Rapidly	86

SCIENCE & TECHNOLOGY POLICY

Policy on Technology Imports By Ordnance Industry Reviewed

40080054 Beijing ZHONGGUO JIXIE BAO in Chinese 27 Sep 88 p 2

[Text] Since the "Sixth Five-Year Plan" the ordnance industry has imported a large amount of technology and equipment. Industry trade integration, technology trade integration and many other forms were used in selective adoption. Most introduced items are of late 70's and early 80's levels. This has had a major effect on raising the level of China's ordnance industry products, expansion of production capacities, strengthening of testing and measuring methods and the training of workers.

It should be said that the work of ordnance technology importation has achieved substantial economic returns and social benefit. At the same time we must also look at some problems still existing from the previous period which require study and solution. The primary manifestations are rates of introduction of production lines and equipment which are too high while the rates of introduction of specialized technology are too low. Also, because of a lack of overall direction, there is duplication in the introduction of technology and technology digestion and absorption is slow.

The ordnance industry has its own unique characteristics. In times of peace, it shares many similarities with ordinary mechanical industries. Regarding the present ordnance industry technology importation work, it is still most important that it be based on profound reform and that policies and methods appropriate to it be chosen.

First, correct directions must be selected and plans formulated.

At present, technology adoption is being put into practice under conditions of a substantial industrial and technological base and a substantial capacity for digestion and absorption. We should progress from the initial starting points and selection should be based on long-term development strategies for the ordnance industry technology and the economy. The important points should be: 1) The essentials of the weapons development strategy, which are those items critical to defeating an invading enemy in future wars, e.g., anti-tank and anti-aircraft weapons, neutralization weapons, tanks and armored vehicles, light weapons and complementary ammunition and photo-electronic instruments; 2) Elimination of areas of

deficiency in ordnance technology; 3) Newly developed and key technologies, including measurement and testing technology and management technology; 4) Consumer product technology, which has decisive significance in making the ordnance industry and enterprises profitable; and 5) Technology and equipment which is important to the earning of foreign exchange through ordnance industry exports. The relative importance of these five items should be accurately stipulated then put into practice accordingly.

Second, in the integration of software and hardware, emphasis is to be placed on software.

In order to close the technological gap between the ordnance industry and the world standard as soon as possible, both software and hardware must be imported. In the integration of software and hardware, software is to be given priority. The scope of software technology is very broad and we must emphasize importing modern research and design methods, advanced testing methods, computation methods, and processing and managing techniques. For example, computer aided design (CAD), computer aided manufacturing (CAM), computerized engineering analysis (CAE), flexible manufacturing systems (FMS) and micro development systems (MDS), etc. These software technologies are all very different. We must import more advanced and applied technology based on our own foundation and abilities. At the same time, focal points are necessary. We must have those high-level technologies required by planned importation which can take a leading or driving role, and from this mastery of the world's advanced technologies and development and design techniques improve the scientific level of our industry and enterprises.

Third, integration and mutual compatibility of military and civilian needs.

When importing products to guarantee the requirements of the military, whether or not these products have any crossover civilian use must be fully considered. When importing products to ensure the needs of the people, whether or not potential exists for military utilization must be considered. When importing technologies, attention must be paid to crossover use between military and civilian products. Dual use of technology must be treated as an important policy. Dual use represents dual promotion and dual improvement as well as appropriate linkage and compatibility crossover.

Throughout the entire process of technology importation, careful and effective handling of the crossover between the technology of the defense industry and civilian technology can bring into full play the inherent advantages of defense industry technology, spurring the development by civilian industry of new areas of technology based on the original directions of the technology, advancing the technological progress of the entire society and the development of the national economy. Simultaneously, it would be possible to advance the establishment of a defense industry base, raise its standards, increase its returns, and improve its overall ability to meet an emergency.

Fourth, emphasize absorption and be creative.

Whether we can strengthen our independent developmental ability through technology importation, and rapidly progress technologically depends upon the degree of absorption of imported technology. It must be made clear that our objective in importing technology is not only to increase production capability during the period of importation or accelerate economic growth for a single period of time, but more importantly it is to further the assimilation of foreign technology. In this way, our S&T level can be raised and our ability to independently research, develop, and manufacture new products and new equipment can be strengthened. Strength can be accumulated and a foundation built for the long-term economic development of the ordnance industry. Regardless of whether we base our considerations on full utilization of benefits or on future economic growth, both require that much attention be paid to the work of assimilation, absorption and creation of new ideas. S&T management departments at all levels must regard this task as an important mission and actively participate in the demonstration of imported technology and in feasibility studies to confirm the quality of imported technology and equipment. The tasks of absorption, assimilation, and creation must become regular practice, firmly grasped and to which much attention is paid.

In the process of implementing assimilation, absorption, development, and creation of new ideas from imported technology, by what standards can we judge when we have achieved mastery, development and creation? Could they be considered as follows?

Mastery--Formulation of our own technological conditions or requirements, determination of feasible material substitution policies, mastery of the key technologies, determination through testing of which prototypes or samples meet the technical requirements for imported technology, steady commencement of batch production.

Development--As far as is allowable under contract provisions, imported technology can be applied in whole or in part to similar or different products, thus clearly raising the technical level of these products. Also, products with different specifications can be obtained through extended development based on imported product technology. Specialized products can be derived from general products, products for use in the air or on the sea can be derived from products intended for use on land. The technical level of these products is equal to that of imported technology.

Creation--With respect to product mix and material composition the changes are greater; functional improvement is greater; new breakthroughs exist in principles and mechanisms, etc.

Fifth, many sources of funding and policy encouragement.

Fund raising can be put into practice according to the following several methods.

First, Ministries, Provincial (or Municipal) Offices (or Bureaus) of Machinery, the Offices of the Commission of Science, Technology and Industry for National Defense and related enterprises should establish a special fund for assimilation, absorption, development, and creation based on imported technology. Second, the proportion of scientific research funding accounted for by funding for technology development should be appropriately increased and the focal points of technology development funding changed to technical reform, assimilation, and creation. Third, solution and rational allocation of funding between technology importation and the assimilation, creation functions must be stressed. At present, a common phenomenon is having the money to import but lacking the ability to assimilate. In the future, any importation project with an assimilation or creation mission will have funding for those missions allocated simultaneously with funding for importation. Fourth, strive for the support of financial departments. As regards equipment of major importance to the military, critical needs of the national economy and items required in accordance with development programs, we should fight to obtain loans from banks at preferential interest rates with longer repayment terms.

Concerning importation of technology for the ordnance industry, relevant and encouraging policies should be formulated.

Appropriate protective policies should be adopted and import taxes raised to protect those domestic products which have reached a level comparable to the international standard for similar products and for which there is a substantial domestic production capacity, thus ensuring a market for these newly created products.

Whether or not pricing is regulated, enterprises can independently set prices during the testing period on any product determined by the planning and management departments to have reached a level comparable to the international standard and for which the domestication of production has exceeded 80 percent. After the test-marketing period, formal pricing will be fixed by price control authorities according to the limits of their jurisdiction.

For tax revenue, a policy which fosters the new and limits the old should be adopted. On those products developed and created from technology importation, product taxation should be appropriately reduced during the initial production period. Conversely, for those older products with less advanced function, lower prices should be adopted, product taxes increased and other methods utilized as restrictions.

For reward and encouragement, it is suggested that the following measures be adopted:

First, in rewarding science and technology, increase the proportion of reward which goes for technology importation, assimilation and creation. Thoroughly change the past concepts which do not consider assimilation and creation to be invention. The accomplishments of assimilation and absorption should be treated as S&T accomplishment and should be eligible for S&T accomplishment

and development rewards. The results of development and creation should be eligible for rewards for invention. Also, in the future, a regulation should be made to the effect that enterprises can take a certain proportion of the first year's income from sales of any items of assimilation or creation listed in Ministry or Bureau programs, for use as special item bonuses. This would be calculated as a loss and not taxed under incentive tax. This is to reward and encourage meritorious workers.

Second, when the process of assimilation, creation and domestication of production of imported technology causes profit to decrease and the decreases are examined and ratified by the financial departments, worker benefits and incentives should still be provided.

Third, a contract responsibility system can be implemented with respect to certain assimilated and absorbed items, e.g., testing and measuring instruments and equipment and dies. A contract program would be proposed by the enterprise and after ratification by project management, labor and wage departments, income to contractors would be exempt from incentive tax.

In addition to those methods listed above, information exchange should be improved to facilitate selection of the best programs and avoid repetition. Also, horizontal unification must be developed to extract the best, comprehensive results from importation of technology.

SCIENCE & TECHNOLOGY POLICY

Development Strategy for High Technology in China's Colleges and Universities

40080039a Beijing KEYAN GUANLI [SCIENCE RESEARCH MANAGEMENT] in Chinese No 4, Oct 88 pp 49-53, 17

[Article by Su Fei [5685 5481], et al., Jilin Industrial University]

[Summary] Research universities not only provide an appropriate environment for the maturation of scientists and technical specialists, they also provide enterprises with many scientific research accomplishments and technical resources.

The universities for which a role in high-tech research is planned are limited to those universities participating in the high-tech "national team" (which was formed by the organization of high-tech projects arranged by the State). These research universities, composing the country's principal force in scientific research, should proceed based on their actual strengths and areas of special competence. Without affecting the precedence of normal scientific research instruction, an elite capability should be concentrated to initiate high-tech development work.

Development of high-tech is a rigorous test of a university's scientific research management system. It requires conditions and an environment closely related to the "ten special features" of high-tech, in addition to the conditions necessary for development of ordinary scientific technology. For example: 1) The high yield, high efficiency and fast paced characteristics of high-tech require that research universities have a contingent of specialists dedicated to technology transfer work. 2) The highly competitive and highly intellectual nature of high-tech require that an ideal environment be provided by research universities for talented S&T personnel. 3) The high level nature, capital intensiveness and high risk involved with high-tech make necessary the rational selection and allocation of research capability (including personnel, materials and finances). 4) The high degree of interdisciplinary penetration and integration requires universities to

seek out a unified scientific research system, i.e., an organic unification of universities, scientific academies and enterprises.

In an analysis of China's present university situation, the following positive factors are: 1) The universities have relatively strong foundations in the economy and scientific research, also they have strong S&T contingents; 2) they have the superiority of unified organizational management and overall planning; and 3) in the wake of China's thorough reform of its S&T system, the scientific research management systems of the universities certainly will gain further improvement as well as many methods to overcome defects such as the gap between research and production and low level research projects. Major negative factors are: 1) About one-third of the effort of research workers is wasted solving problems in project ratification, trial production and accountability procedures. 2) Funding is inadequate. 3) The risk involved with high-tech development dissuades many people from participation out of fear that a long period without results may influence their reputation.

China's research universities can be divided into levels based on their capacity to develop high-tech. The strategy for those institutes of the highest level (universities which compose the "national team") is modeled in diagram 1, while the strategy for middle level institutions (key universities which are not members of the "national team") is modeled in diagram 2. The universities included in the third level (universities not classified as key institutions with weak research capability) can, based on the particular conditions of the institution, refer to the model in diagram 2.

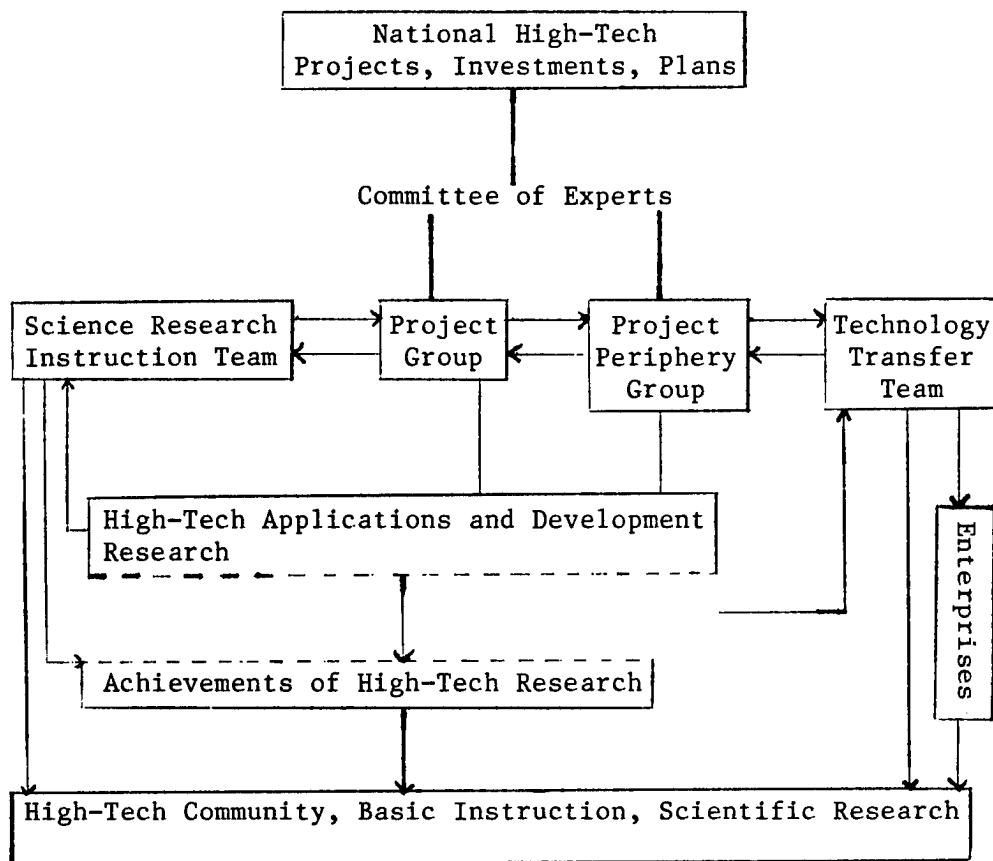


Diagram 1

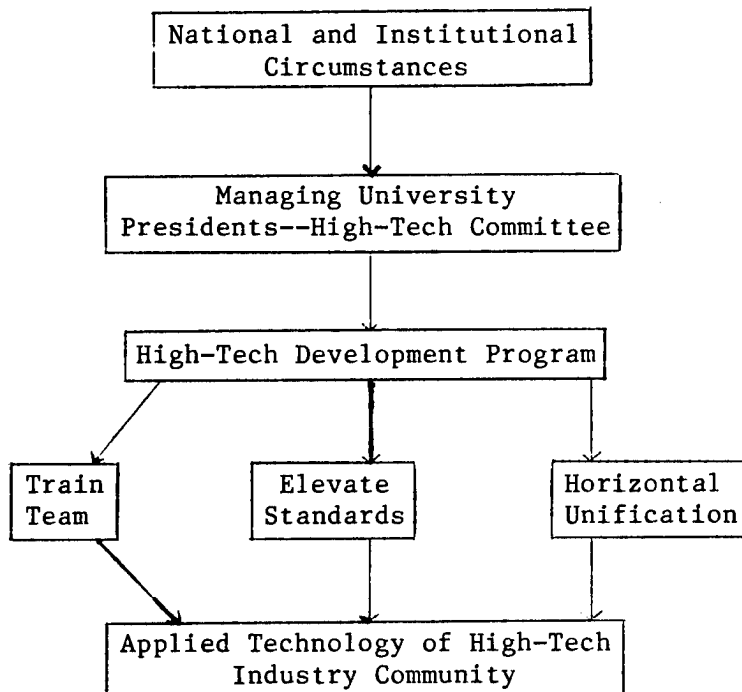


Diagram 2

SCIENCE & TECHNOLOGY POLICY

Granting Research Institutes Power To Select Projects

40080039b Beijing KEYAN GUANLI [SCIENCE RESEARCH MANAGEMENT] in Chinese
No 4, Oct 88 pp 31-34, 27

[Article by Yi Shanfeng [2496 0810 6912] (China Geological Research Institute)]

[Summary] 1. Progress

The China Geological Research Institute (used as an example in this article) has begun the following three reforms: 1) Reform of concepts: Project selection will no longer depend on directives from above or independent selection, but competition for projects will be based on application for funding, competitive bidding on key projects and the needs of carrying out production. 2) Reforms in the structure of scientific research: In the "Sixth Five-Year Plan" 80 percent of the projects were in basic or basic applications areas. This has been changed to 50 percent in basic or basic applications areas and the remaining 50 percent in areas directly serving national economic construction (including manpower). 3) Reform of funding: During the "Sixth Five-Year Plan" all funding for research projects came out of the institute's operational funds and from funding for specialized topics allotted from higher levels. Now, projects are funded with appropriations apart from those allocated for administrative functions.

2. Problems

- 1) The research institute lacks authority to select research subjects.

A survey of 274 research institutes indicates that "the needs of production organizations" and "the ease of obtaining funding" are the two most important criteria in project selection. "The state of the art in international S&T" and "the suggestions of managing departments" rank at the bottom of the list of criteria. Because operational funding has decreased and prices have increased, research institutes also lack the financial ability to select projects themselves. This kind of situation could encourage bureaucracy and pragmatism. It could also result in a loss of initiative, foresight and diversification.

2) Investment rates are low.

Low investment rates have had the following two results: Project departments and research institutes both lack funds to upgrade instruments and renew facilities. Funding is inadequate to support the projects, forcing some S&T workers to seek new contract work to compensate. However, this increases the work-load and creates new funding deficiencies.

3) Difficulties in primary areas of concentration.

Some objectives have been set high, while financial pressure is heavy and competitive conditions are unequal. Compared with the "Sixth Five-Year Plan" the number of people apparently working on key projects during the "Seventh Five-Year Plan" has increased. But due to personnel working in other areas to compensate for funding shortages, the actual number working in key projects is only 54 percent of that during the "Sixth Five-Year Plan" period.

4) Intermediate links in development are lacking.

In order to meet the needs of reform, earning income and deregulation and to overcome shortages of funding, research institutes are utilizing some of their energies in S&T development. However, they lack the many intermediate links necessary to developing products which exploit the value of S&T. At the same time developmental personnel and funding are both inadequate.

3. Suggestions

Our institute should strive for more projects and more funding to develop the economy, science and ourselves. Simultaneously, we should concentrate on major problems in national construction which other departments have not thought of or cannot handle. Also, we should actively focus on advanced long-term development problems in science and economic construction. This should be emphasized by the leadership and actively arranged for the following reasons: 1) The Chinese Academy of Sciences has people highly skilled in development and many advanced accomplishments. 2) The funding provided to research institutes should be increased to arrange major problems and advanced projects in coordination with important missions. This can wait no longer. 3) In the "Sixth Five-Year Plan," the reforms and methods used were clearly effective.

State funding and delegation of decision-making authority to research institutes should be gradually implemented. Only in this way can the strengths of the Chinese Academy of Sciences be more fully utilized.

Study of Self-Tuning α - β Filter to Improve Tracking Accuracy of Maneuvering Targets

40090031a Beijing YUHAN XUEBAO [JOURNAL OF CHINESE SOCIETY OF ASTRONAUTICS] in Chinese No 3, 31 Jul 88 pp 1-6

[English abstract of article by Liu Yongtan [0491 3057 0982], et al., of Harbin Institute of Technology]

[Text] From the point of view of engineering application, this paper proposes an approach toward designing a self-tuning α - β filter based on Reference 1. Therefore, from both aspects of filter structure and parameter matching, it successfully solves the problem of maneuvering target tracking accuracy. The simulation results achieved with an IBM/AT computer using 8087 assembly language indicate that not only is this method simple and demonstrating acceptable performance, but it also is nearly twice as accurate as the one employing the constant gains α - β filter.

References

1. Quan Taifan, et al., "A New Method to Improve Tracking Accuracy of Maneuvering Targets," The Third Conference on Control Engineering, Australia, 1986 pp 201-204.
2. Trunk, G.V., "Survey of Radar ADT," MICROWAVE JOURNAL, Vol 27 pp 77-88.
3. Wilson, K.C., "An Optimal Control Approach to Designing Constant Gain Filters," IEEE TRANS, Vol AES-8 No 6, Nov 1972.
4. Yuan Junshan, "Radar Station Flight Path Processing," COMMAND AND CONTROL, Vol 2 No 2, 1981.
5. Sage, A.P., Husa, G.W., "Adaptive Filtering with Unknown Prior Statistics," JACC, 1969.

Nonlinear Time-Optimal Control of Spacecraft Large-Angle Attitude Maneuvers
With Reaction Wheels

40090031b Beijing YUHAN XUEBAO [JOURNAL OF CHINESE SOCIETY OF ASTRONAUTICS]
in Chinese No 3, 31 Jul 88 pp 7-14

[English abstract of article by Jin Liang [6855 2733] of Beijing Institute of
Control Engineering]

[Text] In this paper, the nonlinear attitude dynamic model is obtained and
the dynamic equation is represented by the angular velocity and the vector of
the Euler quaternion. Then, a global linearizing coordinate is transformed
into an equivalent controllable linear system. The time-optimal control law
for motor torques of reaction wheels is designed and the calculations of the
maneuver time and system state are given. Finally, digital simulation is
illustrated.

References

1. Jin Liang, "Design of a Triaxial Stable Satellite Skewed Reaction Wheel Control Device," JOURNAL OF UNIVERSITY OF SCIENCE AND TECHNOLOGY FOR NATIONAL DEFENSE, No 3, 1984.
2. Vadali, S.R., "Variable-Structure Control of Spacecraft Large-Angle Maneuvers," JOURNAL OF GUIDANCE, CONTROL AND DYNAMICS, Vol 9 No 2, 1986.
3. Dwyer, T.A.W., "Exact Nonlinear Control of Spacecraft Skewing Maneuvers with Internal Momentum Transfer," JOURNAL OF GUIDANCE, CONTROL AND DYNAMICS, Vol 9 No 2, 1986.
4. Dwyer, T.A.W., "Design of an Exact Nonlinear Model Follower for the Control of Large Angle Rotational Maneuvers," "Proceedings of 22nd IEEE Conference on Decision and Control," IEEE, New York, December 1983.
5. Hunt, L.R., Su, R., Meyer, G., "Global Transformation of Nonlinear Systems," IEEE TRANSACTIONS ON AUTOMATIC CONTROL, Vol AC-28, January 1983.
6. Su, R., "On the Linear Equivalence of Nonlinear Systems," SYSTEMS AND CONTROL LETTERS, Vol 2 No 1, 1982.
7. Anderson, B.D.O., Moore, J.B., "Linear Optimal Control," Prentice Hall, New Jersey, 1971.

Numerical Calculation of Hypersonic Nonequilibrium Viscous Shock-Layer Flow Over Slender Body With Blunt Nose

40090031c Beijing YUHAN XUEBAO [JOURNAL OF CHINESE SOCIETY OF ASTRONAUTICS] in Chinese No 3, 31 Jul 88 pp 15-22

[English abstract of article by Shen Jianwei [3088 1696 0251], et al., of the National University of Defense Technology]

[Text] In this paper, the numerical method is studied to calculate the hypersonic nonequilibrium viscous flow over a slender body with a blunt nose. The details of solving the continuity equation and normal momentum equation jointly are described, as well as is the mathematical method of dealing with slip boundary conditions at high altitude. The results of the numerical solution indicate that the method is successful for approaching the afterbody region about 30 times greater than the nose radius.

References

1. Davis, R.T., "Numerical Solution of the Hypersonic Viscous Shock Layer Equations," AIAA JOURNAL, Vol 8 No 5, May 1970.
2. Bird, R.B., Stewart, W.E., Lightfoot, E.N., "Transport Phenomena," 1960.
3. Swaminathan, S., Kim, M.D., Lewis, C.H., "Nonequilibrium Viscous Shock-Layer Flow Over Blunt Sphere-Cones at Angle-of-Attack," AIAA 82-0825.
4. Miner, E.W., Lewis, C.H., "Hypersonic Ionizing Air Viscous Shock-Layer Flow Over Nonanalytic Blunt Bodies," NASA CR-2550, May 1975.
5. Miner, E.W., Lewis, C.H., "Computer User's Guide for a Chemically Reacting Viscous Shock-Layer Program," NASA CR-2551, May 1975.
6. Boylan, D.E., "Laminar Heat Transfer on Sharp and Blunt Ten-Degree Cones in Conical and Parallel Low Density Flow," AD-765546, 1974.

Optimal Guidance Law With First Order Lag Loop for Bank-to-Turn Missile

40090031d Beijing YUHANG XUEBAO [JOURNAL OF CHINESE SOCIETY OF ASTRONAUTICS]
in Chinese No 3, 31 Jul 88 pp 30-38

[English abstract of article by Luan Zewei [2940 3419 1218], et al., of Harbin
Institute of Technology]

[Text] An optimal guidance law for a BTT missile based on the minimum principle is discussed in this paper. It is assumed that the kinetic characteristics of the autopilot and airframe are that of a first order lag loop. The target maneuvering and the attitude of the body are studied. The linear moving equations of the target relative to the missile are obtained by linearizing the state equations at the operating point. The quadratic performance index is the minimum miss distance and controls energy consumption.

Based on the assumptions, an optimal intercept guidance law with the pitch acceleration and roll rate as control variables for a BTT missile has been deduced.

References

1. Luan Zewei, "Missile Inclined Turn Control Technology and Its Applications in the United States," AERONAUTIC ARMAMENTS, No 4, 1986 pp 15-27.
2. Stallard, D.V., "An Approach to Optimal Guidance for a Bank-to-Turn Missile," "Proceedings of the 1980 AIAA Guidance and Control Conference," 11-13 August 1980, pp 192-202.
3. Stallard, D.V., "Biased Optimal Guidance for a Bank-to-Turn Missile," "Proceedings of the American Control Conference," 22-24 June 1983.
4. Carlos, A.L. Velloso, "Optimal Digital Control of a Bank-to-Turn Missile," AD/A 144 043, March 1984.

Difference Scheme With Autocontrol Artificial Viscosity to Predict Ablated
Nosetip Shape

40090031e Beijing YUHANG XUEBAO [JOURNAL OF CHINESE SOCIETY OF ASTRONAUTICS]
in Chinese No 3, 31 Jul 88 pp 55-60

[English abstract of article by Yang Maozhao [2799 5399 2507] of China
Aerodynamic Research and Development Center]

[Text] The triple layer explicit difference scheme, to which has been added
an artificial viscosity item, is found by using filtration in the computation
of the ablated nosetip shape. The scheme is of first order accuracy in
regions where the shape change is wavy and of second order accuracy in regions
where it is smooth. Numerical experiments show that the scheme is effective.

References

1. Zhang Hanxin, et al., "Coupled Calculation of Reentry Nosetip Ablation and Aerodynamic Characteristics," Technology Report 002359, Institute 1705, Oct 1977.
2. Huang Zhenzhong, "Transient Shape and Internal Temperature Distribution of Ablated Nosetip," JOURNAL OF AERODYNAMICS, No 1, 1981.
3. Yang Maozhao, et al., "Engineering Numerical Analysis of Reentry Vehicle Inviscid Flow and Surface Heating Rate," JOURNAL OF AERODYNAMICS, No 1, 1984.
4. Zhang Hanxin, et al., "Discussion of Some Problems Regarding Mixed Difference Schemes," PAPERS IN COMPUTATIONAL AERODYNAMICS, Jan 1980 pp 111-121.

Study of Pretreatment, Superplasticity of Industrial Superhigh Strength Aluminum Alloy LC9

40090031f Beijing YUHANG XUEBAO [JOURNAL OF CHINESE SOCIETY OF ASTRONAUTICS] in Chinese No 3, 31 Jul 88 pp 67-74

[English abstract of article by Yang Jinfeng [2799 6855 7685], et al., of Harbin Institute of Technology; Wang Yonghai [3769 3057 3189] of Northeast Light Alloy Fabrication Plant]

[Text] Through two pretreatment methods, the industrial superhigh strength aluminum alloy LC9 demonstrated good superplasticity in a certain temperature range and at a certain strain rate. By means of thermo-mechanical treatment (TMT) and a simple forging treatment, under different optimum conditions ($T_{TMT} = 515^{\circ}\text{C}$, $\dot{\epsilon}_{TMT} = 1.66 \times 10^{-3} \text{ S}^{-1}$; $T_f = 405^{\circ}\text{C}$, $\dot{\epsilon}_f = 1.66 \times 10^{-3} \text{ S}^{-1}$), the results were as follows: elongation $\delta_{TMT} = 1300$ percent, $\delta_f = 380$ percent, flow stress $\sigma_{TMT} = 1.7 \text{ MPa}$, $\sigma_T = 16 \text{ MPa}$, strain rate sensitive index $m_{TMT} = 0.66$, $m_f = 0.3$. When the thermo-mechanical treatment was used, the dispersion of the η phase played an important role in obtaining a fine-grained micro-structure, while the resolution of the η phase reduced the cavity sensitivity of the material and restrained the early fracture of the specimen. Through the TMT process and forging process pretreatment, the fracture forms were of the unstable cavity type and stable necking type, respectively.

References

1. Paton, N.E., et al., J OF METALS, Vol 34 No 8, 1982 pp 21-26.
2. Wert, J.A., J OF METALS, Vol 34 No 9, 1982 pp 35-40.
3. Ren Meng, "Minutes from the Third National Metal Superplasticity Symposium of the China Metals Society," 1982.
4. Zhou Shanyou, et al., "Chinese and Japanese Treatises on Superplasticity," Beijing, 1985.
5. Liu Yuwen, et al., METALS SCIENCE AND INDUSTRIAL TECHNOLOGY, Vol 5 No 2, 1986 pp 31-39.
6. Yan Minggao, et al., HEAT PROCESSING INDUSTRIAL TECHNOLOGY, Nos 1-2, 1982 p 54.

7. Hu Gengxiang, et al., "Metallography," Shanghai Science and Technology Press, 1980 p 328.
8. Cui Jianzhong, Doctoral Dissertation, Northeast Engineering Institute, September 1985.
9. Yang Jinfeng, et al., "Papers from the Second Sino-Japanese Symposium on Superplasticity," Yokohama, Japan, November 1986.

Power Division, Optimum System Design Method of Dual-Frequency System

40090031g Beijing YUHAN XUEBAO [JOURNAL OF CHINESE SOCIETY OF ASTRONAUTICS]
in Chinese No 3, 31 Jul 88 pp 81-91

[English abstract of article by He Zhenghua [0149 2973 5478] of Shanghai
Institute of Satellite Engineering]

[Text] The dual-frequency system consists of three subsystems, i.e., coherent dual-frequency Doppler tracking, data transmission and telemetry. It has been widely used in the field of space flight and is currently still in use. However, some parts of its theory, as well as the optimum system design as shown in this paper, have never appeared in the published literature. This paper presents the concept and equations for: (1) Composite (random) error of a dual-frequency range rate system resulting from the high frequency channel is absolutely predominant; (2) optimum power division and optimum design method of the dual-frequency range rate system, saving the precious satellite power of improving the range rate measurement accuracy; (3) optimum power division for a dual-frequency system for the same goal of saving power or improving the accuracy of the respective subsystems; (4) the optimum design method for a dual-frequency system, including a very fast and convenient graphic method.

References

1. Guier, W.H., Weiffenbach, G.C., "A Satellite Doppler Navigation System," PIRE, Apr 1960.
2. "The Navy Navigation Satellite System--Description and Status," NAVIGATION, Vol 15 No 3, Fall 1968.
3. He Zhenghua, "Power Distribution in Ultra-Shortwave Dual-Frequency Systems," "Reports at the Second Annual Conference on Space Electronics," Wuxi, Aug 1980.
4. He, Zhenghua, "Power Division and Optimum System Design Method of Dual-Frequency System," IAF-84-386, 35th Congress of the International Astronautical Federation, 7-13 October 1984, Lausanne, Switzerland.
5. Shapiro, A.H., "Theoretical Error Analysis of the SCF Augmented Doppler Tracking System," AD-601579.

6. "Phaselock Technology," Science Press, 1971.
7. Debey, L.G., "Tracking in Space by Doploc," IRE TRANSACTIONS ON MILITARY ELECTRONICS, Apr-Jul 1960.
8. Van Caster, J.C., "Design Evaluation Report--Goddard Range and Range Rate System," N70-17522.
9. Saint-Etienne, J., "Ionosphere Residue Errors in Dual-Frequency Radiolocation Systems in Space," ANN GEOPHYS, Vol 37 No 1, 1981 pp 241-246.
10. "Satellite Systems for Geodesy and Geodynamics," Document 2/66-E, 30, Working Group 2-C, Draft New Report, CCIR, Study Group Period 1982-1986, Geneva, Nov 1983.

China Launches Its First Meteorological Satellite

40080070a Beijing HANGKONG ZHISHI [AEROSPACE KNOWLEDGE MAGAZINE] in Chinese
No 10, Oct 88 p 2

[Text] On 7 September, at 5:30 Beijing daylight saving time, China successfully launched its first experimental meteorological satellite into a near-circular sun-synchronous orbit; all equipment onboard the satellite functioned normally.

This satellite, named "Fengyun-1," was launched from the Taiyuan Satellite Launch Center by a "Long March-4" launch vehicle. It was the first polar-orbit meteorological satellite built and launched by this country. The satellite is equipped with two ultra high resolution scanning radiometers with five detection channels. It has the capability of detecting cloud images, ground surface images, ocean water color images, boundaries between bodies of water, ocean surface temperatures, ice and snow cover, and vegetation growth both in daylight and during nighttime. The satellite's main mission is to acquire global weather information and transmit the data to satellite ground stations around the world. In addition, it is also capable of detecting particle contents in space to provide data for space physics research. Since the "Fengyun-1" became operational, China's weather forecast capability, particularly in the area of monitoring and forecasting destructive weather movement, has been greatly enhanced. Therefore, this satellite plays an important role in providing service to China's economic development.

The "Long March-4" launch vehicle is a three-stage rocket which uses conventional propellant; it is primarily used to launch large satellite payloads into mid-to-low altitude orbits. They include sun-synchronous satellites which are widely used for weather and ocean observations and resource exploration. Many of China's new space technologies have been implemented on the "Long March-4" to improve its rocket engine design, its digital circuit design, and in its first and third sub-stages to provide the launch capability of large-diameter satellites.

Weather Satellite Returns Photographs

40080070b Beijing HANGKONG ZHISHI [AEROSPACE KNOWLEDGE MAGAZINE] in Chinese
No 10, Oct 88 p 2

[Text] On 7 September, at 7:09 Beijing daylight saving time, China's weather satellite returned its first photograph of cloud images.

It was a photograph taken above the Soviet Union and the Asian landmass. The picture showed clearly visible details which reflects the good technical performance of China's first sun-synchronous polar-orbit satellite. Each day, three satellite ground stations located at Beijing, Guangzhou, and Urumqi can receive data from the satellite during its 6 to 8 passes over these regions. These data are processed by the Satellite Weather Center to produce timely pictures of cloud images, cloud analysis diagrams, and surface feature maps to the user. Such information greatly enhances China's capability in monitoring destructive weather movement and improves the timeliness and accuracy of weather forecast.

Scientific Probe and Technical Experiment Satellite

40080070c Beijing HANGKONG ZHISHI [AEROSPACE KNOWLEDGE MAGAZINE] in Chinese
No 10, Oct 88 p 2

[Text] On 5 August at 16:30, a scientific probe and technical experiment satellite was launched from the Jiuchuan Satellite Launch Center. The satellite was successfully injected into the designated orbit and all on-board equipment functioned normally. After completion of its mission, the satellite will be returned to earth as planned.

Also carried onboard the satellite were the experiments of three West German users. This was the second time satellite service was provided to a foreign user by a Chinese satellite since the micro-gravity experiment conducted last August for the French Matra Company.

China's Heavy Launch Vehicles

40080070d Beijing HANGKONG ZHISHI [AEROSPACE KNOWLEDGE MAGAZINE] in Chinese No 10, Oct 88 p 2

[Text] China is currently developing three new rockets of the "Long March" family to provide greater launch capabilities. By the early 1990's, these launch vehicles will be able to provide the service of launching various domestic and foreign commercial satellites. This information was revealed in late August by the director of the No 1 Research Institute of the Ministry of Aeronautics and Astronautics, Wang Yunzi, and the chief design engineer of the "Long March-3," Xie Guangxuan.

In order to accommodate the launch requirements of domestic and foreign commercial satellites, the No 1 Research Institute of the Ministry of Aeronautics and Astronautics have initiated a plan to develop new launch vehicles and to improve existing launch vehicles.

The three new launch vehicles being developed are:

The "Long March-3A" rocket, which is based on the "Long March-3" design; it has a geosynchronous transfer orbit (GTO) payload capability of 2,500 kg.

The "Long March-2E" rocket, which uses the new rocket strapping technology. It consists of 4 booster rockets strapped to the main body of "Long March-2." It has a low-orbit payload capability of 8,800 kg.

A new three-stage launch vehicle, which combines two "Long March-2E" rocket with the third stage of the "Long March-3." It has a GTO payload capability of 4,500 kg.

The improved launch vehicles include:

The "Long March-1D" launch vehicle, which is an improved version of the "Long March-1"; it has a low-orbit payload capability of 700 to 750 kg.

Experts believe that based on China's current rocket technology, it is possible to carry out the above plan without difficulty.

High-Altitude Experimental Balloons

40080070e Beijing HANGKONG ZHISHI [AEROSPACE KNOWLEDGE MAGAZINE] in Chinese
No 10, Oct 88 p 3

[Text] After 10 years of dedicated efforts, China has now established a high-altitude scientific balloon system. It has the capability of producing and deploying balloons smaller than 200,000 cubic meters. Currently, efforts are under way to develop systems for deploying 300,000 to 400,000 cubic meter balloons.

Over the past 10 years, the Chinese Academy of Sciences has deployed 150 high-altitude balloons to conduct dozens of experiments in the areas of cosmic rays and high-energy astro-physics, atmospheric physics, space astronomy, space physics, remote sensing, and space chemistry.

In the area of high-energy celestial physics, Chinese scientists have succeeded in using high-altitude balloons to make observations of pulse neutron stars for the first time. The measured data on hard X-ray spectrum of the Cygnus X-1 have attracted considerable attention in the scientific community. In the area of infrared astronomical observations, the infrared brightness temperature of the sun was measured for the first time. In the area of space chemistry, high-altitude balloons have helped Chinese scientists obtain valuable samples of cosmic dust.

ADVANCED MATERIALS

Determination of Hydrogen, Deuterium, Tritium, Helium, Oxygen, Nitrogen, Carbon Monoxide in Gas Mixture by GC-GCMS

40080059 Beijing HE HUAXUE YU FANGSHE HUAXUE [JOURNAL OF NUCLEAR AND RADIOCHEMISTRY] in Chinese Vol 10 No 3, Aug 88 (manuscript received 12 May 87) pp 143-150

[Article by Deng Zhongguo [6772 0022 0948], Lin Zhihao [2651 1807 6275] and Lai Yunxiang [6351 6663 7013] of the Institute of Atomic Energy, Beijing, and Jing Kangcai [5427 1660 2088] and Wu Runxian [0702 3387 0341] of P.O. Box 345, Chengdu, Xichuan: "Analysis of Hydrogen and Helium Isotopes and Oxygen, Nitrogen and Carbon Monoxide with GC-GCMS"]

[Text] This paper describes the use of capillary gas chromatography (GC) and gas chromatography - mass spectrometry (GCMS) with neon carrier gas to simultaneously analyze hydrogen and helium isotopes, oxygen, nitrogen and carbon monoxide with high accuracy. The sample size is 10 ul and the accuracy is 1.5 - 2.0 percent. The atomic to molecular ion ratios for HD, HT and DT were measured with GCMS. It was found that the atomic ion to molecular ion ratios of the isotopes are unequal. The effect of CO on the separation characteristics of the low temperature GC column was observed.

I. Analysis of Gas Mixture of Hydrogen-Helium Isotopes and Characteristics of GCMS

The difficulty in analyzing the contents of a gas mixture containing hydrogen, deuterium, tritium, helium, oxygen, nitrogen and carbon monoxide is in the determination of the hydrogen-helium isotopes. GC and MS are the primary methods used to measure these isotopes^{1,2}. With GC a thermal conductivity pool gas chromatography is used and with MS either a low or high resolution mass spectrometer is required. Neither GC or MS can totally solve the analysis of these isotopes. Although the six components of the hydrogen isotopes can be separated by GC, yet the sensitivity for each component is different. A known standard is required for calibration in order to obtain quantitative results. The two helium isotopes cannot be separated GC, resulting in low sensitivity and large error. The advantages of MS include

sensitivity, accuracy, wide concentration range and identical sensitivity to all six hydrogen isotope compositions. However, the molecular and atomic ions of these isotopes and helium ion will form several doublets in the mass spectrum. To analyze these doublets will require the knowledge of thermal equilibrium constants. Some thermal equilibrium constants cannot be accurately measured. It is also difficult to determine precisely whether a sample is in equilibrium or the status of the sample is altered in the analysis. Therefore, the error associated with the thermal equilibrium constants is high. Although a high resolution mass spectrometer (resolution > 1300) can separate some doublets, however, certain doublets (such as $T^{-3}\text{He}$) cannot be separated. Hence, it is very difficult to simultaneously measure the contents of hydrogen and helium isotopes. In addition, it is relatively complicated to prepare sensitivity curves for such mixtures using MS. One of the difficulties in using MS alone is that the hydrogen, nitrogen and oxygen background levels are high and they fluctuate widely in the mass spectrometer.

Due to these reasons, we are using GC in parallel to GCMS. GCMS is used to measure the contents of hydrogen and helium isotopes and GC is used to determine the contents of oxygen, nitrogen and carbon monoxide. A shunt is used to divert most of the sample to the GC to compensate for its low sensitivity and a small amount of the sample goes into the GCMS. Because the GC column in the GCMS can separate the six hydrogen isotope components, the mass spectrometer is provided with a single component sample to avoid doublets in the mass spectrum. Moreover, we can take advantage of the mass spectrometer which has high sensitivity, accuracy and identical response to the six hydrogen isotope components. Thus, GC-GCMS has two outstanding advantages. The first is high sensitivity. With a 10 μl sample, the accuracy can reach 1.5 - 2.0 percent. The concentration range is 0.1 - 100 percent. The hydrogen background is low. The second is that hydrogen, helium, oxygen and nitrogen can be simultaneously measured with one sample.

II. Key Problems with GC-GCMS

Two problems must be resolved before GC-GCMS can be used to measure the contents in the mixture. One is to develop a GC which can be linked to a mass spectrometer and the other is to synchronize the GC peak with the magnetic field scanning and ion beam recording of the MS.

1. Construction of the GC System

The capillary column C that is directly connected for GCMS analysis must meet the following requirements. (1) It should use a low temperature metallic capillary column with the proper resistance and separation characteristics. (2) There should be no flow restriction and dead volume between the sampling port and the ion source. (3) It should have a good vacuum seal.

(1) Fabrication and activation of the low temperature capillary column

The direct connection of GCMS depends upon the flow restriction in the capillary column. The capillary tube should be long and filled evenly to create a large but uniform pressure drop for the carrier gas between the inlet and outlet of the tube.

The capillary tube used to separate hydrogen isotopes is a 0.4 mm inner diameter x 9 m glass capillary⁷ which has good separation characteristics. A 0.4 mm inner diameter x 20 m glass capillary filled with Al_2O_3 (Fe_2O_3) was also used in this work. However, it was found to be difficult to have a vacuum connection. In addition, it breaks easily and is not suitable to analyze radioactive sample. Therefore, the low temperature GC columns were made with 0.6-0.8 mm inner diameter, 1-1.5 m long stainless steel capillary tubes.

The major difficulty in the fabrication of metallic capillary column is filling. The following method was used to fill it with 120 mesh packing material.

(a) Both ends of the tube were enlarged to facilitate the filling.

(b) The filling was done in two sections to reduce the travel distance. A 0.5 mm diameter tungsten wire was inserted half way into the column. After one half of the tubing was filled, the tungsten wire was removed to fill the other half.

(c) A vacuum pump was used to pull a vacuum in the tubing to increase the mobility of the packing material.

(d) It was filled several times with a small amount of packing material each time.

After the column was packed, the quality of the packed column was checked with the carrier gas. The GC column was activated at 200-250°C and separation characteristics of the six hydrogen isotopes were used to check and control the activation time.

(2) Flow restriction and dead volume are not permitted in the tubing.

(3) Vacuum check

The vacuum seal of the GC system was checked by a helium leak detector. If the GC system can keep a good vacuum, it is easy to connect it to a mass spectrometer.

2. Scanning and Ion Beam Collection in the MS

Since it is a quantitative measurement, the accuracy requirement is high. It is not acceptable to record a fast scanning multi-ion chromatographic spectrum. Mass pre-selectors are used and calibrated at the peaks of those molecular ions of interest. After the GC peak corresponding to a certain mass is recorded, the instrument immediately jumps to the next pre-selector to record another GC peak until all the GC peaks are recorded.

III. Experimental Apparatus and Method of Analysis

1. Experimental Apparatus

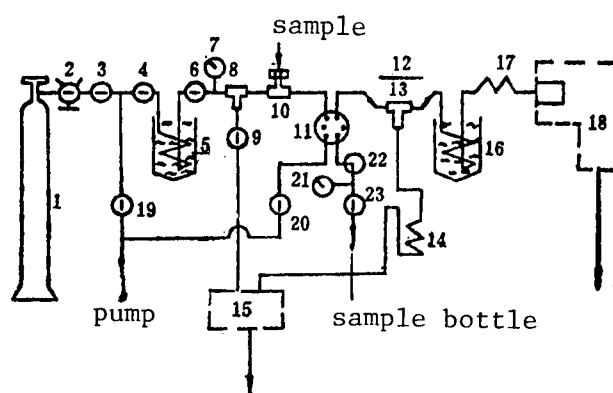


Figure 1. Flow Diagram of the GC-GCMS System

1- neon carrier gas cylinder; 2- pressure reduction valve; 3- fine adjustment valve; 4,6,19-23- two-way valves; 5- activated charcoal liquid nitrogen trap; 7- vacuum gauge; 8- carrier gas flow divider; 9- fine adjustment vacuum valve; 10- sampling port; 11- six-way valve; 12- shunt; 13- sample splitter; 14- constant temperature column; 15- thermal conductivity GC; 16- low temperature capillary column; 17- GCMS connector; 18- mass spectrometer.

The experimental apparatus and flowchart are shown in Figure 1. The operating conditions of the apparatus are briefly described as follows:

(1) Low temperature metal capillary column: spirally coiled stainless steel capillary tubes 0.8 mm ID x 1.5 mm and 0.6 mm ID x 1.0 mm.

- (2) Constant temperature column: 2.0 mm ID x 1.0 m stainless steel column filled with 120 mesh 5 A molecular sieve which was activated in vacuum for 3 - 4 hours prior to use at 350°C.
- (3) Sampling port: consisting of a sample injector and a six-way valve which is at 2.67 Pa in vacuum.
- (4) Small thermal conductivity pool: stainless pool with a 20 μ l effective volume, 100 ohm tungsten resistor, 200 μ A operating current at room temperature.
- (5) GCMS connector: 0.6 mm ID x 1.5 m stainless steel capillary tube.
- (6) Mass spectrometer: a Model CH4 mass spectrometer is used in the GCMS with a gas source, 20 μ A electron beam, 30 and 70 eV energy, 3 kV ion acceleration potential, mass pre-selector peak recorder, and Faradaic cylinder to collect static charge. A 120 l/min vacuum pump is used as the pre-pump.

2. Method of Analysis

The analysis process is shown in Figure 1. The neon carrier gas passes through the cylinder (1), pressure reducing valve (2), and fine adjustment valve (3) and enters the activated charcoal liquid nitrogen trap (5) to remove water vapor and organics from air. The purified neon passes through valve (6) and its pressure is measured by vacuum gauge (7). A flow divider (8) is used to let a portion of the carrier gas into the thermal conductivity reference cell through the fine adjustment vacuum valve (9). The other portion goes into the sampler (10). The sample is introduced through the sampler or a six-way valve (11). It goes into the sample splitter (13) with the carrier gas. When GC measurements are not made, connector (12) is added to allow most of the sample to enter the constant temperature chromatography column (14) to be measured by the thermal conductivity GC (15). A small portion of the sample flows into the low temperature column (16) and then enters the mass spectrometer (18) through connector (17). The entire analysis simultaneously determines the concentrations of hydrogen, deuterium, tritium, helium, oxygen and nitrogen with one sample.

IV. Experimental Results

1. Selection of Carrier Gas Flow Rate

Table 1 shows the relation between carrier gas flow rate, column pressure, vacuum in the ion source of the mass spectrometer, and times at which peaks for hydrogen and helium isotopes to appear. As shown in Table 1, the times for hydrogen isotopes to appear are moved forward at a higher flow rate. However, the vacuum in the ion source becomes poorer as the flow rate increases. Therefore, the carrier gas flow rate was fixed at 1.1 ml/min to ensure long term stable operation of the mass spectrometer.

Table 1. Carrier Gas Flow Rate, Column Pressure, Vacuum and Times for Hydrogen, Deuterium, Tritium and Helium Peaks

carrier flow rate ml/min	column pressure 10 ⁵ Pa	vacuum 10 ⁻³ Pa	peak appearing time			
			He	H ₂	HD	D ₂
1.0	1.07	2.00	4' 10"	54'	69'	92'
1.1	1.17	2.93	4'	48'	67'	89'
1.2	1.37	3.33	3' 10"	44'	62'	87'

2. Separation of Hydrogen, Helium, Oxygen and Nitrogen

The GCMS carrier gas flow rate is 1.1 ml/min and the GC carrier gas flow rate is 6.0 ml/min. The results are shown in Figure 2. It was found in the separation of hydrogen isotopes that if the CO content in the sample exceeded 5 percent the activity of the low temperature chromatography column would decrease due to temporary poisoning by CO. After the sample passed by, the activity was restored. Figure 3 shows the chromatographic peaks of HT and D₂ with 5 percent CO and without CO.

3. Determination of Ratio of Atomic Ion to Its Parent Molecular Ion

The atomic ion to molecular ion ratios for the six hydrogen isotopes were measured by GCMS at 30 eV and 70 eV. The chromatographic peak of T⁺/DT⁺ is shown in Figure 4. The measured and theoretical results from GCMS and the MS data from abroad are shown in Table 2^{2,8}. The value in parenthesis is not measured. It is calculated based on the ratios of H₂, D₂ and T₂ under the assumption that the atomic ion to molecular ion ratios for the two isotopes are identical. The D⁺/DT⁺ ratio in the table was measured in a high tritium content tritium/deuterium mixture where D₂ was neglected⁸. Obviously, ratios for HD, HT and DT cannot be directly measured. We also found that in HD, HT and DT the atomic ion to molecular ion ratios for any two isotopes are not equal. This is probably because the lighter atom has high mobility than the heavier one in the dissociation or ion-molecule reaction, thus producing more lighter proton clusters. The measurement of the atomic ion to molecular ion ratios for HD, HT and DT and the fact that they are unequal have not been reported in the literature to date.

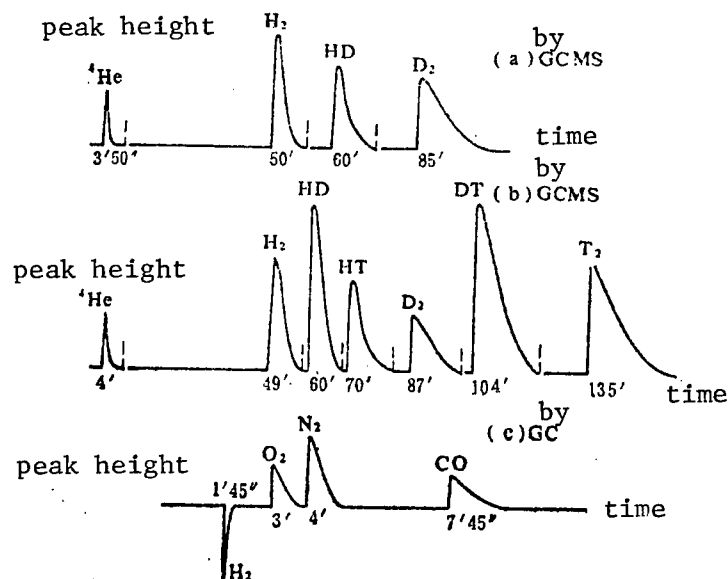


Figure 2. Separation Spectra

(a), (b) GCMS chromatographic peaks for hydrogen, deuterium, tritium and helium; (c) GC peaks for O_2 , N_2 and CO .

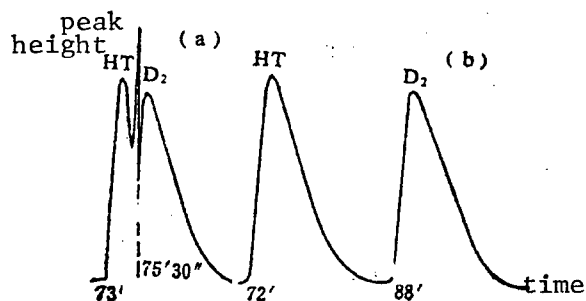


Figure 3. Chromatographic Peaks for HT and D_2

(a) Sample with 5 percent CO (b) Sample without CO

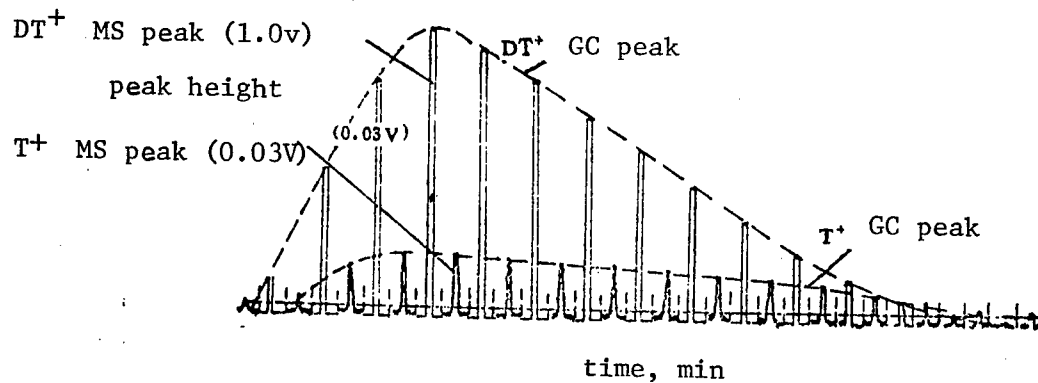


Figure 4. GCMS and GC Peaks for T^+ and DT^+

Table 2. Atomic Ion to Molecular Ion Ratios for H₂, HD, HT, D₂, DT and T₂

electron energy, eV	method	ratio, $\times 10^{-2}$								
		$2H^+/H_2^+$	H^+/HD^+	D^+/HD^+	$2D^+/D_2^+$	H^+/HT^+	T^+/HT^+	D^+/DT^+	T^+/DT^+	$2T^+/T_2^+$
70	GCMS	1.48	0.45	0.95	0.99	0.32	0.66	0.22	0.40	0.44
30	GCMS	1.27	0.41	0.85	0.70	0.27	0.50	0.19	0.32	0.36
30	theoretical	1.60	(0.54)	(0.54)	0.72	(0.39)	(0.39)	(0.26)	(0.26)	0.38
30	MS	1.30	(0.48)	(0.48)	0.70	(0.34)	(0.34)	(0.25)	(0.25)	0.36
30	MS							0.20		

4. Sensitivity Curves

(1) GCMS Sensitivity Curves

The sensitivity curves for various components are described as follows

(a) Sensitivity curves for samples containing H, (H,D) and H, D, T).

As shown in Figure 5, GCMS has the same sensitivity to these three types of samples. This curve can be used to calculate the abundance of hydrogen isotopes. It can also be used to determine the contents of hydrogen isotopes in a mixture. After the instrument is calibrated with a high purity hydrogen sample, the contents can then be measured.

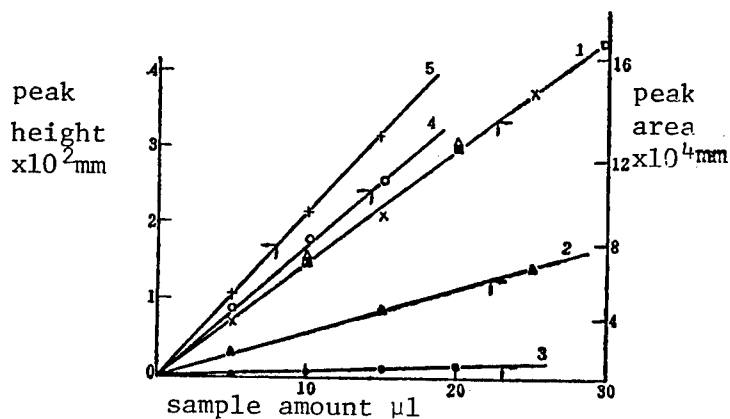


Figure 5. Sensitivity Curves in Measuring Hydrogen and Helium with GCMS and Measuring O₂ and N₂ with GC

Δ, ● - He sample; x - H sample; Δ - HD sample; □ - HDT sample;
○ - O₂ sample; + - N₂ sample

(b) Sensitivity Curve for He Sample and Shunt Ratio

The sensitivity curves for the He sample were determined by GCMS before and after the GC was connected to the GCMS, as shown in Figure 5. The slopes of curves (2) and (3) were used to calculate the ratio of sample going into the GC to that going into the GCMS. It was determined to be 5.1 : 1.

(2) Sensitivity Curves for Measuring O₂ and N₂ with GC

The sensitivity curves for measuring O₂ and N₂ with GC after the GC was connected to the GCMS are shown in Figure 5.

(3) H to He Sensitivity Ratio

The hydrogen to helium sensitivity ratio can be calculated from curves (1) and (2) in Figure 5, which is 2.70. The theoretical value (from ionization efficiency) is 2.65.

5. Analysis of Hydrogen-Deuterium Samples

GCMS was used to analyze binary samples containing H and D. The results are shown in Table 3 together with the data obtained with MS. The accuracy of measurement is 1.5 percent and the two methods are consistent.

Table 3. Determination of H and D Contents in Binary Samples Containing H and D.

content, percent	GCMS value									MS value
	1	2	3	4	5	6	7	8	mean	
H	11.60	11.73	11.29	11.38	11.32	11.52	11.69	11.59	11.51±0.16	11.60±0.12
D	88.40	88.24	88.71	88.61	88.66	88.47	88.31	88.40	88.47±0.16	88.37±0.14

6. GC-GCMS Measurement of Mixed Samples

Mixed samples with hydrogen, helium and nitrogen were analyzed by the GC-GCMS system. A 10 µl sample was introduced into the sampler. The nitrogen content was determined by GC and the hydrogen and helium contents were measured by GCMS. Figure 6 shows the spectra. The contents of various components are shown in Table 4. The accuracy of measurement is 1.5 - 2.0 percent.

Table 4. Composition of Mixed Samples (percent)

No.	$^3\text{He}_2$	H	D	T	N
80	0.94	0.51	58.65	33.44	6.50
81	1.01	0.48	58.68	33.32	6.49
82	0.96	0.49	58.53	33.62	
83	0.96	0.49	58.62	33.40	
mean	0.97 ± 0.03	0.49 ± 0.01	58.61 ± 0.12	33.43 ± 0.13	6.50

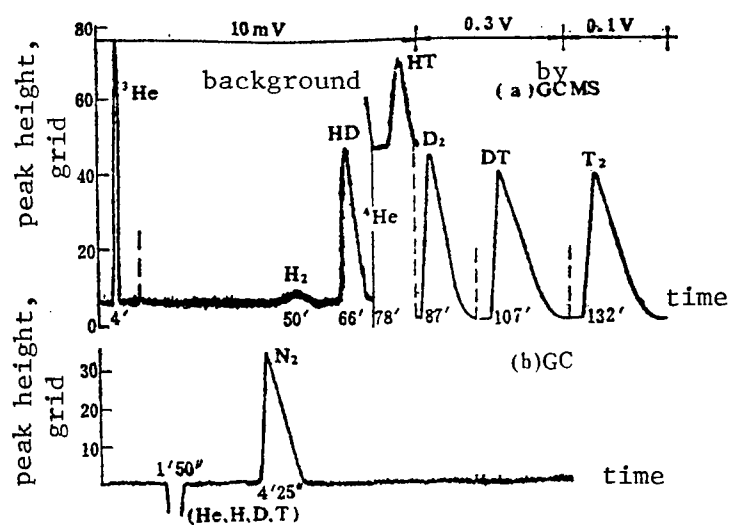


Figure 6 Chromatographic Peaks for a Mixed Sample

V. Conclusions

1. GC-GCMS is a new technique capable of determining hydrogen and helium isotopes, as well as oxygen and nitrogen, in a mixture. It requires a small amount of sample, and is accurate and reliable. In addition, it is a direct measurement.
2. The atomic ion to molecular ratios for HD, HT and DT were reported for the first time. Moreover, the ratios involving these three molecules and their corresponding two isotope atoms are not equal.
3. It was found that the $\text{Al}_2\text{O}_3(\text{Fe}_2\text{O}_3)$ low temperature chromatography column would be poisoned when the CO content exceeds 5 percent.
4. Chromatography involving the use of a small thermal conductivity pool and a capillary column was attempted.

Cai Yuliang [5591 3022 5328], Liu Haofen [0419 3185 5358], Wen Guiqin [3306 2710 3830], Liu Yongfu [0419 3057 4395], Zhang Linxiang [1728 2651 4382] and Yuan Yunxia [5913 0061 7209] also participated in the experimental work.

References

1. Genty, C. et al., ANAL. CHEM., 42, 7 (1970).
2. Foster, K. W., MLM-1099, (1960).
3. Jones, W. M., J. CHEM. PHYSICS, 17, 1062 (1947).
4. Schott, R. et al., METHODS PHYSIQUES D'ANALYSE (G.A.M.S.) 7, 165 (1971).
5. Mehrhoff, T. K. et al., GEPP-215, (1976).
6. Warner, D. K. et al., BULLETION D'INFORMATIONS SCIENTIFIQUES ET TECHNIQUES, 178, 79 (1976).
7. Cerey, C. et al., BULL. SOC. CHIM. FRANCE, 2315 (1962).
8. Mcionteer, B. B. et al., LA-2086, (1954).

New HBeAg Immune Binding Sites Found by Mc-anti-HBe

40101007b Beijing CHINESE MEDICAL JOURNAL in English Vol 101 No 7, Jul 88
pp 517-518

[Article by Zhang Zheng [1728 2973], Li Xin-fu [2621 2450 1381], Sun Yan [1327 3508] and Tao Qi-min [7118 0366 2404], Institute of Helatology, Beijing Medical University, Beijing]

[Text] In detecting HBsAg by RIA, when Mc-anti-HBe(b) is coated on the well and radiolabled, some HBsAg positive sera show high values but other remain negative. This indicates a new binding site on HBsAg in some sera. The antigenicity of this new binding site is not as strong as that of the "b" determinant on HBsAg and shows cross reactivity with Mc-anti HBe(b), but not with Mc-anti HBe(a).

In 1982, Imai¹ acquired Mc-anti-HBs(a) and (b) cell lines immunized with free HBeAg. In 1984, Ferns and Tedder² also got both Mc-anti-HBe (α) and (β) cell lines. In 1986, K.S. Spiezia prepared two Mc-anti-HBe(β) cell lines. At present McAb has been widely used not only in the preparation of test kits but also in the analysis of antigenic determinants. Researchers have reported that when the same kinds of Mc-anti-HBe were coated and labeled for detection of HBsAg, HBeAg positive sera showed negative value. This might be competitively binded HBeAg epitope by coated and labeled the same Mc-anti-HBe. In the study of HBeAg, we found that when Mc-anti-HBe(b) was coated and labeled, some of the HBeAg positive sera showed high cpm values while others do not. It seems that there may be a new binding site on some HBeAg.

MATERIAL AND METHODS

Material. Mc-anti-HBe(a) and (b) were supplied by the Institute of Immunology Co. Ltd. of Japan. Human polyclonal anti-HBe (HP-anti-HBe) was purified by affinity chromatography by ourselves. The serum of patients with chronic persistent hepatitis confirmed by liver biopsy (CPH) and HBsAg carriers was collected in Beijing.

Methods. Mc-antibodies and HP-anti-HBe were labeled with ^{125}I by the chloramine T method. HBeAg was detected by sandwich RIA.

RESULTS

HBeAg was detected by different patterns of coating/labeling. Different RIA matchings were chosen. Mc-anti-HBe(a) and (b) and HP-anti-HBe were used as coating and labeling antibodies respectively. Ten samples of HBeAg positive sera were tested. The results are shown in Table 1. All tests were confirmed by neutralization.

Table 1. Detection of HBeAg by RIA

Matchings (coating/labeling)	Positive number*	Negative number
a/a	0	10 (1.79)
a/b	10 (84.7)	0
a/HP	10 (2.73) weak	0
b/a	10 (27.4)	0
b/b	2 (19.3)	8 (1.97)
b/HP	10 (3.78) weak	0
HP/a	10 (5.6)	0
HP/b	10 (23.74)	0
HP/HP	10 (2.98) weak	0

* P/N average value

New binding site positive rate in 100 HBeAg positive sera samples. Fifty CPH samples and 50 carrier samples were selected. All were HBeAg positive. All samples were tested by four RIA matchings. The results were shown in Table 2.

Table 2. HBeAg Detection in 100 HBeAg Positive Sera Samples by Different RIA Matchings

P/N ratio	CHP (N = 50)				HBeAg (N = 50) carrier				Total (%)			
	a/b	b/a	b/b	a/a	a/b	b/a	b/b	a/a	a/b	b/a	b/b	a/a
30	35	0	0	0	44	0	0	0	79	0	0	0
10.1-30	15	33	8	0	6	36	6	0	21	69	14	0
5.1-10	0	17	11	0	0	14	14	0	0	31	25	0
2.1-5.1	0	0	13	0	0	0	15	0	0	0	28	0
2.1	0	0	18	50	0	0	15	50	0	0	33	100

Table 2 shows the classifications according to the P/N ratios. The results showed no significant differences between the CPH and carrier groups ($P > 0.05$). By a/b matching the P/N value of 79 percent of the sera was greater than 30, whereas by b/b matching all the sera P/N value was lower than 30. In class 1 and class 2, with P/N values greater than 10, the a/a matching results were significantly higher than those of b/b matching ($P < 0.01$). By a/b matching all the sera gave negative results.

DISCUSSION

In 1975 Kohler and Milstein⁴ established the hybridoma technique which greatly improved immunological detection of HBeAg of different RIA patterns. We found that there might be a new immunogenic binding site on HBeAg besides determinants (a) and (b). The characteristics of this new site are HBeAg sera with the new binding site which showed high cpm values in the b/b model, this had not been reported previously. This binding site was weaker than the b determinant in binding with Mc-anti-HBe(b). As samples with P/N values higher than 10 were much more numerous by a/b matching than by b/b matching ($P < 0.01$), it is suggested that there is cross-reactivity between the new binding site and the (b) determinant, but no evidence of sharing common antigenicity with the (a) determinant. All of the sera tested by a/a matching were negative.

There was no significant difference between CPH and HBsAg carrier groups in positive rate and antigenicity of the new binding site. This new binding site might be a subgroup of Mc-anti HBe(b) specific (b) determinant or a new determinant which shared cross reactivity with the (b) determinant. Further study is required. This new binding site may be caused by HBeAg change in conformation or repeat sequencing. Preparation of McAb specific for this new binding site and protein analysis of HBeAg with this new site will aid understanding this new determinant.

REFERENCES

1. Imai, M et al. Demonstration of two distinct antigenic determinants on hepatitis B e antigen by monoclonal antibodies. *J Immunol* 1982; 128:69.
2. Ferns RB, Tedder RS. Monoclonal antibodies to hepatitis B e antigen (HBeAg) derived from hepatitis B core antigen (HBcAg): Their use in characterization and detection of HBeAg. *J Gen Virol* 1984; 65:899.
3. Spiezia KS, Mushahwar IV. Re-examination and further characterization of a monoclonal antibody to hepatitis B e antigen (anti-HBe). *J Virol Meth* 1986; 13(4):351.
4. Kohler G, Milstein C. Continuous cultures of fused cells secreting antibody of predefined specificity. *Nature (London)* 1975; 256:495.

Investigation of Prevalence of Hepatitis A Outbreak in Minhang District, Shanghai

40091013a Shanghai SHANGHAI YIKE DAXUE XUEBAO [ACTA ACADEMIAE MEDICINAE SHANGHAI] in Chinese Vol 15 No 5, Jul 88 pp 360-364

[English abstract of article by Han Xiangyang [7281 0686 7122], et al., of the Department of Epidemiology, School of Public Health, Shanghai Medical University; Pan Zhongfang [3382 9112 5364], et al., Antiepidemic Station of Minhang District, Shanghai]

[Text] From 15 January to 15 February 1988, 2,449 cases of acute hepatitis A were reported in Minhang, Shanghai, a district of 105,476 residents. The attack rate was 23.2 per thousand population, with 41.4 per thousand among 20-29 year olds, 39.9 per thousand for those 30-39 years old, and no reports of occurrence in people any older. An investigation disclosed that the cause of the outbreak was the ingestion of the raw clam, Arca (Anadara) subcrenata. The facts confirming the source of infection were: (1) two supplies of clams preceded the two epidemic peaks by 1 month, corresponding to the incubation period of hepatitis A, and up to 27.9 percent of the people in the sample population were found to have ingested these raw clams; (2) a case-control study indicated that 94.4 percent of the hepatitis A patients had a history of eating clams, significantly higher than the percentages of the general population (27.9 percent) and the control patients (28.7 percent), and that the odds ratio (OR) was up to 72.0 (95 percent confidence level: 25.9 - 200.3), i.e., the more clams one consumed, the higher the OR value would be; and (3) a sampling survey of the population showed that the relative risk (RR) of acquiring hepatitis A infection in those who had ingested the clams was 29.37 times higher than that in those who had not, with 93.1 percent of the total hepatitis A cases estimated to be attributable to having eaten contaminated clams.

References

1. Wang Jianxiang, et al., "Use of CDNA-RNA Molecular Hybridization to Detect Hepatitis A Virus in Clinical Stool Samples," JOURNAL OF SHANGHAI MEDICAL UNIVERSITY, Vol 15 No 5, 1988 p 380.
2. Wang Jianxiang, et al., "Serum Epidemiological Study of Hepatitis A Outbreak in Shanghai in 1988," JOURNAL OF SHANGHAI MEDICAL UNIVERSITY, Vol 15 No 5, 1988 p 374.

3. Wang Jianxiang, et al., "Pathological Proof of Transmission of Hepatitis A by Arca subcrenata--Preliminary Results of Nucleic Acid Molecular Hybridization and Immune Electron Microscopy," JOURNAL OF SHANGHAI MEDICAL UNIVERSITY, Vol 15 No 5, 1988 p 384.
4. Hu Mengdong, et al., "Preliminary Survey of Hepatitis A and B Serological Indicators in Normal Humans in the Shanghai Area," CHINESE JOURNAL OF INFECTIOUS DISEASES, Vol 1, 1983 p 42.
5. Papaevangelcu, G.J., "Global Epidemiology of Hepatitis A," "Hepatitis A," (Ed. Gerety, R.E.), Academic Press, Inc., Orlando, 1984 p 117.
6. Kang Laiyi, et al., "Survey of a Hepatitis A Epidemic," CHINESE JOURNAL OF INFECTIOUS DISEASES, Vol 1, 1983 p 168.

Seroepidemiological Survey of Viral Hepatitis A During Epidemic in Shanghai

40091013b Shanghai SHANGHAI YIKE DAXUE XUEBAO [ACTA ACADEMIAE MEDICINAE SHANGHAI] in Chinese Vol 15 No 5, Jul 88 pp 374-379

[English abstract of article by Wang Jianxiang [3076 0256 5046], et al., of the Department of Epidemiology, School of Public Health, Shanghai Medical University]

[Text] In order to investigate the characteristics of an epidemic of hepatitis A in Shanghai which occurred in the early spring of 1988, 1,649 residents of the Changning district were surveyed. The investigation revealed that the attack rate of hepatitis A was 5.76 percent, and the sufferers were mainly limited to the age group of 20-39, with no difference between males and females. For those who had eaten a species of clam, Arca (Anadara) subcrenata, the attack rate was 15.86 percent, while it was 0.64 percent for those who had not eaten the clam. The relative risk (RR) was found to be 24.78, the attributable risk (AR) 15.22 percent, the attributable risk percentage (AR%) 95.96, the population attributable risk (PAR) 5.12 percent and the population attributable risk percentage (PAR%) 88.89. The attack rate of hepatitis A was closely related to the quantity of clams and ways ingested ($p < 0.0001$). Blood samples of 470 of the 1,649 residents examined for anti-HA and anti-HA IgM revealed that the number of persons susceptible to hepatitis A in the population fell gradually as the age increased. The average susceptibility of this group was 30.21 percent. In the anti-HA negative group, for those who had eaten the clams the attack rate was 29.41 percent and the infective rate was 38.24 percent, while for those who had not ingested the clams the attack rate was 1.35 percent and the infective rate was 5.41 percent. The relative risk was 21.79 and 7.07, respectively. The overall inapparent infection rate of hepatitis A in this outbreak was 1.91 percent.

References

1. Purcell, R.H., et al., "A Microtiter Solid-Phase Radioimmunoassay for Hepatitis A Antigen and Antibody," J IMMUN, Vol 116, 1976 p 349.
2. Deinhardt, F.W., et al., "Significance of Anti-HAV of the IgM Class for the Diagnosis of Hepatitis A," in "Viral Hepatitis," (Ed. Vyas, G.N.), Franklin Institute Press, Philadelphia, 1978 p 736.

3. Devine, R.E., et al., "Laboratory Diagnosis of Acute Hepatitis A Virus (HAV) Infection by Detection of HAV-Specific IgM Antibody Using a Commercially Available Radioimmunoassay," CAN J PUBLIC HEALTH, Vol 70, 1979 p 58.
4. Mason, J.O., et al., "Infectious Hepatitis Traced to the Consumption of Raw Oysters," AMER J HYG, Vol 75, 1962 p 90.
5. Ruddy, S.J., et al., "An Epidemic of Clam-Associated Hepatitis," JAMA, Vol 208, 1969 p 649.
6. Qiu Huashi, et al., "Survey Report on Hepatitis A Outbreak Caused by Arca granosa," CHINESE JOURNAL OF PREVENTIVE MEDICINE, Vol 13, 1979 p 229.
7. Kang Laiyi, et al., "Survey of a Hepatitis A Epidemic," CHINESE JOURNAL OF INFECTIOUS DISEASES, Vol 1, 1983 p 168.

Isolation, Identification of Toxins Contained in *Microcystis Aeruginosa* From Donghu Lake, Wuhan*

40091008 Beijing HAIYANG YU HUZHAO [OCEANOLOGIA ET LIMNOLOGIA SINICA] in Chinese Vol 19 No 5, Sep 88 pp 424-430

[English abstract of article by He Jiawan [0149 1367 5463], et al., of the Institute of Hydrobiology, Chinese Academy of Sciences, Wuhan]

[Text] The eutrophication of water supplies and recreational water bodies in China has increased, causing the water bloom of blue-green algae. Studies were carried out in order to determine the presence of toxic Cyanobacteria in freshwater lakes and ponds.

In 1984-1985 during the water bloom seasons, algal cells of *Microcystis aeruginosa* were collected from Donghu Lake. Most of them were toxic. The toxin was isolated by homogenization, extraction, ultracentrifugation, and ion exchange chromatography, and purified by high performance liquid chromatography. The results showed that the toxicity of the freeze-thaw cells was 100 mg/kg for 20-25 g mice by intraperitoneal injection, with a survival time of 60-120 min ($LD_{100} = 100$ mg/kg). The toxicity of the purified toxin was 1 mg/kg in mice by i.p. The modes of poisoning were similar to those reported involving the hepatotoxic peptides of *Microcystis aeruginosa*. The pure toxin had two u.v. absorbance shoulders at 230 and 240 nm, respectively, and had heat and alkaline stability. The main amino acids of the toxin were asparatic acid, glutamin acid, alanine, arginine, serine and phenylalanine. The fast atom bombardment mass spectra of the toxin showed the molecular weight to be about 937 daltons.

* Project supported by the National Natural Sciences Foundation.

References

1. Yu Jialu, et al., "Study of Toxicity of Blue-Green Algal Bloom in Lake Donghu, Wuhan. I. Determination of Freshwater Blue-Green Algae Toxicity," JOURNAL OF AQUATIC BIOLOGY, Vol 11 No 3, 1987 pp 212-218.
2. Almann, M.J., Juttner, F., "A Rapid Procedure for the Isolation of an Unstable *Microcystis* Toxin with FDF Feature," FEMS MICROBIOL LETTERS, Vol 12, 1981 pp 191-193.

3. Bishop, C.T., Anet, E.F.L.J., Gorham, P.R., " Isolation and Identification of the Fast-Death-Factor in Microcystis aeruginosa NRC-1," CAN J BIOCHEM PHYSIOL Vol 37, 1959 pp 453-471.
4. Botes, D.P., Kruger, Helene, Viljoer, C.C., "Isolation and Characterization of Four Toxins from Bluegreen Microcystis aeruginosa," TOXICON, Vol 20, 1982 pp 945-954.
5. Bent, P.E., Carmichael, W.W., "Isolation and Characterization of Peptide Toxins from Freshwater Cyanophytes Anabaena flos-aquae and Microcystis aeruginosa," OHIO J SCI, Vol 80, 1980 pp 66-68.
6. Codd, G.A., Carmichael, W.W., "Toxicity of a Clonal Isolate of the Cyanobacterium Microcystis aeruginosa from Great Britain," FEMS MICROBIOLOGY LETTERS, Vol 13, 1982 pp 409-411.
7. Elleman, T.C., Falcomer, I.R., Runnegar, M.T., "Isolation Characterization and Pathology of the Toxin from a Microcystis aeruginosa Bloom," AUST J BIOL SCE, Vol 31, 1978 pp 209-218.
8. Gorham, P.R., Carmichael, W.W., "Phycotoxins from Blue-green Algae," PURE AND APPL CHEM, Vol 52, 1979 pp 165-174.
9. Kirpenko, Yu. A., et al., "Isolation of Toxin from Blue-green Algae Biomass and Some of Its Physico-chemical Properties," DOPOV AKAD NAUK UKR RESR, Ser B, 1975 pp 359-361.
10. Rabin, P., Darbre, A., "An Improved Extraction Procedure for the Endotoxin from Microcystis aeruginosa NRC-1," BIOCHEM SOC TRANS, Vol 3, 1975 pp 428-430.
11. Slatkin, D.N., Stoner, R.D., Adams, W.H., "A Typical Pulmonary Thrombosis Caused by a Toxic Cyanobacterial Peptide," SCIENCE Vol 220, 1983 pp 1382-1385.
12. Theiss, W.W., Carmichael, W.W., "Physiological Effect of a Peptide Toxin Produced by the Freshwater Cyanobacteria (Blue-Green Algae) Microcystis aeruginosa Strain 7820," "Mycotoxins and Phycotoxins: A Collection of Invited Papers Presented at the Sixth International IUPAC Symposium on Mycotoxins and Phycotoxins," Ed. by P.S. Steyn and R. Vleggaar, Pretoria, South Africa, 1986 pp 22-25.
13. Watanabe, M.F., Oishi, S., "Toxic Substance from a Natural Bloom of Microcystis aeruginosa," APPLIED AND ENVIRONMENTAL MICROBIOLOGY, Vol 43 No 4, 1982 pp 819-822.

Effects of Proteinase Inhibitors on Coagulative Activity of Chinese Agkistrodon Acutus Venom

40091011g Tianjin ZHONGHUA XUEYEXUE ZAZHI [CHINESE JOURNAL OF HEMATOLOGY]
in Chinese Vol 9 No 9, Sep 88 pp 513-515, 573

[English abstract of article by Deng Chengqi [6772 2110 4388], et al., of the First Affiliated Hospital, West China University of Medical Sciences]

[Text] The interference of plasmic proteinase inhibition in the coagulative activity of the Chinese agkistrodon acutus venom (CAAV) has been investigated by fibrin coagulation, fibrin polymerization function and immunoelectrophoretic radioautograph of ^{131}I -CAAV. The normal defibrinated plasma could inhibit the coagulative activity of the CAAV, and its left coagulative activity was negatively correlated with the incubation time ($P < 0.001$). Pure AT-III gradually decreased the coagulative activity of the CAAV, but α_2 -mG increased the coagulative activity following incubation with the CAAV. AT-III inhibited the fibrin polymerization induced by the CAAV, but α_2 -mG increased this reaction. The results of the immunoelectrophoretic radioautograph showed that both AT-III and α_2 -mG could make the CAAV form complexes.

References

1. Yang Qingyu, et al., "Clinical Application of Agkistrodon Acutus Venom," CHINESE JOURNAL OF HEMATOLOGY, Vol 8, 1987 p 269.
2. Chen Yuancong, et al., "Physiochemistry, Toxicology and Applications of Snake Venom," First Edition, Science Press, 1983 p 20.
3. Bale, M., Mosher, D., "Effects of Thrombospondin on Fibrin Polymerization and Structure," J BIO CHEM, Vol 261, 1986 p 862.
4. Hunter, W., Greenwood, F.C., "Preparation of Iodine-131-Labeled Human Growth Hormone of High Specific Activity," NATURE, Vol 194, 1962 p 495.
5. Shanghai Municipal Medical Chemistry Testing Station, "Clinical Immunological Testing," Vol 2, First Edition, Shanghai Science and Technology Press, 1986 p 35.
6. Li Jiazeng, "Snake Venom and Blood Coagulation," FOREIGN MEDICINE, HEMATOLOGY SERIES, Vol 1, 1979 p 10.
7. Egberg, N., "On the Metabolism of the Thrombin-like Enzyme from the Venom of Bothrops Atrox," THROMB RES, Vol 4, 1974 p 35.

Disseminated Intravascular Coagulation-like Syndrome in Patients Envenomated by Agkistrodon Acutus Bite

40091011h Tianjin ZHONGHUA XUEYEXUE ZAZHI [CHINESE JOURNAL OF HEMATOLOGY] in Chinese Vol 9 No 9, Sep 88 pp 519-521, 573

[English abstract of article by Wen Shangwu [2429 1424 2976], et al., of Wannan Medical College]

[Text] A study was conducted of 11 patients envenomated by Agkistrodon acutus bites. The results showed that most of the coagulation screening tests (Fgn, PT, Plt and serum FDP) were abnormal, but plasma antithrombin-III and fibronectin levels remained in the normal range. These data suggest that there was no evidence of thrombin formation in the systemic circulation in the victims. Therefore, it was determined that the patients envenomated by Agkistrodon acutus bites had a disseminated intravascular coagulation (DIC)-like syndrome rather than true DIC.

References

1. Hasiba, U.H., et al., "DIC-like Syndrome After Envenomation by the Snake Crotalus Horridus Horridus," NEW ENG J MED, Vol 292, 1975 p 505.
2. Schmaier, A.H., et al., "Crotalocytin: Recognition and Purification of a Timber Rattlesnake Platelet Aggregating Protein," BLOOD, Vol 56, 1980 p 1013.
3. "Chinese Venomous Snakes and Snakebite Prevention and Treatment: Standards for Snakebite Diagnosis and Condition Categorization," People's Press, Shanghai, 1974 pp 168, 190.
4. Veroruggen, H.W., Wessels, J.M.C., "A Rapid Turbidimetric Determination of Fibrinogen Degradation Products (FDP)," THROMB HAEMOSTAS, (Stuttg), Vol 39, 1978 p 12.
5. Scherman, C.A., Lee, J., "Fibronectin: Blood Turnover in Normal Animal and During Intravascular Coagulation," BLOOD, Vol 60, 1982 p 558.
6. Russell, F.E., "Snake Venom Poisoning," Scholium International, Inc., Great Neck, NY, 1983 pp 188-202, 15-18.
7. Tu Guangtao, et al., "Physiochemistry of Snake Venom: Effects of Snake Venom on Blood and the Cardiovascular System and Clinical Applications Thereof," ADVANCES IN BIOCHEMISTRY AND BIOPHYSICS, Vol 6, 1979 p 22.

8. Mori, N., et al., "Purification of a Proteinase (Ac 5-proteinase) and Characterization of Hemorrhagic Toxins from the Venom of the Hundred-Pace Snake (*Agkistrodon acutus*)," TOXICON, Vol 22, 1984 p 451.

Studies on Protoplast Culture of Rice (Oryza sativa L.), Plant Regeneration From Protoplast-Derived Calli

40091011a Beijing YICHUAN XUEBAO [ACTA GENETICA SINICA] in Chinese Vol 15 No 5, Oct 88 pp 321-328

[English abstract of article by Li Liangcai [2621 5328 2624], et al., of the Institute of Genetics, Chinese Academy of Sciences, Beijing]

[Text] Protoplasts isolated from suspension cells of a japonica rice (77-170) and an indica variety (IR-50) were cultured in a RY-2 medium. The plating efficiency of the 77-170 was as high as 2.5 percent. Plant regeneration was achieved in both subspecies. Some methodological improvements are as follows: (1) A two-step isolation procedure was used to avoid the spontaneous fusions and to obtain high quality protoplasts. (2) Protoplasts isolated from suspension cells cultured in an AA medium supplemented with ABA showed a distinctly higher level of survival and division. (3) Postponing the transfer of the embedded protoplasts into a liquid medium might be beneficial to their survival and division. (4) Using media with relatively high osmotic pressure in culturing protoplast-derived calli increased their plant regeneration frequency on subsequent differentiation media. This is the first report of plant regeneration from the protoplast culture of an indica rice. All regenerated plants are albinos, probably due to their long-term culture history (1 and 1/2 years).

References

1. Chen Ying, et al., SCIENTIA SINICA, Vol 1, 1974 pp 40-51.
2. Lei Ming, et al., SCIENCE BULLETIN, Vol 22, 1986 p 1729.
3. Wang Guangyuan, et al., PLANT PHYSIOLOGY BULLETIN, Vol 4, 1986 p 49.
4. Y. Karasuyama, et al., GENETICS, Vol 40 No 6, 1986 pp 32-37.
5. Abdullah, R., et al., BIOTECHNOLOGY, Vol 4, 1986 p 1087.
6. Chu, C.C., et al., SCIENTIA SINICA, Vol 18, 1975 p 659.
7. Coulibaly, M.Y., Demarly, Y., Z PFLANZENZUCHTIG, Vol 96, 1986 pp 79-81.
8. Cutter, E.C., in "Plant Anatomy, Part I," (ed. E.C. Cutter), Edward Arnold, Ltd., 1978 pp 62-64.
9. Frearson, E.M., et al., DEV BIOL, Vol 33, 1973 p 130.
10. Fujimura, T., et al., PLANT TISSUE CULTURE LETTER, Vol 2, 1985 p 74.
11. Gamborg, O.L., et al., EXP CELL RES, Vol 50, 1968 p 151.

12. Green, C.E., et al., in "Molecular Genetics of Plants and Animals," (ed. K. Dawney, et al.), Academia Press, 1983 p 147.
13. Huber, W., et al., Z PFLANZENPHYSIOL, Vol 81, 1977 p 234.
14. Inoue, M., Maeda, E., JAPAN J CROP SCI, Vol 2, 1980 p 167.
15. Inoue, M., Maeda, E., JAPAN J CROP SCI, Vol 3, 1981 p 318.
16. Jones, M.G.K., in "Cereal Tissue and Cell Culture," (ed. S.W.J. Bright and M.G.K. Jones), Martinus Nijhoff/Dr. W. Junk Publishers, 1985 p 204.
17. Kisher, B.K., Reddy, G.M., PLANT CELL REPORTS, Vol 5, 1986 p 391.
18. Linsmaier, E.M., Skoog, F., PHYSIOL PLANT, Vol 18, 1965 p 100.
19. Liu Lifei, Kwan-long Lai, "Abstracts, First Intl Cong Plant Mol Biol," ed. G.A. Galan, University of Georgia, 1985 p 11.
20. Lu, C., Vasil, I.K., THEOR APPL GENET, Vol 59, 1981 p 275.
21. Milborrow, B.V., in "Advanced Plant Physiol," (ed. M.B. Wilkins), Pitman Publishing Ltd, 1984 p 78.
22. Murashige, T., Skoog, F., PHYSIOL PLANT, Vol 15, 1962 p 473.
23. Müller, A.J., Grafe, R., MOL GEN GENET, Vol 161, 1978 p 145.
24. Nabors, M.W., et al., PLANTA, Vol 157, 1983 p 385.
25. Power, J.B., Cocking, E.C., SCIENCE PROGRESS, Vol 59, 1971 p 181.
26. Thompson, J.A., et al., PLANT SCIENCE, Vol 47, 1986 p 123.
27. Torriani, U., Potrykus, I., EXPERIENTIA SUPPL, Vol 45, 1983 p 268.
28. Toriyama, K., Hinata, K., PLANT SCIENCE, Vol 41, 1985 p 179.
29. Torrizo, L.B., Zapata, F.J., PLANT CELL REPORTS, Vol 5, 1986 p 136.
30. Wakasa, K., et al., J PLANT PHYSIOL, Vol 117, 1984 p 223.
31. Yamada, Y., et al., PLANT CELL REPORTS, Vol 5, 1986 p 85.

Induction of Dihaploid Plants From Unpollinated Ovaries of Potato In Vitro

40091011b Beijing YICHUAN XUEBAO [ACTA GENETICA SINICA] in Chinese Vol 15
No 5, Oct 88 pp 329-334

[English abstract of article by Tao Zirong [7118 5261 2837], et al., of the
Institute of Genetics, Chinese Academy of Sciences, Beijing]

[Text] The in vitro culture of unpollinated ovaries is a new approach for
obtaining dihaploids in potatoes, and is of theoretical and practical
significance. The authors have achieved success in the induction of
dihaploid plantlets from unpollinated ovaries of potatoes, with the
preliminary results having been reported in 1984. Here we will report the
overall results in detail.

Calluses and dihaploid plantlets were obtained from the in vitro culture of
unpollinated ovaries of two autoteraploid genotypes. The ovaries were
excised when the neighboring anthers contained pollen at the uninucleate
stage. They were then cultured on a Murashige and Skoog medium supplemented
with different hormones and sucrose. It was found that the most suitable
induction medium was the MS medium supplemented with 2,4-D 2.0 mg/l,
zeation 0.1 mg/l and sucrose 3 percent. The most suitable differentiation
medium was 1/2 MS medium supplemented with 2,4-D 0.5 mg/l, kin 2 mg/l,
BAP 2 mg/l, GA 0.5 mg/l, zeation 0.2 mg/l and sucrose 2 percent.

Two genotypes used in the authors' experiment were able to produce calli, and
the 26 green plants regenerated were derived from only two genotypes. It
appears that the plantlet differentiation from the callus depended more on
the genotype than on the composition of the media.

References

1. Tao Zirong, et al., GENETICS, Vol 7 No 5, 1985 pp 23-24.
2. Wang Jingju, et al., ACTA BOTANICA SINICA, Vol 23 No 4, 1981 pp 329-330.
3. Wu Boji, et al., ACTA BOTANICA SINICA, Vol 24 No 2, 1982 pp 125-129.
4. Zhu Zhiqing, et al., SCIENTIA SINICA, No 5, 1975 pp 484-490.
5. Zhou Chang, et al., JOURNAL OF WUHAN UNIVERSITY, NATURAL SCIENCE EDITION,
Vol 3, 1982 pp 61-72.

6. Zhou Chang, et al., ACTA GENETICA SINICA, Vol 7 No 3, 1980 pp 283-288.
7. Zhu Zhongchun, et al., ACTA GENETICA SINICA, Vol 8 No 1, 1981 pp 63-65.
8. Mix, G., POTATO RES, Vol 26, 1983 pp 63-67.
9. San Noeum, L.H., in "Proceedings Conf Breeding Genet Base Crops," Wageningen, 1979 pp 327-329.
10. Yang, H.Y., Zhou, C., THEORETICAL AND APPLIED GENETICS, Vol 63 No 2, 1982 p 97.
11. Zhou, C., Yang, H.Y., PLANT SCIENCE LETTER, Vol 20, 1981 p 231.

Study of Identification of Male Sterile Cytoplasms Using Analysis of Mitochondrial DNAs in Maize

40091011c Beijing YICHUAN XUEBAO [ACTA GENETICA SINICA] in Chinese Vol 15 No 5, Oct 88 pp 335-339

[English abstract of article by Xie Youju [6200 0645 5468], et al., of the School of Biology, Beijing Agricultural University]

[Text] Modified Kemble's methods were used for the identification of male sterile cytoplasms in maize. The Xho I restriction patterns of mitochondrial DNA from Shuang A and Tang A cytoplasms, which are used in seed production in China, were indistinguishable from that of S cytoplasm control. Undigested mitochondrial DNAs from Shuang A and Tang A cytoplasms also clearly showed the S₁ and S₂ plasmid-like DNAs characteristic of the S cytoplasm group. These data indicate that Shuang A and Tang A cytoplasms belong to the S cytoplasm group. A comparison of the restriction patterns of mitochondrial DNAs from Y cytoplasm, which was discovered several years ago, with those of T cytoplasm indicate that Y cytoplasm belongs to the T cytoplasm group. These results will be helpful in the reasonable arrangement of male sterile cytoplasm in seed production in China. The identification methods of male sterile cytoplasm in maize are discussed.

References

1. Ju Ud Meng Agricultural Science Station, Liaoning, GENETICS BULLETIN, Vol 3, 1974 pp 21-24.
2. Maize Seed Breeding Group, Yichang Branch of Huazhong Agricultural College, GENETICS AND SEED BREEDING, Vol 5, 1976 pp 18-19.
3. Qin Taichen, et al., JIANGSU AGRICULTURAL SCIENCE, Vol 6, 1984 pp 6-10.
4. Kemble, R.J., Gunn, R.E., Flavell, R.B., GENETICS, Vol 95, 1980 pp 451-458.
5. Levings, C.S. III, Sederoff, Ronald R., PROC NATL ACAD SCI USA, Vol 80, 1983 pp 4055-4059.
6. Pring, D.R., Levings, C.S. III, et al., PROC NATL ACAD SCI USA, Vol 74, 1977 pp 2904-2908.
7. Pring, D.R., Levings, C.S. III, GENETICS, Vol 89, 1978 pp 121-136.
8. Xie Youju, Gengenbach, Burle, MAIZE GENETICS COOPERATION NEWSLETTER, Vol 56, 1982 pp 138-140.

Study of Breeding, Cytogenetics of Octoploid Triticales With Different Cytoplasms

40091011d Beijing YICHUAN XUEBAO [ACTA GENETICA SINICA] in Chinese Vol 15 No 5, Oct 88 pp 340-347

[English abstract of article by Wang Guizhi [3769 2710 5347], et al., of Harbin Normal University]

[Text] The stability of the meiosis seed-set rate and plumpness of kernels might be changed when the cytoplasm of a triticales is changed. The wheat variety "Chinese Spring" with different alien cytoplasms was crossed with rye, and the F₁ plants were treated with colchicine for chromosome doubling. Octoploid triticales with different alien cytoplasms were different in seed-set rates, heading rates and plant forms. Some demonstrated weak growth, or their anthers were not dehiscent, or their stamens became pistillate. Different cytoplasms had apparent effects on chromosome pairing, as was shown by the univalent frequency at the metaphase of the first meiotic division. Certain effects of the D-type plasm can perhaps improve the seed-set rate of octoploid triticales.

References

1. Yan Yurui, et al., ACTA AGRONOMICA SINICA, Vol 1 No 4, 1956, pp 331-336.
2. Zhang Yan, et al., SCIENTIA AGRICULTURA SINICA, Vol 4, 1985 pp 56-60.
3. Mu Yuanjun, CHROMOSOMES, II-21-22, 1981 pp 639-651.
4. Mukai, Y., GENETICS, Vol 39 No 1, 1985 pp 53-63.
5. Tsunewaki, K., Kyoto University Department of Agriculture Research Report, 1-26, 1983.
6. Jouve, N., COMMUNICATIONS, Vol 6 No 3, 1978 pp 235-241.
7. Kihara, H., "Proc III Int Wheat Genet Symp," 1968 pp 125-134.
8. Kihara, H., SEIKEN ZIHO, No 26-27, 1979 pp 1-13.
9. Kihara, H., CYTOLOGIA, Vol 47, 1982 pp 435-450.
10. Nakata, N., JAPAN AGRIC TOTTORI UNIV, Vol 21, 1985 pp 1-9.
11. Ogiwara, Y., Tsunewaki, K., "Proc VI Int Wheat Genet Symp," 1983 pp 407-413.
12. Sasaki, M., "Proc VI Int Wheat Genet Symp," 1983 pp 1179-1184.

13. Tsunewaki, K., "Japan Soc Prom Sci," Tokyo, 1980, p 290.
14. Tsunewaki, K., JAPAN GENET, Vol 59, 1984 pp 215-224.
15. Tsunewaki, I., "Proc VI Int Wheat Genet Symp," 1984 pp 1139-1144.

Structural Variance Analysis of Mitochondria COI, COII Genes From Normal, Cytoplasmic Male-Sterile Varieties of Rice (Oryza sativa)

40091011e Beijing YICHUAN XUEBAO [ACTA GENETICA SINICA] in Chinese Vol 15 No 5, Oct 88 pp 348-354

[English abstract of article by Liu Yansheng [0491 3508 3932], et al., of the Institute of Genetics, Fudan University, Shanghai; Zhuo Degen [0587 1795 5327] of Hunan Academy of Agricultural Sciences, Changsha]

[Text] The authors analyzed the mtDNAs (mitochondrial DNAs) and ctDNAs (chloroplast DNAs) isolated from fertile (Zhenshan 97B) and male-sterile (Zhenshan 97A) cytoplasms by using the restriction endonuclease PstI, HindIII and BamHI. The results show that mtDNAs from Zhenshan 97A and 97B cytoplasms were distinguishable. Southern hybridization, using labeled mt genes (cytochrome C oxidase subunit I, II, COI, COII) of rice, did not indicate the presence of a mtDNA-homologous region on the ctDNA fragments, but showed the structural difference of COI, COII genes between the fertile and male-sterile cytoplasm lines. It has not been demonstrated whether different mtDNAs of normal and male-sterile cytoplasms of rice are associated with cytoplasmic male sterility.

References

1. Yuan Longping, "Easy Course in Hybrid Paddy Rice," Hunan Science and Technology Press, 1985.
2. Dai Yaoren, ACTA GENETICA SINICA, Vol 5 No 3, 1978 pp 227-233.
3. Fu Hongyi, ACTA GENETICA SINICA, Vol 10 No 6, 1983 pp 471-476.
4. Xu Shuhua, ACTA AGRONOMICA SINICA, Vol 2, 1984 pp 14-18.
5. Zhu Qi, et al., SHANGHAI AGRICULTURAL JOURNAL, Vol 1 No 1, 1985 pp 1-10.
6. Dixon, L.K., Leaver, C.J., PLANT MOL BIOL, Vol 1, 1982 pp 89-102.
7. Erickson, L., et al., THEOR APPL GENET, Vol 72, 1986 pp 145-150.
8. Forde, B.G., Leaver, C.J., PROC NATL ACAD SCI USA, Vol 75, 1978 pp 3841-3845.
9. Forde, B.G., Leaver, C.J., PROC NATL ACAD SCI USA, Vol 77, 1978 pp 418-422.
10. Kadowaki, K., et al., JAPAN J BREED, Vol 36, 1986 pp 333-339.
11. Leaver, C.J., Gray, M.W., ANN REV PHYSOL, Vol 33, 1982 pp 373-402.
12. Lewin, R., SCIENCE, Vol 224, 1984 pp 970-971.

13. Lonsdale, D.M., et al., CELL, Vol 34, 1983 pp 1007-1014.
14. Lonsdale, D.M., et al., NUCL ACIDS RES, Vol 12, 1984 pp 9249-9261.
15. Maniatis, T., et al., in "Molecular Cloning," 1982 pp 90-91.
16. Medgyesy, P., et al., PROC NATL ACAD SCI USA, Vol 82, 1985 pp 6960-6964.
17. Nagy, F., et al., THEOR APPL GENET, Vol 66, 1983 pp 203-207.
18. Palmer, J.D., Schields, C.R., NATURE, Vol 307, 1984 pp 437-440.
19. Pring, D.R., et al., PROC NATL ACAD SCI USA, Vol 74, 1977 pp 2904-2908.
20. Pring, D.R., Levings, C.S. III, GENETICS, Vol 89, 1978 pp 121-136.
21. Ricard, B., et al., PLANT SCIENCE, Vol 43, 1986 pp 141-149.
22. Rigby, P.W.J., et al., J MOL BIOL, Vol 113, 1977 pp 237-251.
23. Rothenberg, M., et al., CURR GENET, Vol 9, 1985 pp 615-618.
24. Scalla, R., et al., PLANT SCIENCE LETTERS, Vol 22, 1981 pp 269-277.
25. Southern, E., J MOL BIOL, Vol 98, 1975 p 503.
26. Terachi, T., Tsunewaki, K., THEOR APPL GENET, Vol 73, 1986 pp 175-181.
27. Tudzinski, P., et al., THEOR APPL GENET, Vol 72, 1986 pp 695-699.
28. Weinslander, L., et al., J MOL BIOL, Vol 113, 1977 pp 237-251.
29. Yamaguchi, H., Kakiuchi, H., JAP J GENET, Vol 58, 1983 pp 607-611.

Synthesis, Cloning of Lengthy cDNA Segments of 3'-Poly(A) RNA Virus

40091011f Beijing YICHUAN XUEBAO [ACTA GENETICA SINICA] in Chinese Vol 15
No 5, Oct 88 pp 382-388

[English abstract of article by Xu Naizheng [1776 0035 2973], et al., of the
Institute of Genetics, Chinese Academy of Sciences, Beijing]

[Text] To synthesize lengthy cDNA segments of the 3' region of the RNA virus genome (Dengue fever virus II) without poly (A) in the 3' end, the authors joined poly (A) < 50 bp-pCp to the 3' end of the virus RNA by RNA ligase and constructed a virus RNA-poly(A)-pCp template that can use oligo (dT) as a primer for the synthesis of cDNA. Using this template, the authors synthesized lengthy cDNA segments which contain the complete 3' region of the virus RNA. The cDNA $\geq$ 5kb. It is advantageous for analyzing the structure-function of large RNA viruses and for researching infection of virus cDNA copy.

References

1. Buell, G.N., et al., J BIOL CHEM, Vol 253, 1978 p 2471.
2. Deng, G.R., Wu, R., METHOD ENZYMOLOGY, Vol 100, 1983 p 96.
3. Gething, M.J., et al., NATURE, Vol 287, 1980 p 301.
4. Gough, N.M., et al., EMBO J, Vol 4, 1985 p 645.
5. Maniatis, J., et al., "Molecular Cloning," Cold Spring Harbor Lab, 1982.
6. Okayama, H., Berg, P., MOL CELL BIOL, Vol 2, 1982 p 161.
7. Watson, C.J., Jackson, J.F., "DNA Cloning," Vol II, 1985 p 79.

Significance, Measurements of Areas, DNA Contents of Micronucleus Induced by Different Mutagens, Spindle Poisons

400910111 Beijing ZHONGGUO HUANJING KEXUE [CHINA ENVIRONMENTAL SCIENCE]
in Chinese Vol 8 No 5, Oct 88 pp 69-72

[English abstract of article by Cao Jia [2580 0163], et al., of the Department of Hygiene, Third Military Medical College, Chongqing]

[Text] The authors measured the areas and DNA contents of a micronucleus (MN) by an image processing system. Four mutagens and spindle poisons were used to induce the MN of RBCs in mouse bone marrow. The results show that almost 100 percent of the MN areas induced by mutagens was in the range of $0.5-4\mu^2$, with about 80-90 percent of the MN having a DNA content in the range of 0.5-6 percent of the G_1 nucleus. About 15-25 percent of the MN areas induced by spindle poisons was larger than $4\mu^2$, and about half of all MN has a DNA content larger than 6 percent of the G_1 nucleus. Mutagens and spindle poisons were probably separated by selecting the area of $4\mu^2$ and the DNA content of 6 percent of the G_1 nucleus. The authors also discuss MN formation in chromosome aberration types.

References

1. Heddle, J.A., et al., MUT RES, Vol 123, 1983 pp 61-118.
2. Yamamoto, K.I., et al., MUT RES, Vol 71, 1980 pp 127-131.
3. Högstedt, B., et al., MUT RES, Vol 156, 1985 pp 229-232.
4. Valadaud-Barrieu, D., MUT RES, Vol 119, 1983 pp 55-58.
5. Pincu, M., et al., INT J RADIAT BIOL, Vol 47 No 4, 1985 pp 423-432.
6. Hayashi, M., et al., MUT RES, Vol 127, 1984 pp 129-137.
7. Heddle, J.A., et al., MUT RES, Vol 44, 1977 pp 63-69.
8. Callisen, H.H., et al., ANALYT QUANT CYTOL HISTOL, Vol 8 No 3, 1986 pp 219-223.

Detection of Salmonella Typhi Vi-Antigen by Chemiluminescent Immunoassay.

I. Solid Phase Chemiluminescent Immunoassay

40091012a Beijing ZHONGHUA WEISHENGWUXUE HE MIANYIXUE ZAZHI [CHINESE JOURNAL OF MICROBIOLOGY AND IMMUNOLOGY] in Chinese Vol 8 No 5, Oct 88 pp 282-285

[English abstract of article by Qian Weihua [6929 4850 5478], et al., of the Capital Institute of Medicine; Ji Guoxin [6060 0948 2946], et al., of the National Institute for the Control of Pharmaceutical and Biological Products]

[Text] A new method for solid phase chemiluminescent immunoassay (Sandwich method) for the quantitative detection of the *S. typhi* Vi-antigen has been established. The method includes the use of: (1) the rabbit polyclonal antibody (IgG) to the Vi-antigen as the coating antibody, (2) luminol-labeled monoclonal antibody (IgM) to the Vi-antigen as the detecting antibody, (3) horseradish peroxidase and H_2O_2 as the luminescent system. The experiment showed that the detection limit and detection range of the method were 0.024 ng/ml and 0.0061-400 ng/ml, respectively. The sensitivity of this method is 41 times higher than that of ELISA, as reported in the literature. The results of healthy and mimic blood and urine specimens tested by the method are also reported in this paper.

References

1. Luo Haibo, et al., "Advances in Medical Bacteriology," People's Health Press, 1985 p 136.
2. Nolan, C.M., et al., J CLIN MICROBIOL, Vol 12 No 1, 1980 p 22.
3. Sivadase, et al., LANEET I, 8369, 1984 p 134.
4. Brett, T.J., et al., J CLIN MICROBIOL, Vol 15, 1982 p 235.
5. Rockhill, R.C., et al., J CLIN MICROBIOL, Vol 11, 1980 p 313.
6. Wong, K.H., et al., APPL MICROBIOL, Vol 24 No 4, 1972 p 628.
7. Simpson, J., et al., NATURE, No 29714, 1979 p 649.
8. Leroy, S.H., et al., ANALYTICAL BIOCHEM, Vol 93, 1979 p 267.
9. Cheng, P.T., et al., J IMMUNOL METHODS, Vol 48, 1982 p 159.
10. Han Qin, et al., JOURNAL OF BEIJING SECOND MEDICAL COLLEGE, Vol 4, 1981 p 281.
11. Li Maonian, et al., "Numerical Statistics," Tianjin People's Press, 1982 p 429.

12. Zhu Peikun, "Immunoenzyme Technology," Shandong Science and Technology Press, 1983 p 78.
13. Sichuan Medical College, "Public Health Statistics," People's Health Statistics, 1980 p 213.
14. Olsso, T., et al., J CLIN MICROBIOL, Vol 11, 1980 p 313.
15. Cheng Songgao, CHINESE JOURNAL OF IMMUNOLOGY, Vol 2 No 1, 1986 p 34.

Investigation of Methods of Detection, Quality Control of HBsAg RIA Kit
Prepared With Monoclonal Antibodies

40091012b Beijing ZHONGHUA WEISHENGWUXUE HE MIANYIXUE ZAZHI [CHINESE JOURNAL
OF MICROBIOLOGY AND IMMUNOLOGY] in Chinese Vol 8 No 5, Oct 88 pp 331-334

[English abstract of article by Guo Wei [6753 3837], et al., of the National
Institute for the Control of Pharmaceutical and Biological Products, Beijing]

[Text] Through a series of experiments involving the wide screening of the
10 strains of anti-HBs monoclonal antibodies established by the authors'
laboratory, three strains suitable for the coating and labeling of HBsAg RIA
Kit were selected. A comparative study was carried out between this kind of
RIA Kit (COMRIA-5) and Abbott's AUSRIA-II, and their sensitivities for
assaying adr, adw and ayw subtypes were similar. Both could detect as little
as 0.5 ng/ml and had good linear reactions. As for employing the COMRIA-5
Kit to identify the nine different HBsAg subtypes, it was shown that all the
antigen-antibody reactivities were very good. The radiolabeled antibody does
not inhibit the binding of the antigen to the solid-phase antibodies. There-
fore, the one-step two-step assay was developed. This assay has the same
sensitivity as Abbott's AUSRIA (two-step) Kit. A collection of 103 specimens
was tested with the two Kits, and the correlation rate was found to be
100 percent.

References

1. Goodall, A.H., et al., MED LAB SCIEN, Vol 38, 1981 p 349.
2. Goodall, A.H., et al., J IMMUNOL METHODS, Vol 52, 1982 p 167.
3. Ben-Porath, E., et al., TRANSFUSION, Vol 25 No 1, 1985.
4. Li Defu, et al., BEIJING MEDICINE, Vol 6 No 6, 1984 p 321.
5. Wang Jing, et al., BEIJING MEDICINE, Vol 7 No 6, 1985 p 378.
6. Darrell, L., et al., J IMMUNOLOGY, Vol 132 No 5, 1984 p 920.
7. Wands, J.R., et al., PROC NATL ACAD SCI USA, Vol 78, 1981 p 1214.

Establishment of Hybridoma Cells Producing Monoclonal Antibody to Pre-S (2)
Epitope of HBV, Its Preliminary Clinical Use

40091012c Beijing JIEFANGJUN YIXUE ZAZHI [MEDICAL JOURNAL OF CHINESE PEOPLE'S
LIBERATION ARMY] in Chinese Vol 13 No 5, Oct 88 pp 362-365

[English abstract of article by Han Fenglian [7281 7685 6647], et al., of the
Immunology Laboratory, Hospital No 302, PLA]

[Text] HBsAg containing pre-s (2), purified by affinity chromatography with
PHSA coupled to CNBr-activated sepharose 4B, was used as the immunogen to
immunize in vivo the spleens of BALB/C female mice. The spleen cells from the
immunized mice were fused with mouse myeloma cells (SP2/0-Ag). Clones pro-
ducing the antibody were screened by serial enzyme immunosorbent assay, and
subclone cultures were isolated by limiting dilution. Finally, three clones,
which were positive for the anti-pre-s (2) antibody, were selected. The clones
were still stable by several passages. They were injected i.p. to prime-
treated BALB/C mice to produce ascitic fluid. The titers of anti-pre-s (2)
antibodies in the ascitic fluid were above 10^5 .

Isotype analysis revealed that all immunoglobulins were of the IgG1 mouse
subclass. The purified McAb for pre-s (2) conjugated with horseradish
peroxidase was used to develop a sandwich-type assay (ELISA). Using the
assay, pre-s (2), the receptor for PHSA, was detected in the sera of patients
with HBV infection. The assay method was more sensitive, specific, reproduc-
ible and reliable. The assay may be practical in routine hepatitis B immuno-
diagnosis, and merits further clinical trial.

References

1. Milich, D.R., et al., "Enhanced Immunogenicity of the Pre-S Region of
Hepatitis B Surface Antigen," SCIENCE, No 228, 1985 pp 1195-1199.
2. Pontisso, P., et al., "Virus Associated Receptors for Polymerized Human
Serum Albumin in Acute and Chronic Hepatitis B Virus Infection,"
GASTROENTEROLOGY, 84, 1983 pp 220-226.
3. Alberti, A., et al., "Antibody Which Precipitates Dane Particles in Acute
Hepatitis Type B: Relation to Receptor Sites Which Bind Polymerized Human
Serum Albumin on Virus Particles," HEPATOLOGY, 4, 1984 pp 220-226.

4. Neurath, A.R., et al., "Hepatitis B Virus Contains Pre-S Gene Encoded Domains," NATURE, 315, 1985 pp 154-156.
5. Budkowska, A., et al., "A Monoclonal Antibody Enzyme Immunoassay for the Detection of Epitopes Encoded by the Pre-S2 Region of the Hepatitis B Virus Genome," J IMMUNO MED, 97, 1987 pp 77-85.
6. Ohnuma, H., et al., "Large Hepatitis B Surface Antigen Polypeptides of Dane Particles with the Receptor for Polymerized Human Serum Albumin," GASTROENTEROLOGY, 90, 1986 pp 695-701.
7. Budkowska, A., et al., "Monoclonal Antibody Recognizing Pre-S2 Epitope of Hepatitis B Virus: Characterization of Pre-S2 Epitope and Anti-Pre-S2 Antibody," J MED VIROL, 20, 1986 pp 111-125.
8. Budkowska, A., et al., "Hepatitis B Virus Pre-S Gene Encoded Antigenic Specificity and Anti-Pre-S Antibody: Relationship Between Anti-Pre-S Response and Recovery," HEPATOLOGY, Vol 6 No 3, 1986 pp 360-369.

New AI Tool for Combat Command Described

40080061 Shenyang XIAOXING WEIXING JISUANJI XITONG [MINI-MICRO SYSTEMS] in Chinese Vol 9 No 10, Oct 88 pp 46-49

[Article by Wang Junling [3769 6511 3781] and Gao Guangfeng [7559 1639 1496], General Staff Institute No 61: "KAT, A Knowledge Acquisition Tool for the IBM-PC"]

[Text] **Abstract:** This paper is primarily a description of a practical and effective knowledge acquisition tool, KAT, that runs on the IBM-PC. By helping the user set up a "knowledge tree," this system generates a knowledge structure, and this knowledge structure with its linear retrieval and chained elements can help experts in a field to share knowledge with a computer and to establish knowledge bases.

I. Preface

As people develop expert systems or other knowledge engineering [projects] based upon knowledge systems, knowledge acquisition is the most vital and also most difficult step, which to a very great degree reflects system performance and the speed of system creation. This is because in the creation of a new expert system the knowledge engineer must always relearn expert knowledge. Not only must he read through many books and materials, but he must also be in close coordination with experts, to the greatest extent possible reorganizing the knowledge and experience of experts. Experience has shown that it is never easy whatever the source of expert knowledge. Because the specialized knowledge of experts has accumulated over a long period of life experiences, this knowledge has not usually been organized or structured in their minds. Generally speaking, experts are good at presenting examples, but they are not accustomed to providing the details of such knowledge. In addition, the knowledge provided by experts is generally incomplete, imprecise, and sometimes self-contradictory. This means that the knowledge engineer must do a great deal of hard work to extract that knowledge from experts and to index it through organization and restructuring according to definite forms as he establishes a knowledge base. For these reasons, knowledge acquisition has been publicly recognized as the "bottleneck" problem in the development process of expert systems, and it continues to receive much attention from researchers in artificial intelligence both here in China and abroad. This paper concentrates on describing a practical, effective knowledge acquisition tool developed by

the authors and called KAT, as well as its design philosophy and functional characteristics.

II. The KAT System, A Practical Knowledge Acquisition Tool

KAT is a knowledge acquisition tool directed toward experts in any given field. It uses a teaching learning method to help such experts set up knowledge bases, and to a certain degree, this system serves as a knowledge engineer.

KAT was written in the Sinicized compiler-type Prolog language. The system has been used to establish such military expert systems on mid-sized and mainframe computers as the "Tianshan No 1 Combat Command Decision Making System" and the "Army Campaign Mobile Support Expert System."

2.1 The Knowledge Acquisition Modes of the KAT System

The KAT system generates a knowledge structure by helping the user set up a "knowledge tree," and uses this structure in linear retrieval and chaining to help experts transmit knowledge and to build the knowledge base. This method can serve as a bridge for the acquisition of various knowledge structures. The concept of a "knowledge tree" can be abstracted from the process by which a typical expert system development tool does knowledge acquisition, and we can see that this concept reflects an essential manifestation of knowledge acquisition. For example there is the concept of an "upper and lower tree" in the EMYCIN system. Generally speaking, logical representations and rule representations, as well as process representations, naturally form knowledge trees. The semantic network representation also takes the "tree" as its central knowledge structure. Frame representations that are as different as is possible, the understanding of this concept of "tree" will differ widely, but structurally they cannot depart from the "tree" structure. The KAT system focuses upon this essential mode of knowledge acquisition to build a "tree" system. This system not only manifests the hierarchical relations within knowledge, but also manifests the inference relations within knowledge. What we mean by inference relations among knowledge nodes are the logical relations between those nodes and each subnode. For example, each subnode can independently lead to the node, the group thereby constituting an 'OR' relation; it might be necessary for several subnodes to simultaneously infer that node, in which case this makes up an 'AND' relation. These relations permit degrees of confidence. See the AND/OR chart in Figure 1, which forms the inference relations between nodes. The nodes with single lines indicate the 'AND' relations, and all others make up the 'OR' relation. The system can automatically generate 'IF-THEN' rule sets for these inference relations in accordance with the user's prompt.

2.2 A real example of the generation process for a field knowledge tree

In creating the military combat command expert system, we have chosen the conditional determinative portion, specifically the process of forming the "tree" for determining the nature of enemy artillery groups as an example,




Figure 1. AND/OR Chart

to which we have added explanation of the particular methods for arranging knowledge.

How are we to determine the nature of the presence of the deployed enemy artillery groups? This involves several problems. The central one is under what conditions can we determine that an enemy artillery group is involved? There are several channels of intelligence sources. One is reports on the enemy situation as provided by higher authorities, and another is the result of reconnaissance efforts at various levels, both of which might generate the following facts: there are attacks from artillery, artillery troops are occupying territory, enemy troops are engaged in building artillery works, large-caliber artillery has been discovered, and prisoners have identified the artillery group, etc. The conditions just described are all used to determine whether the observed phenomena are the particular characteristics of artillery groups, and they are used to arrange a tree structure, as shown in Figure 2.

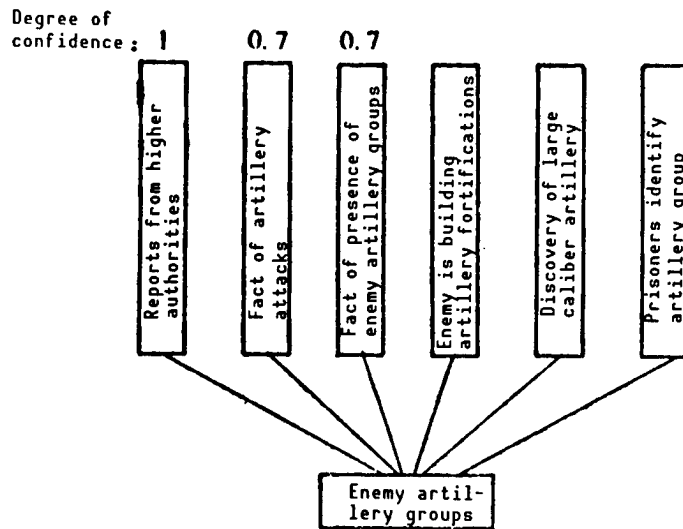


Figure 2.

When a particular area has been determined to be an artillery group, then what level artillery group is it? Within enemy defensive positions it is possible to find divisions of artillery, or regiments of artillery, or even army groups of artillery, so this tree grows longer, as shown in Figure 3.

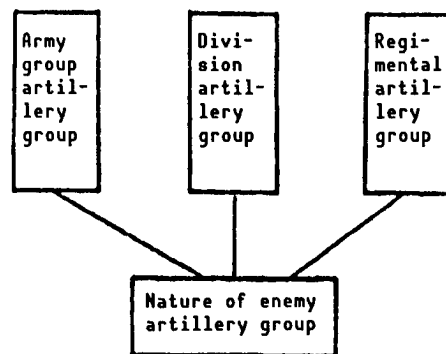


Figure 3.

From here on, we determine the nature of the enemy artillery group according to the basic battlefield position of the enemy, as well as from particular conditions that have been learned. The basic position of enemy division artillery groups within the enemy battle formation is a position 6-13 km from their front lines, or between the second and third positions of its deployment, or in the second position; this, while regimental artillery groups are in positions 2-6 km behind their lines, or are between the second and third positions; army groups of artillery are behind the artillery divisions, or are behind the third positions, or are more than 20 km behind the front lines. With this knowledge as the conditions, the "tree" blossoms, as shown in Figure 4.

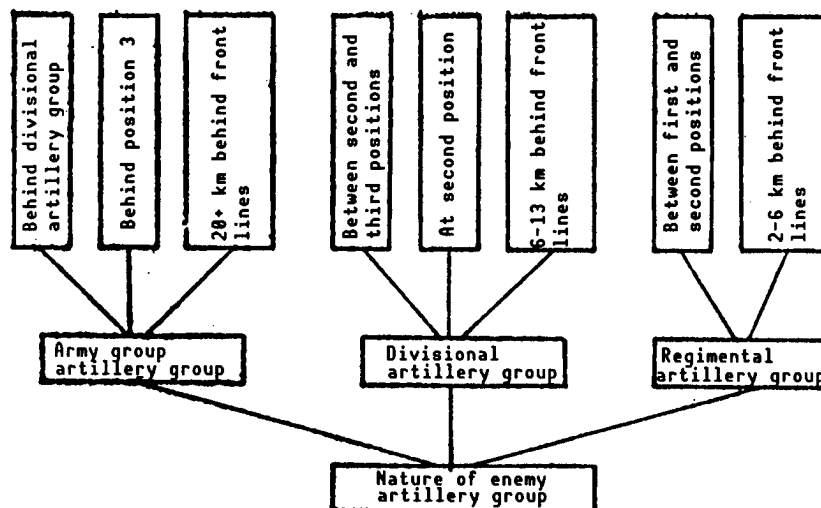


Figure 4.

Combining the two portions just described, a knowledge tree for determining enemy artillery groups is basically complete, and we will now consider the inference relations among the nodes, which can be arranged as follows: (see Figure 5)

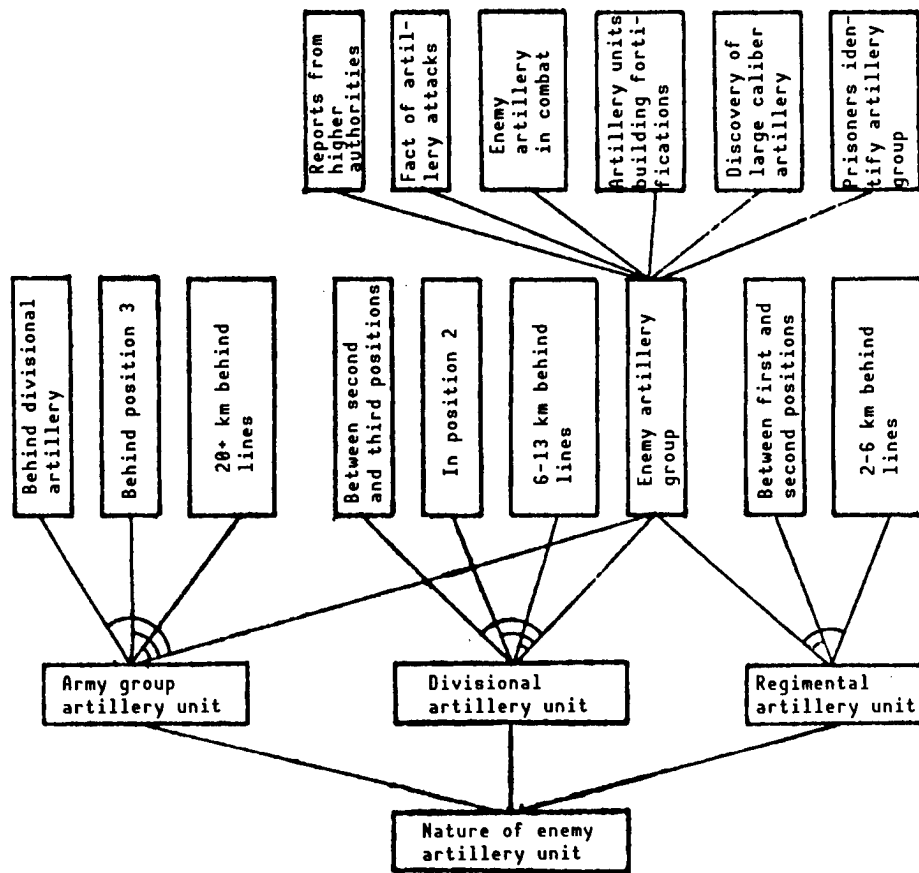


Figure 5. Knowledge Tree for Determining Nature of an Enemy Artillery Group

2.3 The functional characteristics of the system

Generally speaking, the knowledge acquisition process is one of expansion, and it is a process in which the knowledge base continues to grow and mature, so the system provides a convenient and flexible means to continually expand the knowledge base.

2.3.1 I/O modes

An excellent I/O environment will make the system feel smooth to the user, which is an advantage for the field expert to teach knowledge to the computer. The KAT system provides many function commands to the user. This command mode is far more flexible and convenient than the traditional menu mode. The commands include: system commands, inquiry commands, debugging commands, and check commands. The field expert and system dialog use natural language exclusively.

2.3.2 The debugging function

The KAT system is similar to other knowledge base management systems in its add, edit, and save functions for the knowledge base, which aids in the




Figure 6.

maintenance and renewal of knowledge. Also, because of the hierarchical nature of the knowledge structure, these functions are implemented more easily (Figure 6). When using the delete command to delete node "c," that node and its sublevel nodes are completely eliminated. The inference relations for these nodes are also completely deleted.

2.3.3 The inquiry function

The system provides a group of knowledge base static inquiry commands for the ease of the user in querying the knowledge base, in understanding the internal structure of the knowledge base, and also to allow on-line printing. At the same time, the system also provides several commands by which to interpret the knowledge structure:

The 'How' command: explains how the knowledge at a particular node can be inferred.

The 'Why' command: explains why the knowledge at a particular node was established.

The 'What' command: interprets the knowledge concept of a particular node.

2.3.4 The check function

It is hard to avoid incorrect input of data during the knowledge acquisition process. Therefore, during the knowledge acquisition process the KAT system provides parsing prompts and checks on input data in a timely fashion, and it also provides data on deficiencies and to help with interpreting.

The system can also do a simple redundancy check on data being input. If newly input knowledge already exists in the knowledge base, the system will not accept it and will issue an error message. The system also provides complete check commands used to statically check whether the knowledge base is complete or whether the logical relations among the knowledge nodes have been established.

III. Conclusions

We have only discussed here some of the typical functions of the system. An excellent knowledge acquisition tool is a powerful aid to people who are developing knowledge-based systems. The KAT system uses the instructive learning mode, and the method that helps the user establish a "knowledge tree" generates a knowledge structure that can then be a linear retrieval

and chaining help to the expert in imparting knowledge and for establishing a knowledge base. Because of its practicality and efficiency, this system has been effectively used in creating various expert military systems, especially for the process of medium-to-large-scale military expert systems.

References

1. Randall Davis and Douglas B. lenat [sic], "Knowledge-Based Systems in Artificial Intelligence," McGraw-Hill International Book Co., 1982.
2. Lu Ruqian [7120 3067 6870], "Recent Developments in Artificial Intelligence," JISUANJI GONGCHENG YU YINGYONG, 1987.4.
3. G. Kahn, S. Nowlan, and J. McDermott, "A Foundation for Knowledge Acquisition," IEEE 1984 Workshop on Principles of Knowledge-Based Systems.

Experimental Investigation of Compton Free Electron Laser

40080062 Shanghai ZHONGGUO JIGUANG [CHINESE JOURNAL OF LASERS] in Chinese
Vol 15 No 9, 20 Sep 88 pp 553-555

[Article by Fu Ensheng [0265 1869 3932], Wang Zhijiang [3769 0037 3068], Wang Bing [3769 0365], Chen Lei [7115 4320], Shie Peisheng [4258 1014 0581], and Zhou Huifen [0719 1979 5358] of the Shanghai Institute of Optics and Fine Mechanics, Chinese Academy of Sciences, Shanghai, and He Duohui [0149 1122 1979], Wang Fuhua [3769 1788 5478], Pei Yuanji [5952 0337 0689], Jia Qika [6328 0683 0595], Liang Ruzhen [2733 3067 3791], and Yan Yan [1438 1750]]

[Text] Abstract: Experimental results of a Compton free electron laser are reported. Free electron radiation with an average power of 1.4W at 10 μm was obtained when a 22MeV relativistic electron beam was injected into the SmCo_5 permanent undulator with a 3 cm period for a total of 98 periods by a linear accelerator.

This paper describes the research experiments of China's first Compton free electron laser. The laser is based on a 30MeV linear accelerator, equipped with an electron beam transport system, a constant period magnetic undulator, and optical system. The output radiation has a wavelength of 9 to 11 μm . In November 1986, 10 μm radiation at an average power of 1.4W was obtained on this system. The experimental, setup of the Compton free electron laser is shown in Fig. 1. The linear accelerator (not shown) injects a beam of 22 MeV electrons into the electron transport system. The electron beam transport system consists of deflecting magnets, a beam control slit (23), quadupole magnets, beam monitor (9), fluorescent screens for observing the electron beam (3,7), vacuum pumps and an insert plate valve. Through the transmission line, a high quality electron beam of about 1 percent energy dispersion and $5\pi \cdot \text{mm} \cdot \text{m}$ rad divergence is injected into the vacuum chamber of the magnetic undulator (5). The device may be used as a free electron laser amplifier or oscillator. So far only the free electron spontaneous radiation output experiments have been performed.

Tables I and II list the characteristic parameters of the electron beam and the undulator parameter, respectively. The two ends of the undulator are equipped with 1/8 period magnets to bring the magnetic

field strength smoothly to zero. Figure 2 shows the structure of the vacuum chamber and the undulator of the free electron laser. One undulation period consists of four SmCo_5 permanent magnets, and the dimension of a magnet is $35 \times 12 \times 7.5 \text{ mm}^3$. Measurements show that the total integrated field strength is less than 88 G.cm , which satisfies the experimental requirements.

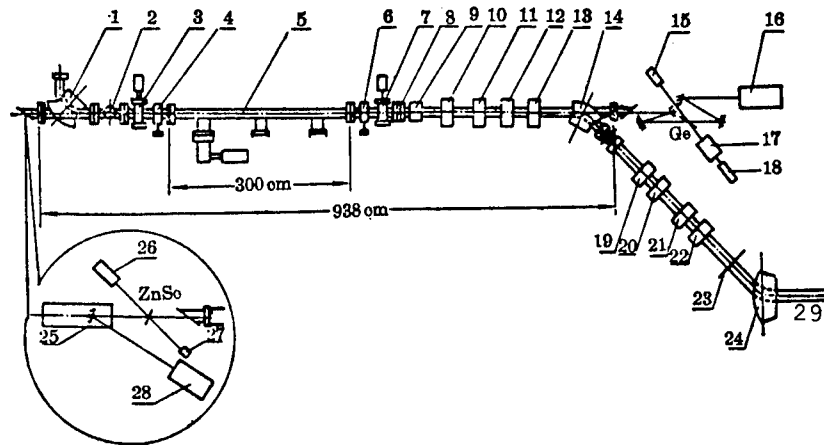


Fig. 1. Experimental setup of the Compton free electron laser

- 1,14,24 -- Deflecting magnets; 2 -- Sputtering ion pump;
- 3,7 -- Fluorescent screen plug; 4,6 -- Insert board valve;
- 5 -- Undulator and vacuum chamber; 8 -- Ripple tube;
- 9 --- Beam monitor; 10-13, 19-22 -- Quadrupole magnets;
- 15 -- Photon drag or TeCdHg detector; 16 -- TEA CO₂ laser;
- 17 -- Beam spreading telescope; 18,26 -- He-Ne laser;
- 23 -- Slit; 25 -- Step motor controlled reflecting mirror;
- 27 -- Bolometer or TeCdHg detector; 28 -- Spectrometer
- 29 -- Electron beam

Table I. Electron beam parameters

Electron energy	20-40 MeV
Average current	5-7 mA
Duty factor	1.4×10^{-2}
Peak current	0.35-0.5 A
Macroscopic pulse width	1 μ s
Micropulse width	5 ps
Repetition rate	50 Hz
Energy dispersion	~1%
Divergence	~5 π ·mm·m rad
Radiation frequency	2856 MHz

Table II. Undulator parameters

Period length	3 cm
Central peak magnetic field	0.28 T
Magnet gap	15 mm
Length	294 cm
Number of periods	98
Undulator parameter K	0.79

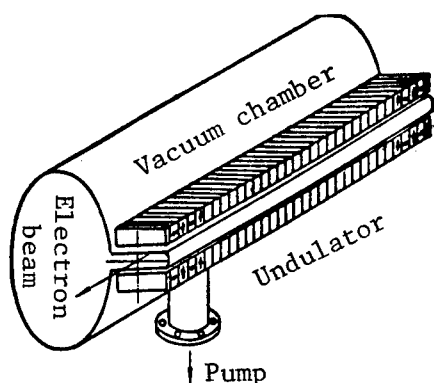


Fig. 2. Vacuum chamber and undulator of free electron laser

At the two vacuum sealed ends of the undulator there are a pair of 10 μ m NaCl windows at the Brewster angle to allow almost lossless passage of parallel electric vectors. Relativistic electron beam is deflected 90° by the undulator and the dipole magnets to the fluorescent screen target outside the vacuum system. A television camera is used to observe the beam intensity and pattern on the fluorescent screen target. At about 10 cm from the NaCl Brewster window and on the axis of the transport system are a bolometer and an amplifier in a shielded box.

The detected signals are brought to an oscilloscope outside the experimental hall via shielded cables. When the electron beam energy and the transport system are properly matched, the oscilloscope will show a spontaneous radiation signal of 20 ms period at a beam repetition rate of 50 Hz. When the electron beam repetition rate is varied in the 25-60 Hz range, the period of the observed signal also varies accordingly. A set of pictures such as those shown in Fig. 3 was taken with an oscilloscope camera. Based on the response rate of the model RD-L bolometer and the gain of the amplifier, the average power of the 10 μm radiation in the 1 μs macroscopic electron beam pulse is computed to be 1.4 W. When the radiation output is obtained, the undulator was removed from the beam path without changing anything else, then the signals disappeared. This further proved that the observed radiation is coherent Compton scattering caused by the interaction of the magnetic field of the undulator and the relativistic electron beam. This radiation is hundreds of times stronger in intensity and tens of thousands times greater in brightness than the usual synchrotron radiation¹. In 1975 it was first reported that the peak power of the spontaneous radiation of a Compton free electron laser was 15×10^{-5} W and the average power was 15×10^{-19} W. The peak power of the stimulated emission is 15 W, which is 10^5 times greater² than the peak power of the spontaneous radiation.

[Figure 3 on following page]

It was discovered in the experiments that Bremsstrahlung X-ray has a large effect on the detection of the radiation, and may cause an indication of 100 mV on the oscilloscope. Using 4 cm thick lead shields, we eliminated the X-ray interference, reduced the noise level to below 10 mV and detected the radiation output of the free electron laser.

In the preparation stage of our experiments, Wang Mingchang [3769 2494 1603], Huang Xuren [7806 1645 0086] and Ling Genshen [0407 2704 3234] of the Shanghai Institute of Optics and Fine Mechanics participated in some of the work. During the experiments colleagues in the Accelerator Laboratory and Opto-electronics Laboratory of the Chinese University of Science and Technology provided a great deal of assistance. The authors thank them for the help.

References

1. B. M. Kincaid, J. Appl. Phys., 48(7), 2684 (1977).
2. L. Elias, et al., Phys. Rev. Lett., 36, 717 (1976).

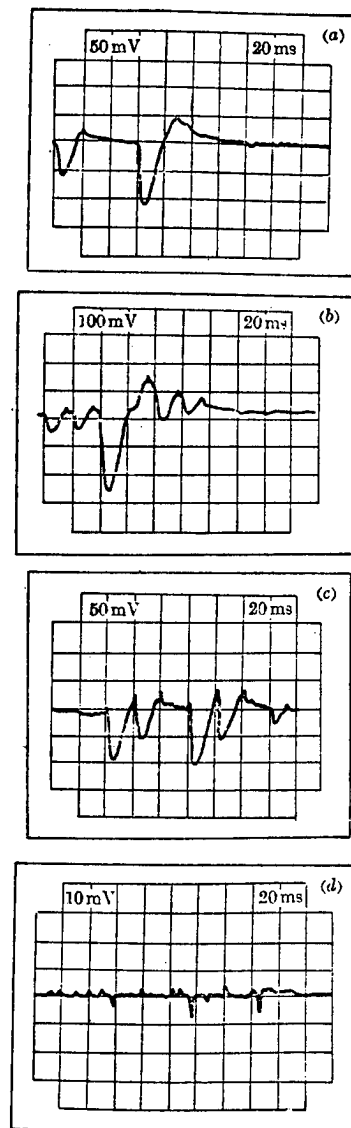


Fig. 3. Output waveform of Compton free electron laser

(a), (b) and (c) are three photographic records, in (b) the highest output power is 270 mW. (d) shows the detector noise level, about 10 mV.

Two-Wave Mixing Gain Enhanced in Photoconductive Photorefractive Materials
With Alternating Electric Fields--A New Approach

40090024a Shanghai YINGYONG JIGUANG [APPLIED LASER] in Chinese Vol 8 No 2,
Oct 88 pp 193-196, 210

[Article by Ye Shounian [5509 7445 1628] and Xu Gan [1776 3227] of Beijing
Institute of Aeronautics and Astronautics; and Sun Yinguan [1327 1377
1351] of Beijing Normal University]

[Abstract] At present, photorefractive crystals are the principal
nonlinear optimal materials for optical signal data processing and
computation for many kinds of optical signals by using low power continuous-
wave lasers.

By theoretical analyses and experiments, it was shown that in two-wave
mixing in photorefractive crystals of the photoconductive type, the
alternating electric field approach has several advantages over the
dc electric field and moving grating methods: higher gain, less sensitivity
to external vibrations, automatic optimization of operating conditions,
and structurally simple devices, among other advantages. Thus, applications
can be expected in fields such as coherent light amplification, real-time
optical signal processing, and optical phase conjugations. Four figures
show the time-based property of the $\pi/2$ phase shift component of the
modulating oscillation amplitude of the space charge field, the light
path of the alternating electric field method, curves plotted from
experiments, and waveforms of signal light intensity. References: 6,
in English. The paper was received for publication on 27 March 1988.


Fast Q Switch Theory Tested Experimentally

40090024b Shanghai YINGYONG JIGUANG [APPLIED LASER] in Chinese Vol 8 No 5, Oct 88 pp 205-207



[Article by Wu Hongxing [0702 7703 5281], Li Yongping [2621 3057 1627] and Wang Shengbo [3769 5116 3134] of Department of Physics, China University of Science and Technology]

[Abstract] The authors present a wide-ranging discussion of theory of Q switching rate; the theory is divided into two categories: fast Q-switch and slow Q-switch. They pointed out that all stably changing Q-switches can be described in terms of fast Q-switches, and all instantaneously changing Q-switches can be described by utilizing the fast Q-switch theory. Under the definition of the fast Q-switch, the authors detected experimentally the output of a Q-switch laser given the condition of different switching times and functions; the fast Q-switch theory thereby was proved.

The experiment arrangement is shown in the diagram below.

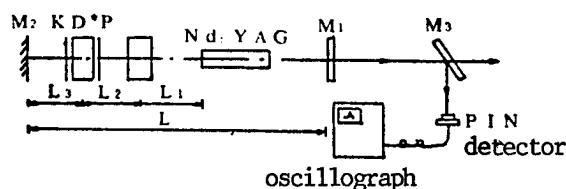

Two following figures show hot (at left side) and cold (at right side) cathode thratron switch circuits:

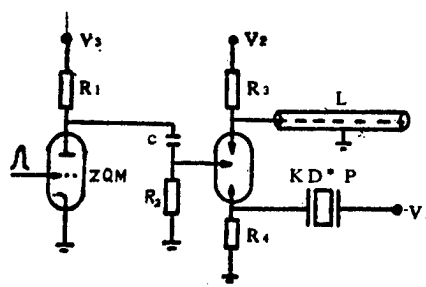

Three other figures show laser outputs of different Q-switches, observation on the switching time lag, and leading-edge waveforms of the two different switches. One table lists data of the output pulse parameters of the different Q switches. References: 2, in Chinese.

The research was supported by the (Chinese) State Science Fund. The authors are grateful to Wang Peilin [3769 0160 3829] of the Anhui Institute of Optics and Precision Instruments for assistance with measurement and test equipment.

Branch-Selected CO-CO₂ Compound Laser

40090028a Shanghai GUANGXUE XUEBAO [ACTA OPTICA SINICA] in Chinese Vol 8 No 10, Oct 88 pp 911-916

[English abstract of article by Gui Zhenxing [2981 2182 5281], et al., of Shanghai Institute of Optics and Fine Mechanics, Chinese Academy of Sciences]

[Text] In this paper the authors report a new type of sealed-off branch-selected CO-CO₂ compound laser operating at room temperature for the first time. Approximately 200 lasing lines were obtained in the region of 5.2-6.3 μm and 9.2-10.8 μm , with the highest output power of the stronger lines being about 2.5 W (CO) and 10 W (CO₂). The influence of CO₂ concentration in the gas mixture, discharge current and pressure on the power distribution of the CO and CO₂ lasing spectra was investigated experimentally. The excitation processes for CO and CO₂ molecules in the compound laser have been analyzed.

References

1. Seguin, H.J., Tulip, J., et al., APPL PHYS LETT, Vol 20 No 11, 1972 p 435.
2. Barry, J.D., Boney, W.E., et al., IEEE, J.Q.E., Vol QE-9 No 7, 1973 p 779.
3. Aleinikov, V.S., Masychev, V.I., SOV J.Q.E., Vol 12 No 9, 1982 p 1219.
4. Peters, P.J.M., Wittman, W.J., et al., APPL PHYS LETT, Vol 37 No 2, 1980 p 112.
5. Zhang Shunyi, et al., CHINESE JOURNAL OF LASERS, Vol 15 No 2, 1988 p 115.
6. Gui Zhenxing, et al., JOURNAL OF OPTICS, Vol 4 No 12, 1984 p 1131.
7. Gui Zhenxing, et al., LASER TECHNOLOGY, Vol 11 No 4, 1987 p 24.
8. Schulz, G.J., PHYS REV, Vol 125 No 1, 1962 p 229; *ibid.*, Vol 135 No 4A, 1964 p 988.
9. He Guangheng, et al., "Fundamentals of Laser Design," Shanghai Science and Technology Press, 1979, 1st edition, p 130.
10. Rich, J.W., J.A.P., Vol 42 No 7, 1971 p 2719.
11. Lin Junyou, et al., QUANTUM ELECTRONICS, Vol 1 No 2, 1984 p 149.

Seven-Channel FIR HCN Laser Interferometer for Determining Electron Density Profile on HT-6M Tokamak

40090028b Shanghai GUANGXUE XUEBAO [ACTA OPTICA SINICA] in Chinese Vol 8 No 10, Oct 88 pp 933-939

[English abstract of article by Tong Xingde [4547 5281 1795], et al., of the Institute of Plasma Physics, Chinese Academy of Sciences, Hefei]

[Text] In this paper, the principle of interferometry for determining the electron density of plasma is presented. The structure of the seven-channel interferometer and its measurement results on the HT-6M Tokamak are described. The light source used in the interferometer is a c.w. glow HCN laser with cavity length of 3.4 M and power output of about 100 mW at 337 μm . The averaged electron density of seven probing chords can be given simultaneously. The detectable sensitivity is 1/15 fringe with a temporal resolution of 0.1 ms. Through asymmetrical Abel inversion from the line integrals of the phase shift of seven chords, the electron density profile at different times or a three-dimensional diagram of space-time distributions of the electron density can be obtained.

References

1. Nishigawa, A., JAP J APPL PHYS, Vol 15 No 9, 1978 pp 1753-1758.
2. Stott, P.E., et al., "Diagnostic for Fusion Reactor Conditions," Commission of the European Communities, Brussels, Belgium, 1982 pp 199-205.
3. Wolfe, S.M., et al., APPL OPTICS, Vol 15 No 12, 1976 pp 2645-2650.
4. Veron, D., OPTICS COMMUNICATIONS, Vol 10 No 1, 1974 pp 95-99.
5. Guo Qiliang, et al., NUCLEAR FUSION AND PLASMA PHYSICS, Vol 2 No 4, 1982 pp 243-245.
6. Xiang Zhilin, et al., "High Temperature Plasma Diagnostic Technology," (Vol 2), Shanghai Science and Technology Press, 1982 pp 110-113.
7. Button, K.J., "Infrared and Millimeter Waves," New York, Academic Press, Inc., 1979, Chapter 2.
8. Li Wenlai, et al., BEIJING OPTICS, No 4, 1982 pp 1-6.
9. Yasutomo, Y., et al., IEEE TRANSACTIONS PLASMA SCI, Vol PS-9 No 1, 1981 pp 18-24.

Second Harmonic Space Resolved Spectrum Initiated by Laser Produced Plasma Filament

40090028c Shanghai GUANGXUE XUEBAO [ACTA OPTICA SINICA] in Chinese Vol 8 No 10, Oct 88 pp 940-945

[English abstract of article by Gu Min [7357 2404], et al., of Shanghai Institute of Optics and Fine Mechanics, Chinese Academy of Sciences]

[Text] Space resolved spectra with both high spectral resolution ($\sim 0.2 \text{ \AA}$) and spatial resolution ($\sim 2 \text{ }\mu\text{m}$) of the second harmonic emission scattered at 90° to the laser axis were observed when both narrow band and broad band laser beams were adopted in an Al planar target experiment. After analyzing many phenomena, it has been proved that the second harmonic emission observed at 90° to the laser axis is initiated by the interaction of the laser with plasma filaments other than those of a planar wave with plasmas. The theory is in agreement with the experimental results on the whole.

References

1. Erokhin, N.S., Moiseev, S.S., Mukhin, V.V., NUCLEAR FUSION, Vol 14 No 2, 1974 pp 333-339.
2. Bobin, J.L., Decroisette, M., Meyer, B., et al., PHYS REV LETT, Vol 30 No 13, 1973 pp 594-597.
3. Decroisette, M., Meyer, B., Vitel, Y., PHYS LETT A, Vol 45 No 6, 1973 pp 443-444.
4. Basov, N.G., Bychenkov, V. Yu., Krokhin, O.N., et al., SOV J QE, Vol 9 No 9, 1979 pp 1081-1101.
5. Carter, D.P., Sim, S.M.L., Hughes, T.P., OPT COMMUN, Vol 35 No 2, 1980 pp 423-425.
6. Maaswinkel, A.G.M., OPT COMMUN, Vol 35 No 2, 1980 pp 236-238.
7. Auer, G., Sauer, K. Baumgärtel, K., PHYS REV LETT, Vol 42 No 26, 1979 pp 1744-1746.
8. Jackel, S., Eliezer, S., Zigler, A., PHYS REV A, Vol 24 No 3, 1981 pp 1601-1608.
9. Tanaka, K. Seka, W., Goldman, L.M., et al., PHYS FLUIDS, Vol 27 No 8, 1984 pp 2187-2190.

10. Gu Min, Tan Weihan, Lin Zunqi, et al., PHYS FLUIDS, Vol 30 No 5, 1987 pp 1515-1520.
11. Tan Weihan, Lin Zunqi, Gu Min, et al., PHYS FLUIDS, Vol 30 No 5, 1987 pp 1510-1514.
12. Tan Weihan, Gu Min, JOURNAL OF OPTICS (Publication pending).
13. Herbst, M.J., Stamper, J.A., Whitlock, R.R., et al., PHYS REV LETT, Vol 46 No 5, 1981 pp 328-331.
14. Lin Zunqi, Tan Weihan, Gu Min, et al., LASER PART BEAMS, Vol 4 No 2, 1986 pp 223-230.
15. Tan Weihan, Yu Wenyan, Lin Zunqu, et al., LASER PART BEAMS, Vol 4 No 2, 1986 pp 231-237.
16. Deng Ximing, et al., JOURNAL OF OPTICS, Vol 3 No 2, 1983 pp 97-101.
17. Guo Yongming, et al., CHINESE JOURNAL OF LASERS, Vol 14, 1987 (Publication pending).
18. Tan Weihan, SCIENTIA SINICA, Series A, No 8, 1986 pp 833-839.

Optical Investigation of InGaAs-GaAs Strained Layer Quantum Well Structures

40090030a Beijing BANDAOTI XUEBAO [CHINESE JOURNAL OF SEMICONDUCTORS] in Chinese Vol 9 No 6, Nov 88 (manuscript received 1 Dec 87) pp 563-569

[English abstract of article by Xu Zhongying [1776 0112 5391] et al. of the Institute of Semiconductors, Chinese Academy of Sciences, Beijing, and by T. G. Andersson and Z. G. Chen of the Department of Physics, Chalmers University of Technology, Goteborg, Sweden]

[Text] Detailed investigations of optical properties were carried out on InGaAs-GaAs strained layer quantum well structures. Photoluminescence peak energies of structures are in agreement with the Kronig-Penny analysis combined with the effect of strain in the InGaAs layer. Hot carrier photoluminescence measurements demonstrate that photoinduced carrier heating in an InGaAs-GaAs strained quantum well is substantially increased as compared to the bulk and shows indium composition dependence. The critical layer thickness obtained from photoluminescence can be described with the mechanical balance model.

References:

- [1] G. C. Osbourn, *J. Appl. Phys.*, **54**, 5096(1983), *Phys. Rev.*, **B27**, 5126(1983).
- [2] J. Y. Marzin, M. N. Charasse and B. Sermage, *Phys. Rev.*, **B31**, 8298(1985).
- [3] T. G. Andersson, Z. G. Chen, V. D. Kulakovskii, A. Uddin and J. T. Vallin, to be published in *Phys. Rev.*, **B**(1987).
- [4] Z. Y. Xu, Z. G. Chen, D. Teng, et al., *Surface Science*, **174**, 216(1986).
- [5] R. C. Miller, A. C. Gossard, W. T. Tsang and O. Munteanu, *Phys. Rev.*, **B25**, 3871(1982).
- [6] H. Asai and K. Oe, *J. Appl. Phys.*, **54**, 2052(1983).
- [7] Z. Y. Xu and J. Z. Xu, to be published.
- [8] R. C. Greene and K. K. Bajaj, *Solid State Commun.*, **45**, 831(1983).
- [9] S. Adachi, *J. Appl. Phys.*, **58**, R1(1985).
- [10] D. L. Rode, *Phys. Rev.*, **B2**, 1012(1970).
- [11] P. Y. Yu, M. Cardona, and F. H. Pollak, *Phys. Rev.*, **B3**, 340(1971).
- [12] J. Shah, A. Pinczuk, A. C. Gossard and W. Weigmann, *Physica*, **134B**, 175(1985).
- [13] 徐仲英、李玉璋等, 物理学报, **36**, 1330(1987). Z. Y. Xu and C. L. Tang, *Appl. Phys. Lett.*, **44**, 692(1984).
- [14] D. A. B. Miller, D. S. Chemla, D. J. Eilenberger, P. W. Smith, A. C. Gossard and W. T. Tsang *Appl. Phys. Lett.*, **41**, 679(1982).
- [15] R. People and J. C. Bean, *Appl. Phys. Lett.*, **47**, 322(1985).
- [16] J. W. Matthews and A. E. Blakeslee, *J. Cryst. Growth*, **27**, 118(1974).
- [17] I. J. Fritz, S. T. Picraux, L. R. Dawson, T. J. Dr, P. W. Smith, A. C. Gossard and W. T. Tsang *Appl. Phys. Lett.*, **46**, 967(1985).

Briefs

Fiber-Optic Communications Pilot Projects--At the National Conference on Fiber-Optic Communications held 11-14 September [1988], 15 pilot projects in fiber-optic communications engineering were commended [see JPRS-CST-88-021, 10 Nov 88, p 129]. Of these, seven are part of the posts & telecommunications system. They are: the Hefei-Wuhu [Anhui Province] Public Network primary trunkline project, using 140Mbps [DS4] single-mode optical cable, total length 146 kilometers, with a first-phase capacity of 1920 voice circuits and an eventual capacity of 3x1920 circuits; the Jiangsu [Province] Yangzhou-Gaoyou Public Network secondary trunkline project, using China's first all-domestically-made 34Mbps [DS3] single-mode overhead optical cable, total length 62 kilometers; the Chengdu-Guan Xian [Sichuan Province] Public Network secondary trunkline project, using 34Mbps single-mode optical cable, total length 64.6 kilometers; the Wuhan-Jingzhou [Hubei Province] Public Network secondary trunkline project, using 34Mbps multimode optical cable, total length 244.86 kilometers [see JPRS-CST-88-016, 29 Aug 88, p 105]; the Wuhan Municipality local telephone repeater project, using 140Mbps single-mode optical cable, total length 37 kilometers, with an initial installed capacity of 60+60 circuits and an ultimate capacity of 1920+90 circuits; the Shanghai Municipality local telephone repeater project, using 140Mbps single-mode optical cable, total length 34 kilometers; and the Tianjin Municipality local telephone repeater project, using 140Mbps single-mode optical cable. [Text] [40080103a Beijing DIANXIN JISHU [TELECOMMUNICATIONS TECHNOLOGY] in Chinese No 11, Nov 88 p 47]

New All-Solid-State Satcom Station Equipment--The all-solid-state 6-m satellite communications station equipment developed and manufactured by Research Institute 4 of the Institute of Posts & Telecommunications Science in Tibet--the first of its kind developed in China--recently passed a State Satellite Communications Station joint technical group acceptance check [see also FBIS-CHI-88-224, 21 Nov 88, pp 56-57]. The system equipment includes new technologies such as a field-effect-transistor solid-state power amplifier and a fault self-diagnostic display. [Summary] [40080103b Beijing DIANXIN JISHU [TELECOMMUNICATIONS TECHNOLOGY] in Chinese No 11, Nov 88 p 47]

New Digital Microwave Project--Construction for China's first domestically made unattended 34Mbps [DS3] digital microwave project--the Shanghai Power Industry Bureau's Shanghai-to-Jinshan digital microwave power loop network communications project--has been completed and the network is now operational. Investment for the communications equipment for each of the stations in this project came to only one third of what an imported system would have cost. Operational data

have shown that this project meets international standards for similar systems; the complete reliance on imported systems of like kind has therefore been overcome. [Text] [40080103c Beijing DIANXIN JISHU [TELECOMMUNICATIONS TECHNOLOGY] in Chinese No 11, Nov 88 p 47]

New DMW Communications System--China is now developing a 6GHz 1920-line high-capacity digital microwave (DMW) communications system. The "Overall Design Plan for a 6GHz 1920-Line High-Capacity DMW Communications System" drafted by Research Institute 4 of the Ministry of Posts & Telecommunications' Institute of Posts & Telecommunications Science has undergone examination and approval. Proposed design principles, component technology requirements, system structure, and all subsystem functions--as well as plan options and assignment of system technological targets--all comply with CCIR, CCITT, and corresponding domestic standards. [Text] [40080112a Beijing DIANXIN JISHU [TELECOMMUNICATIONS TECHNOLOGY] in Chinese No 12, Dec 88 p 47]

Statistics Released on Optical Cable--It has been learned from the National Conference on Fiber-Optic Communications held in September 1988 in Beijing [see JPRS-CST-88-021, 10 Nov 88, pp 128-129] that, as of the end of this year, according to still incomplete statistics, 36 cities are now using optical-cable transmission systems for municipal telephone communications, with a total of 2041 kilometers of optical cable laid; and seven provinces have built long-distance optical cable communications lines, totaling 1098 kilometers in length. It is estimated that, by the end of the Seventh 5-Year Plan, this amount will reach 7000 kilometers. Following is a breakdown of the statistics for optical cable laid for various provinces and municipalities in the posts & telecommunications system: Beijing [Municipality], 259.6 km; Tianjin [Municipality], 142.2 km; Hebei [Province], 49.6 km; Shanxi [Province], 11 km; Liaoning [Province], 240 km; Jilin [Province], 11.3 km; Heilongjiang [Province], 322 km; Shanghai [Municipality], 239 km; Jiangsu [Province], 166.8 km; Zhejiang [Province], 34.5 km; Anhui [Province], 6.3 km; Fujian [Province], 197.6 km; Ningxia [Hui Autonomous Region], 20 km; Jiangxi [Province], 159 km; Shandong [Province], 255.7 km; Henan [Province], 7 km; Hubei [Province], 484.6 km; Hunan [Province], 50 km; Guangdong [Province], 715.4 km; Guangxi [Zhuang Autonomous Region], 4 km; Sichuan [Province], 108.4 km; Yunnan [Province], 76 km; Shaanxi [Province], 22.4 km; Gansu [Province], 23.1 km; and Qinghai [Province], 38.5 km. [Text] [40080112b Beijing DIANXIN JISHU [TELECOMMUNICATIONS TECHNOLOGY] in Chinese No 12, Dec 88 p 47]

Military Tactical Communications Equipment--According to a report in ZHONGGUO DIANZI BAO, the new vehicle-mounted short-wave 100W single-sideband transceiver and automatic antenna tuning system developed by the state-run Fenghuo ["Beacon"] Radio Plant recently passed national-level technical accreditation and has been put into batch production. The transceiver uses all-solid-state components. Outside of China, only a small number of foreign countries--Japan, the FRG, and the U.S.--produce this high-precision, technologically complex equipment.
[Text] [40080103d Beijing ZHONGGUO JIXIE BAO in Chinese 8 Dec 88 p 2]

Fiber-Optic Industry Develops Rapidly--China has opened or planned to open 112 optical cable lines with a total length of 4342 kilometers. So far, 36 cities have adopted fiber-optic telecommunications technology in telephone networks, and eight provinces have constructed optical-cable lines for long-distance communications service. Besides meeting the domestic needs for fiber-optic raw materials, there is surplus for the foreign market. China is now able to manufacture 14,000-16,000 kilometers of optical cable each year and over 50 kinds of opto-electronic devices. They can be used for telecommunications, broadcasting, television, railway, military, computer, transport, and other purposes.
[Text] [40100031 Beijing CEI Database in English 27 Jan 89]

END