

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 074-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 1993		3. REPORT TYPE AND DATES COVERED Stage I Report, May-June 1993
4. TITLE AND SUBTITLE Laser Induced Reaction for Prebond Surface Preparation of Aluminum Alloys			5. FUNDING NUMBERS Contract No. F61708-93-C005	
6. AUTHOR(S) M. Rotel, J. Zahavi, A. Buchman, & H. Dodiuk				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Israel Institute of Metals Technion Haifa, Israel Materials and Processes Department RAFAEL Haifa, Israel			8. PERFORMING ORGANIZATION REPORT NUMBER N/A	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) SERDP 901 North Stuart St. Suite 303 Arlington, VA 22203			10. SPONSORING / MONITORING AGENCY REPORT NUMBER N/A	
11. SUPPLEMENTARY NOTES This work was supported in part by Contract No. F61708-93-C005. The United States Government has a royalty-free license throughout the world in all copyrightable material contained herein. All other rights are reserved by the copyright owner.				
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release: distribution is unlimited			12b. DISTRIBUTION CODE A	
13. ABSTRACT (Maximum 200 Words) The potential of UV lasers for prebonding treatment of Al-2024 alloy was proved in a previous investigation [1] with a modified epoxy adhesive. Surface treatment of Al by excimer laser results in oxidation and morphological changes of the surface promoting high shear adhesion strength at optimal laser conditions. The objective of this research is to establish the effect of excimer ArF UV laser on the Al alloy surface microstructure and chemical activity and its correlation with the macro behavior of shear and peel strength and failure locus of adhesively bonded joints using structural adhesives for structural and repair applications. The first stage of this research of structural adhesives for various service temperatures and their primer were ordered. The details of the adhesives and the primer are given in Table 1.				
14. SUBJECT TERMS excimer ArF UV laser, Aluminum alloy, SERDP			15. NUMBER OF PAGES 7	
			16. PRICE CODE N/A	
17. SECURITY CLASSIFICATION OF REPORT unclass	18. SECURITY CLASSIFICATION OF THIS PAGE unclass	19. SECURITY CLASSIFICATION OF ABSTRACT unclass	20. LIMITATION OF ABSTRACT UL	

19980817 127

NSN 7540-01-280-5500

Standard Form 298 (Rev. 2-89)
Prescribed by ANSI Std. Z39-18
298-102

BTIC QUALITY INSPECTED 1

LASER INDUCED REACTION FOR PREBOND SURFACE
PREPARATION OF ALUMINUM ALLOYS

Stage I Report (5-6/93)
Contract No. F61708-93-C005

LASER INDUCED REACTION FOR PREBOND SURFACE
PREPARATION OF ALUMINUM ALLOYS

Stage I Report (5-6/93)
Contract No. F61708-93-C005

by

M. Rotel, J. Zahavi
Israel Institute of Metals, Technion, Haifa, Israel

A. Buchman, H. Dodiuk
Materials and Processes Department,
RAFAEL, Haifa, Israel

Haifa, June 27, 1993

INTRODUCTION

The potential of UV lasers for prebonding treatment of Al-2024 alloy was proved in a previous investigation [1] with a modified epoxy adhesive.

Surface treatment of Al by excimer laser results in oxidation and morphological changes of the surface promoting high shear adhesion strength at optimal laser conditions. The objective of this research is to establish the effect of excimer ArF UV laser on the Al alloy surface microstructure and chemical activity and its correlation with the macro behaviour of shear and peel strength and failure locus of adhesively bonded joints using structural adhesives for structural and repair applications.

The first stage of this research (0001 of the contract) is summarized in this report. This stage includes the preparation of all Al specimens with required configurations for the various tests.

EXPERIMENTAL

Adhesives and Primer

3 kinds of structural adhesives for various service temperatures and their primer were ordered. The details of the adhesives and the primer are given in Table 1.

Table 1: The structural adhesives and the primer

COMMERCIAL NAME (CYANAMID)	CURING CONDITIONS	APPLICATION FORM	SERVICE TEMPERATURE RANGE
FM73	1 Hr. 120°C 40psi	FILM, 0.38mm POLYESTER CARRIER	-55°C to +120°C
FM3002K	1.5Hr. 120°C 40psi	FILM, 0.3mm POLYESTER CARRIER	-55°C to +175°C
FM350NA	1Hr. 177°C 30psi	FILM GLASS CARRIER	-65°C to +177°C
BR127	1/2Hr. R.T. 1/2Hr. 121°C	MIXING, BRUSHING	-55°C to +177°C

All adhesives and the primer will pass quality control tests including epoxy content, solid content, volatiles and percent of fluency, before application.

Adherends Preparation

Four kinds of Al 2024 adherends were prepared:

- 1- Single lap shear adherends (see Fig. 1) according to ASTM D-1002-72
25 X 100X 1.6 mm (2 for each sample).
- 2- Peel adherends according to ASTM D-3167 (see Fig. 2).
25 X 250 X 1.6 mm (rigid).
25 X 250 X 0,5 mm (flexible).
(One of each for each sample).

- 3- Tensile adherends according to ASTM C-297
(Flat wise, FW)
37 X 37 X 37 mm with a central penetrating hole
(described in Fig. 3)
(2 for each sample).
- 4- Wedge adherends
According to ASTM D-3762
25 X 250 X 1.6 mm
(2 for each sample + a wedge).
The sample is described in Fig. 4.


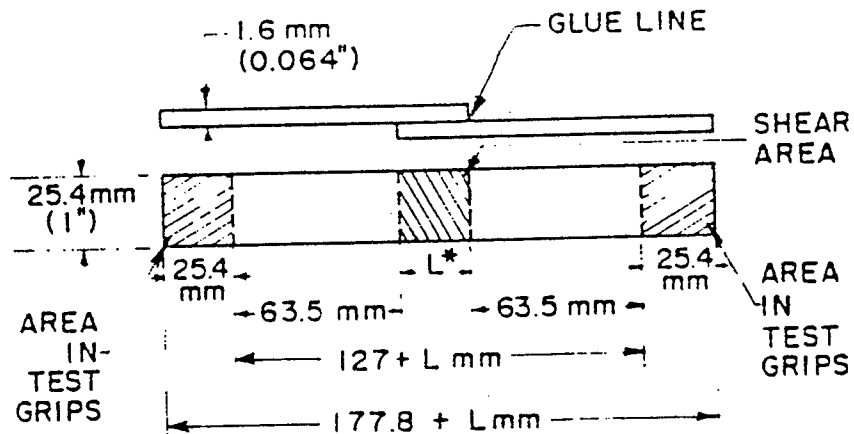


Fig. 1: SLS adherends.

203
76

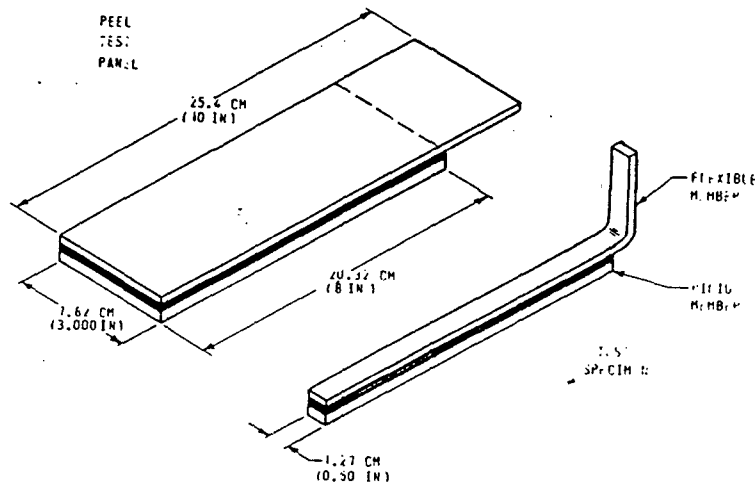

NOTE—A 1.5 to 3.0-in. (38.1 to 74.2-mm) shim can be used to facilitate the start of peel.

Fig. 2: Peel tests' adherends

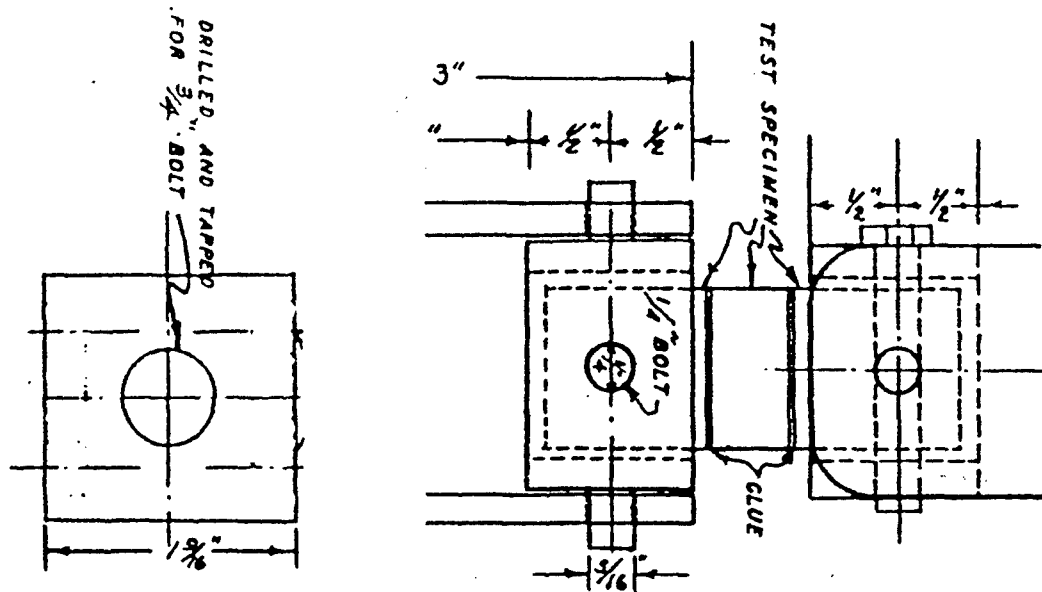


Fig. 3: Tensile tests' adherends.

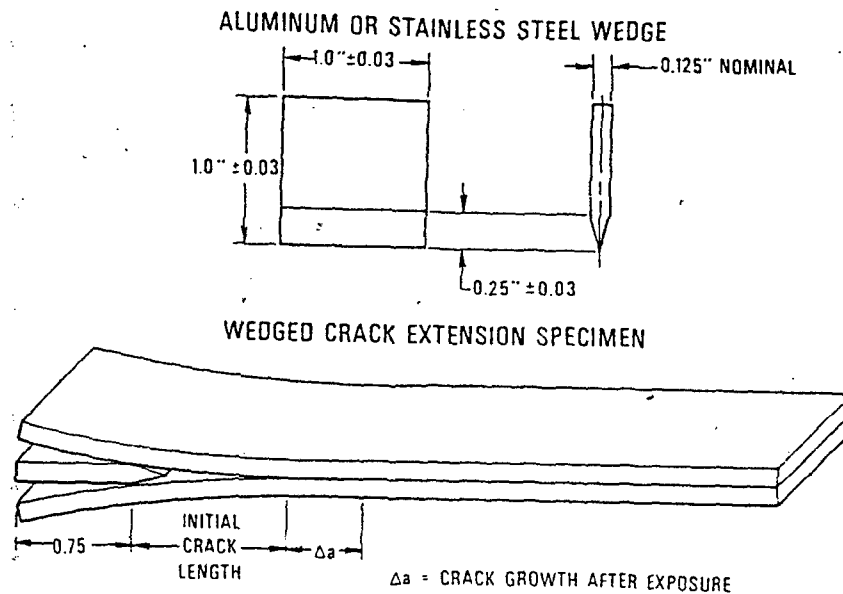


Fig. 4: Wedge test adherend.

Amount and Kinds of Samples

Two kinds of references will be used in all experiments for comparison with laser treated specimens. A non-treated Al sample, An unsealed chromic acid anodized Al sample (MIL-A-8625C).

SLS adherends will be tested at various laser parameters + 2 references in order to establish the optimal laser conditions.

Peel, tensile and wedge tests will be produced at optimal laser conditions only + 2 references.

The total amount of sample sets prepared are summarized in Table 2.

Anodization treatment for the reference adherends will be performed as close as possible to the adhesion stage.

Table 2: Number of sets needed for the various tests.

Adhesive	Adherends	SLS (1)	Peel (1)	Tensile (1)	Wedge (2)
FM 73	Laser irradiated	3	1	1	1
	Untreated	1	1	1	1
	Anodized	1	1	1	1
FM300 2K	Laser irradiated	3	1	1	1
	Untreated	1	1	1	1
	Anodized	1	1	1	1
FM350NA	Laser irradiated	3	1	1	1
	Untreated	1	1	1	1
	Anodized	1	1	1	1

(1) Each set = 5 samples

(2) Each set = 3 samples

The total amount of samples prepared are:

SLS (Shear)	75 samples
FW (tensile)	45 samples
PEEL (90°)	45 samples
Wedge	27 samples.

SUMMARY

All adherends for the various tests were prepared. Adhesives and primer were ordered and will be QI tested when received. Task No. 0001 was completed.

malka(laser1)tal