


Discussions
of the
13th International Workshop
on
Water Waves and Floating Bodies

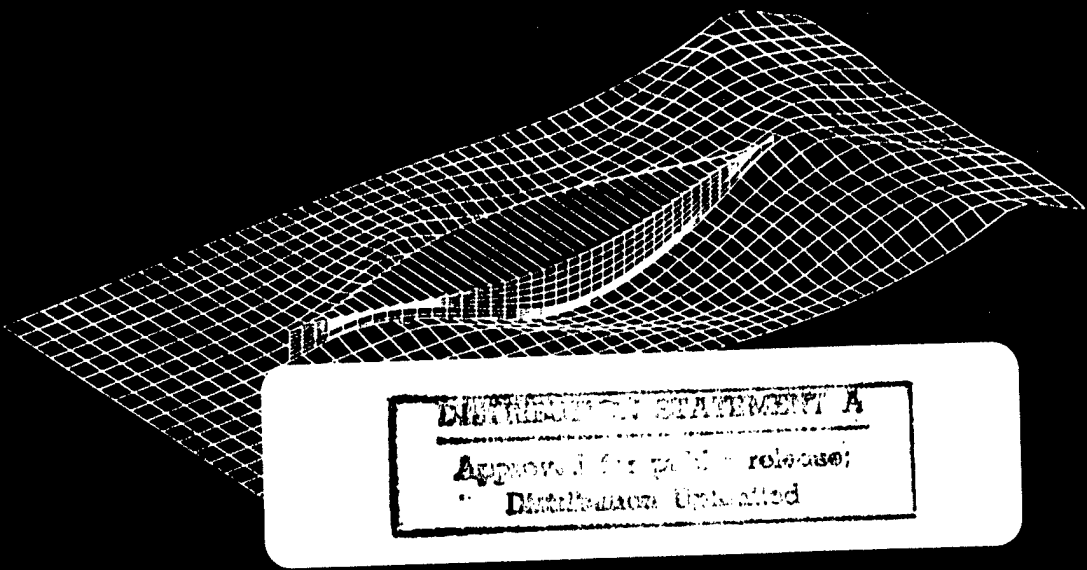

29 March - 1 April 1998

Alphen aan den Rijn,
The Netherlands

Editor: A.J. Hermans

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.			
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE May 1998	3. REPORT TYPE AND DATES COVERED Final 29 March - 1 April 1998	
4. TITLE AND SUBTITLE Discussions of the 13th International Workshop on Water Waves and Floating Bodies		5. FUNDING NUMBERS N00014-98-1-1021	
6. AUTHOR(S) A.J. Hermans			
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) A. J. Hermans Department of Applied Mathematics Delft University of Technology PO Box 5031 2600 GA Delft, The Netherlands		8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Technical Director Office of Naval Research International Field Office PSC 802 Box 39 FPO AE 09499-0700		10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES			
12a. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release, distribution is unlimited		12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) The Thirteenth International Workshop on Water Waves and Floating Bodies was organized by the Department of Applied Mathematics (ITS), in cooperation with the Department of Marine Technology (DEP) of the Delft University of Technology and held in Alphen aan den Rijn from 29 March till 1 April, 1998. This particular location was chosen to obtain an optimal interaction between the participants, both sociably and scientifically. A total of 46 papers was presented. these presentations were selected on the basis of extended abstracts. The selection has been carried out by a committee consisting of the host together with his two predecessors, Dr. Volker Bertram of the University of Hamburg and Prof. Bernard Molin of the Ecole Superiure d'Ingenieurs de Marseille. The 79 participants comprises the authors (also of rejected abstracts), session chairmen and representatives of sponsoring organisations.			
14. SUBJECT TERMS Key Words: Green function, waves and current, free-surface, Rankine method, oscillatory bodies, wave decay, hydroelastic deflection, ship motion, gravity wave systems, wave pattern analysis		15. NUMBER OF PAGES	
		16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT	18. SECURITY CLASSIFICATION OF THIS PAGE	19. SECURITY CLASSIFICATION OF ABSTRACT	20. LIMIT

D i s c u s s i o n s
of the
13th International Workshop
on
Water Waves and Floating Bodies

29 March - 1 April 1998

**Alphen aan den Rijn,
The Netherlands**

Edited by A.J. Hermans
Department of Applied Mathematics
Delft University of Technology

19980901 035

DTIC QUALITY INSPECTED 1

ISBN 90-407-1720-6 / CIP

Copyright © 1998 by A.J. Hermans

All rights reserved. No part of the material protected by this copyright notice may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying, recording or by any information storage and retrieval system, without permission from the publisher.

Printed in the Netherlands

The Workshop is sponsored by



Delft University of Technology

Delft University of Technology



Allseas Engineering



Maritime Research Institute Netherlands

bluewater engineering b.v.

Bluewater Engineering




Single Buoy Moorings Inc.



IHC Gusto Engineering B.V.



Heerema Offshore Construction Group b.v.



Onderzoekschool voor Stromingsleer



Ministerie van Verkeer en Waterstaat/
Directoraat-Generaal Goederenvervoer



Office of Naval Research Europe

This work relates to Department of the Navy Grant N00014-98-1-1021 issued by the Office of Naval Research European Office. The United States has a royalty-free license throughout the world in all copyrightable material contained herein.

PREFACE

The Thirteenth International Workshop on Water Waves and Floating Bodies was organized by the Department of Applied Mathematics (ITS), in cooperation with the Department of Marine Technology (DEP) of the Delft University of Technology and held in Alphen aan den Rijn from 29 March till 1 April, 1998. This particular location was chosen to obtain an optimal interaction between the participants, both sociably and scientifically.

A total of 46 papers was presented. These presentations were selected on the basis of extended abstracts. The selection has been carried out by a committee consisting of the host together with his two predecessors, Dr. Volker Bertram of the University of Hamburg and Prof. Bernard Molin of the Ecole Supérieure d'Ingénieurs de Marseille.

The 79 participants comprises the authors (also of rejected abstracts), session chairmen and representatives of sponsoring organisations.

We thank the sponsors for their generous financial support. We could keep the cost at a reasonable level and solve the budgetary problems for many of the participants. Thanks to Prof. Jo Pinkster who contacted most of the sponsors.

Judith Ormskerk took care of the production of the proceedings and its supplement and not to forget the final arrangements for the workshop in the birdpark Avifauna. Due to her contribution we could have a successful meeting.

Each participant has obtained the proceedings, with the extended abstracts, a few weeks in advance. This is one of the traditions of these workshops and as a result the discussions have been of high scientific level. This second part (supplement) of the proceedings reports of these discussions. Also the abstract of the presentation of S.J. Cox and M.J. Cooker, the program and the list of participants are included.

Just before the meeting we lost a dear friend and colleague. Ralph Kleinman died on February 23, 1998. In the past he contributed to some of the workshops and intended to participate this one, as well. Kleinman is known for his work on integral equations and optimization techniques applied to problems in scattering and wave propagation. Although his major field of interest was acoustic and electromagnetic scattering he contributed to water waves, as well. He was convinced that his approach concerning shape optimization in acoustic scattering could lead to interesting results in ship hydrodynamics. Together with his colleagues at the Universities of Delaware and Tel Aviv, Kleinman has prepared a presentation on this topic. The abstract of his intended presentation is in the proceedings. Unfortunately the presentation could not take place. It is up to the scientific community to pursue his line of research.

CONTENTS

Harry B. Bingham , <i>Computing the Green function for linear wave-body interaction</i> Discusser(s): X.-B. Chen	1
Bjarne Büchmann, Pierre Ferrant and Jesper Skourup , <i>Runup on a body in waves and current. Fully non-linear and finite order calculations</i> Discusser(s): M.W. DINGEMANS	2-3
R.C.T. Rainey	4
H.C. Raven	6
Tim H.J. Bunnik and Aad J. Hermans , <i>Stability analysis for the 3D unsteady free-surface condition with raised panels</i> Discusser(s): M.W. DINGEMANS	7
J. Grue	8
M. Kashiwagi	9
Y. Kim	10
W.W. Schultz	11
Xiao-Bo Chen and Francis Noblesse , <i>Super Green functions for generic dispersive waves</i> Discusser(s): H. Iwashita	12
Alain H. Clément , <i>Computation of impulse response function using differential properties of the time-domain Green function</i> Discusser(s): X.-B. Chen	14
Simon J. Cox and Mark J. Cooker , <i>The effect of wave impact on a body in the breaker zone</i> Abstract	15
Discusser(s): A.A. Korobkin	19
P.A. Tyvand	20
Heike Cramer, Volker Bertram and Gerhart Thiert , <i>A fully 3-d Rankine method for ship seakeeping</i> Discusser(s): R.F. Beck	21
P.A. Tyvand	20
Donald Danmeier , <i>Multiple-body simulations using a higher-order panel code</i> Discusser(s): H.J. Prins	22
Odd M. Faltinsen and Rong Zhao , <i>Water entry of a wedge into a channel</i> Discusser(s): A.A. Korobkin	23
J.N. Newman	24
J. Pinkster	25

Emmanuel Fontaine and M.P. Tulin, <i>On the generation of wave free oscillatory bodies and of trapped modes</i>	
Discusser(s): Q.W. Ma	26
M. McIver	27
J.N. Newman	28
F. Ursell	30
Erratum	31
Stéphan T. Grilli and Zhimin Hu, <i>Modeling of instabilities of oil containment systems by a vortex sheet method</i>	
Discusser(s): E. Palm	32
W.W. Schultz	33
Hidetsugu Iwashita, <i>Influence of the steady flow in seakeeping of a blunt ship through the free-surface condition</i>	
Discusser(s): X.-B. Chen	34
R.C.T. Rainey	35
K. Takagi	36
Hiroshi Kagemoto, <i>Wave decay characteristics along a long array of cylindrical legs</i>	
Discusser(s): D. Evans	37
M. McIver	38
J.N. Newman	39
Seppo Kalske, <i>Unsteady bow wave field and added resistance of ships in short waves</i>	
Discusser(s): A.A. Korobkin	40
K. Takagi	41
Masashi Kashiwagi, <i>A new direct method for calculating hydroelastic deflection of a very large floating structure in waves</i>	
Discusser(s): R. Eatock Taylor	42
S. Zhang	43
Yonghwan Kim and P.D. Slavounos, <i>A finite-depth unified theory of ship motion</i>	
Discusser(s): J.A.P. Aranha	44
J. Grue	45
M. Kashiwagi	49
B. Molin	50
M. Landrini, O. Oshri, T. Waseda and M.P. Tulin, <i>Long time evolution of gravity wave systems</i>	
Discusser(s): M.W. Dingemans	51
S. Grilli	52
R.C.T. Rainey	53
W.W. Schultz	54

C. Levi, S. Welch, E. Fontaine and M.P. Tulin , <i>Experiments on the ringing response of an elastic cylinder in breaking wave groups</i>	
Discusser(s): R.C.T. Rainey	55
C.M. Linton , <i>Rapidly convergent representations for free-surface Green's functions</i>	
Discusser(s): A.H. Clément	58
N. Kuznetsov	59
W.W. Schultz	60
Q.W. Ma, G.X. Wu and R. Eatock Taylor , <i>Numerical simulation of sloshing waves in a 3D tank</i>	
Discusser(s): V. Bertram	61
W.W. Schultz	62
Maureen McIver , <i>Uniqueness, trapped modes and the cut-off frequency</i>	
Discusser(s): N. Kuznetsov	63
C.M. Linton	64
P. McIver , <i>On the completeness of eigenfunction expansions in water-wave problems</i>	
Discusser(s): A.H. Clément	65
D. Evans	66
Bernard Molin and Y. Stassen , <i>A procedure to remove secularity in third-order numerical wave tanks</i>	
Discusser(s): B. Büchmann	67
M.W. Dingemans	68
O. Motygin and N. Kuznetsov , <i>Non-uniqueness in the water-wave problem: an example violating the inside John condition</i>	
Discusser(s): M. McIver	69
D. Evans	70
J.N. Newman , <i>Hydrodynamic analysis of the McIver toroid</i>	
Discusser(s): X.-B. Chen	71
D. Evans	72
N. Kuznetsov	73
C.M. Linton	74
R.C.T. Rainey	75
S. Zhang	78
Hoyte C. Raven and Henk J. Prins , <i>Wave pattern analysis applied to nonlinear ship wave calculations</i>	
Discusser(s): R.F. Beck	79
S.D. Sharma	80
Erratum	81

Anil K. Subramani, Robert F. Beck and William W. Schultz, <i>Suppression of wave-breaking in nonlinear water wave computations</i>	
Discusser(s): E. van Daalen	82
M.W. Dingemans	83
H.C. Raven	84
S.D. Sharma	85
Peder A. Tyvand, <i>Free-surface evolution at the edge of an impulsively upwelling fluid layer</i>	
Discusser(s): E. van Daalen	86
W.W. Schultz	88
T. Utsunomiya and R. Eatock Taylor, <i>Analogies for resonances in wave diffraction problems</i>	
Discusser(s): C.M. Linton	90
Erratum	91
Riaan van 't Veer, <i>Experimental validation of a Rankine panel method</i>	
Discusser(s): X.-B. Chen	92
H.C. Raven	93
William C. Webster and Xinyu Zhang, <i>A waterfall springing from unsteady flow over an uneven bottom</i>	
Discusser(s): S. Grilli	94
J. Grue	95
W.W. Schultz	96
Jaap-Harm Westhuis and Andonowati, <i>Applying the finite element method in numerically solving the two dimensional free-surface water wave equations</i>	
Discusser(s): S. Grilli	97
Q.W. Ma	99
D.J. Wood and D.H. Peregrine, <i>Pressure-impulse theory for water wave impact on a structure with trapped air</i>	
Discusser(s): A.A. Korobkin	101
Sheguang Zhang, Woei-Min Lin, Kenneth Weems and Dick K.P. Yue, <i>A hybrid boundary-element method for non-wall-sided bodies with or without forward speed</i>	
Discusser(s): X.-B. Chen	102
H. Kagemoto	103
M. Kashiwagi	104
Programme	A-E
List of Participants	a-h

Title of Abstract : Computing the Green function for linear wave-body interaction

Author(s) : H.B. Bingham

Discusser : X.-B. Chen

Questions/comments:

You define the Green function which satisfies a "Dirac" condition involving the normal derivative at a point on the body surface. What happens for double derivatives at/near this point? In other words is the Laplace equation still satisfied at this point?

Author's reply:

The Green function actually satisfies a Poisson equation, so now it does not satisfy the Laplace equation at one point on the body. Physically meaningful quantities are always obtained by integrating the Green function over the body however, and therefore will satisfy the Laplace equation everywhere.

Title of Abstract : Runup on a body in waves and current. Fully non-linear and finite order calculations

Author(s) : B. Büchmann, P. Ferrant and J. Skourup

Discusser : M.W. Dingemans

Questions/comments:

I do not understand the post-processing in which wave steepness may be chosen. For a second-order model wave steepness is part of the model and resulting wave forces are nonlinearly connected to the quantities. Or do you in fact do a linear computation and call it a second-order method?

Author's reply: (B. Büchmann)

It is a standard procedure to adapt a perturbation procedure to account for (weak) non-linearity. As noted in your book (Dingemans, 1997, section 2.8) "for the extension [from linear] to non-linear wave motion it is necessary to invoke some perturbation method". Choosing a Stokes expansion the problem is solved at first and second order at each time step. It is possible to non-dimensionalize both the first and the second order equations such that the dimensions of the wave height, H , can be chosen after the problem is solved. All first order quantities are then scaled by H , while the second order quantities are scaled by e.g. H^2/h , where h is the water depth. There is nothing mysterious about this procedure; it corresponds exactly to solving the progressive wave problem to second order for an unknown wave amplitude, a , thus finding a first order solution proportional to a , and a second order solution proportional to $k * a^2$ (a can then be chosen after the general solution is found - thus " in a post-processing procedure").

Reference:

Dingemans, M.W., (1997), "Water Wave Propagation over Uneven Bottoms", World Scientific Publishing, Singapore.

Title of Abstract : Runup on a body in waves and current. Fully non-linear and finite order calculations

Author(s) : B. Büchmann, P. Ferrant and J. Skourup

Discusser : M.W. Dingemans

Questions/comments:

In the abstract you note that spatial non-convergence is occurring. Can you expand on that?

Author's reply: (B. Büchmann)

We do not note spatial divergence. What we do note is that for some parameters (esp. when the Froude number increases) we cannot with the given (limited) computer resources obtain results that are fully converged in space. This is due to the fact that we have an upper bound on the number of panel that we can use. Increasing the density of the panels close to the cylinder will force us to either make the discretization too coarse in other areas, or move the truncation boundaries too close to the body. In both cases this will distort the solution also close to the body.

Title of Abstract : Runup on a body in waves and current. Fully non-linear and finite order calculations

Author(s) : B. Büchmann, P. Ferrant and J. Skourup

Discussor : R.C.T. Rainey

Questions/comments:

This is of course a most impressive piece of work. I am interested in the authors' remark at the end of their Introduction, that they have a "method for defining the domain of validity of finite order model(s)" i.e. models based on a "perturbation procedure about the still water level". This is because I have in [1] an argument that this perturbation procedure (which I refer to in [1] and [2] as "Stokes' expansion", incidentally) will diverge once the wave height reaches the cylinder diameter. And I would like to know if my argument, which is really a conjecture, is correct.

In particular, I am interested in the fully non-linear results from ANSWAVE given during the presentation by Huseby and Grue. These only covered wave heights below the cylinder diameter, which I understood to be because higher waves were too steep for ANSWAVE. But how about longer wavelengths, in deep water - would ANSWAVE then run for wave heights greater than the cylinder diameter?

I appreciate that the Keulegan-Carpenter number at the water surface ($KC(S)$) is then greater than π , so that flow separation may perhaps begin. However, we did not see any significant separation in our "ringing" experiments [2] until $KC(S)$ was at least double that, so that ANSWAVE results in this regime cannot be dismissed for this reason. (If anything, I would have thought that flow separation was much more of an issue in the cases you have run with steady current, in Figure 1 and 2).

[1] Rainey, R.C.T. 1995 "Slender-body expressions for the wave load on offshore structures" Proc. R. Soc. Lond. Vol. A450, pp. 391-416.

[2] Chaplin, J.R., Rainey, R.C.T. & Yemm, R.W. 1997 "Ringing of a vertical cylinder in waves" J. Fluid Mech. Vol. 350, pp. 119-147.

Author's reply: (P. Ferrant)

Thanks for your kind comment.

Motivated by your question, we run new simulations using ANSWAVE with the same wavelength as in Huseby & Grue's paper, i.e. $\lambda/h = 1.2823$ (h water depth), but with a cylinder radius reduced to $R/h = 0.015$, leading to $kR = 0.0735$. We have been able to run stable simulations in this configuration up to A/R about 1.4, which is well above the upper limit of convergence of Stokes expansion conjectured in [1]. But obviously this is not a proof that your conjecture is false, since ANSWAVE is NOT based on a Stokes expansion procedure. Then an interesting question is what would be the manifestation of the conjectured divergence in a fully non-linear simulation (or in experiments). In order to find some elements of answer, we plan to investigate the behaviour of ANSWAVE around $A/R = 1.0$, to see whether or not any change of regime occurs in this region.

Title of Abstract : Runup on a body in waves and current. Fully non-linear and finite order calculations

Author(s) : B. Büchmann, P. Ferrant and J. Skourup

Discussor : H.C. Raven

Questions/comments:

It is not quite clear to me why you say that the second order model poses higher resolution requirements than the non-linear model.

1. Are not the same short scattered waves inherent in the non-linear model?
 2. Are they then damped, distorted or aliased in that model as well, for insufficient panel density?
-

Author's reply: (P. Ferrant)

The statement that the second order model requires finer meshes for convergence may seem surprising, but is based on the observation of the behavior of both numerical models. For some of the cases for which spatial convergence of second order quantities was difficult to obtain, fully non-linear simulations were repeated with finer meshes. No sensible differences with earlier results were observed, indicating that fully non-linear simulation results were reasonably converged.

1. It might well happen that some of the separate problems in the Stokes expansion series representation of the problem lead to stiffer solutions than the global fully non-linear solution.
Both models presented in this paper are based on different approximations of the physical problem and, to the authors' knowledge, unique. The extremely good agreement of both models in the low Froude-low steepness regime is an indication that both theories are sound and have been correctly implemented.
2. Regarding the still unexplained difference of convergence behavior of both models in some particular combinations of parameters, other implementations of both the second order and fully non-linear theories of 3D wave-body-current interactions would be welcome for further validation.

Title of Abstract : Stability analysis for solving the 3D unsteady free-surface condition with raised panels

Author(s) : T.H.J. Bunnik and A.J. Hermans

Discussor : M.W. Dingemans

Questions/comments:

1. Do you have any idea why central-difference method becomes unstable?
2. Can it be chaotic behaviour, because central difference schemes are known to exhibit chaotic behaviour.

Author's reply:

1. Central differences become unstable if the speed of the stream is large. In that case, when a wave propagates in the same direction as the stream, we may only include points in the difference scheme which contain information about what the wave will be like in the future, so these points must lie upstream, opposite to the direction of propagation.
2. I do not think so, the numerical scheme also becomes unstable if we use "downwind" differences instead of central differences.

Title of Abstract : Stability analysis for solving the 3D unsteady free-surface condition with raised panels

Author(s) : T.H.J. Bunnik and A.J. Hermans

Discusser : J. Grue

Questions/comments:

By assuming that $\tau > 1/4$ some analytical problems are perhaps avoided. It would be interesting to see a similar stability analysis for $\tau < 1/4$, and for $\tau \rightarrow 1/4$.

In the continuous case the Green function has singularity at $\tau = 1/4$, since two wavenumbers merge there. The singularity disappears, however, if the wavenumbers are made slightly different, which may be the case in the discrete case.

Author's reply:

It is very easy to apply our stability analysis also for $\tau < 1/4$ and $\tau \rightarrow 1/4$. If $\tau = 1/4$ and we let the gridsize approach zero, we will find two identical wavenumbers like in the continuous case. The numerical scheme is according to our standards however still stable in this case, because in our analysis we do not look at the singular behaviour of the Green function.

It is true of course, that because the wavenumbers differ at $\tau = 1/4$ for nonzero gridsize, this explains why Rankine panel methods have less problems with the singularity at $\tau = 1/4$ than panel methods using the Green function satisfying the Kelvin condition.

Title of Abstract : Stability analysis for solving the 3D unsteady free-surface condition with raised panels

Author(s) : T.H.J. Bunnik and A.J. Hermans

Discussor : M. Kashiwagi

Questions/comments:

In the discussion on the numerical damping, you emphasized that the 2nd order difference scheme is effective. I want to know the result when applying a higher order, say 3rd order scheme. If the singularity strength is represented by a non-constant function, say the β -spline function, how will the results look like?

Author's reply:

A third order scheme reduces dispersion drastically, but the damping becomes slightly positive (amplification). If the singularity strength is a β -spline, then we can calculate the derivatives in the free surface condition analytically with high precision. This will probably reduce the damping very much.

Title of Abstract : Stability analysis for solving the 3D unsteady free-surface condition with raised panels

Author(s) : T.H.J. Bunnik and A.J. Hermans

Discussor : Y. Kim

Questions/comments:

Your result seems very interesting. The result may provide the stability condition for various schemes. You showed some cases for numerical differentiation, but, if we can apply this method to higher order panels, we can forget the numerical differential for space.

Do you have any experience or idea if the panel has a higher-order basis function?

Author's reply:

Using analytical derivatives from higher order basis functions will probably reduce damping and dispersion. Some trick however has to be found to satisfy the radiation condition (for $\tau > 1/4$ waves propagate downstream). this can probably be done by shifting the collocation points upstream.

Title of Abstract : Stability analysis for solving the 3D unsteady free-surface condition with raised panels

Author(s) : T.H.J. Bunnik and A.J. Hermans

Discusser : W. Schultz

Questions/comments:

1. Is $\alpha = 1$ for figure 1(b) and all later figures in your presentation?
2. How do you relate the k where the central difference scheme becomes unstable on your last figure of your presentation to the meshsize?

Author's reply:

1. Yes.
2. The meshsize was related to the length of the steady wave by $Fn_{\Delta x} = 0.05$, which means we have 20 panels per steady wavelength. We now send over this grid an unsteady wave at a range of wavenumbers. So for the point where the difference scheme becomes unstable in case of head waves, which happens $k \approx 23$, we have about $5\frac{1}{2}$ panels per wavelength.

Title of Abstract : Super green functions for generic dispersive waves

Author(s) : X.-B. Chen and F. Noblesse

Discussor : H. Iwashita

Questions/comments:

I think it is doubtful to conclude that your method is the "only" method for solving this kind of problem. We also applied the panel Green function (obtained by integrating the monopole source over the panel) to the practical boundary value problem and compared results with corresponding results by the ordinal monopole Green function method, increasing the number of panels on the ship surface up to 1000 or so. Then we could not see a remarkable difference. So we cannot say that the integration of the Green function over the panel promotes the cancelation of its singularity near the free surface provided the practical number of elements are used in the calculation. Ordinal monopole Green function method can be a practical method, too.

Author's reply:

It is well known that, in the limit of both source and field points being at the free surface, the Green function of wave diffraction-radiation with forward speed is extremely singular and highly oscillatory so that its integration in the usual approach (in which the Green function and its gradient are evaluated and subsequently integrated over a panel or a segment) is difficult and may not be robust, if not impossible, to get accurate precision for field points near a waterline-segment or a hull-panel at the free surface. Differently here, we consider directly free-surface potential flows (super Green functions) generated by an arbitrary distribution of singularities and summarize in our paper new mathematical representations of near-field and far-field waves of free-surface effects in a generic dispersive medium. We can show mathematically that the super Green function is not singular as far as a non-singular distribution of singularities is applied along a segment or over a panel at the free surface. Furthermore, the representation of super Green functions given in the paper for generic singularity distributions and dispersive media, is general and remarkable simple.

A practical method that makes it possible to accurately evaluate free-surface due to an arbitrary distribution of singularities is a critical necessary ingredient of a reliable method for computing 3D flow about a ship advancing in waves. A boundary-integral representation suited for accurate numerical calculations is another critical necessary ingredient. How-

ever, while these two elements are necessary ingredients, they are not sufficient. Another essential ingredient is an appropriate procedure for solving the selected integral equation. Professor Iwashita's comments pertain to the classical solution procedure - based on inversion of a matrix of influence coefficients - that has been adopted in free-surface hydrodynamics since Hess and Smith's pioneering work on the calculation of potential flows in an unbounded fluid. In our opinion, the traditional Hess & Smith solution procedure may not be well suited for obtaining robust and accurate solutions of free-surface flows with forward speed. An alternative solution procedure based on an iterative scheme and higher-order distribution of singularities on ship's hull is indeed being studied.

Title of Abstract : Computation of impulse response function using differential properties of the time-domain Green function

Author(s) : A.H. Clément

Discussor : X.B. Chen

Questions/comments:

The most remarkable result using differential properties of TGF you have previously obtained is that you can avoid the convolution integral embeded in integral equations. I am confused by your present study in which the most-time-consuming convolution integral is still present.

Author's reply:

The method I have proposed at the last workshop to derive fully differential models replacing convolution integrals, unfortunately failed for high frequency input (see Clément 1998). Nevertheless, as you can see, the left hand side of the model (i.e. the Green function ODE) already brings substantial CPU time savings.

The Effect of Wave Impact on a Body in the Breaker Zone

Simon J. Cox and Mark J. Cooker

School of Mathematics, UEA, Norwich, NR4 7TJ. E-mail: simon.cox@uea.ac.uk

1 Introduction

When a wave breaks against a vertical wall high pressures of brief duration are recorded both on the wall and in the surrounding fluid. Fluid particle accelerations of over $10,000g$ (where g is the acceleration due to gravity) have been found in numerical simulations of breaking waves, and experiments validate these figures. These wave impacts have caused large amounts of damage to coastal structures around the world. Our goal in this work is to try and quantify the effect of these violent impacts on a body floating on the surface near a sea wall when a wave breaks against the wall.

The analysis of Cooker and Peregrine (1992) has shown that objects on the sea bed in the vicinity of a wave impact can experience impulses big enough to move them, and this is probably one of the mechanisms by which concrete armour blocks on breakwaters are removed or destroyed. When considering the motion of floating bodies in similar areas of high fluid accelerations, one thinks of a moored boat or the capstone of a vertical structure in the fluid. For instance, a small vessel tied to a quay in a storm will be buffeted, often severely, by the wave motion against the quay wall. This action may have very destructive effects upon the vessel, even causing structural damage. Observation suggests that floating debris, such as barrels and planks of timber, collect near walls. These objects, because of their relatively low mass, are likely to be easily propelled by impulses generated by wave breaking.

We use the idea of pressure impulse, P (see Cooker and Peregrine, 1995). P was found by Bagnold (1939) to be constant for repeated impacts even though the peak pressure varied widely and unpredictably between apparently similar impacts. Pressure impulse is defined as

$$P(x, y, z) = \int_{t_b}^{t_a} p(x, y, z, t) dt, \quad (1)$$

where p is pressure and the subscripts b and a refer to before and after the impact, i.e. t_b and t_a are the start and finish times of the impact. It is assumed that the impact time $\Delta t = t_a - t_b$ is small compared with other time scales before impact. We neglect viscosity and assume that before and after impact the fluid is incompressible, and that the nonlinear terms in Euler's equation are sufficiently small that P satisfies Laplace's equation, $\nabla^2 P = 0$.

2 A Floating Plate

Cooker and Peregrine (1995) idealise the breaking process by assuming the free surface to be flat with the wave travelling from right to left towards the wall at $\bar{x} = 0$. The idealised wave has a vertical flat face which impacts with a speed u_0 on the wall. See figure 1(a). The fluid of density ρ then occupies a rectangular domain of depth H and infinite extent in the positive \bar{x} direction. The ratio of breaking wave height to total water depth is denoted by $\mu \in [0, 1]$, where $\mu = 1$ is wave impact over the full height of the wall. Figure 1(b) shows contours of constant pressure impulse for a wave impacting over the top half of the wall ($\mu = \frac{1}{2}$).

In a small domain, D , near the surface, such as that around $\bar{x} = x_0 = 0.25H$, the contours of constant P are approximately parallel to the \bar{x} -axis. On the surface $P = 0$ since pressure, p , is a constant (without loss of generality this constant is 0) and P increases into the fluid. If \underline{u}_b and \underline{u}_a denote the velocities of the fluid before and after impact respectively, then $\underline{u}_a - \underline{u}_b = -\frac{1}{\rho} \nabla P$. We take $\underline{u}_b = (-u_0, 0)$ so the vertical component of \underline{u}_a is $v_a = -\frac{1}{\rho} \partial P / \partial y$. The pressure impulse gradient at

the surface in D is therefore associated with a vertical fluid velocity after impact. A body, B , floating in this area will be propelled upward, with some speed V . We expect V to depend on the size and shape of B and on the applied gradient of pressure impulse.

We define a new horizontal coordinate in D by $x = \bar{x} + x_0$. The origin is now on the free surface, $y = 0$, and we consider a flat impermeable floating plate, B , of negligible thickness, between $x = -L$ and $x = L$, on $y = 0$. The pressure forces acting on B are assumed to be much greater than any gravitational forces, and it is assumed to be at rest before impact. The plate, of mass $m \geq 0$, is moved (by the effect of the wave impact) in the positive y direction with initial velocity V so that on the plate $\partial P / \partial y = -\rho V$. The constant $G > 0$ is the local pressure impulse gradient, given by the model for the whole domain, which can be estimated directly from figure 1. Hence, far away from B , $\partial P / \partial y \sim -G$. The boundary-value problem for $P(x, y)$ in the lower half plane is

$$\begin{aligned} \bullet \quad \nabla^2 P &= 0 \quad \text{for } y \leq 0 & \bullet \quad P &= 0 \quad \text{on } |x| > L, y = 0 \\ \bullet \quad \frac{\partial P}{\partial y} &\rightarrow -G \quad \text{as } y \rightarrow -\infty \text{ or } |x| \rightarrow \infty & \bullet \quad \frac{\partial P}{\partial y} &= -\rho V \quad \text{on } |x| \leq L, y = 0. \end{aligned}$$

In order to solve this we introduce a complex variable $z = x + iy$, then the expression

$$P = -\rho V y + (G - \rho V) \Re \left\{ (L^2 - z^2)^{1/2} \right\}, \quad (2)$$

where \Re denotes real part, satisfies the boundary conditions.

Equation (2) can be used to find the imparted velocity V . The change in momentum of the plate, mV , is equal to the impulse, I , on it. I is the integral of the pressure impulse along the length of B . So

$$mV = I = \int_{-L}^L P|_{y=0} dx = (G - \rho V) \int_{-L}^L (L^2 - x^2)^{1/2} dx = \frac{1}{2} (G - \rho V) L^2 \pi.$$

Thus

$$V = \frac{\frac{1}{2} L^2 \pi G}{m + \frac{1}{2} L^2 \pi \rho}. \quad (3)$$

As the length, L , of the plate increases, so too does the velocity at which it is moved, asymptoting to G/ρ , but an increase in mass reduces V . The contours of pressure impulse are shown in figure 2. Equation (3) implies that the maximum possible speed of the plate after impact is bounded above by G/ρ , which is the speed of the fluid in the absence of B . Note also that, as $m \rightarrow 0$, the pressure impulse, given by (2) and (3), tends to a value of $-Gy$, consistent with there being no plate present.

In order to test the hypothesis that V depends on shape, we can use a conformal map to study the change in P due to a change in the shape of B . We map the solution for P below a flat plate, (2), in the z plane, to the region below a body, B' , in a complex w plane. We require that the conformal map, $z(w)$, has $z \sim w$ as $z \rightarrow \infty$ and keeps the free surface flat. Equation (2) becomes

$$P = \Re \left\{ i\rho V w + (G - \rho V) (L^2 - z(w)^2)^{1/2} \right\}. \quad (4)$$

Again, V can be found by equating the momentum of B' with the impulse acting on it. Then

$$mV = I = \Im \left\{ \int_{B'} P i dw \right\} = \rho V A + (G - \rho V) \Re \left\{ \int_{-L}^L \sqrt{L^2 - x^2} \frac{dw}{dz} \Big|_{z=x} dx \right\} \quad (5)$$

where A is the cross-sectional area of the submerged part of B' . For instance, this would give the velocity at which a semicircular or semi-elliptical body will move and can obviously be extended to a wide range of classes of shapes. Since (5) requires dw/dz rather than $w(z)$, the impulse on shapes whose boundary is given by the Schwarz Christoffel mapping theorem can be calculated, without performing the integration required to find the profile of the body.

3 A Floating Disc

We can find the pressure impulse around and beneath a flat circular disc of radius a floating horizontally on the fluid free surface. We assume that the pressure impulse field is uniform in a direction parallel to the wall. Following Fabrikant (1991, p87) we use cylindrical polar coordinates (r, θ, y) to solve the system

$$\begin{aligned} \bullet \quad \nabla^2 P &= 0 \quad \text{for } y \leq 0 & \bullet \quad P &= 0 \quad \text{on } r > a, y = 0 \\ \bullet \quad \frac{\partial P}{\partial y} &\rightarrow -G \quad \text{as } y \rightarrow -\infty \text{ or } r \rightarrow \infty & \bullet \quad \frac{\partial P}{\partial y} &= -\rho V \quad \text{on } r \leq a, y = 0. \end{aligned}$$

Then

$$P(r, y) = -Gy + \frac{2}{\pi} (G - \rho V) \left(\sqrt{a^2 - l_{\pm}^2} + y \sin^{-1} \left(\frac{a}{l_{\pm}} \right) \right) \quad (6)$$

where

$$l_{\pm} = \frac{1}{2} \left\{ \left[(r+a)^2 + y^2 \right]^{\frac{1}{2}} \pm \left[(r-a)^2 + y^2 \right]^{\frac{1}{2}} \right\}.$$

Equating the momentum of the disc with the impulse on it gives

$$mV = I = \int_0^{2\pi} d\theta \int_0^a r P|_{y=0} dr = 4(G - \rho V) \int_0^a r \sqrt{a^2 - r^2} dr = \frac{4}{3} (G - \rho V) a^3$$

and then $V = \frac{4}{3} a^3 G / (m + \frac{4}{3} a^3 \rho)$. In three dimensions the velocity resembles the form for a two-dimensional body, cf (3), in that an increase in mass, m , reduces the speed at which the disc moves. Both (2) and (6) possess singularities in ∇P at their edges, corresponding to spray roots.

4 Concluding Remarks

We have shown that a body, floating in the vicinity of a sea wall when a wave breaks against it, experiences an impulsive lift. In the case of large floating bodies, we envisage these two-dimensional and axisymmetric calculations to be used to find the impulses on a small cross-section of B . By summing the impulses on all cross-sections one can compute stress concentrations and the nett impulse.

Further calculations for other bodies will be presented at the Workshop.

SJC is supported by the UK Engineering and Physical Sciences Research Council, Award number 96000215.

- BAGNOLD, R.A. 1939 Interim report on wave-pressure research. *J. Inst. Civil Eng.* **12**:201–226.
- COOKER, M.J. AND PEREGRINE, D.H. 1992 Wave impact pressure and its effect upon bodies lying on the sea bed. *Coastal Eng.* **18**:205–229.
- COOKER, M.J. AND PEREGRINE, D.H. 1995 Pressure-impulse theory for liquid impact problems. *J. Fluid Mech.* **297**:193–214.
- FABRIKANT, V.I. 1991 *Mixed Boundary Value Problems of Potential Theory and their Applications in Engineering*. Kluwer, Dordrecht.

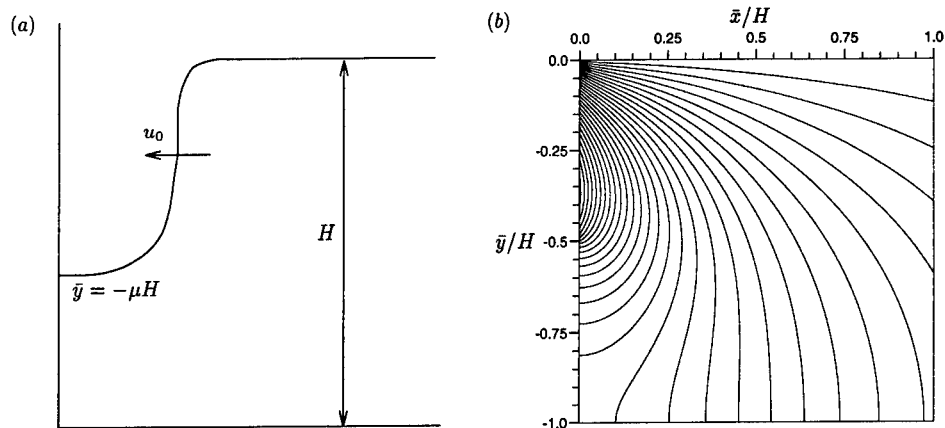


Figure 1: (a) Sketch of idealised wave breaking. (b) Pressure impulse contours for the analysis of Cooker and Peregrine (1995). The wave impacts over a fraction $\mu = 0.5$ of the wall at $\bar{x} = 0.0$ and the sea bed is at $\bar{y}/H = -1.0$. Contour spacing is $0.01\rho u_0 H$. Note that the contours are almost horizontal near the surface for $\bar{x}/H \leq 0.5$. We put a floating body, B , on the free surface, $\bar{y} = 0.0$, at a point near $\bar{x}/H = 0.25$.

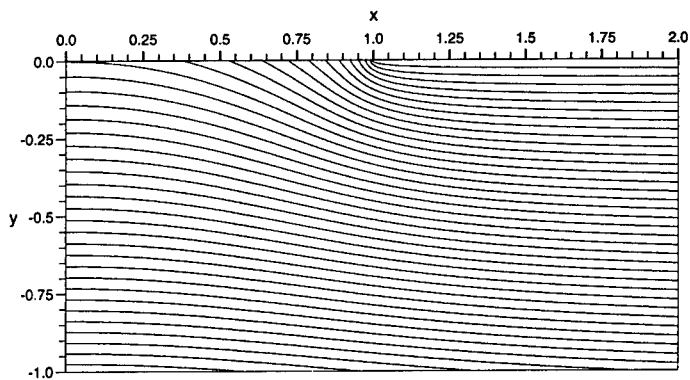


Figure 2: Pressure impulse contours below a flat plate $x \in [-1, 1], y = 0$. In this case $G = m = L = \rho = 1.0$ and the contour spacing is $0.03LG$. $P_{max} = 0.389LG$. Since P is symmetric about the line $x = 0$ we show only half the domain. Note that $|\nabla P|$ is singular at $x = \pm 1$, corresponding to spray roots.

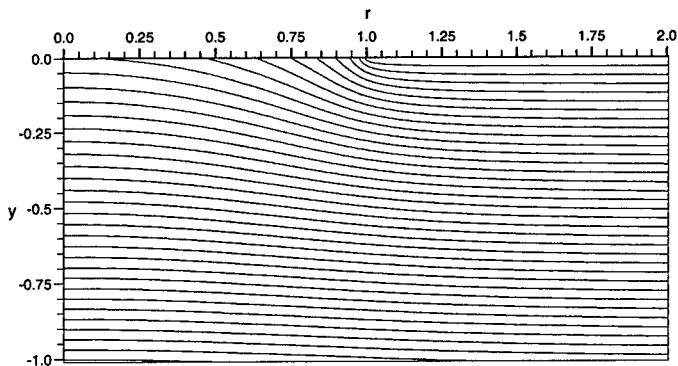


Figure 3: Pressure impulse contours below a flat horizontal disc, $r \in [0, a], y = 0$. In this case $G = m = a = \rho = 1.0$ and the contour separation is $0.03aG$. $P_{max} = 0.273LG$. These contours should be compared with those in figure 2.

Title of Abstract : The effect of wave impact on a body in the breaker zone

Author(s) : S.J. Cox and M.J. Cooker

Discussor : A.A. Korobkin

Questions/comments:

Did you check that the boundary condition on the surface of an arbitrary body is satisfied with the pressure impulse, which you constructed with the help of conformal mapping technique?

Author's reply:

We have corrected equation (4) so that the boundary condition is satisfied. We had written $z(w)$ rather than w . This introduces a term, proportional to the submerged cross-sectional area of the body, in our expression for the impulse on an arbitrary body (5).

Title of Abstract : The effect of wave impact on a body in the breaker zone

Author(s) : S.J. Cox and M.J. Cooker

Discusser : P.A. Tyvand

Questions/comments:

You compare the heave motion of various bodies forced by the pressure impulse. A body in forced impulsive motion has an added momentum given by its instantaneous velocity multiplied by its added mass (in the infinite frequency limit).

Will these floating bodies move passively with the fluid after the impact so that there is no relative motion between the bodies and the surrounding fluid?

If so, there will be no effect of added mass. But as soon as there is such relative motion, added mass of the body with zero-potential condition at the free surface should be included.

Author's reply:

If the body is freely floating on the surface before impact, then it moves with the surface at initial speed $V = G/\rho$. If the mass, m , of the body is not equal to the mass, M of displaced water then there is relative motion between the body and surrounding fluid and

$$V = \frac{Gk}{m - M + \rho k} \quad \text{where} \quad k = Re \int_{-L}^L \sqrt{L^2 - x^2} \frac{dw}{dz} \Big|_{z=x} dx .$$

This formulation automatically includes the effect due to added mass.

Title of Abstract : A fully 3-d Rankine method for ship seakeeping

Author(s) : H. Cramer, V. Bertram and G. Thiart

Discussor : R.F. Beck

Questions/comments:

When you implement horizontal plane motions, do you intend to include lifting effects in sway and yaw?

How will you account for the trailing vorticity?

Author's reply:

Yes, a Kutta condition (linearized) will be implemented. A special dipole element with oscillating strength in the free wake was developed by Dr. Thiart of the University of Stellenbosch. The results will be presented at the next ONR.

Title of Abstract : Multiple-body simulations using a higher-order panel code

Author(s) : D. Danmeier

Discussor : H.J. Prins

Questions/comments:

In your presentation you mentioned the results of Ohkusu.
How do your results compare to his?

Author's reply:

The choice of simulating the drift motions of a floating body in the presence of a fixed structure was inspired by Prof. Ohkusu's Boss '76 paper. We did not intend to replicate his floating ship-fixed structure system, but hoped to observe some drift motion against the direction of incident waves. In this sense our two results compare, but of course the waves of kd/π differ since our geometries are not the same.

Title of Abstract : Water entry of a wedge into a channel

Author(s) : O. Faltinsen and R. Zhao

Discussor : A. Korobkin

Questions/comments:

What is the Generalized Wagner theory you mentioned?

Author's reply:

By Generalized Wagner theory I mean that I use the assumptions of Wagner except that I account for the elastic vibrations of the hull. This has an effect in the body boundary conditions and in the kinematic free surface condition. The consequence is change in the pressure distribution and rate of change with time of the wetted surface. Only the "outer domain" is considered. This means the details at the spray roots are not analyzed. However the latter should be possible to do and a matching be done.

Title of Abstract : Water entry of a wedge into a channel

Author(s) : O. Faltinsen and R. Zhao

Discusser : J.N. Newman

Questions/comments:

In view of the importance of the induced vertical velocity due to the heave motion of the side hulls, can you comment about the analogous effects due to pitch, m -terms, and steady forward velocity?

Author's reply:

When I talk about the vertical velocity, I mean a local velocity at a cross-section of the ship. The effect of pitch on the vertical velocity is therefore included. The effect of forward speed is included as a time-dependent angle of effect due to pitch. Both of these effects are important.

Title of Abstract : Water entry of a wedge into a channel

Author(s) : O. Faltinsen and R. Zhao

Discussor : J. Pinkster

Questions/comments:

Do you restrict your remark concerning the inadequacy of ship motion codes for predicting slamming to this type of craft (fast catamarans) or do you consider this to be true for more conventional ships also?

Author's reply:

One important point in my presentation was that the large ship accelerations reduce the water entry velocity with time. Since the maximum slamming loads are proportional to velocity square, the slamming loads will be sensitive to the accelerations. Since ship accelerations can be significantly influenced by nonlinear effects due to bow flare, I guess that linear ship motion codes have their limitations in this respect also for conventional ships with significant bow flare. But this needs to be investigated.

Title of Abstract : On the generation of wave free oscillatory bodies and of trapped modes

Author(s) : E. Fontaine and M.P. Tulin

Discussor : Q.W. Ma

Questions/comments:

When a body is forced to oscillate in water, it should physically carry some energy. If there is no wave induced, the energy should be consumed in some way. Can you make a comment on this?

Author's reply:

Oscillating wave-free bodies do not generate waves while forced in periodic motion at the designed frequency. As a result, when the periodic regime is reached, the flux of energy carried away from the body vanishes as well as the work done to maintain body motion.

Title of Abstract : On the generation of wave free oscillatory bodies and of trapped modes

Author(s) : E. Fontaine and M.P. Tulin

Discussor : M. McIver

Questions/comments:

Have you looked at any time domain computations for a body whose boundary goes into a singularity rather than encloses it?

Author's reply:

No, but it would be interesting. On another subject, you pointed out to us at the meeting in an oral communication the interesting papers by Bessho [2] and others [3] and we thank you. The work by Bessho substantially anticipate our mathematical results on stationary wave-free bodies. The applications in [3] were made for heave alone and generally yielded shapes quite different from those shown by us since they generally sited their singularity well below the surface and not on it as in our case. Of course it is possible to obtain a wide variety of shapes by moving and spreading the singularities. As far as we know, they were unaware of trapped modes.

You have also asked us privately whether there is an infinite amount of energy in the flow, as this could invalidate John's uniqueness theorem. The answer is not clear, but certainly the energy density becomes unbounded at the singularity. At this time, the trapped mode solutions which we have given including figure above, while satisfying the boundary conditions on the free surface may best be considered mathematical curiosities in view of the presence of the singularity at the origin. There are possibilities to weaken this singularity sufficiently by placing it below the surface and spreading it vertically, but we have not undertaken this.

Title of Abstract : On the generation of wave free oscillatory bodies and of trapped modes

Author(s) : E. Fontaine and M.P. Tulin

Discussor : J.N. Newman

Questions/comments:

1. On a historical point of view, I believe the basic wave-free singularities described here are equivalent or analogous to those considered by several authors. Regarding the zero-speed time-harmonic case, Ursell (2D) and Havelock (3D) derived sets of wave-free potentials by combining higher-order singularities (vertical dipoles, quadrupoles, etc.) in a systematic manner. Their papers are referenced in [10]. See also equations 13.21 and 19.50 and the surrounding text in [10]. The original paper by Ursell [5] gives the stream functions rather than the potentials. Your equation (9) appears to be equivalent to his first ($m = 1$) wave-free stream function, after accounting for the different coordinate systems. Subsequently he worked with potentials, instead of stream functions, and generalized to include antisymmetric as well as symmetric singularities about $x = 0$ (cf. the appendix of his paper in [7], and probably some of his papers in the 1950's). From a historical perspective it is amusing to point out that Ursell derived his wave-free potentials (or stream functions) instead of using a straightforward multipole expansion, to avoid the computation of the free-surface integral part of the multipoles. I think the same motivation applied to Havelock's paper. In both cases, added-mass and damping coefficients were computed without programmable electronic computers! If my memory is correct, Tasai also used Ursell's approach for more general 2D bodies mapped onto circles, where the free-surface condition is modified due to the conformal mapping function. A more applied paper on 2D bodies which do not radiate waves is by Motora and Koyama [4], which includes a reference to Bessho's paper [2]. I guess Motora and Koyama were motivated primarily by physical reasoning, and not by the use of wave-free singularities. Concerning the steady wave-resistance problem, Yim [8] (see especially pages 1043-7) describes a 'no-wave-singularity' composed of a dipole and quadrupole. The paper by Bessho [1] also hints at this construction, but is less specific. The discussion of Krein's work in Kostiuikov's book, is more along the same lines as Bessho's work.
2. The use of these singularities to find bodies with trapped modes is very interesting, but it is not clear from fig. 4 if one can generate a physical (i.e. regular) single body (which would be a significant extension of McIver twin bodies). Unless the body in fig. 7 is also singular at the origin, it appears to contradict John's uniqueness theorem.

Author's reply:

Thank you for this review of the literature concerning the subject of wave-free flows, especially the elucidation of Ursell's very early work. The few trapped modes we have calculated including Fig. 2 in the Erratum are singular at the origin (because this is where we have put the singularities). See our comments to M. McIver.

References

- [1] Bessho, M., 1963. "Wave-free distribution and their applications", in *Proc. of the International Seminar on Theoretical Wave-Resistance, in Ann Arbor, pp.891-906*.
- [2] Bessho, M., 1965. "On the wave-free distribution in the oscillation", *Zaosen Kyaokai, 1952-1967, Vol. 117, pp. 127-138. (In Japanese)*.
- [3] Kyozuka, Y. & Yoshida, K., 1981. "On wave-free floating-body forms in heaving oscillation", *Applied Ocean Research, Vol. 3, No 4, pp. 183-194*.
- [4] Matora, S., & Koyama, T., 1966. "Wave excitationless ship forms", in *Proc. 6th Symp. Naval Hydrodynamics, pp. 383-413*.
- [5] Ursell, F., 1949. "On the heaving motion of a circular cylinder on the surface of a fluid", *Quart. Journ. Mech. and Applied Math., Vol. II, Pt. 2, pp. 218-231*.
- [6] Ursell, F., 1949. "On the rolling motion of cylinders in the surface of a fluid", *Quart. Journ. Mech. and Applied Math., Vol. II, Pt. 3, pp. 335-353*.
- [7] Ursell, F., 1961. "The transmission of surface waves under surface obstacles", *Proc. Camb. Phil. Soc., 57, 3, pp. 638-668*.
- [8] Yim, B., 1963. "On ships with zero and small wave resistance", in *Proc. of the International Seminar on Theoretical Wave-Resistance, in Ann Arbor, pp. 1033-1079*.
- [9] Yim, B., 1966. "Analyses on bow waves and stern waves and some small-wave-ship singularity systems", in *Proc. 6th Symp. Naval Hydrodynamics, pp. 681-701*.
- [10] Wehausen, J.V., Laitone, E.V., 1960. "Surface Waves", In *Handbuch der Physik, 9, Fluid Dynamics III, 446-778 (Flugge, S., Truesdell, C., Eds., Springer Verlag, Berlin, 815 pp.)*

Title of Abstract : On the generation of wave free oscillatory bodies and of trapped modes

Author(s) : E. Fontaine and M.P. Tulin

Discussor : F. Ursell

Questions/comments:

Many years ago, in 1949, I considered (see [6]) certain two-dimensional bodies rolling in the free surface of a fluid. The region outside the body in the z -plane was transformed into the outside of a semi-circle in the ζ -plane by a conformal mapping of the form

$$z = \zeta + \frac{a_1}{\zeta} + \frac{a_3}{\zeta^3} + \dots,$$

where the mapping contains only a finite number of terms. Under such a mapping the free-surface condition in the ζ -plane no longer has constant coefficients, but I found that an infinite set of odd wave-free potentials could still be constructed (just as for the semi-circle), and that each such potential contains a finite number of terms. The potential due to the rolling motion then consists of a wave dipole together with an infinite sum of wave free potentials. For certain mappings the cross-section was ship-like, and the coefficients in such a mapping could be chosen so that the wave dipole was missing at zero frequency. A similar calculation at sufficiently slow frequencies would give a slightly different cross-section which does not generate waves in rolling at that frequency.

Author's reply:

Thank you very much for pointing out your pioneering work on wave-free rolling bodies ([6]).

Title of Abstract : On the generation of wave free oscillatory bodies and of trapped modes

Author(s) : E. Fontaine and M.P. Tulin

ERRATUM

For the case of roll motion, equation (10) should be replaced by

$$\Psi = \alpha \left(\frac{1}{z^3} + \frac{i}{2z^2} \right) \Re(e^{i\tilde{t}}) \quad (10)$$

Examples of shapes of wave-free roll oscillating bodies are presented in fig. 1, replacing fig. 5 and 6 of the paper. For $\tilde{\Omega} = 0$ shapes are shown in fig. 2, replacing fig. 7 of the paper.

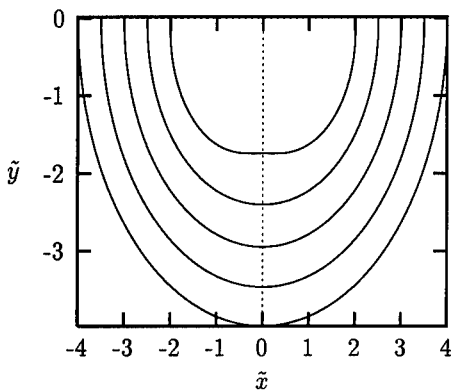


Figure 1: Roll motion. One parameter family of wave free flat bottom bodies for $\tilde{\Omega}_0/\alpha = -1$.

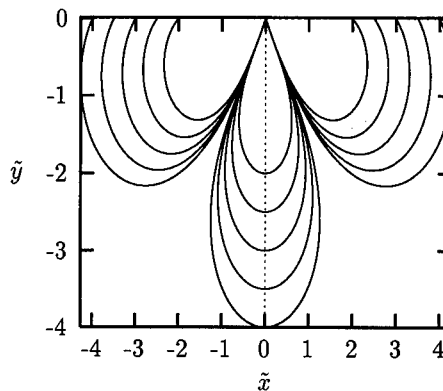


Figure 2: Roll motion. One parameter family of shapes for $\tilde{\Omega}_0/\alpha = 0$.

Title of Abstract : Modeling of instabilities of oil containment systems by a vortex sheet method

Author(s) : S.T. Grilli and Z. Hu

Discussor : E. Palm

Questions/comments:

Why do you introduce a kind of viscosity in your problem and choose it such that the circulation ($d\gamma/dt = 0$) is conserved?

Author's reply:

The physics of this problem shows that boundary layers occur on both sides of the interface/vortex sheet between oil and water. Within the potential flow approximation there is no viscosity and hence, no boundary layers and the velocity takes a finite jump in the interface. The equivalent friction term included gives a measure of the dissipation resulting from viscosity in the boundary layers, and of the diffusion of the velocity jump into a smoother variation.

Now, based on laboratory experiments, we see that for some non-critical velocities, the mean shape of the oil slick is stable as a function of time. Hence, no new circulation should be created as a function of time for such cases and the friction distribution is selected such as this is the case in the model.

Velocity is then increased and the interface shape changes in time.

Title of Abstract : Modeling of instabilities of oil containment systems by a vortex sheet method

Author(s) : S.T. Grilli and Z. Hu

Discussor : W. Schultz

Questions/comments:

Your interpretation of Krasny is different than mine. I feel he convincingly showed that the K-H problem developed a singularity at finite time. Then he, like you, could only progress past this singularity by regularization caused by discretization. Hence, I would call this numerical stability rather than numerical instability. Have you examined conserved quantities during the roll-up? I doubt you can compute this roll-up with desired accuracy.

Author's reply:

In my recollection of Krasny's paper, I think he used only piecewise-constant approximations for the vortex sheets whereas, in the present study, we showed that, the hypersingularity of Biot-Savart equations must be more accurately represented and integrated. When this is done and higher-order methods are used, we showed that second-order tangential derivatives were needed to express the singularities and hence, must be both continuous and accurately calculated at the singular point.

Thus, my interpretation of Krasny's paper is, within the same approximations as his (i.e. piecewise-constant etc.), I agree with his results but, when the more accurate present method is used, numerical results stay accurate during strong roll-up of vortex sheets. (This can be shown by tracking conservation of mass and energy in a model.) In the present calculations, no "regularization of the discretization" was required although, due to intense roll-up, nodes were added and regridded to constant interval, every few time steps, to maintain sufficient resolution of the discretization. This, however, does not consist in smoothing (or regularization) but just in a re-interpolation of the solution at a given time.

Title of Abstract : Influence of the steady flow in seakeeping of a blunt ship through the free-surface condition

Author(s) : H. Iwashita

Discussor : X.-B. Chen

Questions/comments:

If I understand well, you mean that GFM predicts better hydrodynamic coefficients (added mass and damping) than RPM which, on the other side, has the advantage of being able to take into account of steady flow (double-body flow) effects through the free-surface condition. Is it true that the best way is to develop a method which is based on the free-surface Green function and can take account of double-body flow effects within the free-surface condition?

Author's reply:

"Yes" if possible. The theory itself has been presented by Kashiwagi already. But any numerical results have not been presented yet, because of the numerical difficulty concerning the evaluation of the Green function on the free-surface.

Title of Abstract : Influence of the steady flow in seakeeping of a blunt ship through the free-surface condition

Author(s) : H. Iwashita

Discussor : R.C.T. Rainey

Questions/comments:

I pointed out last year that your work is relevant to the design rules used in ship design. In particular, you could compare with the I.A.C.S. longitudinal strength rule [1], which I believe to be non-conservative. For example, if you consider regular waves of height/length ratio 1/10, as I suggested last year [2], you will find shear forces near the bow well in excess of the I.A.C.S. rule, I suspect. This would be a most interesting finding from your work.

[1] Nitta, A., Arai, H. and Magaino, A.: "Basis of the I.A.C.S. unified longitudinal strength requirement", J. Marine Structures, 1992.

[2] Faulkner, D. and Williams, R.: "The design for abnormal waves". Discussion by R.C.T. Rainey. Naval Architects. Vol. 139, 1997.

Author's reply:

Your suggestion is very interesting from the practical point of view and I would like to try if I can get the detail data for the comparison. I however suspect that the steepness 1/10 of the wave seems to be a little larger value than that usually applied in the linear theory. All the experiments in my presentation have been performed using incident waves of the steepness 1/50.

Title of Abstract : Influence of the steady flow in seakeeping of a blunt ship through the free-surface condition

Author(s) : H. Iwashita

Discusser : K. Takagi

Questions/comments:

Your free-surface condition does not guarantee the radiation condition, when τ is less than $1/4$. Therefore, some problems may happen in the case of following sea or at the bow near field in which the local steady inflow becomes very small and local τ becomes less than $1/4$. I would like to know your opinion on this point.

Author's reply:

I am understanding it quite well. So we concluded that the application of the present method should be limited only for $\tau > 0.5$ from the practical point of view.

Title of Abstract : Wave decay characteristics along a long array of cylindrical legs

Author(s) : H. Kagemoto

Discussor : D. Evans

Questions/comments:

You might expect to have large forces on the centre cylinders in your 3×20 array at the trapped mode frequencies corresponding to three cylinders on the center-line of a channel. R. Porter and I have solved this problem for any number of cylinders on the center-line of a channel (Evans and Porter, J. Fluid Mech. 1997). In general these are N trapped modes each having its own distinctive frequency when there are N cylinders on the center-line.

Author's reply:

Thank you for letting me know your work. The array what I have in mind as a final goal is somewhere around several hundreds by several hundreds arrays which may be used for supporting legs of a future VLFS (very large floating structure). Therefore there should be a huge number of trapped modes in a fairly narrow range of wave period.

Title of Abstract : Wave decay characteristics along a long array of cylindrical legs

Author(s) : H. Kagemoto

Discussor : M. McIver

Questions/comments:

How do the calculations change when you consider 59 legs rather than 60 legs?

Author's reply:

Since '59' is a prime number, I first expected that only one trapped mode could appear and therefore a drastic change occurs compared to an array of 60 legs. However, it turned out to be not the case. Because, for example, $59=29+30$ and the trapped mode period for 29 cylinders and that for 30 cylinders are so close that they are practically identical, 2-peak mode appeared at the period and thus no drastic change occurred.

Title of Abstract : Wave decay characteristics along a long array of cylindrical legs

Author(s) : H. Kagemoto

Discussor : J.N. Newman

Questions/comments:

I discussed the variation of amplitude, with similar explanations, at the special Weinblum Session after the last Workshop. This was intended to explain the oscillatory behaviour, as a function of k , below the primary peak.

Do you think these peaks are significant in a realistic ocean spectrum?

Author's reply:

Thank you. I did not know that. I would be pleased if you could give me some written material about your lecture.

Since it is a linear phenomenon and since the trapped-mode periods will be well within the relevant wave period of a realistic ocean spectrum, they should still be significant even in an irregular multi directional wave train. In reality, however, the story may be somewhat different because large steep waves may be damped due to breaking or viscous dissipation.

Title of Abstract : Unsteady bow wave field and added resistance of ships in short waves

Author(s) : S. Kalske

Discussor : A.A. Korobkin

Questions/comments:

What are the conditions for the eikonal equation and the transport equation at the points, where rays reflect from the ship surface?

Author's reply:

At those points the zero normal velocity condition is satisfied in the horizontal xy -plane. This implies that the eikonal function of the reflected ray is equal to the eikonal function of the incident ray there. Moreover, the amplitude function does not change in reflection, because complete reflection is assumed.

Title of Abstract : Unsteady bow wave field and added resistance of ships in short waves

Author(s) : S. Kalske

Discussor : K. Takagi

Questions/comments:

The most important parameter on the added resistance in waves is not only the reduced frequency τ but also the Froude number, since the Froude number plays an important role on the formation of steady bow waves which affect on the added resistance. You should be careful about the difference of the Froude number when you compare numerical results with experimental ones. This is my comment.

Author's reply:

The Froude number value is given within all results concerning added resistance or wave elevation. Reduced frequency τ is used only as an additional parameter because both wave length and advance speed effects are included in τ in a convenient way.

Title of Abstract : A new direct method for calculating hydroelastic deflection of a very large floating structure in waves

Author(s) : M. Kashiwagi

Discussor : R. Eatock Taylor

Questions/comments:

Your transformed stiffness matrix can be obtained directly from the expression for strain energy in the plate. As you say, the free edge boundary conditions are taken care of implicitly. From this starting point I have found that one can obtain a Green function for the elastic deformation of a free-free plate in terms of appropriate products of sinusoidal functions and the rigid body modes. Convergence seems to be good, even for points near the edges of the plate.

Would this be a suitable alternative for use in your direct method, possibly exploiting the efficiency of the FFT to obtain the coefficient matrices of the coupled equations?

Author's reply:

I notice the equivalence between the transformation of the stiffness matrix by partial integrations and the use of variational principle to the expression of the strain energy. I think appropriate products of sinusoidal functions or other orthogonal mathematical functions can be an alternative in the direct method. However, since I have used the B-spline expressions for the pressure in the mode-expansion method, it was easy and simple to use the same form of expression for the deflection in the present method.

Title of Abstract : A new direct method for calculating hydroelastic deflection of a very large floating structure in waves

Author(s) : M. Kashiwagi

Discusser : S. Zhang

Questions/comments:

In your direct method, how do you deal with inertia forces/moments associated with rigid body motions. These forces/moments are automatically removed in modal superposition method but not in the direct method you just presented.

Author's reply:

Validity and accuracy of the new direct method have been checked in various ways, including the comparison with the nodal superposition method (which is referred to as the mode expansion method in the present paper). I could confirm very good agreement between the two, and of course the mode expansion method is also validated for each of the modes through the energy conservation principle, Haskind relation, and numerical convergence with increasing the number of panels. Not only numerically but also analytically, the equivalence of the direct method with the mode expansion method can be shown, more details of which are described in the paper to be presented at OMAE '98 Conference in July. Therefore I do not think there is a problem in the new direct method.

Title of Abstract : A finite-depth unified theory of ship motion

Author(s) : Y. Kim and P.D. Sclavounos

Discussor : J.A.P. Aranha

Questions/comments:

Just to observe that the heuristic formula you have used is correct just at the high frequency limit where, apparently, you found a larger error.

Also, at this high frequency limit, the difference between the problem you solved and the one where the body is fixed in waves, should be irrelevant. For this latter problem I observed a close agreement between Grue's result and the high frequency limit.

Author's reply:

No comment.

Title of Abstract : A finite-depth unified theory of ship motion

Author(s) : Y. Kim and P.D. Sclavounos

Discussor : J. Grue

Questions/comments:

First a comment: Your results for the far-field amplitude of the scattered waves seem to compare well with 3D calculations based on panel methods. Since wave drift forces and wave drift damping forces can be expressed in terms of the far-field amplitudes, one should expect that the averaged forces should compare well with 3D panel methods.

Then two questions:

1. I have found for a floating ship that the effect of a finite depth of the water is not pronounced unless the gap under the ship is much smaller than the draught. What is your experience?
 2. Did you evaluate wave drift damping using your method?
-

Author's reply:

1. The effect of water depth is important in low frequency range. In particular, the hydrodynamic coefficients are sensitive to water depth. Some figures are shown to observe the depth effects on the hydrodynamic coefficients and motion RAOs. The ship model is parabolic hull with beam/length=0.15 and draft/length=0.1. As shown in these figures, the hydrodynamic forces are very sensitive to water depth (figure 1,2), while the motion RAOs show some difference when the depth is very shallow (figure 3).
2. Aranha's formulae were applied to compute the wave drift damping coefficients, and the results are shown in figure 4 and 5. The ship model is Ship1 which Finn and Grue (1998) have applied. In the figure 4, the ITTC spectrums are also plotted in order to see the frequency range of real ocean waves. Here, the ship is assumed to be 100m long. According to these result, Aranha's formulae may provides a reasonable approximation in the frequency range of real ambient waves. Besides the exactness of Aranha's formulae, that's what we found.

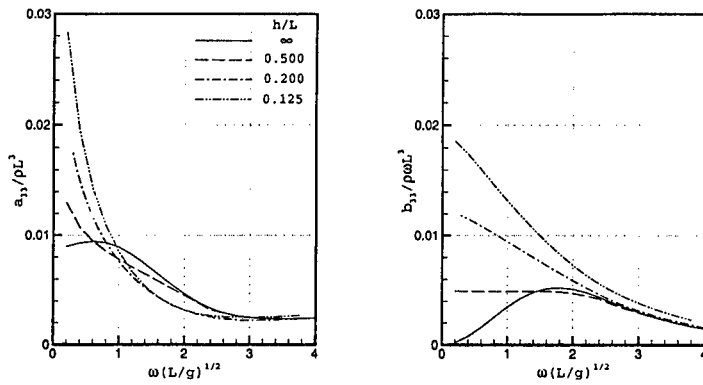


Figure 1: Effects of water depth on the heave added mass and damping coefficient: parabolic hull

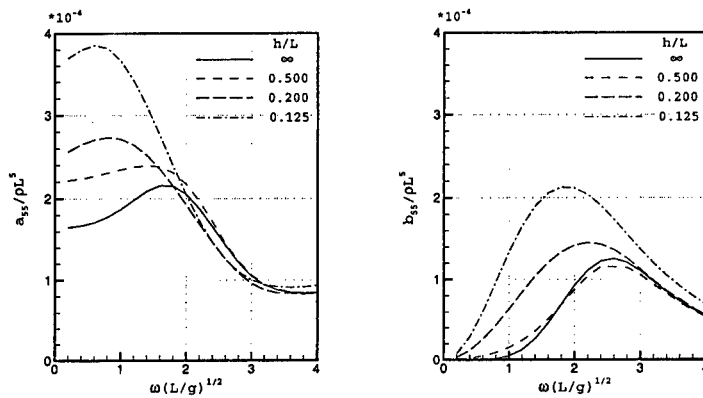


Figure 2: Effects of water depth on the pitch added mass and damping coefficient: parabolic hull

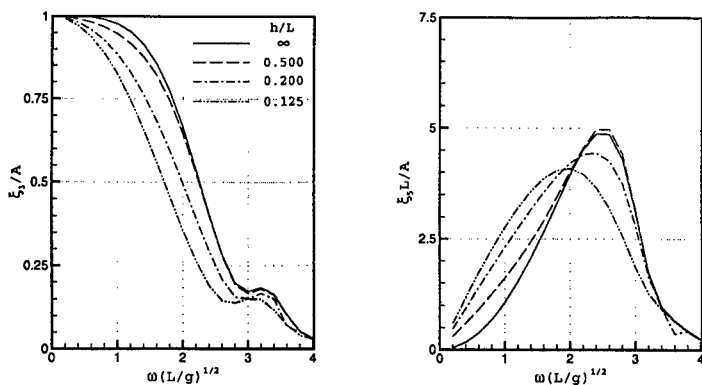


Figure 3: Effects of water depth on the heave Pitch RAOs (magnitude): parabolic hull, $\beta = 180^\circ$

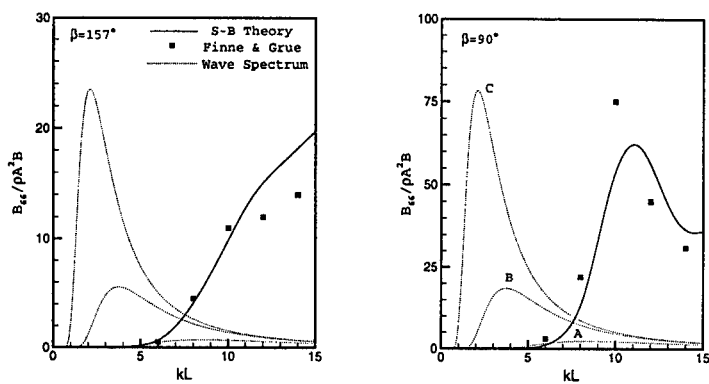


Figure 4: Yaw wave drift damping coefficients, B_{66} , and ITTC wave spectrum for $L = 100m$; ship1, infinite depth, $\beta = 157^\circ$ (left) & $\beta = 90^\circ$ (right), $H_s/L = 0.022(A)$, $0.05(B)$, $0.089(C)$, $T_m(g/L)^{1/2} = 1.35(A)$, $2.51(B)$, $3.35(C)$

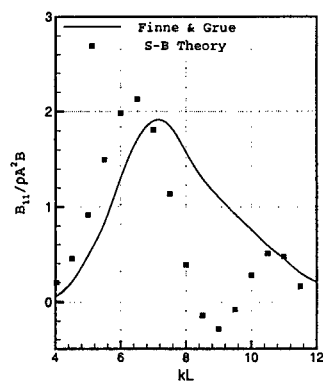


Figure 5: Surge wave drift damping coefficients, β_{11} : ship1, infinite depth, $\beta = 180^\circ$

Title of Abstract : A finite-depth unified theory of ship motion

Author(s) : Y. Kim and P.D. Sclavounos

Discussor : M. Kashiwagi

Questions/comments:

Concerning figure 4 of the longitudinal drift force, is it correct that the computations by WAMIT include the surge contribution and the results by the unified theory does not? I think even in the framework of the unified theory the bow diffraction component in the x -axis can be included, which would give a remarkable improvement in the drift force.

Author's reply:

In our computation, we did not include the surge motion, and neither for WAMIT. As you pointed, for a big ship which has a blunt bow, the surge contribution may be important. The ships for this study are slender so that the surge motion is weakly coupled with other motions. Recently, we obtained the surge motion RAO using an approximated method. We assumed the same added mass with an equivalent spheroid and only Froude-Krylov force is considered for the wave excitation. We found that this approximation provides a quite reasonable result for motion RAOs.

Title of Abstract : A finite-depth unified theory of ship motion

Author(s) : Y. Kim and P.D. Sclavounos

Discusser : B. Molin

Questions/comments:

You showed a figure giving the drift force at different waterdepths. It looked as though the drift force was decreasing when decreasing the waterdepth. This is opposite to my experience of the problem.

Author's reply:

It is very interesting that our result shows the less drift force when the water depth is finite. I think it depends on a ship. Probably the ships applied to our computation have a different trend with that of yours. I checked the results of WAMIT, and both results are shown in the figure.

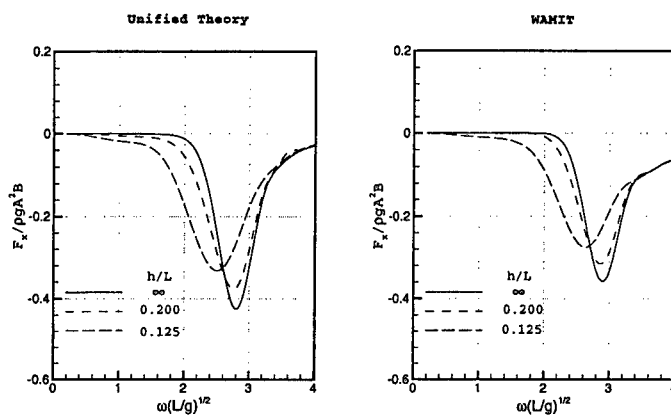


Figure 1: Effects of water depth on the mean drift force: parabolic hull, longitudinal force

Title of Abstract : Long time evolution of gravity wave systems

Author(s) : M. Landrini, O. Oshri, T. Waseda and M.P. Tulin

Discussor : M.W. Dingemans

Questions/comments:

You said that only waves propagating in 1D are considered (planar waves). Does that mean that only three-wave interaction is considered, not four-wave interaction, because for the latter case not all components can travel in the same direction to get resonance.

Author's reply:

Kinematic (resonance) conditions for the four-wave interaction of deep water gravity waves is $\vec{k}_1 + \vec{k}_2 = \vec{k}_3 + \vec{k}_4$, $\omega_1 + \omega_2 = \omega_3 + \omega_4$, where \vec{k}_i, ω_i satisfy the dispersion relation. Benjamin-Feir instability is a degenerate case where three collinear waves (the carrier and the two sidebands) interact. The carrier wave is counted twice in the resonance condition, and thus there will be a slight mismatch in the frequency resonance condition. The combination of this resonant detuning and the amplitude dispersion are the essential ingredients of the Benjamin-Feir instability of Stokes wave (Phillips 1967).

Title of Abstract : Long time evolution of gravity wave systems

Author(s) : M. Landrini, O. Oshri, T. Waseda and M.P. Tulin

Discusser : S. Grilli

Questions/comments:

What kind of incident waves did you specify in both of your models and laboratory experiments? In the laboratory, a monochromatic finite amplitude wave is known to rapidly decompose into higher-harmonics, through nonlinear resonant interactions. This decomposition is similar to the one you identify as solely due to side band instabilities. In fully nonlinear models, numerically exact stream-function waves can be shown to propagate without noticeable decomposition, for a long time. Second order wave generation in the laboratory also helps in limiting wave decomposition. So, when do true side band instabilities really occur?

Author's reply:

Benjamin & Feir side band instability is a nonlinear 'resonant' interaction (four-wave interaction). In experiments with monochromatic input at the wave-maker, most of the higher harmonics are created through 'non-resonant' nonlinear interactions and possible spurious harmonics due to the wave-maker itself. These 'non-resonant' interactions are relatively fast but, being 'non-resonant', in principle they don't grow in time (at least within a weakly nonlinear analysis).

What you called 'true' resonant interactions, that are those interactions satisfying the kinematic conditions to get resonance, are relatively slow. A four-waves resonant interaction takes a time $\mathcal{O}((\omega ka)^{-2})$ to develop.

Within this time scale, we have observed numerically that similar spectral evolutions were obtained regardless of the small difference in the initial conditions: carrier plus side bands, Stokes wave plus side bands or more complex sets of free and bound waves gave rise qualitatively to the same resonant evolution. It is important, however, to allow for the evolution of the desired side bands for comparison purpose, and for that we have seeded all the cases discussed in the abstract.

Title of Abstract : Long time evolution of gravity wave systems

Author(s) : M. Landrini, O. Oshri, T. Waseda and M.P. Tulin

Discussor : R.C.T. Rainey

Questions/comments:

Are conventional techniques for generating irregular waves in model basins unrealistic, in your opinion, because they give insufficiently many breaking waves?

Author's reply:

The experience presently reported is about 'regular waves' seeded with side band perturbations. It is different from an 'irregular wave' systems where the breaking occur randomly in both space and time.

Some recent oceanographic observations (by using radar) do show a more regular breaking pattern, but further study is required to answer which is more 'realistic' in terms of oceanographic grounds.

Title of Abstract : Long time evolution of gravity wave systems

Author(s) : M. Landrini, O. Oshri, T. Waseda and M.P. Tulin

Discussor : W.W. Schultz

Questions/comments:

Our computations of NLS show the same growths and recurrence when only one side band is excited. Have you tried this in your fully nonlinear computations or experiments?

Author's reply:

Benjamin (1967) has reported an experimental result starting with only a single mode present initially, and observed that the other mode would be produced by the subsequent nonlinear interaction. We observed a similar behavior numerically. This can be grossly explained in this way. Non-resonant interaction of the carrier k_c with itself creates the $2k_c$ components. After that, resonant interaction with one of the two side bands creates the other one.

Title of Abstract : Experiments on the ringing response of an elastic cylinder in breaking wave groups

Author(s) : C. Levi, S. Welch, E. Fontaine and M.P. Tulin

Discusser : R.C.T. Rainey

Questions/comments:

This is a splendidly clear demonstration of a crucial point which was suggested, but by no means proved, by our 1994 experiments in focused waves [1] - namely that the waves have to be DEFORMED to produce ringing. This view was originally expressed by the designers of the Heidrun and Draugen offshore platforms, on which "ringing" first emerged as a serious problem during routine model tests in 1992. There it was observed that the waves which caused "ringing" were SHARP CRESTED. As well as the authors' ref. [2], see for example [3] where it is stated that "the waves are steep and highly non-linear" or [2] where it is stated that "experiments in Norway have shown that ringing is produced by exceptionally steep waves, where a sharp wave crest forms".

The authors are also the first to demonstrate (although perhaps less conclusively), that an even worse case is when the wave actually BREAKS. To my knowledge, breaking waves were not seen in the Norwegian experiments, but this may be because the waves were, on average, much less steep. For example, the steepest large waves anyone has measured in the North Sea (and thus the steepest waves used in model tests), to my knowledge, had a peak period of 15.0s and a significant height of 13.8m [4]. Had these been produced by natural evolution from regular 15.0s waves, these waves would (by energy conservation) have had a height of $13.8/1.414 = 9.76\text{m}$. With their wavelength of $1.561 \times 15 \times 15 = 351.3\text{m}$ they would thus have had a steepness ak of $(9.76/2)(6.283/351.3) = 0.087$. This is very much less than the value $ak = 0.20$ given in Figure 2 for the regular waves used as the source of the authors' breaking waves.

On the other hand, if I understand one of the other UCSB papers at this workshop (Landrini et al.) correctly, it could be that the Norwegian experiments were effectively too near the wavemaker to see breaking waves. This would be a sensational conclusion for the Norwegian oil industry - hence my question on that paper.

One might well ask what the full-scale experience of "ringing" has been. The trouble is that large, steep, waves appear to be very rare - in most winters none are reported on a typical North Sea platform, for example. One of the few documented cases of "ringing" was the large "ring" seen in early 1987 on the test rig in Christchurch Bay in the UK (which incorporated a vertical cylinder 0.5m diameter with natural period 0.59s, in 9m water depth), and documented in [2]. Unfortunately, the only wave data ($H_s = 1.38\text{m}$, $T_z = 3.2\text{s}$) was from a nearby wave buoy, so the details of the wave responsible are not available. However, it is shown in [2] that although the "ring" cannot be predicted using a smooth-crested regular wave model, it can be predicted using a sharp-crested wave of the simple form proposed in [5] by Longuet-Higgins (viz. a logsec surface profile, with a

sharp 120 degree crest). This is very close to the message of this present workshop paper. I am incidentally not clear why the authors are so against that simple Longuet-Higgins wave form, which is certainly a convenient "design wave" from a practical point of view. The 120 degree sharp crest was after all proposed by Stokes on the basis of his boyhood observations of waves off the Giant's Causeway in Northern Ireland, vividly described in [5].

Author's reply:

Thank you for your kind remarks and for your very useful discussion of "ringing" events going back to 1987. It is interesting to note in passing that the situation of the testing in Christchurch Bay is very close to a prototype of our model experiment, with a model scale ratio of about 1/4 and for the case $f_n/f_w = 4.3$, which follows from hydroelastic scaling. For that case, the measured acceleration in our experiments are within the range 0.12g to 0.23g, thus very close to those shown in Fig. 3 of your paper. With regard to the steepness, in fact we have carried out experiments for the range ak_0 from 0.12 to 0.28, as noted in our first page, all producing ringing down to the lowest ak_0 tested. We simply were not able to report all this data in the space available.

Regarding the observation of Sir George Stokes, I refer you for contrast to those of the famous Japanese woodcut artist, Hokusai, whose breaking wave with a concave front face and ominously plunging jet (with Mt Fuji in the background) is just right. We must admit though that Mt Fuji looks something like Stokes steepest wave. All humor aside, the real stuff on the shape of steep and high waves in deep water was given by Myrhaug & Kjeldsen in 1987, [9], who measured shapes in the North Sea very similar to those later reported by us [10] from numerical calculations of wave breaking in wave groups. They were asymmetrical waves with concave front faces, as also appear in our tank experiments with groups. These waves seem right for design purposes, as we pointed out in [11]. This suggestion is strongly supported by the wave tank observations of Davies et al, [7]: "Wave events associated with ringing have the following characteristics:

1. (They) usually include the largest crests in the seastate... .
2. They exhibit the strong wave asymmetries identified by Kjeldsen et al (1980), [8], and associated with breaking waves: that is they are generally preceded by a relatively shallow trough, and followed by a much deeper one. Such waves thus bear little resemblance to Stokes wave forms... .
3. Ringing events tend to be initiated by waves on the forward portion of the wave group, when such a crest encounter the leading column of the structure.
4. A spilling breaker that maintain form as it passes through the structure is probably the worst-case wave condition for a TLP, whereas the more infrequent deepwater plunging breaker may be the worst for a monotower structure."

Our observations here are remarkably supportive of these observations. Perhaps our most important result is the correlation of temporal loading with instantaneous wave slope. This means that any wave shape including sufficiently high slopes near the top, whether deformed or not can presumably result in ringing excitation. But shouldn't we use the wave shapes closest to those observed in nature, for design purposes?

References

- [1] Chaplin, J.R., Rainey, R.C.T. & Yemm, R.W. 1997 "Ringing of a vertical cylinder in waves" *J. Fluid Mech.* Vol 350, pp 119-147.
- [2] Rainey, R.C.T. & Smith, S.L. 1993 "Application of slender body theory and accurate wave kinematics to ringing calculations: a critique of the Morison-Wheeler methodology" *Proc. Seminar on Tensioned Buoyant Platforms* (ed. M. Patel, UCL Dept. Mech. Eng.). London: Bentham Press.
- [3] Jefferys, E.R. 1993 "A slender body model of ringing". Discussion by S. Grilli. *Proceeding of the 8th Workshop on Water Waves and Floating Bodies*, IMD Newfoundland.
- [4] Atkins, N., Lyons, R. & Rainey, R.C.T. 1997 "Summary of findings of wave load measurements on the Tern platform" HSE Report OTH 95 467. HSE Books, London.
- [5] Stokes, G.G. 1880 "On the theory of oscillatory waves. Appendix B" in *The Mathematical and Physical Papers of Sir George Stokes*, Vol. 1, pp. 225-228. Cambridge: University Press.
- [6] S. Welch, C. Levi, E. Fontaine and M.P. Tulin, 1998, "Experimental loads on a flexibly mounted vertical cylinder in breaking wave groups", *Proceedings of ISOPE'98*, Montreal.
- [7] K.B. Davies, S.J. Leverette and M.W. Spillane, "Ringing response of TLP and GBS platforms", BOSS'94, Boston-Ma.
- [8] Kjeldsen, S.P., Vinje, T., Myrhaug, D., Brevig, P., 1980. "Kinematics of Deepwater Breaking Waves", OTC.
- [9] Myrhaug, D. & Kjeldsen, S.P., 1987, "Prediction of occurrence of steep and high waves in deep water", *J. Waterway, Port, Coastal, and Ocean Engineering*, Vol. 113, No 2, pp. 122-138.
- [10] Tulin M.P., Yao, Y., Wang P., 1994. The simulation of the deformation and breaking of ocean waves in wave groups - BOSS'94 Boston-Ma.
- [11] Tulin, M.P., Yao, Y., Magnuson, A.K., 1996. The evolution and structure of energetic wind waves. *Proceedings of ISOPE'96*, Los Angeles, Ca.

Title of Abstract : Rapidly convergent representations for free-surface Green's functions

Author(s) : C.M. Linton

Discussor : A.H. Clément

Questions/comments:

Did you compare your method and the usual methods in terms of cpu time, in the parameter domain where both approaches work well?

Author's reply:

I have not yet made any detailed comparisons in terms of cpu time between these new representations and other existing methods. My representations involve certain integrals which need to be evaluated numerically. This is not a problem, but I have not yet attempted to write efficient algorithms for this part of the calculation.

In the region where the eigenfunction expansions work well, I simply set $a = 0$ and then my method and the eigenfunction expansion are identical.

Title of Abstract : Rapidly convergent representations for free-surface Green's functions

Author(s) : C.M. Linton

Discussor : N. Kuznetsov

Questions/comments:

John (1950) contains special asymptotic representation of Green's function valid when points are close to each other and to the free surface.

1. Did you compare your results with John's formula?
2. Is it possible to improve your calculations with the help of John's formula?

Author's reply:

I was unaware that John had done this and am grateful for the information.

Title of Abstract : Rapidly convergent representations for free-surface Green's functions

Author(s) : C.M. Linton

Discussor : W.W. Schultz

Questions/comments:

You had some parenthetical comments about significant figures in your tabular results for larger a values. Does this indicate a need for extended precision?

Author's reply:

My computations were based on the assumption that the terms L_n , $n \geq 2$, in (13) and (22) can be neglected. This is true provided a is sufficiently small. As a is increased there comes a point at which the magnitude of the neglected terms becomes significant and this is the reason for the reduced accuracy noted in the tables.

Title of Abstract : Numerical simulation of sloshing waves in a 3D tank

Author(s) : Q.W. Ma, G.X. Wu and R. Eatock Taylor

Discusser : V. Bertram

Questions/comments:

How would you treat strong sloshing with plunging breakers?

Author's reply:

The presented 3D FEM cannot deal with plunging breaks at present. In a related project our 2D code based on NS equation and VOF technique can deal with wave overturning and breaking.

Title of Abstract : Numerical simulation of sloshing waves in a 3D tank

Author(s) : Q.W. Ma, G.X. Wu and R. Eatock Taylor

Discussor : W.W. Schultz

Questions/comments:

The problem of vertical tank accelerations is called Farady Waves. There is extensive literature that I referred to in the Marseille Workshop (1997).

Author's reply:

We are grateful to Prof. Schultz for bringing our attention to extensive works on the Faraday Waves.

Title of Abstract : Uniqueness, trapped modes and the cut-off frequency

Author(s) : M. McIver

Discusser : N. Kuznetsov

Questions/comments:

The uniqueness theorem remains true for the boundary value problem having more general equation $\nabla^2\phi = \ell^2\phi$ ($\ell \geq 0$) instead of (1). The same proof leads to the following sufficient conditions of uniqueness: $K > \ell$; $(K^2 - \ell^2)^{1/2}h_{\max} \leq 1$. Since there is one cut-off frequency for the modified Helmholtz equation, introducing one more artificial cut-off frequency seems to be confusing.

Author's reply:

It is interesting that the analysis also works for the modified Helmholtz equation. I think that the existence of a cut-off frequency is a subregion in which $\phi = 0$ on the lower boundary is quite important when explaining why trapped modes occur. However I accept that the introduction of an artificial cut-off may be confusing for the modified Helmholtz equation as a genuine cut-off frequency exists for this problem.

Title of Abstract : Uniqueness, trapped modes and the cut-off frequency

Author(s) : M. McIver

Discussor : C. Linton

Questions/comments:

Is it true that your proof can be used to say things about the absence of frequencies at which $T = 0$ in scattering problems?

Author's reply:

Yes. I think this is the case although I have not done the analysis. If the transmission coefficient is zero then the potential will decay to zero at the appropriate infinity. It should be possible to show that a nodal line comes in from that infinity.

Title of Abstract : On the completeness of eigenfunction expansions in water-wave problems

Author(s) : P. McIver

Discussor : A.H. Clément

Questions/comments:

Another application of your theory is the modelization of the so-called "numerical beaches" which consist in limited portion of the free surface where dissipative terms are added to the standard linear condition. At a previous issue of the Workshop (Oxford 1995), I presented a numerical study of these absorbing conditions, and I observed that eigenfunction expansion is always achievable except in the vicinity of the double roots of the complex dispersion relation. Because the set of these double roots is known in advance once for all, numerical method can be adapted to avoid the problem which is local.

Author's reply:

It is interesting to learn of another application of this theory. My only comment is that, even away from double roots, the non-self-adjoint theory is required to establish the completeness of the eigenfunctions.

Title of Abstract : On the completeness of eigenfunction expansions in water-wave problems

Author(s) : P. McIver

Discussor : D. Evans

Questions/comments:

A number of papers in this Workshop involve elastic plates on the free surface where the dispersion relation is of the form

$$K - k(1 + Mk^4) \tan kh = 0$$

and the eigenfunction are non-orthogonal.
Do your theory apply to this case?

Author's reply:

The explicit convergence theorems that I am aware of apply only to cases when the order of the boundary differential operator is less than that of the differential equation involved. The application of the general theory to problems involving elastic plates would therefore require more work than that required for the problem considered here. It will be interesting to see if this can be done.

Title of Abstract : A procedure to remove secularity in third-order numerical wave tanks

Author(s) : B. Molin and Y. Stassen

Discussor : B. Büchmann

Questions/comments:

Can you comment on the application to bi-chromatic and irregular waves?

Author's reply:

This is a good point. We expect that there will be some difficulties in getting a function P that can accommodate the changes of wavelengths of the different components. Most likely our method must be restricted to narrow-banded waves.

Title of Abstract : A procedure to remove secularity in third-order numerical wave tanks

Author(s) : B. Molin and Y. Stassen

Discussor : M.W. Dingemans

Questions/comments:

Did you try to compare your results with results from the usual Stokes-type expansions?

Author's reply:

We tackle the problem in the time domain, when the wavemaker is started from rest and the wave front gradually advances over still water. When a regular wave system has got established in the tank, we should recover Stokes' third-order correction, that is P equal to X and Q equal to Y . This will serve as a check to our computations.

Title of Abstract : Non-uniqueness in the water-wave problem: an example violating the inside John condition

Author(s) : O. Motygin and N. Kuznetsov

Discussor : M. McIver

Questions/comments:

The bands in which uniqueness can be proved for bodies which satisfy the IJ condition, seem to be associated with frequencies at which sloshing occurs in rectangular containers. Do you think that for bodies satisfying some other condition (e.g. bodies which intersect the free surface at an angle of $\pi/4$ in the interior), you may be able to find other uniqueness bands, perhaps associated with some other sloshing problem?

Author's reply:

It is possible that other uniqueness bands could arise under other interior geometrical conditions. However, only a proof can give the answer whether these bands are related to any sloshing problem. Unfortunately, there is no such a proof at the moment. It should be added that we erroneously stated that the corollary is a consequence of the main theorem. Our examples of non-uniqueness do not imply that the IJ condition is necessary for uniqueness in $(\pi/2, \pi)$. To prove this one has to show, that there is no example of non-uniqueness for which the IJ condition holds and the Simon-Ursell condition is violated.

Title of Abstract : Non-uniqueness in the water-wave problem: an example violating the inside John condition

Author(s) : O. Motygin and N. Kuznetsov

Discussor : D. Evans

Questions/comments:

By using horizontal dipoles rather than sources, as used by M. McIver, is it true that you get points of arbitrarily small bodies enclosing singularity which display non-uniqueness?

Author's reply:

Yes, it is. This follows from the asymptotics of the streamfunction $v(x, y)$ near the singularity point $(\pm\pi/\nu, 0)$.

Title of Abstract : Hydrodynamic analysis of the McIver toroid

Author(s) : J.N. Newman

Discussor : X.-B. Chen

Questions/comments:

I guess the usual flat-panel-constant-source method might not be well adapted to study the resonance of this type due to the 'instability' as shown by Figure 4 for damping coefficients. Have you performed numerical tests by using your higher-order panel method? And what is the convergent behaviour of hydrodynamic coefficients?

Author's reply:

The computations presented here are based on the low-order panel method using the potential formulation, hence the potential (not the source strength) is constant on each panel. I would expect the higher-order program to produce more accurate solutions near the trapped wavenumber, for the same number of unknowns, but I have not performed any computations to confirm this.

Title of Abstract : Hydrodynamic analysis of the McIver toroid

Author(s) : J.N. Newman

Discussor : D. Evans

Questions/comments:

The variation in added mass is quite marked close to the trapped mode, in contrast to the damping and exciting force. Would you expect these large values of the added mass to arise in an experiment?

Author's reply:

Yes. Since the added mass varies substantially over a bandwidth of order one, I would expect this to be confirmed experimentally without any special difficulties.

Title of Abstract : Hydrodynamic analysis of the McIver toroid

Author(s) : J.N. Newman

Discussor : N. Kuznetsov

Questions/comments:

On Figure 4 (right) the damping graphs for different panelizations have opposite peaks. This shows that calculations are very sensitive with respect to small perturbations of the trapping toroid. It might be interpreted as instability of toroid's trapping property. Do you agree that the term 'instability' better describes the situation in a vicinity of eigenvalue than 'breaking' of numerical methods.

Author's reply:

First let me point out that the opposite peaks are for the same panelization of the body surface, using irregular-frequency removal in one case and not in the other. I think it is a mistake to attach too much significance to this. The 2D proof of M. McIver at the last Workshop can be extended to show in this 3D case that the heave radiation potential does not exist at the trapped wavenumber. This is reflected numerically in the fact that the linear system (for the potential on each panel) is very ill-conditioned, hence the errors in the numerical solution are greatly magnified. But I would agree with Professor Kuznetsov's suggestion that the numerical solution should be considered 'unstable' in this regime, and highly sensitive to geometric perturbations (e.g. different numbers of body panels).

Title of Abstract : Hydrodynamic analysis of the McIver toroid

Author(s) : J.N. Newman

Discussor : C.M. Linton

Questions/comments:

1. Did you find in your numerical calculations that the overall height of the spikes in the added mass and damping coefficients were the same, as predicted by your conjecture in equation (1)?
Incidentally this is the same conjecture as one that I made when studying the effect of trapped modes on the hydrodynamic characteristics of bodies in channels (Linton & Evans, JFM 1992, 'Hydrodynamic characteristics of bodies in channels').
 2. Have you ever previously encountered situations where WAMIT has produced negative damping coefficients?
-

Author's reply:

1. Since the numerical solutions break down within the narrow domain of the damping coefficient 'spike', one cannot expect the actual height of this to be consistent with (1). (The negative damping spike in Figure 3 is an obvious example of this.)
2. In my experience using WAMIT this is the only application where negative damping coefficients have been computed.

Title of Abstract : Hydrodynamic analysis of the McIver toroid

Author(s) : J.N. Newman

Discussor : R.C.T. Rainey

Questions/comments:

These beautiful computations barely need corroboration, but you have kindly given me the exact coordinates of the McIver toroid (the outer curve on the right of Figure 1, defined as 6828 points) so I am pleased to run our diffraction program AQWA-LINE (unchanged since 1982!) and confirm your answers.

Figure A below shows our panelisation with 3636 elements, which generates the results shown in Figure B, overlaid on those (with irregular frequencies) from Figure 3. The results are essentially the same - the most important difference is that the resonant wavenumber is underestimated by 2.28%, rather than 1.04%. This appears to be due to the relatively large circumferential spacing (10 degrees) of the innermost panels in Figure A - if this is reduced to 5 degrees (giving 4212 elements), the underestimate reduces to 1.25%. [On the other hand the minor (3%) difference in the results at high wavenumber, seen in Figure B, remains - this must be due to some other cause.]

The only question I have is on the interpretation above equation (1) - if the pole is above the real axis for all the discretised bodies, does that not imply that a homogeneous solution only exists for the EXACT McIver toroid? Is it not possible that homogeneous solutions may exist for a range of geometries, just as irregular frequencies do?

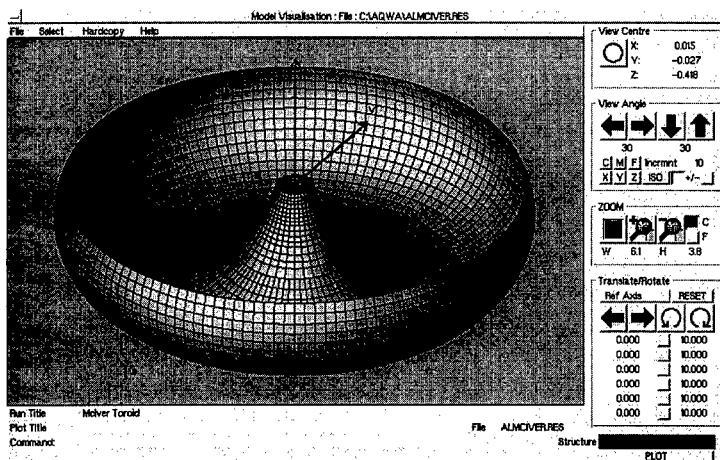


Figure A

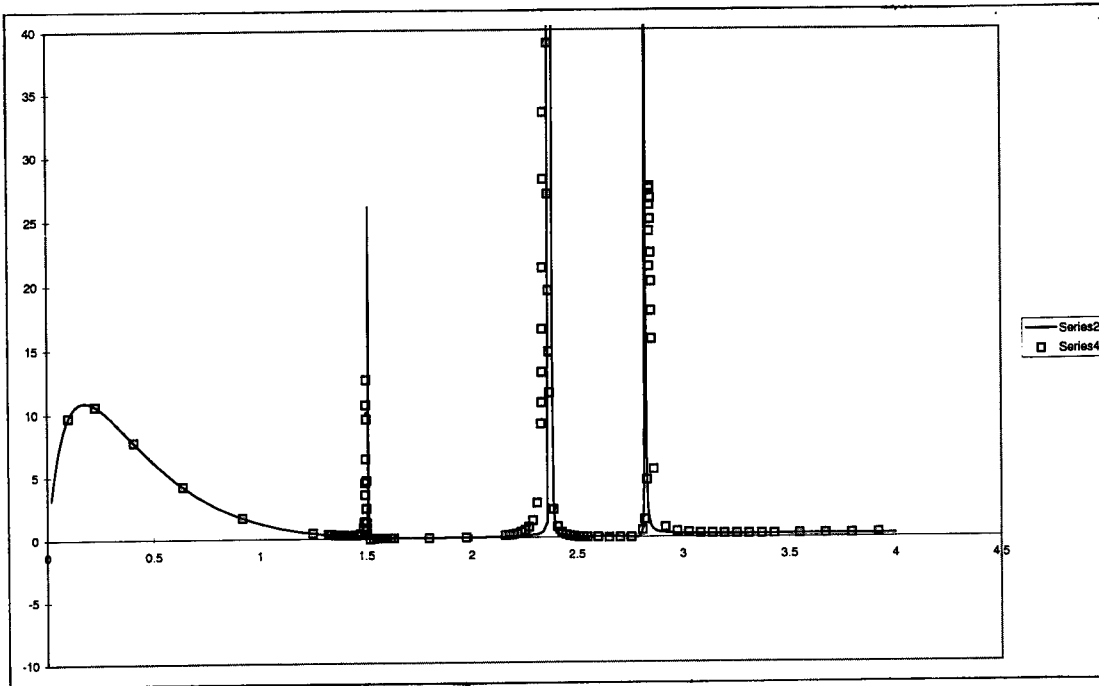


Figure B (Chart 1)

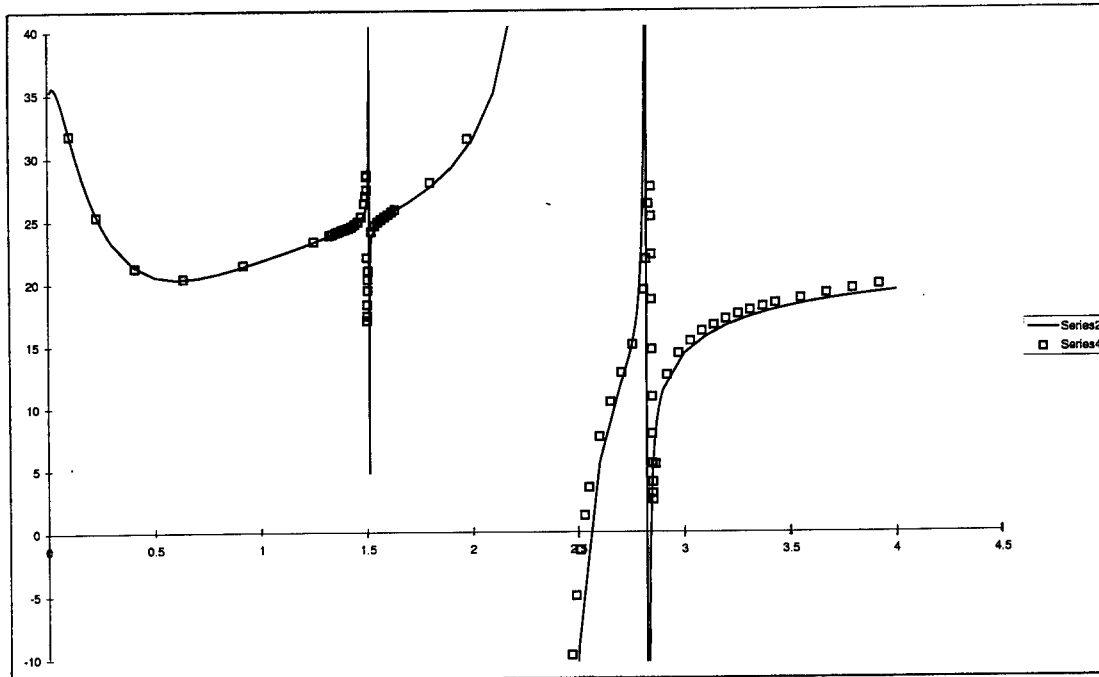


Figure B (Chart 2)

Author's reply:

Thank you for the compliment and confirmation. Regarding the question, I would expect that any perturbation from the exact McIver toroid geometry would correspond to a body where no homogeneous solution or trapped wave exists. This is the premise for my assumption that, for the discretized bodies we used for computations, the pole is just above the real axis. We do not know this rigorously, of course, but it would be especially remarkable if the (already remarkable) property of the continuous family of McIver toroids applied as well to a body of slightly different form. Empirical support for my assumption follows from the observations that, as the number of panels is increased, the trend of the hydrodynamic coefficients is consistent with the behaviour of (1) as $\epsilon \rightarrow 0$.

Title of Abstract : Hydrodynamic analysis of the McIver toroid

Author(s) : J.N. Newman

Discussor : S. Zhang

Questions/comments:

Your conclusion is derived based on the linear theory. Do you expect the phenomenon you predicted can be observed in experiments?

Since experiments involve all sorts of factors such as viscous effects, non-linear effects, etc. the resonance might not occur.

Author's reply:

Conventional moon pools have sharp corners at the opening and other devices which promote viscous damping; experiments indicate reduced resonance of the moon pools, over a broader bandwidth. I expect the same to be true here, although the smooth curvature and converging moon pool radius suggest that nonlinear effects may be more important than viscous damping. In any event, as indicated in my response to David Evans, I would expect to see some indication of the added-mass variations over a relatively broad band of wavenumbers.

Perhaps in addition due to the effects of viscous damping and nonlinearity, the 'spikes' of the other parameters would be more noticeable since a reduction of amplitude would imply a broader bandwidth.

Title of Abstract : Wave pattern analysis applied to nonlinear ship wave calculations
Author(s) : H.C. Raven and H.J. Prins
Discusser : R.F. Beck

Questions/comments:

Why did you not want to apply the momentum theorem directly? Since all velocities are known numerically, it is very little extra work as compared to the linear transversal cut analysis.

Author's reply:

In principle, wave pattern analysis is an elegant method, defining the wave resistance only in terms of the waves and requiring only surface values. We had not expected drawbacks like those we experienced. In hindsight it may as a matter of fact be more straightforward to define a control volume around the hull, generate a dense grid of points on it, compute the velocity induced by all panels and integrate the momentum flux. Perhaps we'll try it soon. To what extent the result then obtained will be free of numerical errors (e.g. an effect of an imperfectly closed hull panelling) is to be found out, but the accuracy will be more easily controlled than that of hull pressure integration.

Title of Abstract : Wave pattern analysis applied to nonlinear ship wave calculations

Author(s) : H.C. Raven and H.J. Prins

Discussor : S.D. Sharma

Questions/comments:

I agree that the application of linearised analysis to a nonlinear transverse wave would produce an apparent periodic variation of wave pattern resistance with increasing distance behind ship. But I am not happy about the very idea of using the less accurate computed far field when the near-field solution is available. There must be a better way of evaluating the pressure integral on the hull surface. If not, one could try to use Lagally's Theorem to compute the force on the hull sources. (Have the authors checked whether the net total source strength is zero?) The next best thing may be to do a momentum integral on a box shaped control surface quite close to the hull. If you do wish to exploit the far field, I propose using a transverse strip instead of a pair of cuts to avoid the need of a least squares analysis.

Author's reply:

A better way to integrate the pressure forces over the hull has been tried for a Dawson-type method in the past (H.C. Raven, Symp. Naval Hydrodynamics 1988). It showed that a higher order pressure integration instead of the simple summation over panels made no essential difference. Two formulations based on Lagally's theorem have then been tried, but both displayed a dependence on the hull panelling very similar to that of pressure integration. To what extent these conclusions carry over to the present nonlinear method is not sure. In any case, applying Lagally's theorem to the raised-panel form will require care but may be worth pursuing. For the momentum integral approach, see above. If we understand it correctly, the transverse strip approach means using the wave height and the longitudinal wave slope along a transverse line. It probably should display the same waviness that we found. The present least squares analysis (needed if we use more than 2 cuts) provides redundancy and permits to spread out the cuts, so it is a solution rather than the source of the problem.

Title of Abstract : Wave pattern analysis applied to nonlinear ship wave calculations

Author(s) : H.C. Raven and H.J. Prins

ERRATUM

The first formula on page 133 should read:

$$\eta = 1/2H_1 \sin x + 1/2H_2 \sin x - 1/8H_1^2 \cos 2x$$

Title of Abstract : Suppression of wave-breaking in nonlinear water wave computations
Author(s) : A.K. Subramani, R.F. Beck and W.W. Schultz
Discussor : E. van Daalen

Questions/comments:

In your abstract you state that the maximum values of the curvature (shown in Fig. 4) do not vary much with the node distribution. However, differences of the order of 30%-40% can be observed.

How does this affect the results?

Also, can you explain why you did this sensitivity study anyway?

Author's reply:

Firstly, we carried out the sensitivity study because it was in keeping with the general guideline that a grid convergence analysis accompany any new numerical investigation.

On the magnitude of the differences due to the node distribution: we admit that differences of that order cannot be categorically glossed over as minor, and we thank you for the correction and, consequently, this opportunity to make an important clarification. The basis for our glossing over the differences, nevertheless, was as follows: The crossing of the threshold value prescribed by the curvature-based criterion only serves as a trigger for the activation of the local absorbing patch. Differences in the estimation of the curvature would undoubtedly be responsible for a wider "error band" in figure 3, but given the sharp rise in the nature of the curve across the threshold value and that the present threshold value is already a conservative limit, the effect of the said differences on the results would be small. For waves that already satisfy the criterion comfortably, no additional damping would result because of the differences; it is only the waves that lie near the threshold value and which would otherwise not have satisfied the criterion that may be affected by the differences. Still, while the inclusion of unnecessary damping would result in slightly different waves, it may be seen as a trade-off for being able to suppress wave-breaking altogether.

Title of Abstract : Suppression of wave-breaking in nonlinear water wave computations
Author(s) : A.K. Subramani, R.F. Beck and W.W. Schultz
Discusser : M.W. Dingemans

Questions/comments:

1. In the presented approach, the goal seems to be suppress effects of wave-breaking in order to be able to proceed the computations. In coastal engineering wave-breaking analysis is primarily used to get an accurate estimate of wave heights.
2. In a recent paper (Dingemans, Otta and Radder, Proc. 25th ICCE, Orlando, 1996) an exact wave-breaking criterion was given which amounted to a criterion on the curvature of the wave.
3. I can not understand the physics behind the extraction of energy due to wave-breaking.

Author's reply:

We are intrigued by your comments, for: (a) Our goal is much the same – to obtain accurate estimates of wave heights (and also wave-resistance); it is just that most methods for computing water waves cannot provide such estimates without suppressing any wave-breaking that occurs; (b) Otta et al. (1996) – in the article that you cite – also talk (although, with little exposition) of the modelling of post-breaking behavior in a way whose "effect is to reduce the crest height and the surface steepness with an associated dissipation of energy".

The physics behind the extraction of energy in our model is simple: we extract energy locally from the fluid by causing it to work against an additional, external pressure. We readily admit that the amount of energy thus extracted is not yet determined by any physical reasoning. We hope to fine-tune the actual energy dissipation associated with wave-breaking as displayed experimentally in Schultz, Huh, and Griffin, (J. FLUID MECH. 278:201-228, 1994).

Lastly, as previously mentioned, there are many criteria for the incidence of wave-breaking. Thank you for bringing yours to our attention. However, we would be hard-pressed to call any of them "exact". We cannot conclusively state whether one criterion is better than the other until an exhaustive comparative study has been performed. Such a study would be useful indeed.

Title of Abstract : Suppression of wave-breaking in nonlinear water wave computations
Author(s) : A.K. Subramani, R.F. Beck and W.W. Schultz
Discussor : H.C. Raven

Questions/comments:

Your paper mentions that you intend to apply similar techniques to steady ship wave pattern calculations. Applying an artificial pressure could work there as well, and has, if I recall correctly, been done (for 2-D submerged foils) by Coleman et al some 10 years ago. However, it appears to me that your criteria for the occurrence of wave-breaking have been derived mainly for ocean waves.

Do you have an idea to what extent they can be used to (near-field) ship waves, or what else should be done?

Author's reply:

We are not aware of the work by Coleman et al., but would like to find out more about what was done. Preliminary observations of steep ship waves (such as the breaking wave at the stern) in our three-dimensional calculations suggest that a similar (if not identical) geometrical, curvature-based criterion as presented in the paper may be applied to such waves – with an estimate for wave number, k , coming from the wavelength based on Froude number. We also reason that the actual form of the damper (the P_{damp} term) would have to take into consideration forward speed effects. However, at this time, we are not sure of an appropriate form of the damper.

We reason that the breaking wave at the bow shoulder (from strip theory) is similar to spray generated off the wedge wavemaker in a two-dimensional tank. In our two-dimensional calculations, we have found the suppression of spray to require more damping than that of a steep, breaking wave (a P_{damp} that's about twice as large) and expect that a breaking ship wave would likewise require more damping than a breaking ocean wave, other things being equal.

Title of Abstract : Suppression of wave-breaking in nonlinear water wave computations

Author(s) : A.K. Subramani, R.F. Beck and W.W. Schultz

Discussor : S.D. Sharma

Questions/comments:

Would it not be more meaningful to use acceleration of the water particles as a criterion for impending wave-breaking?

Acceleration is more "physical" than curvature, which is purely geometrical, is more readily available in the numerical simulation, and perhaps also easier to apply in the more general 3-D case.

Author's reply:

We agree that the local acceleration is a useful criterion and that it is readily available from ϕ_t , but do not necessarily agree that it is more physical. Certainly acceleration and crest curvature occur hand-in-hand. We recognize that an exhaustive comparative study of the various wave-breaking criteria should be performed.

Title of Abstract : Free-surface evolution at the edge of an impulsively upwelling fluid layer

Author(s) : P.A. Tyvand

Discussor : E. van Daalen

Questions/comments:

Would it be possible to check the accuracy of your small-time approximation by calculating the mass and/or energy in the domain as a function of time? Also, I would like to point out that there seem to be much similarities between your problem and the impulsive wavemaker problem, for which small-time expansion analyses were carried out, among others, by Lin (1984) and van Daalen (1993).

Author's reply:

It is easy to show analytically that the first-order elevation takes care of the upwelling mass flux. So there is exact mass balance to the leading order. This means that all higher-order elevations should give zero when integrated from minus to plus infinity. I have not proven this analytically, but I have checked it numerically for the second-order elevation, with high accuracy. Since the mass balance seems to be satisfied identically, mass conservation does not offer any clues to the validity of our asymptotic series.

The energy balance is more difficult, because there is a singularity in the horizontal velocity at the edge $(x, y) = (0, 0)$. But I am more concerned about the momentum balance in this upwelling model: There exists a net momentum in the $-x$ -direction immediately after the impulsive start of an upwelling potential flow. The physical origin of this horizontal momentum is unclear, since there is no horizontal component in the force impulse imposed on the fluid layer from below.

Let me give my opinions on the similarities between the present upwelling problem and the wavemaker problem: The surface elevations are not similar. But there is a logarithmic singularity in each case. This singularity is different because it appears at the bottom in the upwelling problem and at the free surface in the the wavemaker problem. Another difference is that the singularity appears in the horizontal velocity for upwelling, but in the vertical velocity for the wavemaker. These singularities imply that the asymptotic solution represents only an outer expansion. So an inner expansion should be found to make the solution complete. For the upwelling problem, there is no singularity in the higher-order boundary value problems. This is in contrast to the wavemaker, where the singularity influences all higher-order solutions, since it appears at the free surface.

REFERENCES

- [1] Lin, W.-M. 1984 Nonlinear motion of the free surface near a moving body. Ph.D. thesis, Massachusetts Institute of Technology - Dept. of Ocean Engineering.
- [2] van Daalen, E.F.G. 1993 Numerical and theoretical studies of water waves and floating bodies. Dr. thesis, Twente University.

Title of Abstract : Free-surface evolution at the edge of an impulsively upwelling fluid layer

Author(s) : P.A. Tyvand

Discusser : W.W. Schultz

Questions/comments:

1. Your boundary conditions are periodic, but your first-order free surface elevation is not. Can you comment on the periodic extension?
 2. There still is a singularity at the bottom boundary. A more appropriate problem might release a vortex sheet at the velocity discontinuity. It would seem that this might effect the later time solutions that you calculate. Please comment.
-

Author's reply:

1. The periodicity is artificial, but it gives the opportunity to solve the full third-order problem exactly. In the first-order solution, however, we have an exact solution in the limit as L tends to infinity, and we do not need the periodic solution. Since there is exponential spatial decay in the first-order solution, the artificial periodicity works very well. To avoid the periodicity, the higher orders should be solved with a Fourier transform. This is not very practicable in this case, as some of the functions to be transformed do not tend to zero at infinity. As mentioned above, the conservation of horizontal momentum gives conceptual difficulties in the non-periodic case. In the periodic case the overall momentum balance is trivial.
2. The present solution seems to be legal as a mathematical solution of the inviscid irrotational upwelling problem. The discontinuity in the normal velocity along the bottom does not in itself generate any vorticity in the fluid. But there is a more severe singularity: The logarithmic singularity in the horizontal velocity at the edge. It was intended to pose a basically vertical throughflow at the bottom. However, the mathematical solution will have a horizontal flow component along the bottom, so that the upwelling flow will in fact be strongly oblique close to the edge $(x, y) = (0, -1)$. It is not clear to me how a vorticity generation at the edge could be formulated uniquely physically and consistently mathematically. But if we consider the fluid as viscous, we might specify zero tangential velocity along the bottom.

This may suggest a leading-order upwelling with an error-function velocity profile, describing diffusion of vorticity around $x = 0$ and otherwise uniform upward flow. It is far from obvious how to extend such a slightly viscous solution to higher orders, as there is no longer a velocity potential, and diffusion forbids an asymptotic Taylor expansion.

Title of Abstract : Analogies for resonances in wave diffraction problems

Author(s) : T. Utsunomiya and R. Eatock Taylor

Discussor : C.M. Linton

Questions/comments:

1. You claim that the real and imaginary parts of the determinant vanish at the same value of the wavenumber. To what level of accuracy have you checked this assertion?
 2. You showed a table in which you obtained the same wavenumber for trapped modes in a channel as Porter and Evans have obtained for Rayleigh-Bloch surface waves along an array of cylinders. I find this surprising, can you comment on it?
-

Author's reply:

1. The wavenumbers at which the imaginary part of the determinant vanish have coincided with those at which the real part at least five figures accuracy for all cases, and more accurate than six figures accuracy for most cases.
2. It is also surprising for us, since the Rayleigh-Bloch waves seem not to satisfy the same boundary conditions at their nodal lines of the modulated waves at the channel problems in which the Dirichlet or the Neumann B.C.s are applied along the straight lines. Further research is required to understand why such an agreement has been obtained.

Title of Abstract : Analogies for resonances in wave diffraction problems

Author(s) : T. Utsunomiya and R. Eatock Taylor

ERRATUM

Equation (7) is replaced by:

$$B_1^{j(r)} = \cos \frac{r(2j-1)}{2N} \pi, \quad 1 \leq j \leq N; 1 \leq r \leq N-1; N \geq 2, \text{ for Dirichlet B.C.}, \quad (7)$$

$$B_1^{j(r)} = 1, \quad 1 \leq j \leq N; r = N; N \geq 1, \text{ for Dirichlet B.C.}.$$

The second table is replaced by:

Table 2 Trapped wavenumber ks/π for Dirichlet boundary conditions.

Mode number	1/6	2/7	3/8	4/9	5/10
1 cylinder	0.977759(a)	—	—	—	—
2 cylinders	0.248370(s)	0.977759(a)	—	—	—
3 cylinders	0.166245(s)	0.328444(a)	0.977759(a)	—	—
4 cylinders	0.124830(s)	0.248370(a)	0.366671(s)	0.977759(a)	—
5 cylinders	0.0999145(s)	0.199238(a)	0.296807(s)	0.388389(a)	0.977759(a)
10 cylinders	0.0499896(s)	0.0999145(a)	0.149699(s)	0.199238(a)	0.248370(s)
	0.296807(a)	0.343958(s)	0.388389(a)	0.425783(s)	0.977759(a)

Title of Abstract : Experimental validation of a Rankine panel method

Author(s) : R. van 't Veer

Discusser : X.-B. Chen

Questions/comments:

1. What is exactly the approach you used to evaluate double derivatives of the double-body flow in your flat-panel-constant-source method?
 2. Do you check the precision of double derivatives? (A simple way to calculate accurately 6 double derivatives of the double-body flow was presented by X.B. Chen and Š. Malenica in the 11th IWWF in Hamburg, for your info.)
-

Author's reply:

Thank you for your interesting comment and reference to a previous workshop paper. The approach used in SEASCAPE was:

1. calculate the second derivatives close to the hull surface using the double gradient of the Green's function, we used three different points in the direction of the normal vector;
2. extrapolate the results to the hull surface. The approach can give reasonable results, but the accuracy is difficult to assess. Recently your approach has been implemented which is indeed accurate and simple and the method will be used in future calculations.

Title of Abstract : Experimental validation of a Rankine panel method

Author(s) : R. van 't Veer

Discussor : H.C. Raven

Questions/comments:

Just a more general remark on terminology. One point is that 'Neumann-Kelvin' refers to the problem with a Neumann condition on the body and a Kelvin FSBC. A 'Neumann-Kelvin FSBC' therefore does not exist, while being mentioned in many talks.

In your paper 'Neumann-Kelvin' actually means that the m -terms suppose uniform flow. It then comes as no surprise that double-body is better; but you say that including the free-surface steady potential would be still more complete.

Then, look in Iwashita's paper: he also compares m -terms from double-body and Neumann-Kelvin (Fig. 7 and 8), but his NK is the one including the free surface steady potential.

This illustrates the confusion that may result from imprecise shortent terminology.

Your comment is not required.

Author's reply:

No comment.

Title of Abstract : A waterfall springing from unsteady flow over an uneven bottom

Author(s) : W.C. Webster and X. Zhang

Discussor : S. Grilli

Questions/comments:

I am sure you are aware of fully nonlinear potential flow calculations of plunging breaking waves during shoaling over slopes. In such cases, my calculations show that, at breaking, the horizontal velocity is very non-uniform over depth. So, I guess you might need quite a high level GN theory to model that.

Also, such calculations were shown to be within 1-2% of experimental measurements at breaking. Hence, irrotational inviscid flow theory is quite good to model breaking waves before the jet impacts the free surface. (See Grilli, Svendsen, Subramanya, ASCE J. Waterways Port Coastal and Ocean Engineering, 1997.)

Author's reply:

The Green-Naghdi equations in our paper are an approximation of inviscid flow in a waterfall and we hope to extend this to a plunging breaker. Shields and Webster (1988) computed the properties of solutions and regular waves in finite water depth. These results show that almost all of the global properties of the pre-breaking waves (wave height, celerity, energy, particle velocity at the crest, etc.) match extremely well, even though the exact details of the kinematics internal to these waves are not matched. We would expect the same to occur in the breaking wave problem as well. That is, we expect the total flow in the jet and its energy to be reproduced well even though we are not mirroring the details of the jet kinematics. These are the quantities we need to model the post-breaking behavior.

Shields, J.J. and Webster, W.C., "On Direct Methods in Water Wave Theory", J. Fluid Mech., vol. 197, pp. 171-199, Dec. 1988.

Title of Abstract : A waterfall springing from unsteady flow over an uneven bottom

Author(s) : W.C. Webster and X. Zhang

Discussor : J. Grue

Questions/comments:

At the last Workshop, 12th IWWF in Marseilles 1997, Professor E.O. Tuck and collaborators presented solutions to a similar problem as yours. They used analytical solutions and conformal mapping technique, arriving at quite simple procedures to analyze the problem, and obtained then quite simple interpretation.

1. What are the differences between your and their method, and
 2. What is the advantage and gain of the more involved description?
-

Author's reply:

The GN theory is quite different in flavor and intent from the methods presented by Tuck. For simple problems that involve regular waves or solutions, analytical techniques such as Tuck's do yield good results and these results are untainted by approximation. However, Tuck's method will be difficult to use if one wished to treat an irregular wave system shoaling over a irregular bottom, a situation that presents no difficulty for the GN method. Further, GN theory is an unsteady 3-D theory and there are no formal difficulties in extending our GN results to 3-D in order to treat more complicated wave breaking phenomena. This is something that is impossible for fundamentally 2-D methods, such as with the analytical solutions and conformal mapping techniques used by Tuck.

Title of Abstract : A waterfall springing from unsteady flow over an uneven bottom

Author(s) : W.C. Webster and X. Zhang

Discussor : W.W. Schultz

Questions/comments:

If both Green-Naghdi and perturbation methods solve the Euler equations, it should be possible to compare to the mathematical model not necessarily to experiments. In particular for the example you show, the flow should be potential and both methods could be compared to the numerically exact solutions of Tuck and/or Vanden Broeck.

Author's reply:

Yes, we can and will compare our results with theirs. However, we are primarily interested in unsteady flows and Tuck and Vanden Broeck's solutions are not applicable to these situations.

Title of Abstract : Applying the finite element method in numerically solving the two dimensional free-surface water wave equations

Author(s) : J.-H. Westhuis and Andonowati

Discusser : S. Grilli

Questions/comments:

I think you obtained quite nice results with your FEM method. However, in my opinion, you mostly treated cases with fairly shallow water (i.e. long waves) for which the variation of the solution over depth is quite mild, and I am not so sure you would obtain as accurate and/or efficient solutions for more intermediate or deeper water cases or for waves closer to breaking, for which the variation of the solution close to the free surface may be quite large. Also, particularly in the latter case, regridding might pose more of a problem. An alternative method, recently proposed by Kennedy and Fenton, based on polynomial expansions of the solution in the vertical direction, showed very promising for long waves and might be a better alternative to FEM, if one wishes to avoid using a BEM. This so-called LPA method is similar to Green-Naghdi's method. Finally in any case, a BEM method will always be more accurate than a FEM since there is no approximation of the solution inside the domain (i.e. it is exact) and all the numerical effort can be devoted to an accurate representation of the free surface in whose neighborhood most of the variation of the solution occurs. As far as the numerical efficiency, a BEM with a division in sub-regions (not difficult to implement) should combine the best of both worlds, for long domains. Several such implementations of the BEM can be found in the literature.

Author's reply:

Thank you for your comments and remarks.

1. When relative short waves are generated it might indeed be necessary to locally refine the grid in the vertical direction in order to obtain accurate results. As for the case of almost breaking waves; our present method does not deal with overturning waves, because we describe the surface as a function of the spatial variable. When the free surface is treated as a collection of panels, it is possible to treat overturning waves, but as you mention rightly, the gridding of the nodes near the overturning wave can become a difficulty. Maybe the implementation of a hybrid FEM can be of use here because then not only the potential but also the velocities are directly (i.e. without numerical differentiation) known in all nodes. As mentioned in the reply to the question of Mr. Q.W. Ma this could make the gridding easier.

2. It seems to me that the best way to establish the accuracy of a numerical code is to compare its results with carefully controlled measurements. We hope to present reliable calculations that include moving wave generators at realistic frequencies and measurements soon. Maybe it is possible to set up a series of computations using different codes, that recalculate the measurements for different accuracy demands.
3. The presented wave group calculations were compared with calculations using a domain decomposition BEM. It was not found that the BEM domain decomposition was faster than the FEM for that particular situation. Maybe in a more general 2D (or in a 3D) setting this will not always hold, but for the moment we want to specifically focus on 2D tank-like geometry's.
As with many problems the most suited approach depends on the specific requirements and limitations of the situation. At this moment it seems that for the kind of problems we want to deal with, a FEM is the most suited approach, but if the requirements or limitations change, so might the method.

Title of Abstract : Applying the finite element method in numerically solving the two dimensional free-surface water wave equations

Author(s) : J.-H. Westhuis and Andonowati

Discussor : Q.W. Ma

Questions/comments:

I am very pleased with your work, particularly about the comparison of FEM with BEM, implying that FEM may be comparative or even more efficient. Similar comparison has been made by Wu and Eatock Taylor (1994, 1995), there are also some discussions about this issue in our representation of the last workshop.

I also would like to say that if you use iterative solver instead of the direct solver, as we mentioned last year, the requirement for CPU and memory should be further reduced. You said you would implement higher order FEM in your future work. My question is that, how do you think it will be beneficial, bearing in mind that the computation of coefficients involved in high order FEM may need more effort?

Author's reply:

Thank you for your comments. The question whether to use an iterative or a direct-solver depends on the geometry of the domain on which you want to solve the equations. When a two dimensional domain requires relatively few nodes in one direction, the nodes can be numbered such that the band width of the resulting matrix is small. It is then necessary to compare the actual computational effort of using an iterative (preconditioned) solver to achieve the desired accuracy with the effort required by a direct solver. In the two dimensional situations I have been discussing in the presentation, it turned out that a direct solver that employs the symmetric and banded structure of the matrix, is the more efficient solving method. When dealing with three dimensional situations, preconditioned iterative solvers will readily be faster than direct solvers because the bandwidth of the matrix will increase dramatically. However, I do not see how an iterative solver reduces the required memory, because you would need to store an additional preconditioner in order to efficiently solve the linear system.

To answer your question about the benefits of higher order FEM computations: it depends on how you increase the order of your method. The use of e.g. quadratic base functions becomes, I think, especially beneficial in three dimensional calculations, because it has

almost no effect on the number of computations in the iterative solver and allows you to use less elements to obtain comparable accuracy. The contribution of the interaction of quadratic base functions on a triangular element can be calculated numerically by approximating the integral using e.g. a Gaussian quadrature formula.

However, I am particularly interested in another kind of higher order FEM (a hybrid FEM) where you not only use the potential, but also the velocities as 'unknown-variables'. This seems to be a less (but not in $O(n)$) efficient method, but one of the main advantages will be that no differentiation of the potential is needed to compute the velocities on the free surface and (floating) bodies. This advantage greatly reduces the demands that you put on your grid, thus making it possible to more easily deal with complex geometry's.

Title of Abstract : Pressure-impulse theory for water wave impact on a structure with trapped air

Author(s) : D.J. Wood and D.H. Peregrine

Discusser : A.A. Korobkin

Questions/comments:

Did you try another distributions of the bounce-back velocity except of uniform distribution and "cos" one? (to fit the experimental data and to take realistic cavity shape into account).

Author's reply:

We have tried some very simple adaptations to the velocity profile. However, the "cos" distribution is simple and gives reasonable results.

Title of Abstract : A hybrid boundary-element method for non-wall-sided bodies with or without forward speed

Author(s) : S. Zhang, W.-M. Lin and K. Weems

Discussor : X.-B. Chen

Questions/comments:

It is well known that irregular frequencies appear in TGF method. Do you think hybrid method may still have these points?

Author's reply:

In our hybrid method, the irregular frequencies associated with the transient Green's function method used in the outer domain formulation still exist. In our method, potential formulation instead of source formulation is used. However, from our numerical tests with reasonable panel resolutions, these irregular frequency effects seems to be not evident.

Title of Abstract : A hybrid boundary-element method for non-wall-sided bodies with or without forward speed

Author(s) : S. Zhang, W.-M. Lin and K. Weems

Discussor : H. Kagemoto

Questions/comments:

Although you mentioned that the difference between the experiment and the calculation on the bending moment comes from the fact that the whipping effect is not accounted for in the calculation, no high-oscillation component caused by whipping is observed in the experiment.

Author's reply:

In fact, there is indeed high-frequency components present in the experimental measurement (this can be seen in a plot with an expended scale). From spectral analysis, it is found that these high-frequency components are primarily related to the first bending mode of a free-free elastic beam vibration. These results can be found in "Nonlinear Predictions of Ship Motions and Wave Loads for Structural Analysis" by Lin, et al. in Proceedings of the 16th International Conference on OMAE, Yokohama, Japan, April 1997, and in "Dynamic Loadings for Structural Analysis of Fine Form Container Ship Based on a Non-linear Large Amplitude Motions and Loads Method" by Shin, et al. in Transactions of the Society of Naval Architects and Marine Engineers, Vol. 105, 1997.

Title of Abstract : A hybrid boundary-element method for non-wall-sided bodies with or without forward speed

Author(s) : S. Zhang, W.-M. Lin and K. Weems

Discussor : M. Kashiwagi

Questions/comments:

I understand that the free-surface condition in the inner region is satisfied on the incident-wave surface but in the outer region the free-surface condition must be satisfied on $z = 0$ because of the use of the linearized Green function. Then there must be a gap at the patching place between the incident-wave surface and the plane of $z = 0$. How do you treat with this gap problem?

Author's reply:

We have two approaches to deal with this so-called 'gap' problem. One approach is to transform the physical domain under incident wave surface to a computation domain with a deformed body surface and a flat free surface, and solve the problem in the computation domain and transform the results back to the physical domain. The approximation related to this approach is that the slope of the incident wave is small so that in the computation domain, Laplace's equation still holds. In this approach there is no 'gap' at the edge between the free surface and the matching surface. The second approach is to satisfy the body boundary condition and free surface boundary condition on the incident wave surface without transformation as performed in the first approach. In this approach, the gap exists. The results from our sample calculations using the first and the second approaches show no significant differences. The gap can also be treated in a similar fashion as presented by Dommermuth & Yue in *J. Fluid Mech.* Vol. 178, pp. 195-219.

P R O G R A M M E

Sunday March 29, 1998 (1st-2nd session - *STRUISVOGELZAAK*)

10.00 - 14.00 **Registration (*LOBBY*)**

12.00 - 13.15 **Lunch (*VACKENZAAK*)**

13.30 - 13.40 **Opening (*VACKENZAAK*)**

First session - chairman Prof. J.A. Pinkster

13.40 - 14.05 **Odd M. Faltinsen and Rong Zhao, *Water entry of a wedge into a channel.***

14.05 - 14.30 **Tatyana Khabakhpasheva and Alexander Korobkin, *One-side inequalities in the problem of wave impact.***

14.30 - 14.55 **Anil K. Subramani, Robert F. Beck and William W. Schultz, *Suppression of wave-breaking in nonlinear water wave computations.***

14.55 - 15.20 **Peder A. Tyvand, *Free-surface evolution at the edge of an impulsively upwelling fluid layer.***

15.20 - 15.40 **Break (coffee, tea)**

Second session - chairman Prof. S. Sharma

15.40 - 16.05 **Harry B. Bingham, *Computing the Green function for linear wave-body interaction.***

16.05 - 16.30 **Hidetsugu Iwashita, *Influence of the steady flow in seakeeping of a blunt ship through the free-surface condition.***

16.30 - 16.55 **Tim H.J. Bunnik and Aad J. Hermans, *Stability analysis for the 3D unsteady free-surface condition with raised panels.***

16.55 - 17.20 **Sheguang Zhang, Woei-Min Lin, Kenneth Weems and Dick K.P. Yue, *A hybrid boundary-element method for non-wall-sided bodies with or without forward speed.***

17.20 - 17.45 **Riaan van 't Veer, *Experimental validation of a Rankine panel method.***

19.30 **Dinner (*VACKENZAAK*)**

B

Monday March 30, 1998 (3rd-6th session - *ARAZAAL*)

07.30 - 08.30 **Breakfast (*ROAD - HOUSE*)**

Third session - chairman Prof. N. Kuznetsov

08.40 - 09.05 **Stéphan Grilli and Zhimin Hu**, *Modeling of instabilities of oil containment systems by a vortex sheet method.*

09.05 - 09.30 **V.L.F. Matos, A.N. Simos and J.A.P. Aranha**, *Geometric synthesis of 2D submerged bodies.*

09.30 - 09.55 **P. McIver**, *On the completeness of eigenfunction expansions in water-wave problems.*

09.55 - 10.20 **Fritz Ursell**, *On the validity of multipole expansions.*

10.20 - 10.40 **Break** (coffee, tea)

Fourth session - chairman Prof. T. Miloh

10.40 - 11.05 **Maureen McIver**, *Uniqueness, trapped modes and the cut-off frequency.*

11.05 - 11.30 **J.N. Newman**, *Hydrodynamic analysis of the McIver toroid.*

11.30 - 11.55 **O. Motygin and N. Kuznetsov**, *Non-uniqueness in the water-wave problem: an example violating the inside John condition.*

11.55 - 12.20 **R. Porter and D.V. Evans**, *Prediction of resonances due to waves interacting with finite linear arrays of cylinders.*

12.30 - 13.30 **Lunch (*VIJVERZAAL*)**

Fifth session - chairman Prof. A. Korobkin

13.40 - 14.05 **M. Landrini, O. Oshri, T. Waseda and M.P. Tulin**, *Long time evolution of gravity wave systems.*

14.05 - 14.30 **Seppo Kalske**, *Unsteady bow wave field and added resistance of ships in short waves.*

14.30 - 14.55 **Joost Moulijn**, *Added resistance of surface effect ships.*

14.55 - 15.20 **Heike Cramer, Volker Bertram and Gerhart Thiart**, *A fully 3-d Rankine method for ship seakeeping.*

15.20 - 15.40 **Break** (coffee, tea)

Monday March 30, 1998 (3rd-6th session - *ARAZAAL*)

Sixth session - chairman Dr. Volker Bertram

- 15.40 - 16.05 **Hoyte C. Raven** and **Henk J. Prins**, *Wave pattern analysis applied to non-linear ship wave calculations.*
- 16.05 - 16.30 **Donald Danmeier**, *Multiple-body simulations using a higher-order panel code.*
- 16.30 - 16.55 **Q.W. Ma**, **G.X. Wu** and **R. Eatock Taylor**, *Numerical simulation of sloshing waves in a 3D tank.*
- 16.55 - 17.20 **Jaap-Harm Westhuis** and **Andonowati**, *Applying the finite element method in numerically solving the two dimensional free-surface water wave equations.*
- 17.20 - 17.45 **Hiroshi Kagemoto**, *Wave decay characteristics along a long array of cylindrical legs.*
- 18.00 - 19.00 Meeting of organisers of the past and future workshops
- 19.30 Dinner (*VIJVERZAAL*)

D

Tuesday March 31, 1998 (7th-9th session - *ARAZAAL*)

07.30 - 08.30 **Breakfast (*ROAD - HOUSE*)**

Seventh session - chairman Prof. J.N. Newman

08.40 - 09.05 **C.M. Linton**, *Rapidly convergent representations for free-surface Green's functions.*

09.05 - 09.30 **Xiao-Bo Chen and Francis Noblesse**, *Super Green functions for generic dispersive waves.*

09.30 - 09.55 **Alain Clément**, *Computation of impulse response function using differential properties of the time-domain Green function.*

09.55 - 10.20 **Yonghwan Kim and P.D. Sclavounos**, *A finite-depth unified theory of ship motion.*

10.20 - 10.40 **Break** (coffee, tea)

Eighth session - chairman Dr. R. Rainey

10.40 - 11.05 **Morton Huseby and John Grue**, *An experimental investigation of higher harmonic forces on a vertical cylinder in long waves.*

11.05 - 11.30 **Yves-Marie Scolan and Š. Malenica**, *Experimental and numerical second order diffracted waves around an array of 4 cylinders.*

11.30 - 11.55 **C. Levi, S. Welch, E. Fontaine and M.P. Tulin**, *Experiments on the ringing response of an elastic cylinder in breaking wave groups.*

11.55 - 12.20 **Peter S. Tromans and I. Ketut Suastika**, *Spectral response surfaces, designer waves and the ringing of offshore structures.*

12.30 - 13.30 **Lunch (*VIJVERZAAL*)**

Ninth session - chairman Prof. B. Molin

13.40 - 14.05 **D. Indejtchev and Yu. Mochalova**, *Trapped modes in wave channel with an elastic plate on the bottom.*

14.05 - 14.30 **Masashi Kashiwagi**, *A new direct method for calculating hydroelastic deflection of a very large floating structure in waves.*

14.30 - 14.55 **Ken Takagi**, *Water waves beneath a floating elastic plate.*

14.55 - 15.20 **M. Ohkusu and Y. Nanba**, *Some problems of hydroelastic behaviour of a floating thin plate in shallow water waves.*

15.20 - 15.40 **Break** (coffee, tea)

16.00 **Boat trip along the canals and lakes. Dinner on board.**

Wednesday April 1, 1998 (10th-11th session - *ARAZAAL*)

07.30 - 08.30 Breakfast (*ROAD - HOUSE*)

Tenth session - chairman Prof. R. Eatock Taylor

- 08.40 - 09.05 **Bernard Molin** and **Y. Stassen**, *A procedure to remove secularity in third-order numerical wave tanks.*
- 09.05 - 09.30 **Emmanuel Fontaine** and **M.P. Tulin**, *On the generation of wave free oscillatory bodies and of trapped modes.*
- 09.30 - 09.55 **William C. Webster** and **Xinyu Zhang**, *A waterfall springing from unsteady flow over an uneven bottom.*
- 09.55 - 10.20 **D.J. Wood** and **D.H. Peregrine**, *Pressure-impuls theory for water wave impact on a structure with trapped air.*
- 10.20 - 10.40 **Break** (coffee, tea)

Eleventh session - chairman Prof. D.V. Evans

- 10.40 - 11.05 **Bjarne Büchmann**, **Pierre Ferrant** and **Jesper Skourup**, *Runup on a body in waves and current. Fully non-linear and finite order calculations.*
- 11.05 - 11.30 **S.J. Cox** and **M.J. Cooker**, *The effect of wave impact in the breaker zone.*
- 11.30 - 11.55 **T. Utsunomiya** and **R. Eatock Taylor**, *Analogies for resonances in wave diffraction problems.*
- 11.55 - 12.20 **Enok Palm** and **John Grue**, *On the wave field due to a moving two-dimensional, submerged body oscillating near the critical frequency.*
- 12.20 - 12.30 **Closure**
- 12.40 - 13.30 **Lunch** (*VIJVERZAAL*)

List of participants

List of participants**ARANHA, J.A.P.**

Universidade de São Paulo
Dept. of Naval and Ocean Eng.
Cx. Postal: 61548 - CEP: 05424-970
SÃO PAULO, SP
B r a s i l
Fax: +55 11 818 5717
japan@usp.br

BECK, R.F.

University of Michigan
Dept. Naval Arch. and Marine Eng.
2600 Draper Road
ANN ARBOR, MI 48109-2145
U.S.A.
Fax: +1 313 936 8820
rbeck@engin.umich.edu

BERTRAM, V.

TUHH-IFS
Lammersbeth 90
D-22305 HAMBURG
G e r m a n y
Fax: +49 40 2984 3199
bertram@ifspc228.schiffbau.uni-hamburg.de

BUNNIK, T.H.J.

Delft University of Technology
Faculty of Information Technology
and Systems
Dept. of Applied Mathematics
P.O. Box 5031
2600 GA DELFT
The Netherlands
Fax: +31 15 278 7209
t.h.j.bunnik@math.tudelft.nl

CLÉMENT, A.H.

ECN-LMF
Div. Hydrodynamique Navale
1, Rue de la Noë
B.P. 92101
44300 NANTES Cedex 3
F r a n c e
Fax: +33 240 372 523
alain.clement@ec-nantes.fr

BALLAST, A.

MARIN
P.O. Box 28
6700 AA WAGENINGEN
The Netherlands
Fax: +31 317 493 245
a.ballast@marin.nl

BERG, E. VAN DEN

Allseas Engineering b.v.
P.O. Box 5074
2600 GB DELFT
The Netherlands
Fax: +31 15 257 1623
evdB@allseas.com

BÜCHMANN, B.

Technical University of Denmark
Dept. of Hydrodyn. and Water Resources
Building 115
DK-2800 LYNGBY
D e n m a r k
Fax: +45 45 93 6328
buchmann@isva.dtu.dk

CHEN, X.-B.

Bureau VERITAS (DTA)
17bis, Place des Reflets
La Défense 2
92400 COURBEVOIE
F r a n c e
Fax: +33 142 913 395
xchen@bureauveritas.com

COX, S.J.

University of East Anglia
School of Mathematics
University Plain
NORWICH NR4 7TJ
United Kingdom
Fax: +44 1603 25 9515
simon.cox@uea.ac.uk

DAALEN, E. van
MARIN
P.O. Box 28
6700 AA WAGENINGEN
The Netherlands
Fax: +31 317 493 245
e.f.g.van.daalen@marin.nl

DINGEMANS, M.W.
Boomkensdiep 11
8303 KW EMMELOORD
The Netherlands
Fax: +31 527 249 601
Maarten.Dingemans@WLDelft.nl

EGGERMONT, M.
Delft Hydraulics
P.O. Box 177
2600 MH DELFT
The Netherlands
Fax: +31 15 285 8712
michi.eggermont@wldelft.nl

FALTINSEN, O.
Norwegian Univ. of Science and
Technology
Division of Marine Hydrodynamics
N-7034 TRONDHEIM
N o r w a y
Fax: +47 73 595 528
oddfal@marin.ntnu.no

FONTAINE, E.
Univ. of California at Santa Barbara
Ocean Engineering Laboratory
6740 Cortona Drive
GOLETA, CA 93117
U.S.A.
Fax: +1 805 893 4927
emmanuel@vortex.ucsb.edu

DANMEIER, D.
M.I.T.
Dept. of Ocean Engineering
Room 5-324
77, Massachusetts Ave.
CAMBRIDGE, MA 02139
U.S.A.
Fax: +1 617 253 8125
danmeier@mit.edu

EATOCK TAYLOR, R.
University of Oxford
Dept. of Engineering Science
Parks Road
OXFORD OX1 3PJ
United Kingdom
Fax: +44 1865 27 3010
r.eatocktaylor@eng.ox.ac.uk

EVANS, D.V.
University of Bristol
School of Mathematics
University Walk
BRISTOL BS8 1TW
United Kingdom
Fax: +44 117 928 7999
d.v.evans@bristol.ac.uk

FERRANT, P.
SIREHNA
1, Rue de la Noë
P.O. Box 42105
44321 NANTES Cedex 01
F r a n c e
Fax: +33 240 741 736
Pierre.Ferrant@sirehna.ec-nantes.fr

GRILLI, S.
University of Rhode Island
Dept. of Ocean Engineering
211 Sheets Building
NARRAGANSETT, RI 02882
U.S.A.
Fax: +1 401 874 6837
grilli@mistral.oce.uri.edu

GRUE, J.

University of Oslo
Dept. of Mathematics
P.O. Box 1053-Blindern
N-0316 OSLO
N o r w a y
Fax: +47 22 854 349
johng@math.uio.no

HERMANS, A.J.

Delft University of Technology
Faculty of Information Technology
and Systems
Dept. of Applied Mathematics
P.O. Box 5031
2600 GA DELFT
The Netherlands
Fax: +31 15 278 7209
a.j.hermans@math.tudelft.nl

HUSEBY, M.

University of Oslo
Mechanics Division
Department of Mathematics
P.O. Box 1053-Blindern
N-0316 OSLO
N o r w a y
Fax: +47 22 854 349
mhuseby@math.uio.no

IWASHITA, H.

Hiroshima University
Dept. of Engineering Systems
1-3-1 Kagamiyama
HIGASHI-HIROSHIMA 739
J a p a n
Fax: +81 82 422 1042
iwashita@naoe.hiroshima-u.ac.jp

KALSKE, S.

Helsinki University of Technology
Ship Laboratory
P.O. Box 4100
FIN-02015 HUT ESPOO
F i n l a n d
Fax: +358 9 451 3419
seppo.kalske@hut.fi

HAAS, P. DE

Delft Hydraulics
P.O. Box 177
2600 MH DELFT
The Netherlands
Fax: +31 15 285 8712
haas@widelft.nl

HUIJSMANS, R.H.M.

MARIN
P.O. Box 28
6700 AA WAGENINGEN
The Netherlands
Fax: +31 317 493 245
r.h.m.huijsmans@marin.nl

INDEJTCHEV, D.

Russian Academy of Sciences
Inst. for Problems of Mech. Eng.
Bol'shoy pr. 61, V.O.
199178 ST. PETERSBURG
R u s s i a
Fax: +7 812 217 8614
bulatov@ipme.ru

KAGEMOTO, H.

University of Tokyo
Dept. of Naval Architecture and
Ocean Engineering
7-3-1 Hongo, Bunkyo-ku
TOKYO 113
J a p a n
Fax: +81 3 3815 8360
kagemoto@yuiko.nasl.t.u-tokyo.ac.jp

KASHIWAGI, M.

Kyushu University
Research Inst. for Appl. Mechanics
6-1 Kasuga-koen
KASUGA-CITY, FUKUOKA 816-8580
J a p a n
Fax: +81 92 592 4832
kashi@riam.kyushu-u.ac.jp

KHABAKHPASHEVA, T.
Lavrentyev Inst. of Hydrodynamics
Zhemchuzhnaya 14-4
630090 NOVOSIBIRSK
R u s s i a
Fax: +7 383 233 1612
tana@hydro.nsc.ru

KIM, Y.
M.I.T.
Dept. of Ocean Engineering
Room 5-329
77, Massachusetts Ave.
CAMBRIDGE, MA 02139
U.S.A.
Fax: +1 617 253 8125
yonghwan@eolos.mit.edu

KOROBKIN, A.A.
Lavrentyev Inst. of Hydrodynamics
Zhemchuzhnaya 14-4
630090 NOVOSIBIRSK
R u s s i a
Fax: +7 383 233 1612
KAA@hydro.nsc.ru

KUIKEN, H.K.
De Sitterlaan 37
5505 AB VELDHOVEN
The Netherlands

KUZNETSOV, N.
Russian Academy of Sciences
Lab. Math. Mod. and Wave Phen.
Bol'shoy pr. 61, V.O.
199178 ST. PETERSBURG
R u s s i a
Fax: +7 812 217 8614
nikuz@snark.ipme.ru

LANDRINI, M.
INSEAN
Italian Ship Model Basin
Via di Vallerano 139
00128 ROMA
I t a l y
Fax: +39 6 5070 619
surfer@rios3.insean.it

LINTON, C.M.
Loughborough Univ. of Technology
Dept. of Mathematical Sciences
Loughborough
LEICESTERSHIRE LE11 3TU
United Kingdom
Fax: +44 1509 223 969
c.m.linton@lboro.ac.uk

MA, Q.W.
Univ. College London
Dept. of Mech. Engineering
Torrington Place
LONDON WC1E 7JE
United Kingdom
Fax: +44 171 388 0180
ma.q@meng.ucl.ac.uk

MALENICA, Š.
Bureau VERITAS (DTA)
17bis, Place des Reflets
La Défense 2
92400 COURBEVOIE
F r a n c e
Fax: +33 142 913 395
smalenic@bureauveritas.com

McIVER, M.
Loughborough Univ. of Technology
Dept. of Mathematical Sciences
Loughborough
LEICESTERSHIRE LE11 3TU
United Kingdom
Fax: +44 1509 223 969
M.McIver@lboro.ac.uk

McIVER, P.

Loughborough Univ. of Technology
Dept. of Mathematical Sciences
Loughborough
LEICESTERSHIRE LE11 3TU
United Kingdom
Fax: +44 1509 223 969
P.McIver@lboro.ac.uk

MOLIN, B.

ESIM
Dept. Génie Mer
Technopôle de Château-Gombert
13451 MARSEILLE, Cedex 20
France
Fax: +33 49 105 4615
molin@esim.imt-mrs.fr

MOULIJN, J.

Delft University of Technology
Ship Hydromechanics Laboratory
Mekelweg 2
2628 CD DELFT
The Netherlands
Fax: +31 15 278 1836
j.moulijn@wbmt.tudelft.nl

NEWMAN, J.N.

M.I.T.
Dept. of Ocean Engineering
Room 5-324
77, Massachusetts Ave.
CAMBRIDGE, MA 02139
U.S.A.
Fax: +1 617 253 8125
jnn@chf.mit.edu

OHKUSU, M.

Kyushu University
Research Inst. for Appl. Mechanics
6-1 Kasuga-koen
KASUGA-CITY, FUKUOKA 816-8580
Japan
Fax: +81 92 592 4832
ohkusu@riam.kyushu-u.ac.jp

MILOH, T.

Tel Aviv University
Dept. of Fluid Mechanics and
Heat Transfer
RAMAT AVIV 69978
Israel
Fax: +972 3 640 7334
miloh@eng.tau.ac.il

MOTYGIN, O.

Russian Academy of Sciences
Lab. Math. Mod. and Wave Phen.
Bol'shoy pr. 61, V.O.
199178 ST. PETERSBURG
Russia
Fax: +7 812 217 8614
mov@snark.ipme.ru

NANBA, Y.

Kyushu University
Research Inst. for Appl. Mechanics
6-1 Kasuga-koen
KASUGA-CITY, FUKUOKA 816-8580
Japan
Fax: +81 92 592 4832
nanba@riam.kyushu-u.ac.jp

NOBLESSE, F.

D. Taylor Model Basin - CDNSWC
9500 MacArthur Blvd.
WEST BETHESDA, MD 20817-5700
U.S.A.
Fax: +1 301 227 4607
noblesse@dt.navy.mil

PALM, E.

University of Oslo
Dept. of Mathematics
P.O. Box 1053 Blindern
N-0316 OSLO
Norway
Fax: +47 22 854 349
enokp@math.uio.no

PINKSTER, J.

Delft University of Technology
Faculty of Design Engineering and
Production
Dept. of Marine Technology
Mekelweg 2
2628 CD DELFT
The Netherlands
Fax: +31 15 278 1836
j.a.pinkster@wbmt.tudelft.nl

PRINS, H.J.

MARIN
P.O. Box 28
6700 AA WAGENINGEN
The Netherlands
Fax: +31 317 493 245
h.j.prins@marin.nl

RAVEN, H.C.

MARIN
P.O. Box 28
6700 AA WAGENINGEN
The Netherlands
Fax: +31 317 493 245
h.c.raven@marin.nl

SCHULTZ, W.W.

University of Michigan
Dept. of Mechanical Engineering
and Applied Mechanics
2027 Auto Lab.
ANN ARBOR, MI 48109-2121
U.S.A.
Fax: +1 313 764 4256
schultz@umich.edu

SHARMA, S.D.

Mercator University
Institute of Ship Technology
Building BK
D-47048 DUISBURG
Germany
Fax: +49 203 379 2779
sharma@nav.uni-duisburg.de

PORTER, R.

University of Bristol
School of Mathematics
University Walk
BRISTOL BS8 1TW
United Kingdom
Fax: +44 117 928 7999
richard.porter@bris.ac.uk

RAINEY, R.C.T.

WS Atkins
Berkshire House
171 High Holborn
LONDON WC1V 7JE
United Kingdom
Fax: +44 171 379 8563
rctrainey@wsatkins.co.uk

ROMATE, J.E.

University of Twente
Faculty of Mathematical Sciences
Department Applied Analysis
P.O. Box 217
7500 AE ENSCHEDE
The Netherlands
Fax: +31 53 489 4888
Email j.e.romate@math.utwente.nl

SCOLAN, Y.-M.

ESIM
Dept. Génie Mer
Technopôle de Château-Gombert
13451 MARSEILLE, Cedex 20
France
Fax: +33 49 105 4615
scolan@esim.imt-mrs.fr

SIERVOGEL, L.M.

Delft University of Technology
Faculty of Information Technology
and Systems
Dept. of Applied Mathematics
P.O. Box 5031
2600 GA DELFT
The Netherlands
Fax: +31 15 278 7209
l.m.sierevogel@math.tudelft.nl

SKOURUP, J.

ICCH
Danish Hydraulic Institute
Agern Allé 5
DK-2970 HØRSBOLM
D e n m a r k
Fax: +45 45 762 567
jes@dhi.dk

STOEP, C. van der

IHC Gusto Engineering
P.O. Box 11
3100 AA SCHIEDAM
The Netherlands
Fax: +31 10 246 6900
cvs@xs4all.nl

TAKAGI, K.

Osaka University
Dept. of Naval Arch. and Ocean Eng.
2-1 Yamadaoka
Suita, OSAKA 565
J a p a n
Fax: +81 6 879 7594
takagi@naoe.eng.osaka-u.ac.jp

TROMANS, P.S.

Shell International
P.O. Box 60
2280 AB RIJSWIJK
The Netherlands
Fax: +31 70 311 2085
p.s.tromans@sidsbv.shell.com

TYVAND, P.A.

Agricultural Univ. of Norway
Dept. of Agricultural Engineering
Box 5065
N-1432 Ås
N o r w a y
Fax: +47 64 948 683
peder.tyvand@itf.nlh.no

STASSEN, Y.

IFREMER
P.B. 70
29280 PLOUZANE
F r a n c e
Fax: +33 298 224 735
yves.stassen@ifremer.fr

SUBRAMANI, A.K.

University of Michigan
Dept. Naval Arch. and Marine Eng.
2600 Draper Road
ANN ARBOR, MI 48109-2145
U.S.A.
Fax: +1 313 936 8820
aks@umich.edu

TANIZAWA, K.

Ministry of Transport
Ship Research Institute
6-38-1, Shinkawa, Mitaka
TOKYO, 181
J a p a n
Fax: +81 3 422 41 3056
tanizawa@srinot.go.jp

TULIN, M.P.

Univ. of California at Santa Barbara
Ocean Engineering Laboratory
6740 Cortona Drive
GOLETA, CA 93117
U.S.A.
Fax: +1 805 893 4927
mpt@vortex.ucsb.edu

URSELL, F.

28 Old Broadway
MANCHESTER M20 3DF
United Kingdom
Fax: +44 161 275 4819
fritz@fs2.ma.man.ac.uk

UTSUNOMIYA, T.
University of Oxford
Dept. of Eng. Science
Parks Road
OXFORD OX1 3PJ
United Kingdom
Fax: +44 1865 27 3010
tomoaki.utsunomiya@eng.ox.ac.uk

VEER, R. van 't
Delft University of Technology
Ship Hydromechanics Lab.
Mekelweg 2
2628 CD DELFT
The Netherlands
Fax: +31 15 278 1836
r.vantveer@wbmt.tudelft.nl

WASEDA, T.
Institute Pacific Research Center
2525, Correa Road
HONOLULU, HI 96822
U.S.A.
Fax: +1 808 956 9425
twaseda@soest.hawaii.edu

WEBSTER, W.C.
University of California
College of Engineering
McLaughlin Hall (Room 308)
BERKELEY, CA 94720-1702
U.S.A.
Fax: +1 510 643 8653
wwebster@socrates.berkeley.edu

WESTHUIS, J.-H.
MARIN
P.O. Box 28
6700 AA WAGENINGEN
The Netherlands
Fax: +31 317 493 245
j.westhuis@marin.nl

WOOD, D.J.
University of Bristol
School of Mathematics
University Walk
BRISTOL BS8 1TW
United Kingdom
Fax: +44 117 928 7999
deb.wood@bristol.ac.uk

ZHANG, S.
SAIC
Ship Technology Division
134, Holiday Court (Suite 318)
ANNAPOLIS, MD 21401
U.S.A.
Fax: +1 410 224 2631
szhang@ship.saic.com

ZHANG, X.
University of California
Dept. of Naval Arch. & Offshore
Engineering
Naval Arch. Bldg. (Room 202)
BERKELEY, CA 94720-1702
U.S.A.
Fax: +1 510 643 8653
xyzhang@uclink4.berkeley.edu

ZHAO, R.
Norwegian Inst. of Science
and Technology
MARINTEK
P.O. Box 4125 Valentinlyst
N-7002 TRONDHEIM
Norway
Fax: +47 73 595 528
rong.zhao@marintek.sintef.no