

SPAWAR



*Systems Center
San Diego*

TECHNICAL REPORT 1778
August 1998

**Image-Data Transmission
Demonstration over the
Tracking and Data Relay
Satellite System**

R. A. Bloomfield
G. R. Dobson

19980909 013

Approved for public release; distribution is unlimited.

TECHNICAL REPORT 1778
August 1998

Image-Data Transmission Demonstration over the Tracking and Data Relay Satellite System

R. A. Bloomfield
G. R. Dobson

Approved for public release; distribution is unlimited.



Space and Naval Warfare Systems Center
San Diego, CA 92152-5001

DTIC QUALITY INSPECTED 1

**SPACE AND NAVAL WARFARE SYSTEMS CENTER
San Diego, California 92152-5001**

**H. A. Williams, CAPT, USN
Commanding Officer**

**R. C. Kolb
Executive Director**

ADMINISTRATIVE INFORMATION

The work detailed in this report was performed with in-house funding by the Surveillance Radar Technology Product Team of the Space and Naval Warfare Systems Center, San Diego, CA 92152-5001.

Released by
M. A. Pollock
Surveillance Radar Technology
Product Team

Under authority of
T. A. Knight, Head
Joint and National
Systems Division

ACKNOWLEDGEMENTS

Thanks to the National Aeronautics and Space Administration (NASA) and Stanford Telecom individuals who supported this demonstration with equipment and expertise.

EXECUTIVE SUMMARY

OBJECTIVE

The objective of this demonstration was to investigate relevant parameters and show the feasibility of transmitting image data over the Tracking and Data Relay Satellite System (TDRSS).

RESULTS

This demonstration has shown that an image can be compressed, transmitted, received, processed, sent to a remote location over the Internet, and displayed in under 1 minute. Although the image was downloaded only at one site, many sites can receive this information at the same time. This is a significant benchmark in determining the usefulness of such a system to disburse near-real-time image data.

CONTENTS

EXECUTIVE SUMMARY	iii
PURPOSE	1
DEMONSTRATION SETUP	1
PORTCOM EQUIPMENT SPECIFICATIONS	1
IMAGE DATA	3
IMAGE COMPRESSION	3
TRANSMISSION TIME RESULTS	11
CONCLUSION	11
FUTURE CONSIDERATIONS AND TESTING	11
SOURCES OF ADDITIONAL INFORMATION	12
DEMONSTRATION PARTICIPANTS	12

Figures

1. Demonstration setup	2
2. Demonstration image	3
3a. Original image	5
3b. Compression ratio 5:1	6
3c. Compression ratio 10:1	7
3d. Compression ratio 20:1	8
3e. Compression ratio 50:1	9
3f. Compression ratio 100:1	10

Tables

1. PORTCOM Equipment specifications	1
2. Image-compression comparison	3
3. Transmission time comparison	11

PURPOSE

This demonstration investigated relevant parameters and showed the feasibility of transmitting image data over the Tracking and Data Relay Satellite System (TDRSS). Measurements of transmission time and data-compression quality at various baud rates were conducted. This test also provided the opportunity to evaluate Stanford Telecom's (S-Tel's) portable TDRSS transmitter (PORTCOM) in operation.

DEMONSTRATION SETUP

Figure 1 shows the equipment configuration for this demonstration. The original image data were stored on the hard drive of a personal computer (PC). A Titan Company compression algorithm named Increased Compression Engine (ICE) was used to reduce the image size with minimal image-quality degradation. The compressed image was sent from the PC to the PORTCOM via an RS-232 serial communication link. The PORTCOM framed the data and added error-correction information to ensure validity and proper recognition by the receiver. Then the data were sent through the transmitter (which had a 1-watt output power specification) to a 6.8-dBi circularly polarized patch antenna. With the antenna directed toward the geostationary location of the TDRSS satellite, the data were relayed to the ground station. Beamforming processing of the received channels was done at the ground station. The processed data were sent from the ground station over a National Aeronautics and Space Administration (NASA) Communication Network (NASCOM) to the Network Control Center (NCC) at Goddard Space Flight Center (GSFC) in Greenbelt, MD. A workstation or network server at NCC was then able to perform a variety of operations with the data. The data could be stored in a specific directory or posted on a web page for access to anyone with the correct password who is connected to the Internet via file transfer protocol (FTP) or net browser. The data could also be sent automatically via e-mail to designated recipients. For this demonstration, the image data were downloaded from the NCC server to a PC and then displayed.

PORTCOM EQUIPMENT SPECIFICATIONS

The following table lists parameters of the PORTCOM equipment.

Table 1. PORTCOM equipment specifications.

Parameter	Specification
Center frequency	2287.5 MHz
RF power	1.0 watt (+30 dBm)
3-in-diameter patch antenna	6.8-dBi gain, 80-deg beamwidth
User interface	RS-232 for PC
Prime power (battery option)	10 to 20 VDC, < 0.9 A @ 12 VDC
Integrated GPS receiver	8 channels
Data transfer rates	600 bps to 19.2 kbps
Data modulation	BPSK/PN
Data frame format	TDRSS standard—User formats definable
Selectable PN code	2047-chip gold code
Communications	Spread spectrum and error correction coding

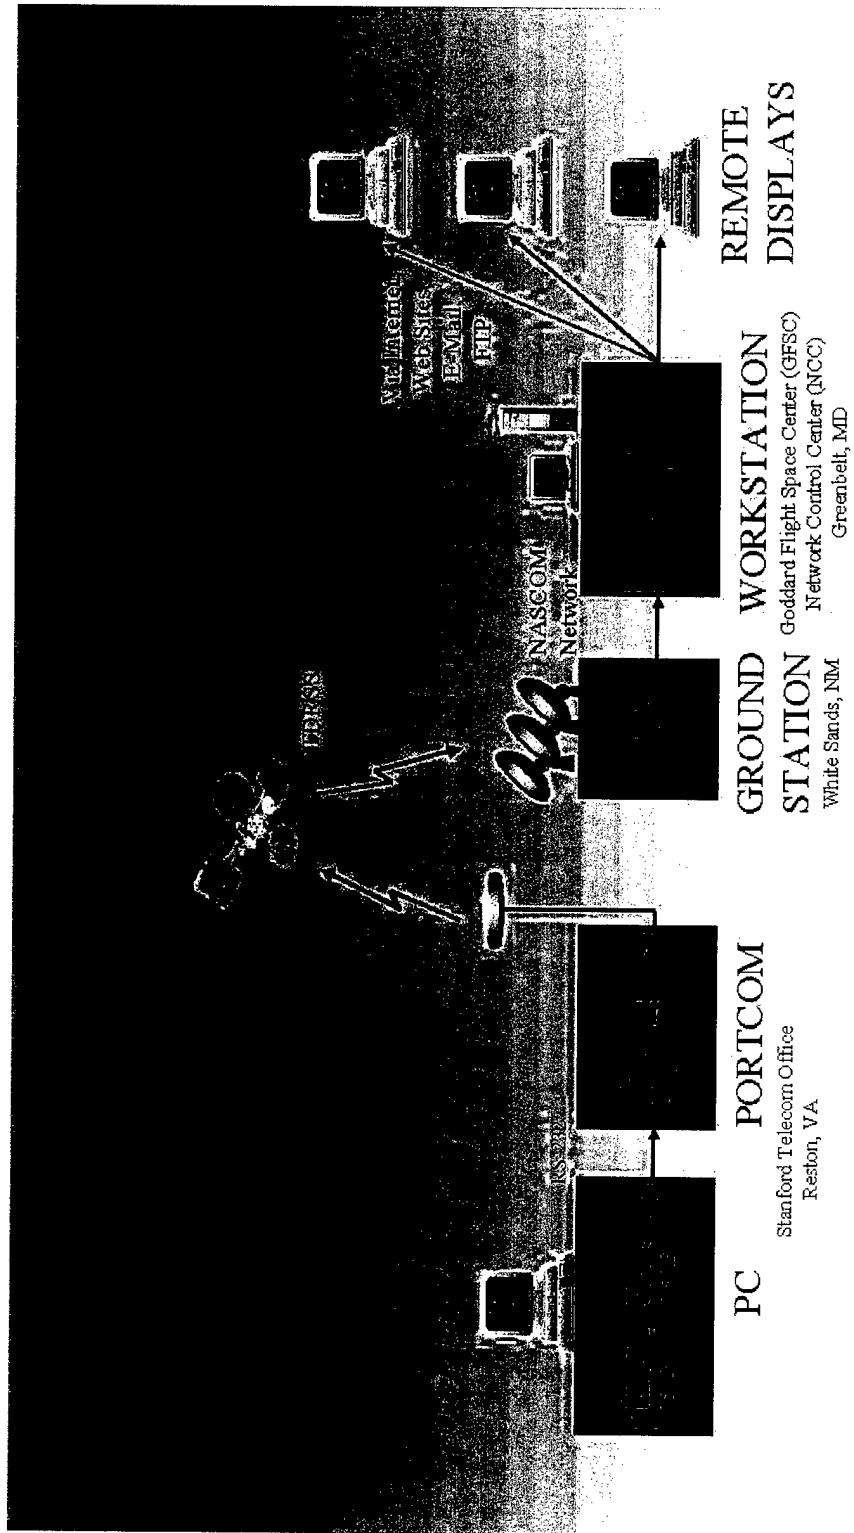


Figure 1. Demonstration setup.

IMAGE DATA

The image in figure 2 was used in the demonstration and stored in bitmap format that consisted of 315 by 240 pixels in an 8-bit gray scale. Disk storage space was 75 kB.



Figure 2. Demonstration image.

IMAGE COMPRESSION

Table 2 lists the effects of compression on image size and the resulting image quality. A compression ratio of 1:10 yielded a 90-percent reduction in size, and a compression ratio of 1:100 yielded a 99-percent reduction in size. The additional size reduction from 90 to 99 percent was small, while the image quality greatly deteriorated. The observation was that the additional processing to obtain 9-percent additional reduction in size was not worth the effort. The compression algorithm was executed on a PC in a Windows environment. The process involved loading the data, selecting the compression ratio, and executing the routine. The compression time was less than 2 seconds for all compression ratios. The PC used for compression processing had a Pentium 200-MHz processor with 32 MB of random access memory (RAM).

Table 2. Image-compression comparison.

Compression Ratio	File Size (k)	Reduction (%)	Image Quality
1:1	75	0	Original
5:1	15	80	Excellent
10:1	7.5	90	Good
20:1	3.75	95	Good
50:1	1.5	98	Poor
100:1	0.75	99	Blurred

The following figures show a comparison of image quality for different compression ratios. The original image and compressed images of 5:1, 10:1, 20:1, 50:1, and 100:1 are shown in figures 3a to 3f, respectively. The amount of useful compression is a function of the original image. Claims of compression ratios of 100:1 are usually based on a high-resolution image that is compressed (i.e., degraded) to some level that is acceptable to the human viewer. If the original image is of lower resolution or quality, then less degradation, and hence, compression is tolerable to the viewer. This image was of a lower quality and resolution. Compression of this image greater than 20:1 produces an image that is blurred, and much detail is out of focus. Each image is also shown inverted to aid in identifying feature degradation as the compression ratio increases.

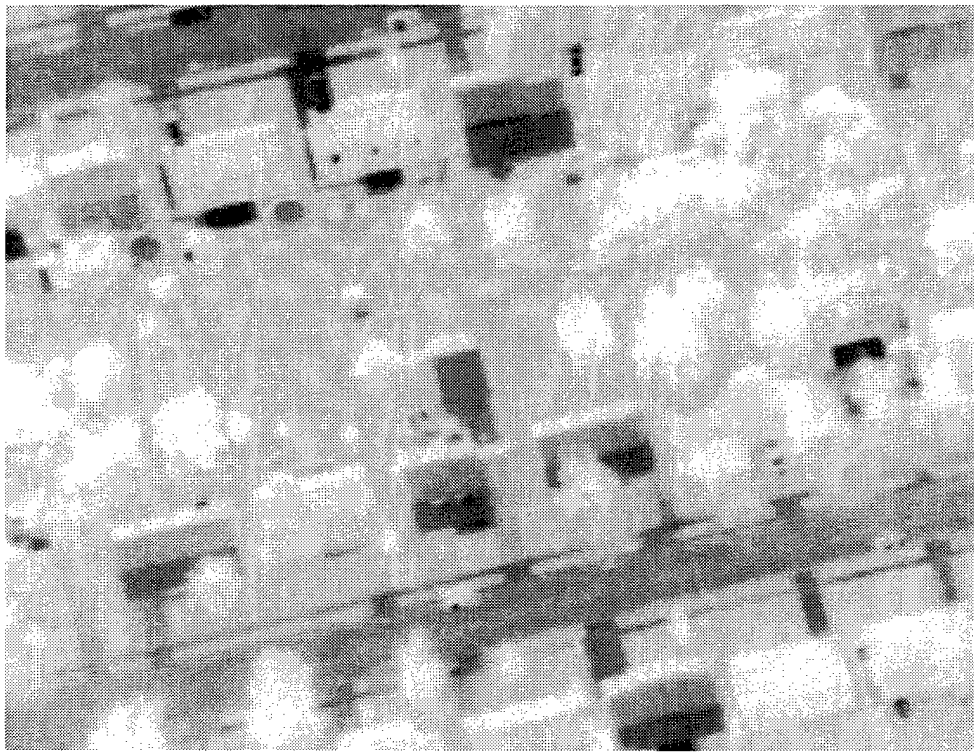


Figure 3a. Original image.



Figure 3b. Compression ratio 5:1.

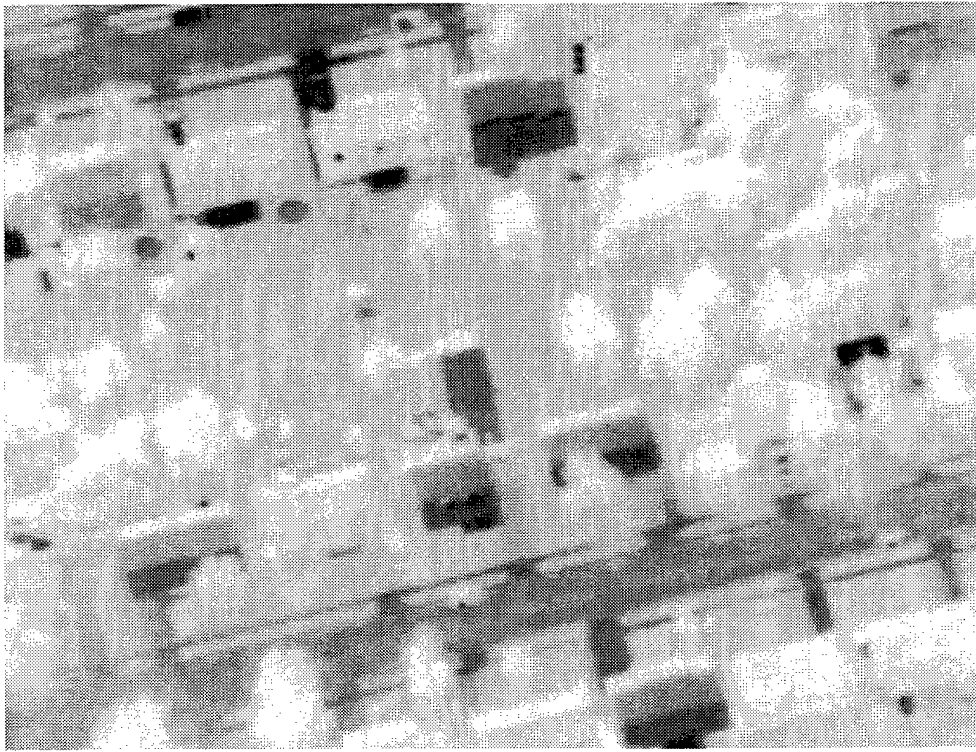


Figure 3c. Compression ratio 10:1.

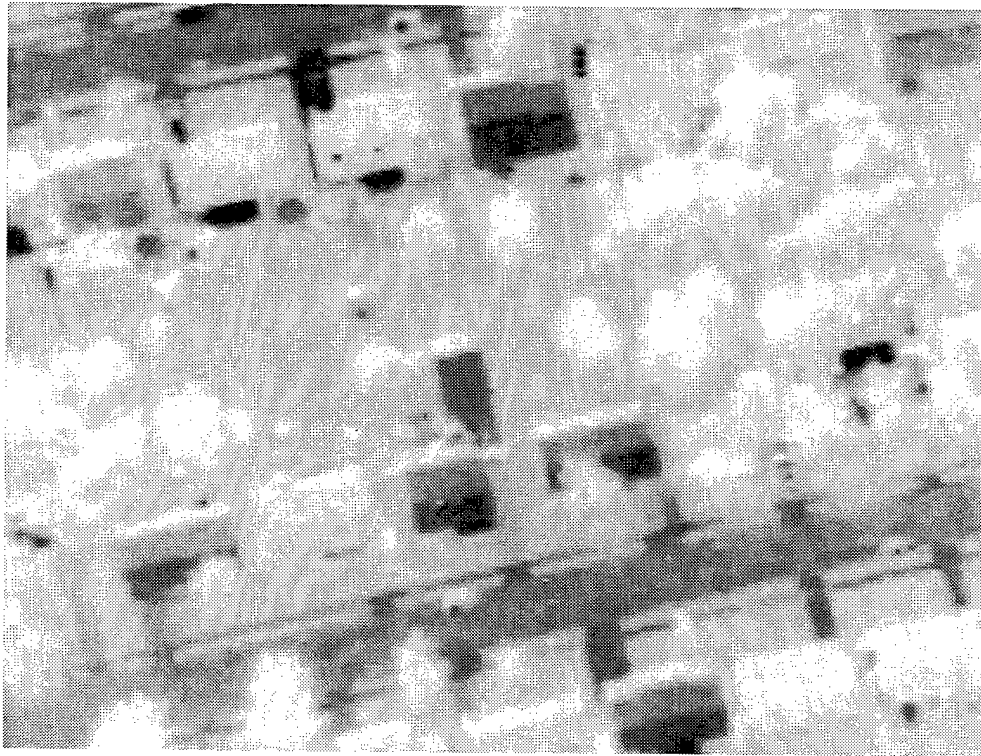


Figure 3d. Compression ratio 20:1.

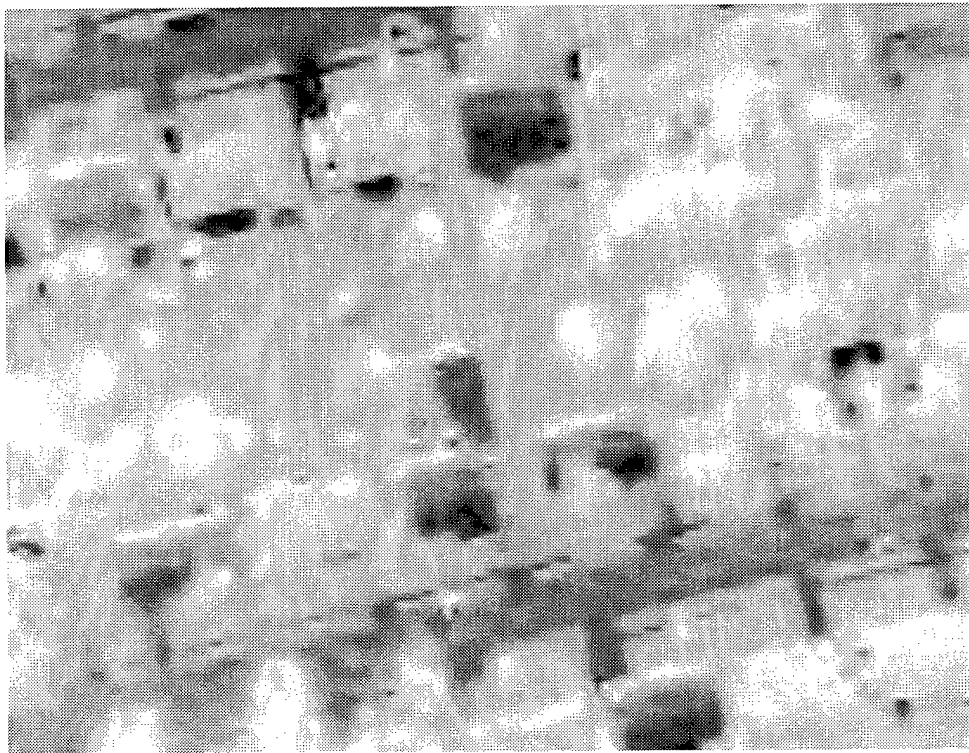


Figure 3e. Compression ratio 50:1.

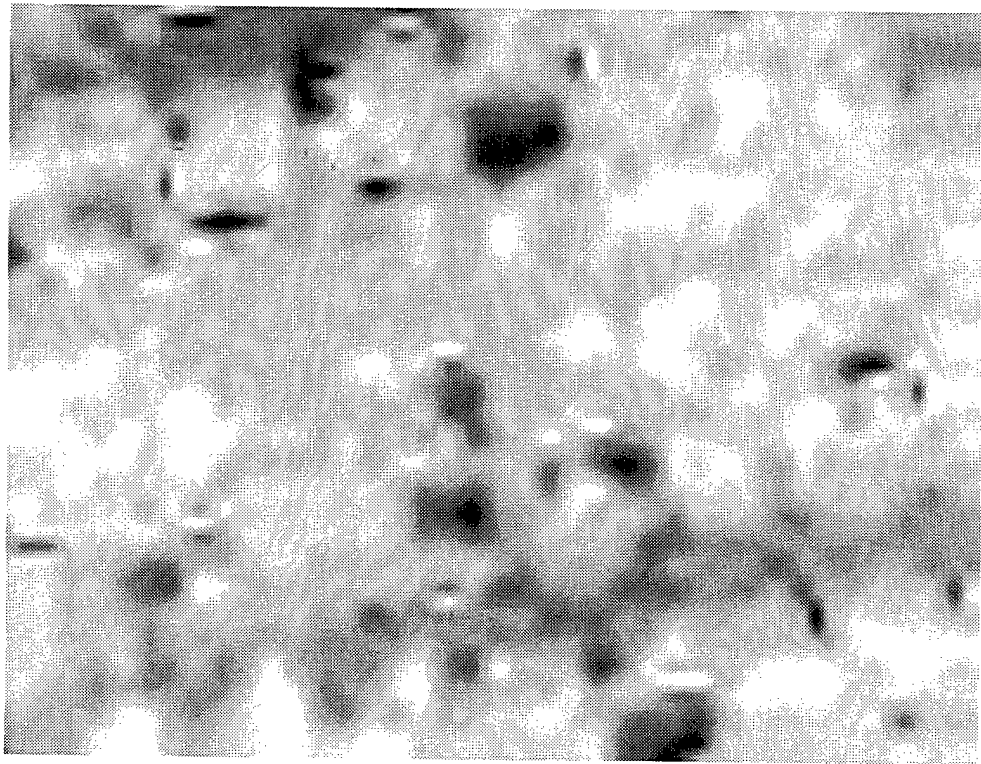
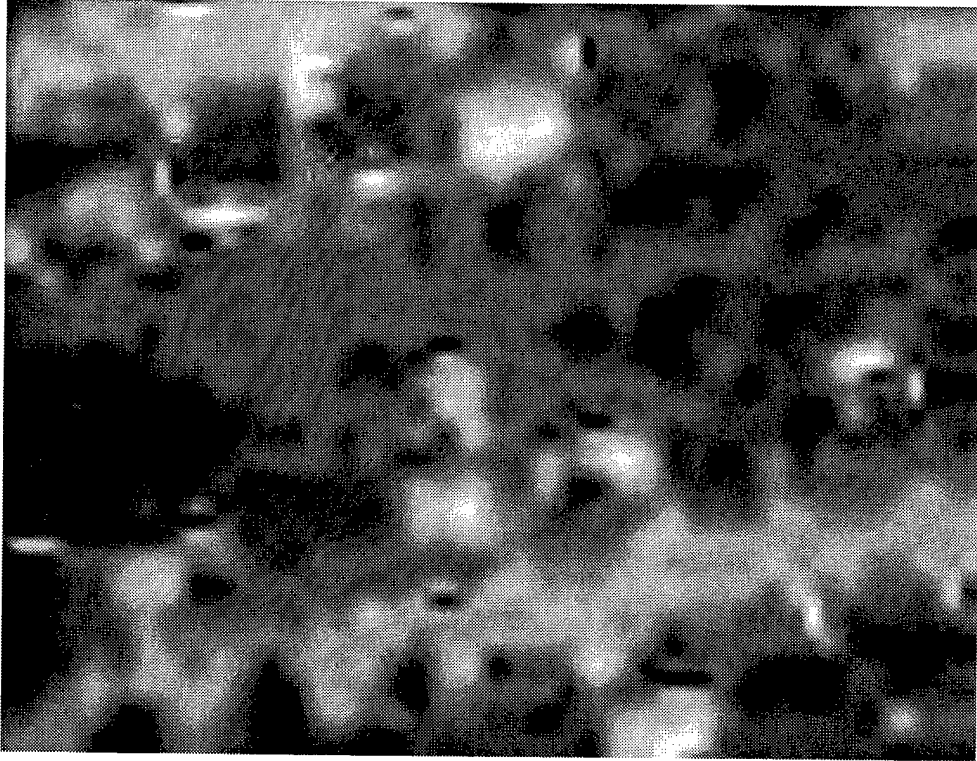


Figure 3f. Compression ratio 100:1.

TRANSMISSION TIME RESULTS

Table 3 shows the elapsed transmission time for sending compressed and uncompressed images at 2400 and 4800 bps. The transmission times for the uncompressed images at 4800 and 2400 bps scale by size. The transmission times for the compressed images were similar because the PORTCOM framed the data before transmission, and the image size was less than a full frame. During the demonstration, after the image was transmitted at 4800 bps, a hardware problem occurred with the network at GSFC thereby halting the transmission of images. Later that day, after the network was repaired, the images were transmitted at 2400 bps.

Table 3. Transmission time comparison.

Image Compression	Data Rate (bps)	Time
Uncompressed	4800	3 minutes
Compressed (20:1)	4800	30 seconds
Uncompressed	2400	5.5 minutes
Compressed (20:1)	2400	35 seconds

CONCLUSION

The demonstration was successfully conducted. The components are available to transmit image data from a remote location and receive the image at any site connected to the Internet. The hardware problem with the NASCOM network, which halted the demonstration, would be solved by using another path to send the image data. The ICE compression algorithm worked very well and was simple to install and use. It is fairly inexpensive and could be licensed for multiple users. Stanford Telecom's PORTCOM system is a viable solution to communicating with TDRSS. The system is small in size and worked as advertised during the demonstration. The transmission time for the compressed images was approximately 30 seconds. A portion of the elapsed time was attributed to the operator manually loading the image, running the compression algorithm, and saving the files. These manual functions could be automated in an operational system, which would further reduce the overall transmission time by 5 to 10 seconds. This demonstration has shown that an image can be compressed, transmitted, received, processed, sent to a remote location over the Internet, and displayed in under 1 minute. Although the image was downloaded only at one site, any number of sites could have received this information at the same time. This is a significant benchmark in determining the usefulness of such a system to disburse near-real-time image data.

FUTURE CONSIDERATIONS AND TESTING

Stanford Telecom is developing a VME-based beamformer that would remove the dependency on NASA ground-station beamforming equipment. This development would yield an on-demand capability to image data distribution without the need to schedule TDRSS time directly.

The next step would be to test this capability from a mobile transmitting platform.

SOURCES OF ADDITIONAL INFORMATION

To view the transmitted image on the web page, visit:

<http://198.62.191.18>

For more information about Stanford Telecom, visit:

<http://www.stel.com>

For more information about Titan ICE, visit:

<http://www.titan.com>

For more information about TDRSS, visit:

<http://www530.gsfc.nasa.gov/tdrss/tdrsshome.html>

DEMONSTRATION PARTICIPANTS

Name	Organization	Contact Information
Allen Daniel	S-Tel	703-438-7964 adaniel@sed.stel.com
Paul Reising	SAIC	703-414-3862 paul.c.reising@cpmx.saic.com
Dan Urban	S-Tel	703-438-8109 durban@sed.stel.com
Rolan Bloomfield	SSC San Diego	619-553-5341 bloom@spawar.navy.mil
Dick Schonbachler	NASA	dick.schonbachler@gssc.nasa.gov
Stu McCullouch	CSC	smccullz@csc.com
George Dobson	SSC San Diego	619-553-1571 dobson@spawar.navy.mil
Clarence Harris	PEO(CU)/PMA-280121	301-757-6368 clarence_e._harris@peocu.navy.mil
Doug Stone	Raytheon Indy	317-306-7858 destone@indy.navy.mil
Mike Riley	SAIC	301-866-6736 michael.w.riley@cpmx.saic.com

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE <p style="text-align: center;">August 1998</p>	3. REPORT TYPE AND DATES COVERED <p style="text-align: center;">Final</p>
4. TITLE AND SUBTITLE <p style="text-align: center;">IMAGE-DATA TRANSMISSION DEMONSTRATION OVER THE TRACKING AND DATA RELAY SATELLITE SYSTEM</p>		5. FUNDING NUMBERS <p style="text-align: center;">In-house</p>
6. AUTHOR(S) <p style="text-align: center;">R. A. Bloomfield and G. R. Dobson</p>		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <p style="text-align: center;">Space and Naval Warfare Systems Center San Diego, CA 92152-5001</p>		8. PERFORMING ORGANIZATION REPORT NUMBER <p style="text-align: center;">TR 1778</p>
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) <p style="text-align: center;">Space and Naval Warfare Systems Center San Diego, CA 92152-5001</p>		10. SPONSORING/MONITORING AGENCY REPORT NUMBER
11. SUPPLEMENTARY NOTES		
12a. DISTRIBUTION/AVAILABILITY STATEMENT <p style="text-align: center;">Approved for public release; distribution is unlimited.</p>		12b. DISTRIBUTION CODE

13. ABSTRACT (Maximum 200 words)

This report details the feasibility of transmitting image data over the Tracking and Data Relay Satellite System (TDRSS). Measurements of transmission time and data-compression quality at various baud rates were conducted. Stanford Telecom's portable TDRSS (PORTCOM) was evaluated.

14. SUBJECT TERMS <p style="text-align: center;">Mission Area: Surveillance near-real-time image data data compression transmission time Tracking and Data Relay Satellite System (TDRSS)</p>			15. NUMBER OF PAGES <p style="text-align: center;">26</p>
17. SECURITY CLASSIFICATION OF REPORT <p style="text-align: center;">UNCLASSIFIED</p>			16. PRICE CODE
18. SECURITY CLASSIFICATION OF THIS PAGE <p style="text-align: center;">UNCLASSIFIED</p>	19. SECURITY CLASSIFICATION OF ABSTRACT <p style="text-align: center;">UNCLASSIFIED</p>	20. LIMITATION OF ABSTRACT <p style="text-align: center;">SAME AS REPORT</p>	

21a. NAME OF RESPONSIBLE INDIVIDUAL

Rolan Bloomfield

21b. TELEPHONE (include Area Code)

(619) 553-5341
e-mail: bloom@spawar.navy.mil

21c. OFFICE SYMBOL

D73H

INITIAL DISTRIBUTION

Code D0012	Patent Counsel	(1)
Code D0271	Archive/Stock	(6)
Code D0274	Library	(2)
Code D027	M. E. Cathcart	(1)
Code D0271	D. Richter	(1)
Code D73D	J. Nugent	(17)
Code D73H	R. A. Bloomfield	(37)
Code D7405	G. R. Dobson	(10)

Defense Technical Information Center
Fort Belvoir, VA 22060-6218 (4)

SPAWAR Liaison Office
Arlington, VA 22202-4804

Center for Naval Analysis
Alexandria, VA 22302-0268

Navy Acquisition, Research and Development
Information Center (NARDIC)
Arlington, VA 22244-5114

GIDEP Operations Center
Corona, CA 91718-8000

Approved for public release; distribution is unlimited.



SPAWAR



Systems Center San Diego

Space and Naval Warfare Systems Center
San Diego, CA 92152-5001