

**NAVAL POSTGRADUATE SCHOOL**  
**Monterey, California**



**THESIS**

**OSCILLATING FLOW ABOUT  
PERFORATED CYLINDERS**

by

David B. Osgood

September 2000

Thesis Advisor:

T. Sarpkaya

Approved for public release; distribution is unlimited.

DTIC QUALITY INSPECTED 4

20000920 044

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instruction, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 2000	3. REPORT TYPE AND DATES COVERED Master's Thesis	
4. TITLE AND SUBTITLE OSCILLATING FLOW ABOUT PERFORATED CYLINDERS			5. FUNDING NUMBERS	
6. AUTHOR(S) David B. Osgood				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Postgraduate School Monterey CA 93943-5000			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES The views expressed in this report are those of the authors and do not reflect the official policy or position of the Department of Defense or the U.S. Government.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Approved for public release; distribution is unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (maximum 200 words) 14. Circular cylinders of various sizes and perforations were subjected to sinusoidally-oscillating flow in a large U-shaped water tunnel. The force-transfer coefficients (drag and inertia) were determined in the range of Keulegan-Carpenter numbers (K) from about 1 to 40. The results have shown that the effect of the perforations is to decrease the inertia coefficient and to increase the drag coefficient. Thus, perforated cylinders are very efficient dampers and may be used to increase or control the damping of cables and large structures in the ocean environment.				
15. SUBJECT TERMS 16. Oscillating Flow, Perforation, Cylinder, Damping, Cable			15. NUMBER OF PAGES 38	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT  Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE  Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT  Unclassified	20. LIMITATION OF ABSTRACT  UL	

THIS PAGE LEFT INTENTIONALLY BLANK

Approved for public release; distribution is unlimited

**OSCILLATING FLOW ABOUT PERFORATED CYLINDERS**

David B. Osgood  
LCDR, United States Navy  
B.S.E.E., University of South Florida, 1986

Submitted in partial fulfillment of the  
requirements for the degree of  
**MASTER OF SCIENCE IN MECHANICAL ENGINEERING**

from the  
**NAVAL POSTGRADUATE SCHOOL**


**SEPTEMBER 2000**

Author:

  
\_\_\_\_\_  
David B. Osgood

Approved by:

  
\_\_\_\_\_  
T. Sarpkaya, Thesis Advisor

  
\_\_\_\_\_  
for Terry R. McNelley, Chairman,  
Department of Mechanical Engineering

THIS PAGE LEFT INTENTIONALLY BLANK

## ABSTRACT

Circular cylinders of various sizes and perforations were subjected to sinusoidally-oscillating flow in a large U-shaped water tunnel. The force-transfer coefficients (drag and inertia) were determined in the range of Keulegan-Carpenter numbers (K) from about 1 to 40. The results have shown that the effect of the perforations is to decrease the inertia coefficient and to increase the drag coefficient. Thus, perforated cylinders are very efficient dampers and could be used in increasing the damping of cables and large structures in the ocean environment.

THIS PAGE LEFT INTENTIONALLY BLANK

## TABLE OF CONTENTS

I.	INTRODUCTION .....	1
II.	PRESENTATION AND DISCUSSION OF RESULTS .....	5
III.	CONCLUSIONS.....	7
	APPENDIX: FIGURES .....	9
	LIST OF REFERENCES .....	17
	INITIAL DISTRIBUTION LIST .....	19

THIS PAGE LEFT INTENTIONALLY BLANK

## LIST OF FIGURES

1.	Cd and Cm versus K for screen No. 1 .....	9
2.	Cd and Cm versus K for screen No. 2 .....	10
3.	Cd and Cm versus K for screen No. 3 .....	11
4.	Cd and Cm versus K for screen No. 4 .....	12
5.	Cd and Cm versus K for screen No. 5 .....	13
6.	Cd and Cm versus K for screen No. 6 .....	14
7.	Cd and Cm versus K for a solid and perforated cylinder .....	15

THIS PAGE LEFT INTENTIONALLY BLANK

## LIST OF SYMBOLS

$C_d$	drag coefficient
$C_m$	inertia coefficient
$D$	diameter of the test cylinder
$D_h$	diameter of holes
$F$	force
$K$	Keulegan-Carpenter number, $= U_m T / D$
$Re$	Reynolds number, $= U_m D / \nu$
$t$	time (sec)
$T$	Period of flow oscillation
$U$	Velocity of oscillating flow
$U_m$	Maximum velocity in a cycle
$\beta$	Porosity, = open area/total area
$\nu$	kinematic viscosity of water
$\rho$	density of water

THIS PAGE LEFT INTENTIONALLY BLANK

## ACKNOWLEDGEMENTS

I wish to express my special thanks to Distinguished Prof. T. Sarpkaya for his continuous help and encouragement throughout the course of this investigation. His constant tutelage was a source of strength and inspiration to me.

I would like to thank my wife for the long hours of absence she endured while I was working on this project. Her constant support, encouragement, and patience always inspired me. I would also like to thank my family whose blessings have always been with me.

THIS PAGE LEFT INTENTIONALLY BLANK

## I. INTRODUCTION

The unsteady motion is of great interest in the solution of many applied technical problems in fluid mechanics, such as the motion of bodies through fluids, fluid motion in or about bodies, free surface flow phenomena, and the motion of fluids inside machinery. The complexities of unsteady non-equilibrium turbulence with or without separation under a variety of time-dependent flow conditions (periodic flows, transverse or bidirectional dynamic response of bodies) are far from understood.

There are an infinite number of time-dependent flows, and one can describe only a few that are caused by some well-defined time-dependence of the ambient flow and/or the fluid/structure interaction (e.g., change of freestream velocity; large-amplitude, time-dependent oscillations of the mean flow; the impulsive start from rest; change of angle of attack; motion of helicopter blades, and the dynamic response of a cable).

The theory of sinusoidally oscillating flow about bodies or the sinusoidal oscillation of a body in a viscous fluid otherwise at rest has long been of special interest to fluid dynamists. In steady flow, the position of the separation points is nearly stationary, except for small excursions about  $\pm 3$  degrees (on a circular cylinder). Furthermore, the interference between the vortices and the body is confined mostly to the aft-body region. There is no obvious relation between the measured lift and drag coefficients and the excursion of the separation points. For example, while the separation angle remains nearly constant at about 80 degrees in the range of Reynolds numbers  $Re$  from about 2000 to 20,000, the drag coefficient increases from about 0.8 to,

1.2 and the mean peak value of the lift coefficient varies anywhere from zero to 0.6 (see e.g., Sarpkaya and Isaacson 1981).

Numerical Simulation) and LES (Large Eddy Simulation) techniques are not likely to provide anything more than occasional samples for comparison with experiments at relatively low Reynolds numbers, at great expense even for two-dimensional flows. The most reliable recourse, at least at present, seems to be carefully conducted laboratory experiments. In this effort, flow visualization can serve as an excellent tool, not merely as an aid to understanding the physics of the flow but also as a means to acquire data and to guide the numerical calculations.

The experimental studies of Morison *et al* (1950) on forces on piles due to the action of progressive waves have provided a useful and somewhat heuristic approximation. The forces are divided into two parts, one due to the drag, as in the case of flow at constant velocity, and the other due to acceleration or deceleration of the fluid. This concept necessitates the introduction of a drag coefficient  $C_d$  and inertia coefficient  $C_m$  in the expression for the in-line force (Keulegan & Carpenter, 1958). Morison's equation does not deal with the transverse force or lift force. If  $F$  is the force per unit length experienced by a cylinder, then one has

$$F = \frac{1}{2}\rho C_d D |U|U + \rho C_m \frac{\pi D^2}{4} \frac{dU}{dt} \quad (1)$$

where  $U$  and  $dU/dt$  represent the undisturbed velocity and the acceleration of the fluid, respectively. A detailed discussion of this equation is given by

Sarpkaya and Isaacson (1981) and will not be repeated here. Suffice it to note that the most comprehensive data on smooth and sand-roughened circular rigid cylinders are given by Sarpkaya (1977, 1986).

An extensive literature search has shown that there are no studies of oscillating flow about perforated cylinders in spite of the fact that they are used in various industrial applications, though mostly for filtering purposes. In the course of search for realistic solutions to the flow-induced oscillations of cables and bodies immersed in the ocean environment it became clear that perforated cylinders can be ideally suited for the damping of undesirable oscillations. Thus, an extensive investigation has been undertaken through the use of a number of carefully selected perforated pipes immersed in a large U-shaped oscillating flow tunnel.

THIS PAGE LEFT INTENTIONALLY BLANK

## II. PRESENTATION AND DISCUSSION OF RESULTS

Each perforated cylinder was subjected to a sinusoidally oscillating flow in a large U-shaped water tunnel (10 m wide and 7.5 m high). The tunnel and the force-acquisition system have been designed and constructed in 1974 and described a number of times since then (see, e.g., Sarpkaya 1977). These will not be repeated here.

The perforated cylinders were constructed of perforated metal sheets in such a manner that they have retained their perfectly circular shape throughout the measurements. We will refer to them here by their numbers. Perforated cylinder No. 1 had a diameter of 127-mm, a hole size of 0.406 mm and a porosity of 30%. Perforated cylinder No. 2 had a diameter of 127 mm, a hole size of 0.83 mm and a porosity of 28%. Perforated cylinder No. 3 had a diameter of 152 mm, a hole size of 0.50 mm and a porosity of 30%. Perforated cylinder No. 4 had a diameter of 127 mm, a hole size of 1.60 mm and a porosity of 30%. Perforated cylinder No. 5 had a diameter of 127 mm, a hole size of 1.59 mm and a porosity of 23%. Finally, Perforated cylinder No. 6 had a diameter of 127 mm, a hole size of 2.50 mm and a porosity of 51%.

Figures 1 through 6 show the drag and inertia coefficients for the above-perforated cylinders. It is evident from a careful perusal of these figures that the magnitudes of the two force-transfer coefficients are dictated primarily by the porosity. Screen No. 1 through No. 5 yield essentially similar drag and inertia coefficients because of the fact that they have nearly identical porosities. On the other hand, the cylinder number No. 6 yields considerably smaller drag and inertia coefficients. This is in conformity with the expectations that the larger the porosity, the larger the flow through the cylinder. Consequently, not only the normal pressures on the cylinder but also the flow about the cylinder are reduced. The consequence of this reduction is that the region of

separation and vortex shedding is considerably decreased relative to perforated cylinders of smaller porosity. However, the most remarkable feature of the results is the variation of the inertia coefficients. It is a well-established fact (Sarpkaya 1977, 1986) that the inertia coefficient for  $K$  smaller than about 4 is nearly constant at a value slightly larger than 2. In the case of perforated cylinders, the inertia coefficient in the said region is always smaller than 2. For the cylinder No. 6, the inertia coefficient is indeed very small.

Figure 7 shows the drag and inertia coefficients for a non-porous (solid) cylinder of 127-mm diameter. It is clear from a comparison of Figs. 1 through 6 with Fig. 7 that the drag coefficients of porous cylinders are about an order of magnitude larger than those of solid cylinders. This is a consequence of the dissipation of large amounts of energy in the vortices generated on both sides of the perforations. It is this remarkable feature of the porosity that makes perforated cylinders ideally suited for damping of cables and structures undergoing hydro-elastic oscillations.

The investigation is currently underway with cylinders oscillating in a fluid otherwise at rest and the results will be reported at a later date.

### III. CONCLUSIONS

Circular cylinders of various sizes and perforations were subjected to sinusoidally oscillating flow in a large U-shaped water tunnel. The force-transfer coefficients (drag and inertia) were determined in the range of Keulegan-Carpenter numbers ( $K$ ) from about 1 to 40. The results have shown that the effect of the perforations is to decrease the inertia coefficient and to increase the drag coefficient. Thus, perforated cylinders are indeed very efficient dampers and could be used in increasing the damping of cables and large floating structures in the ocean environment, thereby reducing considerably the vortex-induced oscillations and hydroacoustic noise.

THIS PAGE LEFT INTENTIONALLY BLANK

APPENDIX: FIGURES

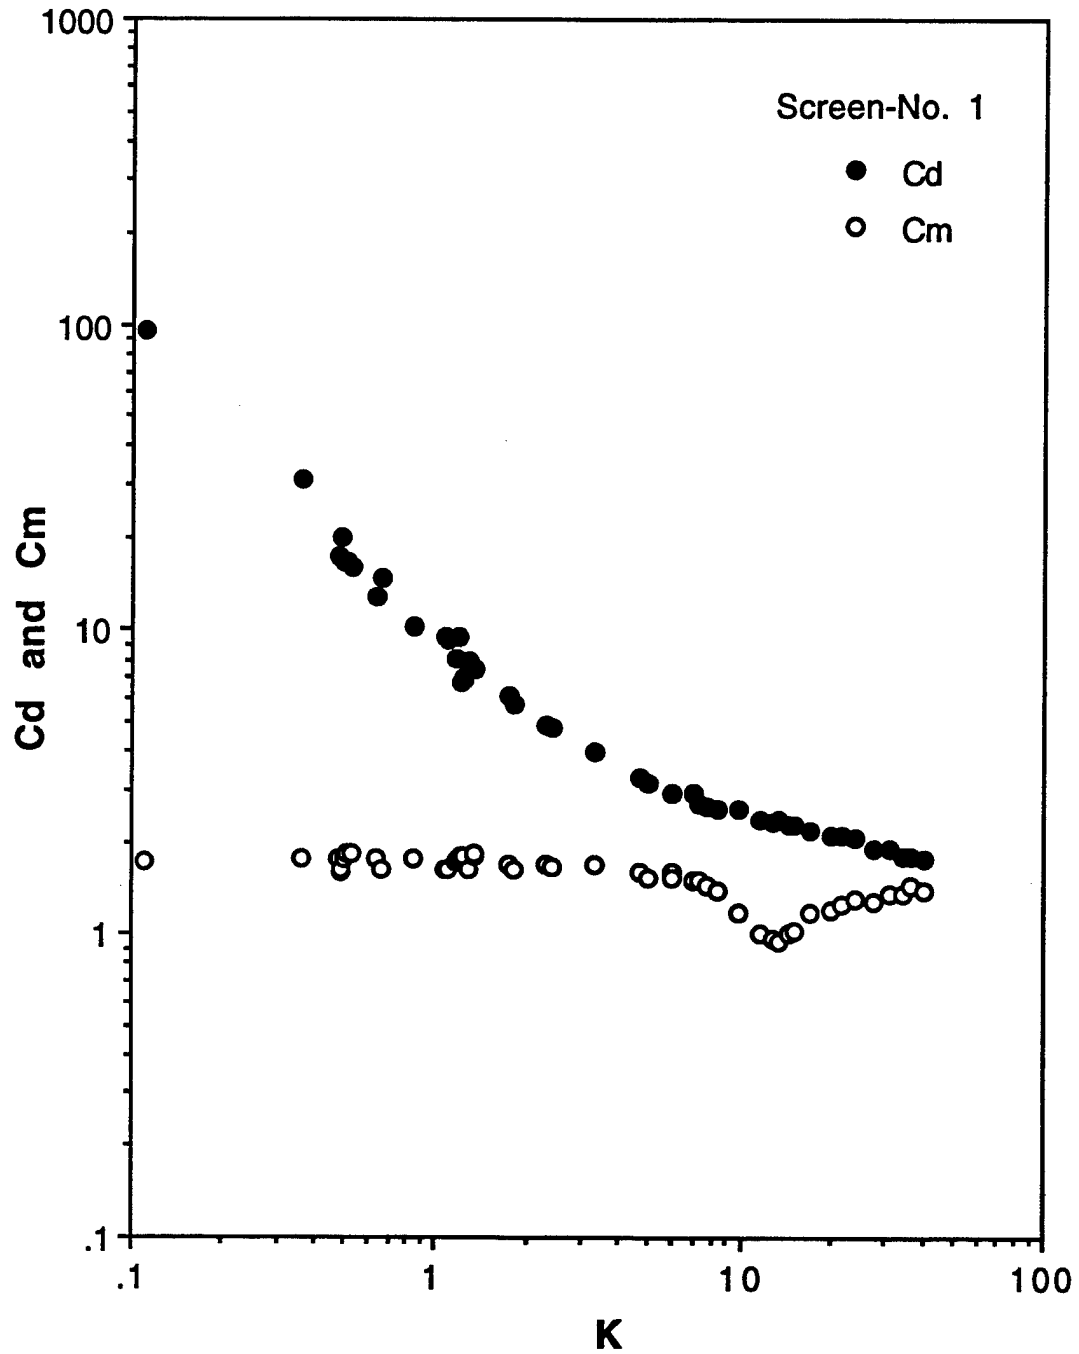


Figure 1. Cd and Cm versus K for screen No. 1.

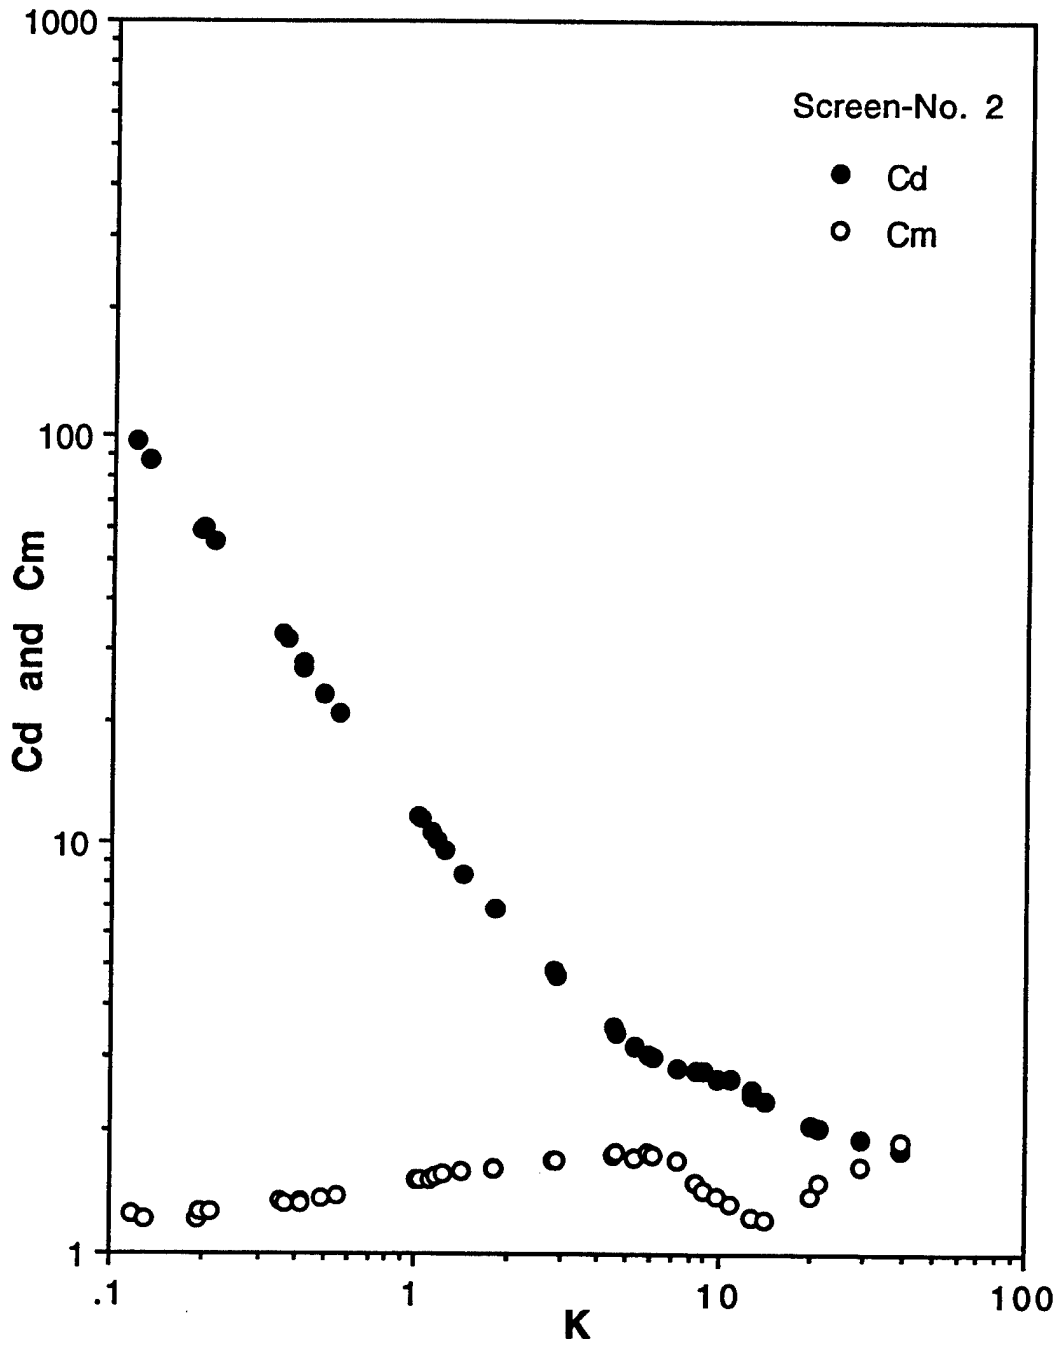


Figure 2. Cd and Cm versus K for screen No. 2.

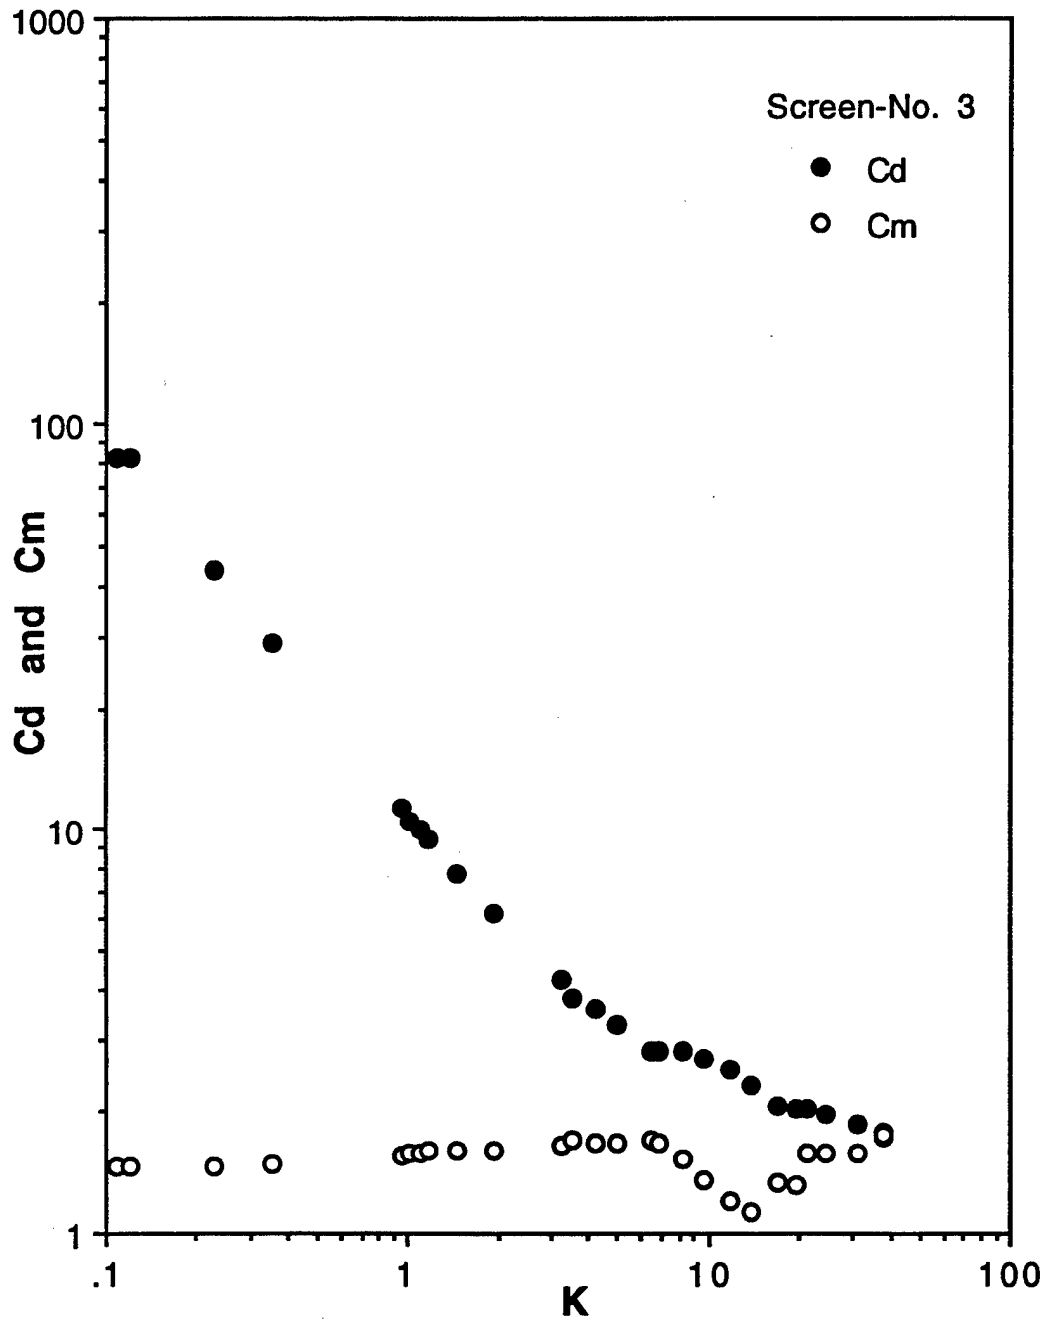


Figure 3. Cd and Cm versus K for screen No. 3.

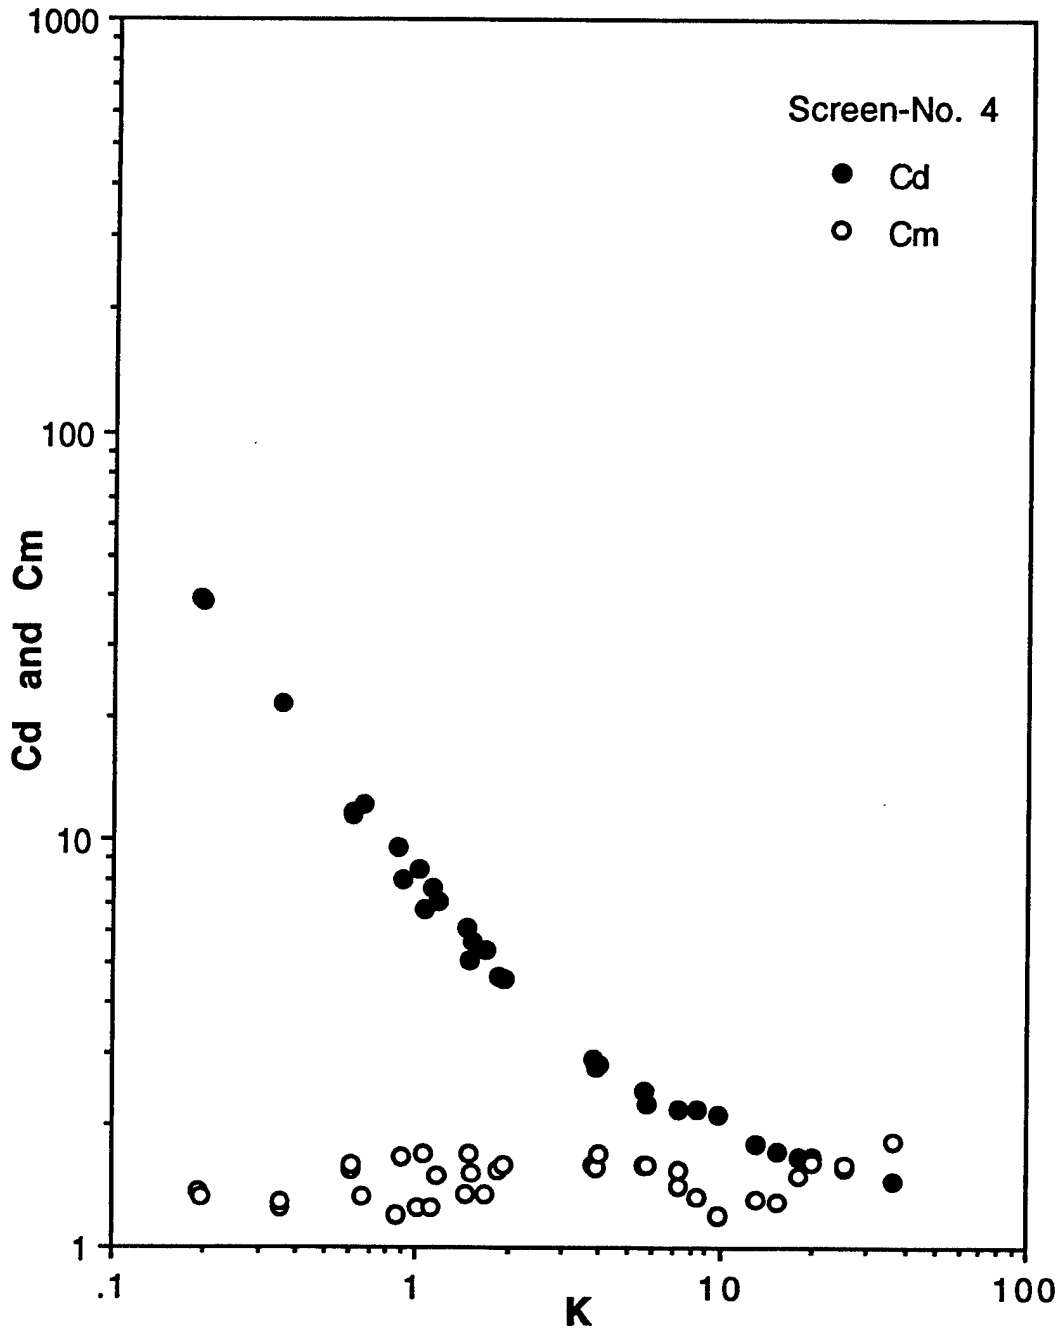


Figure 4. Cd and Cm versus K for screen No. 4.

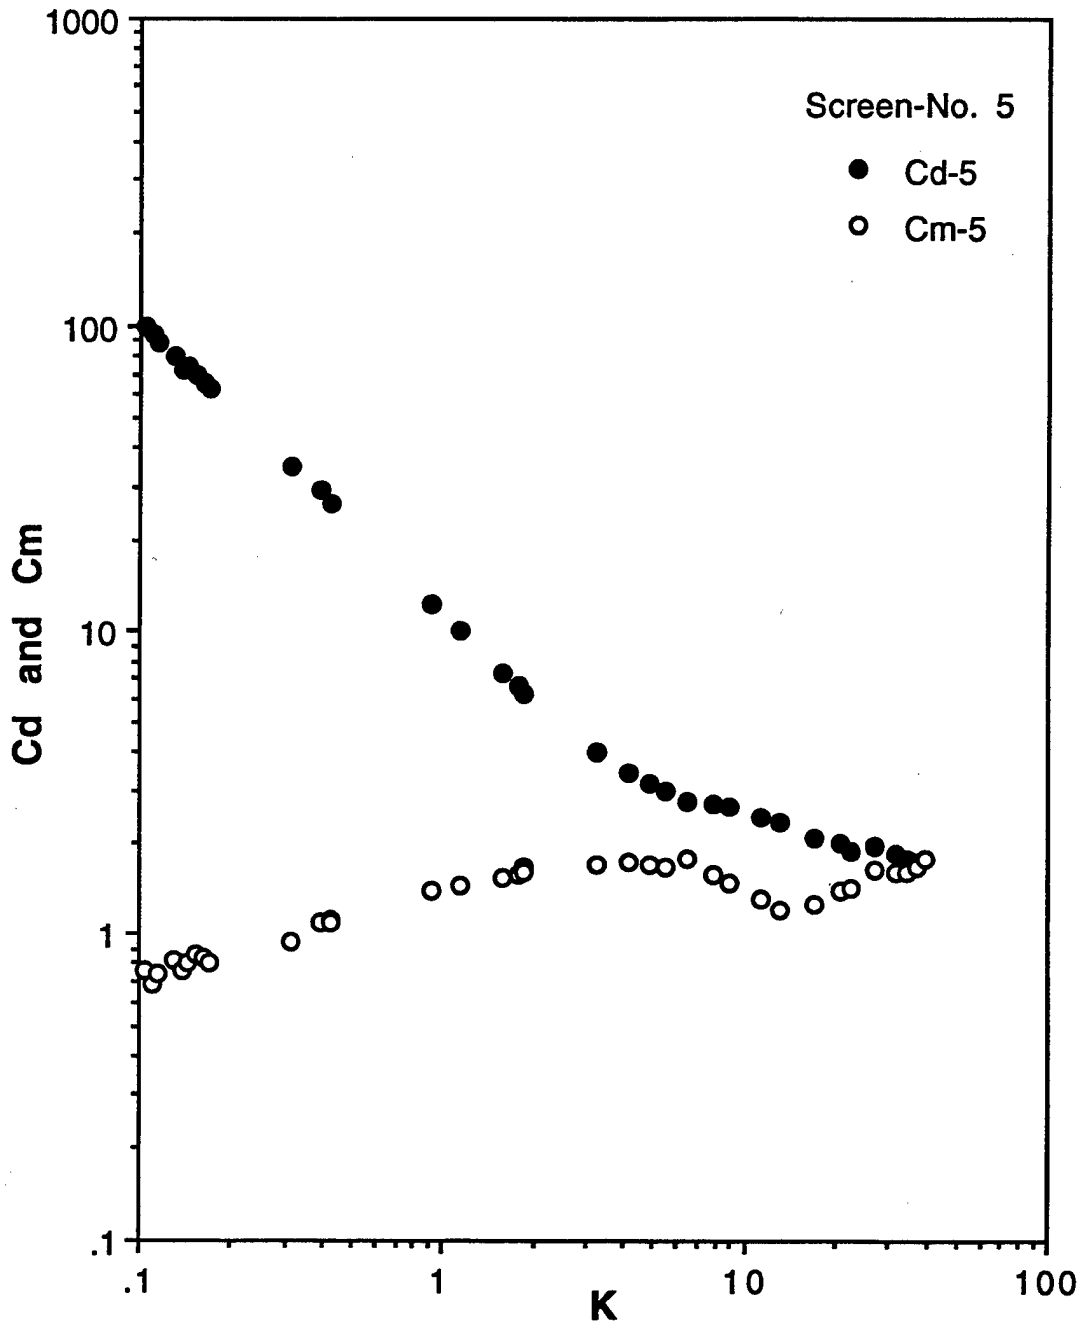


Figure 5. Cd and Cm versus K for screen No. 5.

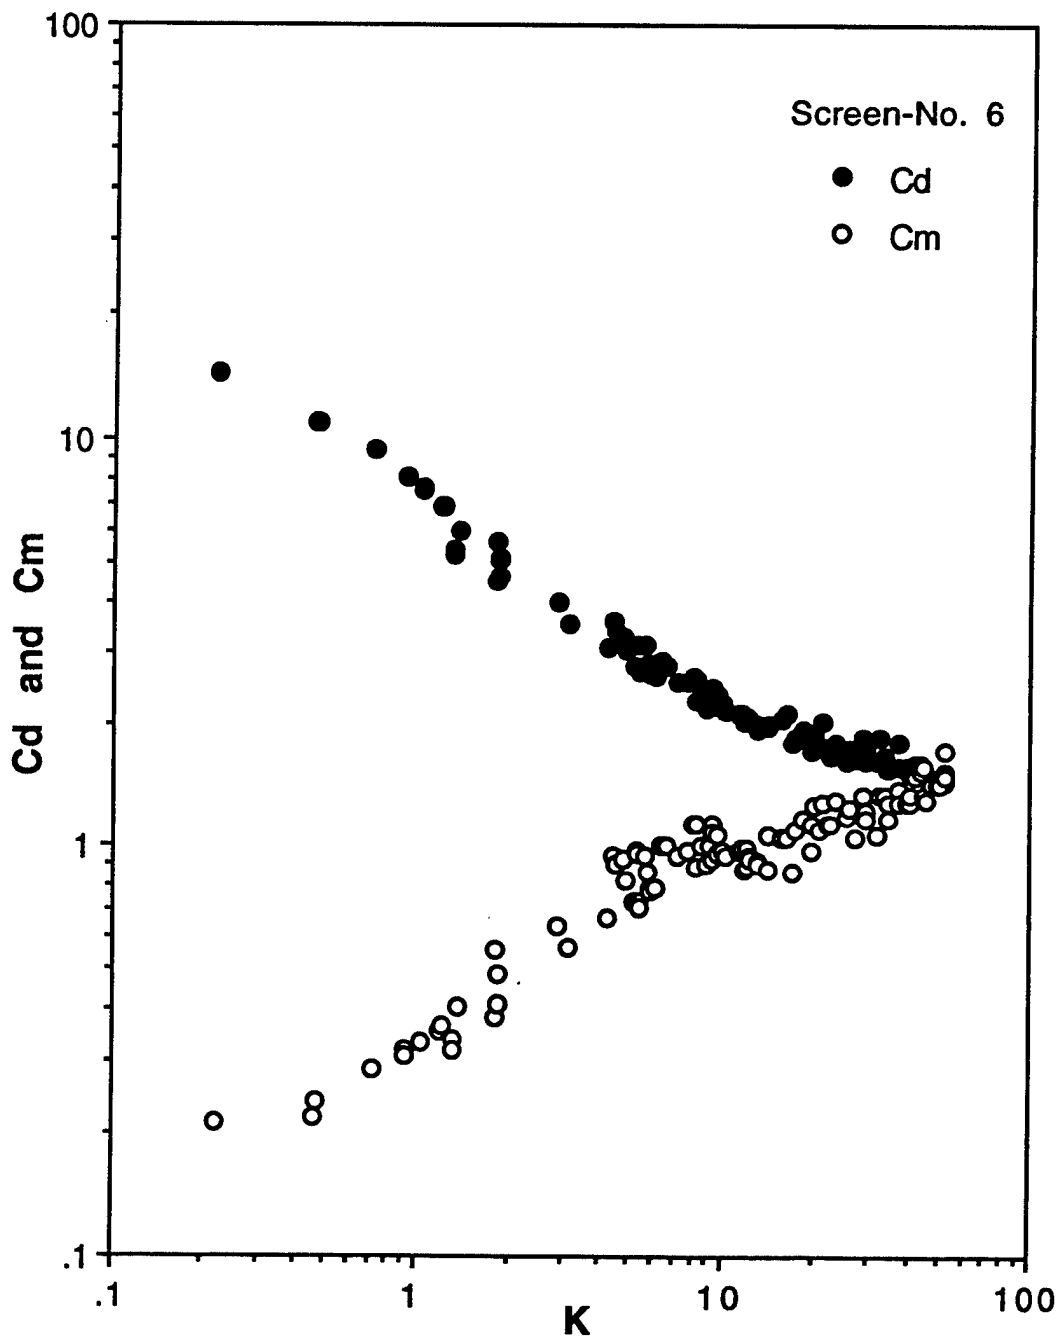


Figure 6. Cd and Cm versus K for screen No. 6.

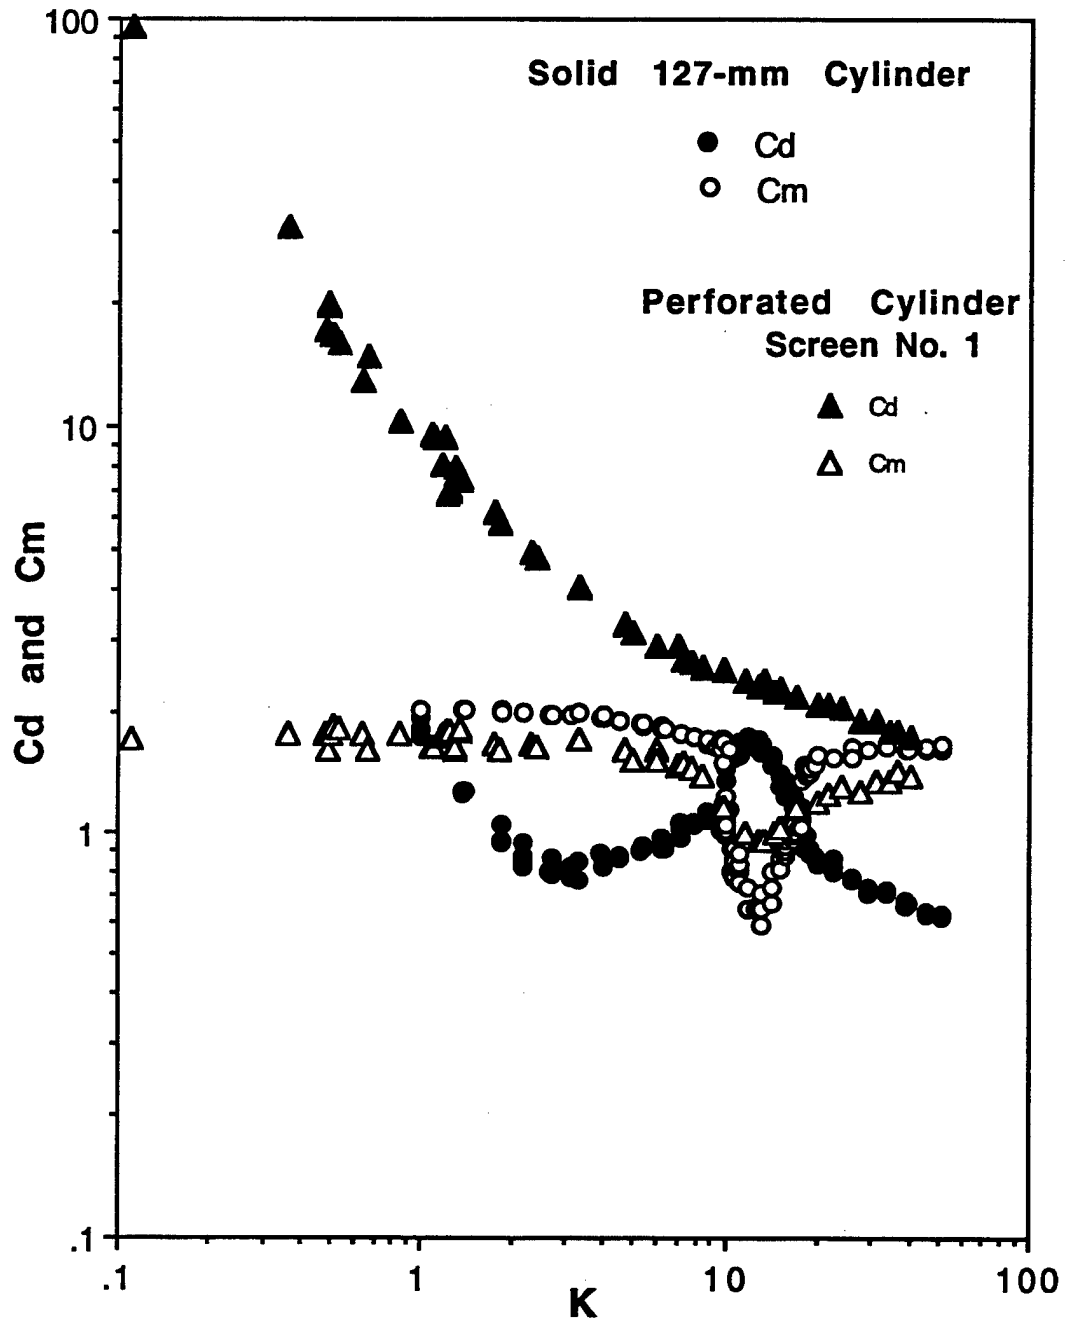


Figure 7. Cd and Cm versus K for a solid and perforated cylinder.

THIS PAGE LEFT INTENTIONALLY BLANK

## LIST OF REFERENCES

Keulegan, G. H., and Carpenter, L. H., 1958 "Forces on Cylinders and Plates in an Oscillating Fluid," *Journal of Research*, National Bureau of Standards, Vol. 60, pp. 423-440..

Morison, J. R., O'Brien, M. P., Johnson, J. W., and Schaaf, S. A., 1950 "The Forces Exerted by Surface Waves on Piles," *Petroleum Transactions*, AIME, Vol. 189, pp. 149-157.

Sarpkaya, T., 1977 "In-Line and Transverse Forces on Cylinders in Oscillatory Flow at High Reynolds Numbers," *Journal of Ship Research*. Vol. 21, No. 4, pp. 200-216.

Sarpkaya, T., and Isaacson, M., 1981 *Mechanics of Wave Forces on Offshore Structures*. Van Nostrand Reinhold, New York.

Sarpkaya, T., 1986 "Force on a Circular Cylinder in Viscous Oscillating Flow at Low Keulegan-Carpenter Numbers," *Journal of Fluid Mechics*, Vol. 165, pp. 61-71.

THIS PAGE LEFT INTENTIONALLY BLANK

## INITIAL DISTRIBUTION LIST

1. Defense Technical Information Center..... 2  
8725 John J. Kingman Rd., STE 0944  
Ft. Belvoir, VA 22060-6218
2. Dudley Knox Library ..... 2  
Naval Postgraduate School  
411 Dyer Rd.  
Monterey, CA 93943-5101
3. Department Chairman, Code ME..... 2  
Department of Mechanical Engineering  
Naval Postgraduate School  
Monterey, CA 93943-5000
4. Dist. Professor T. Sarpkaya, Code ME-SL..... 5  
Department of Mechanical Engineering  
Naval Postgraduate School  
Monterey, CA 93943-5000
5. Curricular Officer, Code 34 ..... 1  
Naval Engineering Department  
Naval Postgraduate School  
Monterey, CA 93943-5000
6. LCDR David B. Osgood..... 3  
91-1075 Lanakoi St.  
Kapolei, Hi 96707
7. George and Peggy Osgood ..... 1  
2180 Bridle Path  
Melbourne, FL 32935