


# REPORT DOCUMENTATION PAGE

Form Approved  
OMB NO. 0704-0188

Public Reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comment regarding this burden estimates or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188,) Washington, DC 20503.

1. AGENCY USE ONLY ( Leave Blank)		2. REPORT DATE January 25, 2001		3. REPORT TYPE AND DATES COVERED Progress Report 01/01/00-12/31/00	
4. TITLE AND SUBTITLE Improved Modeling of Drop Vaporization and Combustion in Diesel Sprays				5. FUNDING NUMBERS DAAG55-98-1-0442	
6. AUTHOR(S) John Abraham					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Purdue University, Purdue Research Foundation West Lafayette, IN 47907				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U. S. Army Research Office P.O. Box 12211 Research Triangle Park, NC 27709-2211				10. SPONSORING / MONITORING AGENCY REPORT NUMBER  ARO 37761.8-EG	
11. SUPPLEMENTARY NOTES The views, opinions and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy or decision, unless so designated by other documentation.					
12 a. DISTRIBUTION / AVAILABILITY STATEMENT  Approved for public release; distribution unlimited.				12 b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  The objective of the research work is to identify limitations of simplified droplet vaporization and combustion models in Diesel sprays and to improve them. Detailed numerical studies of isolated drops, isolated droplet vaporization within the framework of multidimensional model computations, and multidimensional spray computations have been carried out. During the course of the year, the methods adopted for property estimates, variable density effects, multicomponent effects, and ambient gas effects on droplet vaporization were studied. The effect of the numerical resolution on single drop predictions were also studied. The overall conclusion of the work during the course of the year was that under warm Diesel operating conditions, the vaporization rate in diesel sprays is mixing-controlled and, hence, the detailed effects of the vaporization model are not important. Under cold-start conditions it is more important to account for detailed droplet vaporization phenomena.					
14. SUBJECT TERMS Drops; Diesel sprays; Diesel cold start				15. NUMBER OF PAGES 2	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OR REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION ON THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT  UL		



NSN 7540-01-280-5500

Standard Form 298 (Rev.2-89)  
Prescribed by ANSI Std. Z39-18  
298-102

20010301 124

Enclosure 1

---

**REPORT DOCUMENTATION PAGE (SF298)**  
**(Continuation Sheet)**

---

1. List of manuscripts

- (i) S. Post and J. Abraham, "An Evaluation of a Current Model for Collisions and Coalescence in Diesel Sprays in Light of Recent Experimental Findings," paper presented at the 8<sup>th</sup> International Conference on Liquid Atomization and Spray Systems, Pasadena, CA, July 2000.
- (ii) V. Iyer, S. Post and J. Abraham, "Is the Liquid Penetration in Diesel Sprays Mixing Controlled?" paper presented at the 28<sup>th</sup> Intl. Symposium on Combustion, Edinburgh, UK, August 2000.
- (iii) S. Post and J. Abraham, "A Computational Study of the Processes that Affect the Steady Liquid Penetration in Full-Cone Diesel Sprays," accepted for publication in Combust. Sci. Tech., December 2000.
- (iv) S. Post and J. Abraham, "Modeling the Outcome of Drop-Drop Collisions in Diesel Sprays," submitted to Intl. J. Multiphase Flow, October 2000.

2. Scientific personnel

Scott L. Post, a graduate research assistant, pursuing his Ph.D. and the P.I., John Abraham, have been supported on this grant.

3. Report of inventions – none

4. Scientific progress and accomplishments

It has been shown in experimental work carried out at Sandia National Laboratories by D.L. Siebers and by modeling work carried out in the P.I.'s group that, under warm operating conditions, the vaporization in Diesel sprays is mixing-controlled and the vaporization time is not relevant. However, under cold-start conditions, the vaporization time becomes comparable to the mixing time. In this case, it is important to estimate the vaporization time with adequate accuracy. In the work carried out here, it has been shown that the accurate estimate of properties of the liquid and vapor phases, the composition of the fuel, variable density effects of the liquid phase, drop-drop interactions and numerical accuracy are all important parameters in determining the vaporization rate. The dependence of the latent heat of vaporization, partial pressure of the vapor phase and liquid density on temperature has to be included to get results with adequate accuracy. The estimate of the properties at the liquid drop surface by employing the 2/3 rule gives adequate results provided the droplet is isolated in an infinite environment. Results vary depending on the number density of the drops in the spray and the numerical resolution employed. Vaporization rates are significantly affected by the composition of the fuel. In this respect, if a single component is employed to represent the fuel, the adequate specification of the average properties is important. Results of vaporization rates can vary by as much as 50% depending on how these properties are specified.

While results from isolated single droplet studies are somewhat tractable to evaluate, those in sprays are affected by several additional parameters. The vaporization rate has  $D^2$  dependence on the droplet diameters,  $D$ . In a spray, the droplet diameter depends on the injected drop size and collisions and coalescence. The collisions and coalescence model is extremely sensitive to numerical resolution. In work carried out as part of this project, an improved collision and coalescence model has been proposed that gives improved results. The revised model shows that collisions and coalescence may be less important in Diesel sprays than previously thought.

5. Technology Transfer

There have been regular interactions with Diesel manufacturers as part of this work. These include Cummins Engine Company, Detroit Diesel Corporation and Navistar Corporation. There have been interactions with researchers at the University of Wisconsin and Princeton University.

Enclosure 2

**MASTER COPY:** PLEASE KEEP THIS "MEMORANDUM OF TRANSMITTAL" BLANK FOR REPRODUCTION PURPOSES. WHEN REPORTS ARE GENERATED UNDER THE ARO SPONSORSHIP, FORWARD A COMPLETED COPY OF THIS FORM WITH EACH REPORT SHIPMENT TO THE ARO. THIS WILL ASSURE PROPER IDENTIFICATION. NOT TO BE USED FOR INTERIM PROGRESS REPORTS; SEE PAGE 2 FOR INTERIM PROGRESS REPORT INSTRUCTIONS.

**MEMORANDUM OF TRANSMITTAL**

U.S. Army Research Office  
ATTN: AMSRL-RO-BI (TR)  
P.O. Box 12211  
Research Triangle Park, NC 27709-2211

- |  |  |
|--|--|
| <input type="checkbox"/> Reprint (Orig + 2 copies) | <input checked="" type="checkbox"/> Technical Report (Orig + 2 copies) |
| <input type="checkbox"/> Manuscript (1 copy)       | <input type="checkbox"/> Final Progress Report (Orig + 2 copies)       |
|  | <input type="checkbox"/> Related Materials, Abstracts, Theses (1 copy) |


CONTRACT/GRANT NUMBER: DAAG55-98-1-9442

REPORT TITLE: Improved Modeling of Drop Vaporization and Combustion in Diesel Sprays

is forwarded for your information.

SUBMITTED FOR PUBLICATION TO (applicable only if report is manuscript):

Sincerely,

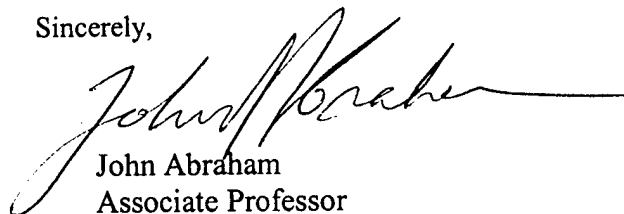  
John Abraham  
Associate Professor