

**REPORT DOCUMENTATION PAGE***Form Approved*  
*OMB No. 0704-0188*

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

**1. REPORT DATE (DD-MM-YYYY)**  
18-03-1998**2. REPORT TYPE**  
Paper**3. DATES COVERED (From - To)****4. TITLE AND SUBTITLE****Flow Properties of a Free Molecule Micro-Resistojet for Small  
Spacecraft Applications****5a. CONTRACT NUMBER****5b. GRANT NUMBER****5c. PROGRAM ELEMENT NUMBER****6. AUTHOR(S)**Andrew D. Ketsdever; Dean C. Wadsworth; Stephen E. Vargo; E. Phillip  
Muntz**5d. PROJECT NUMBER**  
2308**5e. TASK NUMBER**  
M19B**5f. WORK UNIT NUMBER****7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)**Air Force Research Laboratory (AFMC)  
AFRL/PRS  
5 Pollux Drive  
Edwards AFB CA 93524-7048**8. PERFORMING ORGANIZATION  
REPORT****9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)**Air Force Research Laboratory (AFMC)  
AFRL/PRS  
5 Pollux Drive  
Edwards AFB CA 93524-7048**10. SPONSOR/MONITOR'S  
ACRONYM(S)****11. SPONSOR/MONITOR'S  
NUMBER(S)**  
AFRL-PR-ED-TP-1998-039**12. DISTRIBUTION / AVAILABILITY STATEMENT**

Approved for public release; distribution unlimited.

**13. SUPPLEMENTARY NOTES****14. ABSTRACT**

20020115 081

**15. SUBJECT TERMS****16. SECURITY CLASSIFICATION OF:****a. REPORT**  
Unclassified**b. ABSTRACT**  
Unclassified**c. THIS PAGE**  
Unclassified**17. LIMITATION  
OF ABSTRACT**

A

**18. NUMBER  
OF PAGES****19a. NAME OF RESPONSIBLE  
PERSON**  
Jay Levine**19b. TELEPHONE NUMBER**  
(include area code)  
(661) 275-6179

# Flow Properties of a Free Molecule Micro-Resistojet for Small Spacecraft Applications \*

A.D. Ketsdever<sup>1</sup>, D.C. Wadsworth<sup>2</sup>, S.E. Vargo<sup>3</sup>, E.P. Muntz<sup>3</sup>

<sup>1</sup>Propulsion Directorate, <sup>2</sup>Hughes STX,

Air Force Research Laboratory, Edwards AFB, CA USA

<sup>3</sup>Dept. of Aerospace Eng., Univ. of Southern California, Los Angeles, CA USA

## 1 Introduction

Interest in low cost space operations and exploration has encouraged the investigation of small satellite constellations which enhance the performance of tasks previously performed by a few much larger spacecraft. Satellite constellations consisting of several spacecraft with masses between 0.01 and 100 kg will be used for various missions [1]. The growing trend towards the use of large numbers of small spacecraft operating in local clusters or constellations has created a critical requirement for low power, efficient propulsion systems.

There is a growing realization that, in many cases, microthrusters will not be simply scaled down versions of present thruster systems. For example, to maintain efficiency at small scales for chemical thrusters requires a significant increase in operating pressure to maintain equivalent levels of frozen flow and viscous losses which may be incompatible for MEMS valves. Typical nozzle expansions require throat diameters on the order of tens of microns which are easily plugged by particulates [2]. Therefore, there is a viable requirement for novel microthrusters which, from a systematic point of view, offer several benefits over conventional, scaled down versions of existing thrusters.

A free molecule micro-resistojet (FMMR) thruster concept has been developed which offers several distinct advantages over conventional microthruster concepts for attitude control and station keeping maneuvers. The FMMR combines microelectromechanical systems (MEMS) fabrication techniques with simple, lightweight construction as shown schematically in cross section in Fig.1. The FMMR consists of a polysilicon thin film heating element at a temperature  $T_w$  and a long expansion slot. A

slot is chosen as an advantage over a small nozzle expansion because of the possibility of catastrophically plugging a small orifice (typically on the order of 10  $\mu\text{m}$  in diameter) by contaminants.

In the case of the FMMR, the characteristic dimension defining free molecule flow is taken as the slot width,  $w$ . The design requirement is to arrange that the last surface contact by a molecule before it exits through the slot is with the heated surface. Although the free molecule condition sacrifices thruster performance over an ideal continuum expansion, the added benefits of simple construction, reduced risk of nozzle plugging, reduced propellant storage pressure, and simplified valve requirements make the FMMR attractive for several mission requirements.

The figure of merit for thruster performance is the specific impulse ( $I_{sp}$ ) or generated thrust per unit propellant mass flow [3]. In free molecule flow, the specific impulse varies as  $(T_o/m)^{1/2}$  where  $T_o$  is the propellant gas stagnation temperature and  $m$  is the propellant molecular mass. The ratio of the specific impulse for limit expansion through an ideal nozzle to that for free molecule flow through a slot depends on the propellant but is approximately two.

In the present problem, we use parametric, direct simulation Monte Carlo (dsMC) [4] numerical simulations to measure the enhancement of thrust made possible by local / differential surface heating of the rarefied propellant gas in a relatively easily-fabricated and robust MEMS structure. The simple one-dimensional, stationary gas, free-molecular results used in this study are expected to be useful in basic design, however, the actual micro-resistojet involves multidimensional transitional rarefied gas flow, and more sophisticated analysis methods are required for accurate performance predictions.

\*Abstract 6031 submitted to the 21st International Symposium on Rarefied Gas Dynamics, Marseille, France, July 26-31, 1998

## 2 Results

Fig.2 shows typical flowfield results for the nominal case ( $T_w = 600\text{K}$ ,  $T_o = 300\text{K}$ ) oriented in the horizontal direction. The contours consist of raw data, with each pixel corresponding to a flowfield cell, and give an indication of grid resolution. The upper half of the figure shows translational temperature contours. At this rarefaction, slip phenomena are expected to be large. This feature is confirmed by the peak temperature in the gas near the pedestal remaining much lower than the pedestal wall surface temperature. The lower half of the figure shows axial velocity contours. The acceleration of the gas due to the slot expansion is evident, while near the slot wall large velocity slip occurs. These results assume that all thruster walls are fully accommodating.

A parametric study has shown the effect of the slot divergence angle on performance or specific impulse. Comparison of the axial components of slot surface pressure and shear forces indicate that the slot expansion provides net positive increment to performance for the smaller angles (40 to 60 degrees) and lengths ( $250\ \mu\text{m}$ ) considered. The relatively large shear losses indicate that for these highly rarefied flows, small expansion ratios (or short slot heights) are preferable. The limiting case of 90 degrees results in a constant width slot, where only shear losses arise, leading to poor performance. A maximum in the specific impulse is achieved near 60 degrees for a Knudsen number of approximately one, indicating a maximum in the difference between the slot surface pressure and the shear force along the slot expansion wall.

## 3 Conclusions

The scope of this research addresses the FMMR flowfield properties as a function of several parameters including the gas/surface interaction model, FMMR geometry, propellant stagnation temperature and pressure, and slot divergence angle. Of particular interest will be the effect of the slot expansion on thruster performance. A complete parametric evaluation of thruster performance will be presented in the final manuscript.

## References

- [1] Janson, S., Helvajian, H., Robinson, E., *The Concept of Nanosatellite for Revolutionary Low-Cost Space Systems*, paper IAF-93-

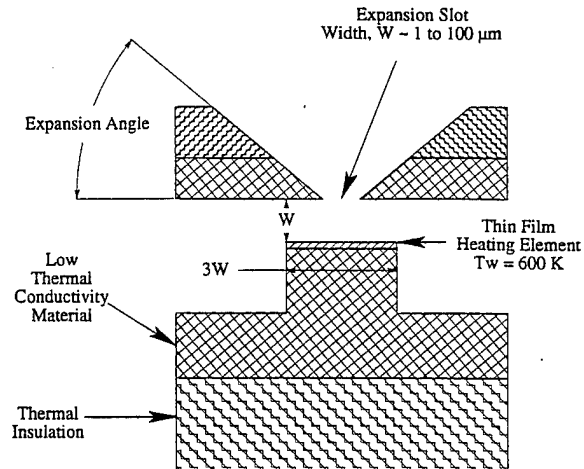


Figure 1: Free Molecule Micro-Resistojet (FMMR) conceptual design schematic

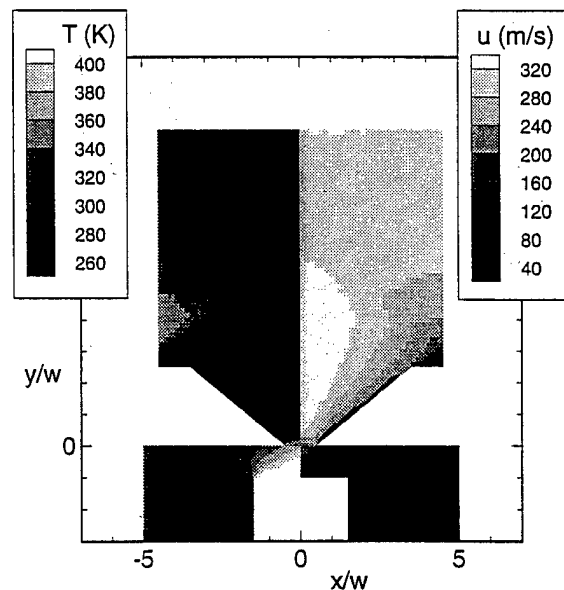


Figure 2: Translational temperature and axial velocity contours for  $T_w = 600\ \text{K}$  and  $T_o = 300\ \text{K}$

U.5.573, 44th Congress of the International Astronautics Federation, Graz, Austria, 1993.

- [2] Bayt, R., Ayon, A., Breuer, K., *Performance Evaluation of MEMS-based Micronozzles*, paper AIAA-97-3169, 1997.
- [3] Sutton, G., *Rocket Propulsion Elements*, 6th Ed., Wiley and Sons, New York, 1992.
- [4] Bird, G., *Molecular Gas Dynamics and the Direct Simulation of Gas Flows*, Clarendon Press, Oxford, 1994.