

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

|  |                             |                                    |                                     |                                   |  |
|--|-----------------------------|------------------------------------|-------------------------------------|-----------------------------------|--|
| 1. REPORT DATE (DD-MM-YYYY)  |                             | 2. REPORT TYPE<br>Technical Papers |                                     | 3. DATES COVERED (From - To)      |  |
| 4. TITLE AND SUBTITLE  |                             |                                    |                                     | 5a. CONTRACT NUMBER               |  |
|  |                             |                                    |                                     | 5b. GRANT NUMBER                  |  |
|  |                             |                                    |                                     | 5c. PROGRAM ELEMENT NUMBER        |  |
| 6. AUTHOR(S)   |                             |                                    |                                     | 5d. PROJECT NUMBER<br>1011        |  |
|  |                             |                                    |                                     | 5e. TASK NUMBER<br>CA9F           |  |
|  |                             |                                    |                                     | 5f. WORK UNIT NUMBER              |  |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)<br>Air Force Research Laboratory (AFMC)<br>AFRL/PRS<br>5 Pollux Drive<br>Edwards AFB CA 93524-7048        |                             |                                    |                                     | 8. PERFORMING ORGANIZATION REPORT |  |
| 9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES)<br>Air Force Research Laboratory (AFMC)<br>AFRL/PRS<br>5 Pollux Drive<br>Edwards AFB CA 93524-7048 |                             |                                    |                                     | 10. SPONSOR/MONITOR'S ACRONYM(S)  |  |
|  |                             |                                    |                                     | 11. SPONSOR/MONITOR'S NUMBER(S)   |  |
| 12. DISTRIBUTION / AVAILABILITY STATEMENT<br><br>Approved for public release; distribution unlimited.  |                             |                                    |                                     |                                   |  |
| 13. SUPPLEMENTARY NOTES  |                             |                                    |                                     |                                   |  |
| 14. ABSTRACT   |                             |                                    |                                     |                                   |  |
| 20030110 140   |                             |                                    |                                     |                                   |  |
| 15. SUBJECT TERMS  |                             |                                    |                                     |                                   |  |
| 16. SECURITY CLASSIFICATION OF:  |                             |                                    | 17. LIMITATION OF ABSTRACT<br><br>A | 18. NUMBER OF PAGES               | 19a. NAME OF RESPONSIBLE PERSON<br>Leilani Richardson          |
| a. REPORT<br>Unclassified  | b. ABSTRACT<br>Unclassified | c. THIS PAGE<br>Unclassified       |                                     |                                   | 19b. TELEPHONE NUMBER<br>(include area code)<br>(661) 275-5015 |

18 separate items enclosed

TP-1998-084

1011CA9F

P 98-77

MEMORANDUM FOR PRS (Contractor Publication)

FROM: PROI (TI) (STINFO)

12 May 1998

SUBJECT: Authorization for Release of Technical Information, Control Number: AFRL-PR-ED-TP-1998-084  
T.C. Miller (SPARTA) "Adhesive Layer Effects on Interfacial Crack - p Asymptotic Fields"

**EXTENDED ABSTRACT**

(Statement A)

## Adhesive Layer Effects on Interfacial Crack Tip Asymptotic Fields

T. C. Miller, Sparta, Inc., 4 Draco Drive, Edwards Air Force Base, CA 93524

Interfacial cracks in layered materials are frequently modeled without considering the presence of an adhesive layer. The validity of this approach depends on factors such as the adhesive layer thickness and properties. In this work, adhesive layer effects are studied by introducing a thin layer into existing computational models and determining the effects on the near tip stress and strain behavior as the adhesive modulus is varied.

The models presented here simulate a set of related photoelastic stress freezing experiments. A typical finite element model is shown in Figure 1. The nominal remote loads were 96.5 kPa in all cases. Different crack orientations (0, 15, 30, and 45 degrees) were used to create different levels of mode mixity. These experiments used three materials, a photoelastic material (araldite), a composite of araldite and aluminum powder, and a thin layer of adhesive. The moduli for the materials (above the stress freezing temperature) were 18.6, 37.2, and 41.4 MPa, respectively. Because in this instance the adhesive layer was thin (approximately 0.20 mm) and had properties similar to the araldite/aluminum material, its effect on the crack tip fields was not significant.


The current work examines the effects of the adhesive layer by systematically varying the modulus in a thin layer of adhesive (0.40 mm) and studying the effects on the field variables near the crack tip. The adhesive layers have moduli that vary from 0.7 to 41.4 MPa, so that a range of situations is considered from adhesives that are relatively weak to those that are comparable to the other two materials.

Figure 2 shows the results for the J integral values as a function of adhesive layer modulus. The J values are determined using the domain


integral method, which uses an area integral that is equivalent to the contour integral. The figure shows that the J values decrease rapidly to some asymptotic value for each crack orientation, so that above some relatively weak modulus (about 7 MPa) the adhesive layer has no effect. For comparison, the figure also shows calculations for models that use only two materials and exclude any adhesive layer. These values lie along the asymptotes, indicating that the bimaterial assumption is viable except in situations where a relatively weak adhesive layer is present.

Figure 3 shows the maximum shear stress contour plots for various crack orientations when the adhesive layer modulus is 0.7 MPa. In these instances the weak adhesive layer causes large shear deformations whenever mixed-mode loading is present. The large deformations cause the higher J values found in Figure 1, and also cause changes in the near tip stress fields. The adhesive layer can only support small stresses, so a large band of low shear stresses is found in the adhesive. The related near tip stress fields are also altered; the asymmetry in the fringe patterns is increased compared to the adhesive free bimaterial specimen. Similar results are found for the in-plane shear stress and strains.


**DISTRIBUTION STATEMENT A**  
Approved for Public Release  
Distribution Unlimited

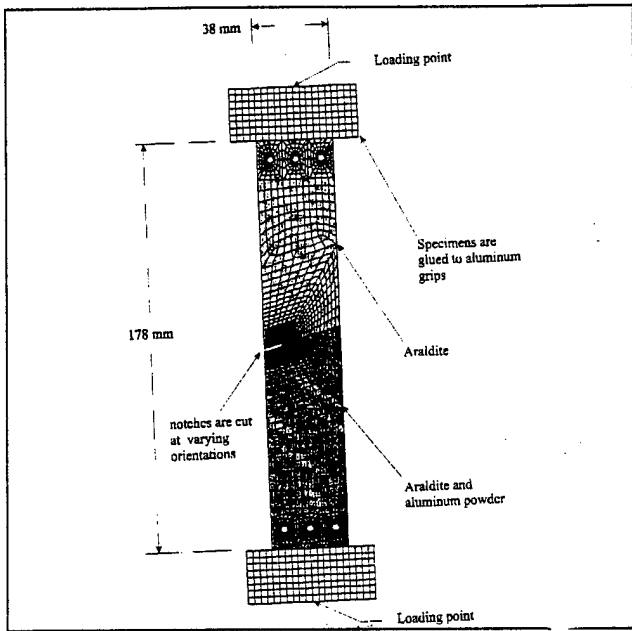

**Figure 1 - Finite element model of a photoelastic specimen**

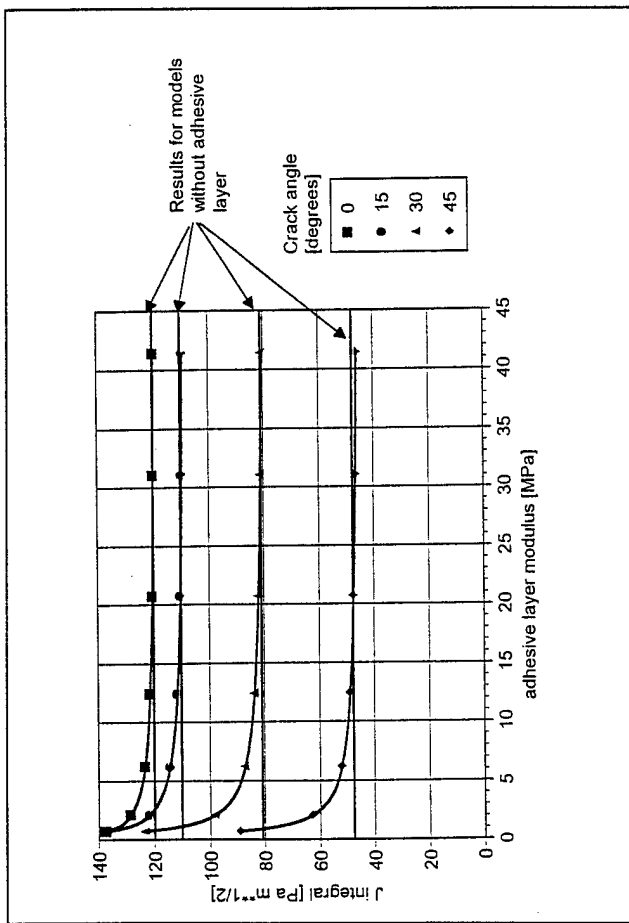

**Figure 2 - J integral values as a function of adhesive modulus**

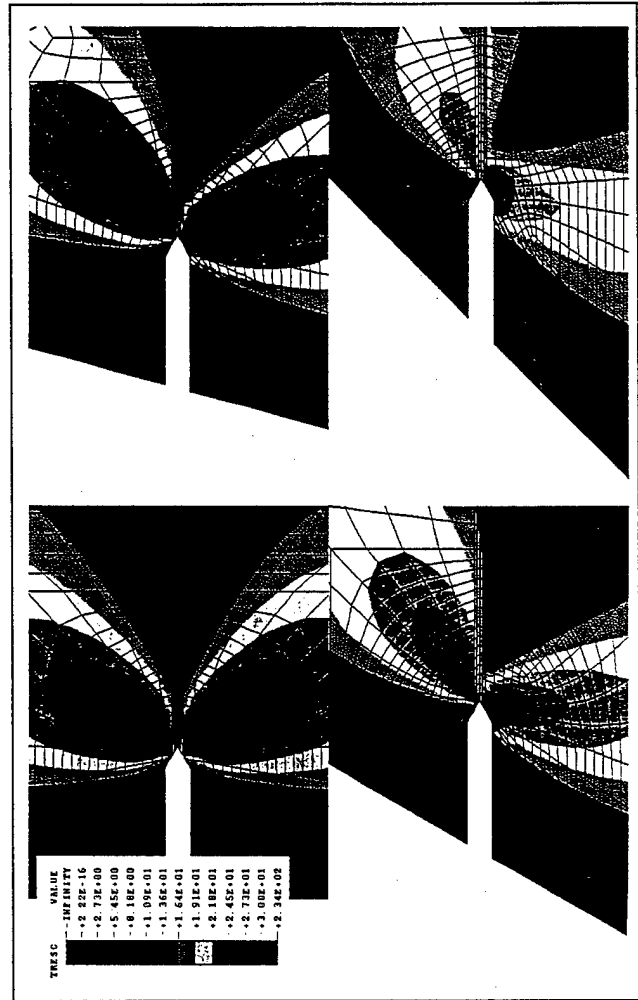

**Figure 3 - Maximum in-plane shear stress with a weak adhesive layer (various mode mixities)**