

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE Technical Papers		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER 3058	
				5e. TASK NUMBER RF9A	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/PRS 5 Pollux Drive Edwards AFB CA 93524-7048				8. PERFORMING ORGANIZATION REPORT	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/PRS 5 Pollux Drive Edwards AFB CA 93524-7048				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S NUMBER(S)	
12. DISTRIBUTION / AVAILABILITY STATEMENT  Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			Leilani Richardson
Unclassified	Unclassified	Unclassified	A		19b. TELEPHONE NUMBER (include area code) (661) 275-5015

20030123 035

21 separate items enclosed

NOTIFIED FILE

30588800

MEMORANDUM FOR PR (In-House Publication)

FROM: PROI (TI) (STINFO)

30 November 1999

SUBJECT: Authorization for Release of Technical Information, Control Number: **AFRL-PR-ED-TP-1999-0228**  
Strakey, P., "Injector/Combustor Technology" (BFI)

49<sup>th</sup> JANNAF Propulsion Meeting (Tucson, AZ, 14-16 Dec 1999)

(Statement A)



**BRIEFING FOR INDUSTRY**  
**16 Dec 1999**



**Injector/Combustor  
 Technology**

**Peter Strakey**  
**Air Force Research Laboratory|AFRL**  
**AFRL/PRSA, 10 E. Saturn Blvd.**  
**Edwards AFB, CA 93524-7660**  
**(805)275-5673**  
**Peter.Strakey@ple.af.mil**




— Air Force Research Laboratory|AFRL —

**Overview**

MCC's & PB's on all Liquid Demos

IHRPT (6.2)  
 Injector/Combustor Technology  
 Improved Chamb. Compat. Inj.  
 Lightweight, Low Cost Injector.

High Pressure and Supercritical  
 Combustion (6.1)

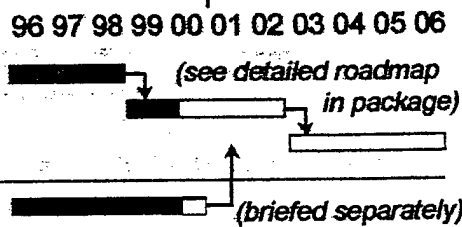

<u>Funding (\$1,000's)</u>	<u>Prior</u>	<u>99</u>	<u>00</u>	<u>01</u>
6.2	4453	973	764	764



## The Problem

- Combustor designers are unable to adequately predict whether all design criteria will be satisfied.
- Problems not discovered until full scale testing tend to be extremely expensive to fix, and usually require sacrificing engine performance\* and/or lifetime.\*
- Most past engine development programs have encountered such problems.

\* IHRPT goals

## Required Injector/Combustor Characteristics

- Complete combustion in the shortest possible length
  - Main injectors: performance vs weight tradeoffs
  - Preburners/GG's: downstream component interactions, eg, turbine blades, etc
- Acoustically stable
  - Chamber modes
  - Feed system coupling
- Chamber/wall compatibility
  - Heat transfer/cooling
  - Oxygen blanching
- Minimize pressure drop
- Throttling
- Ignitable; minimum ignition transients
- Cost, weight
- The "ilities:"
  - Reliability
  - Maintainability
  - Manufacturability
  - Durability
  - Operability

## Technical Approach

- Develop design guidance at the subscale level. Use data to
  - Develop models.
  - Anchor codes.
  - Screen candidate designs.
- Assess the direct impact of design on relevant parameters (e.g., mixing) via windowed access, as appropriate.
- Improve scalability by make all facilities high pressure capable (1500-2000 psi).

## Payoffs

### Provide alternatives to trial and error development

- Performance: Injector related design uncertainties translate to 3-6 sec Isp on a booster class LOX/H<sub>2</sub> engine.
  - Comparison: IHRPT 2010 Isp objective is 13.5 sec.
  - 3-6 sec Isp buys 1.6 - 3.3 tons payload on the Space Shuttle Main Engine (SSME) worth \$20-40M per launch.
- Operability and Lifetime: Injector related performance deficit required SSME turbopumps to be run at 105% rated power, increasing pump stress.
  - Pumps are the most expensive SSME maintenance item.
  - Turb. blade cracking problem is also probably inj. related.
- Instability: Injector related Saturn F-1 instability problem required over 800 full scale tests to solve.
  - Present day costs: over \$750K per test. Total: \$600 million.

Trial-and-error approaches risk significant cost overruns  
that can no longer be afforded

### Relationship to IHRPT Goals

<u>B&amp;OT Goal:</u>	<u>C&amp;EC Tech. Obj.</u>	<u>Inj./Comb. Task*:</u>
Increase Isp (3% cryo, 17% HC)	Incr. Isp. Eff. 5%	a. Reduce film cooling (d). b. Red. design margins (i). c. Reduce F/E (i). d. Incr. stability limits.
	Incr. Th. Isp 6 sec.	e. Incr. Pc (i).
Increase F/W 100%	Incr. Isp. Eff. 5% Incr. Th. Isp 6 sec. Decr. weight 60%	a. - e. f. Lightweight materials (i). g. Eliminate stability aids. h. Red. manifold vol. (d).

\*Quantitative amounts depend on design tradeoff studies  
d - direct AFRL contribution, actual or planned i - indirect contribution

### Relationship to IHRPT Goals

<u>B&amp;OT Goal:</u>	<u>C&amp;EC Tech. Obj.</u>	<u>Inj./Comb. Task*:</u>
Red. failure rate 75%	Red. part count 75%	a. Red. parts count (d).
Red. costs 35%	Red. costs 38%	a. Red. parts count (d). b. Red. handworking (i). c. Relax tolerances (d).

- AFRL will suggest solutions and provide subscale windowed testing support for IHRPT injector/combustor development.
- Overall lead for injector/combustor design should remain with the contractors.



## Subscale hot fire facility

### Propellants



Fuel	H <sub>2</sub> (g), CH <sub>4</sub> (g)
Oxidizer	O <sub>2</sub> (g)
Purge gas	N <sub>2</sub> (g), He(g)
H <sub>2</sub> mass flow rate	.15 lbm/s (.07 Kg/s)
CH <sub>4</sub> mass flow rate	.25 lbm/s (.11 Kg/s)
O <sub>2</sub> mass flow rate	1.0 lbm/s (.45 Kg/s)
N <sub>2</sub> mass flow rate	.5 lbm/s (.23 Kg/s)
Water flow rate	16 lbm/s (7 Kg/s)
Max. system press.	2640 psi. (179 atm)

### Data acquisition and control

VXI bus, MXI-interfaced to PowerPC with 48MB RAM and optical drive.  
 HP 1413B 64ch 100kHz scanning A/D board with signal conditioning modules.  
 Tektronix 16 ch 200kHz /ch A/D board.  
 VX4353 32 ch SPST relay switch card.

### Optics


20 kHz, 20W Cu vapor laser.  
 Innova 4W and 10W Argon Ion lasers.  
 Inj. seed, 2 pulse Yag (1.5J at 1064 nm)  
 Continuum ND6000 Dye laser.  
 Princ. Inst and Stanford gated CCD cams.  
 Infinity and Questar LD microscopes.  
 Aerometrics 2 comp. PDPA.

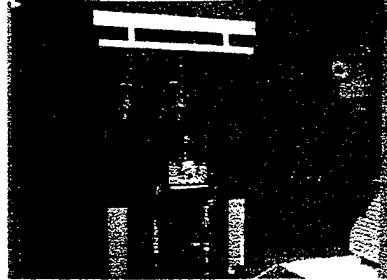

## Optically Accessible Rocket Engine



- Gas/Gas engine. Similar to Penn State Optically Accessible Engine
  - H<sub>2</sub> fuel, O<sub>2</sub> oxidizer. Capability for other fuels.
- FY99 Accomplishments
  - Demonstrated successful firing.
  - Began heat transfer analysis to prepare for insertion of quartz viewing windows.
  - Heat transfer work suspended to prepare for PDRE testing.
- FY00 Tasks
  - Complete heat transfer analysis.
  - Raman imaging of chamber to compare with Penn State results.
  - Blasing of O<sub>2</sub> injector.



## HFTF Upgrades in 1999

- Replaced stainless steel tubing and fittings in GOX system with monel
- GOX system cleaned by NTS
- Installed filters in all systems
- Acquired parts for hydrocarbon system
- Acquired altitude chamber
- Improved data transfer rates with Ethernet switch
- Improved flexibility of Abort System Software
- Upgraded main control computer to Mac G3

## Planned for 2000

- Complete liquid hydrocarbon system
- Procure and install LOX system



## Single element cold flow pressure facility

Gas simulants	N <sub>2</sub> (g), He(g)
Liquid simulant	H <sub>2</sub> O(l), others
Window Purge gas	N <sub>2</sub> (g), He(g)
N <sub>2</sub> mass flow rate	.20 lbm/s (.09 Kg/s)
He mass flow rate	.20 lbm/s (.09 Kg/s)
H <sub>2</sub> O mass flow rate	4.0 lbm/s (1.8 Kg/s)
Max. test art. press.	2000 psi (136 atm)
Max. Fuel sim. press.	3000 psi. (204 atm)
Max. Ox sim. press.	3000 psi. (204 atm)


Windowed test chamber with 5.5" (14 cm) of axial injector travel and a linear translating injector stage with 5" (13 cm) total radial travel inside chamber.

Ability to simulate manifold cross velocities to 30 ft/s (9.1 m/s).

27 tube traversable mechanical patternator  
Phase Doppler, Malvern, other diagnostics



## High Pressure Cold Flow Facility

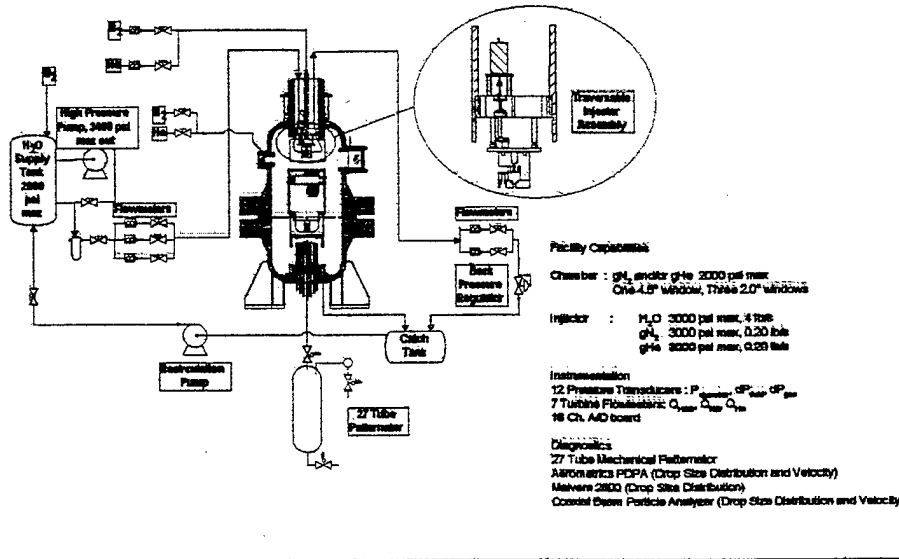


## Automated Patternator System FY99

Spray mass distribution is critical to:

- propellant mixing
- combustion efficiency
- wall compatibility

New system greatly increases speed at which spray mass distribution data can be collected.

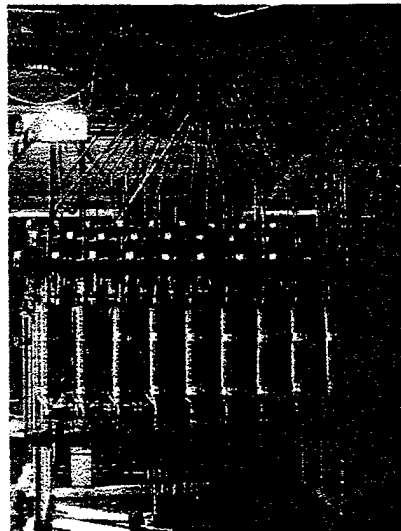

— Air Force Research Laboratory|AFRL —

## Past Systems Supported by Cold Flow Facility

SSME hot gas manifold model  
Fastrac main injector  
SSME/RLV preburner injector comparison  
Proprietary A  
SSME preburner post bias tests

— Air Force Research Laboratory|AFRL —

## FY99 Accomplishments

- PDPA small probe volume development.
  - 2 ILASS and 2 *Atomization and Sprays* publications
- SSME post biasing studies (with Rocketdyne).
  - 35th JPC, *Journal of Prop. and Pow.*
- Proprietary B
- Orifice hydraulics study.
  - *Atomization and Sprays*
- Low cost injector study (partly proprietary).
- Automated Patternator upgrade.
- 3400 psi fluid pressure upgrade.

— Air Force Research Laboratory|AFRL —

## **The Effects of LOX Post Biasing on SSME Injector Wall Compatibility**

AIAA 99-2888

**P. A. Strakey and D. G. Talley**

Air Force Research Laboratory, Edwards AFB, CA

**L. K. Tseng and K. L. Miner**

Rocketdyne Propulsion & Power, The Boeing Company,  
Canoga Park, CA

*35<sup>th</sup> AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit*


— Air Force Research Laboratory|AFRL —

### **Motivation**

- High efficiency engines require high chamber pressure and throughput.
- Problems:
  - High Heat Flux
  - = Oxidative Attack (LOX)
- Wall protection methods;
  - Film Cooling
  - Mixture Ratio Biasing
  - LOX Post Biasing
- The result is Isp loss due to MR non-uniformity in the engine.
- Goal : Provide a detailed understanding, through cold-flow simulations of the effects of LOX post biasing on the liquid and gas phase distribution near a wall.

*35<sup>th</sup> AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit*

## Scaling Parameters

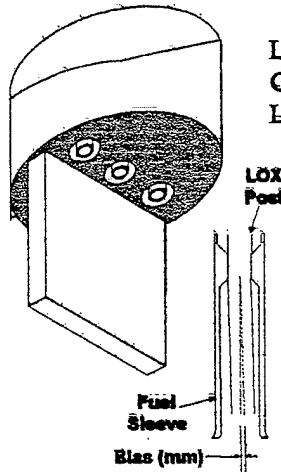

LOX Post ID=4.77 mm  
 Gas Gap=2.24 mm  
 LOX Post Recess=6.35 mm

Parameter	SSME (LOX/gH <sub>2</sub> +H <sub>2</sub> O)	Cold-Flow (H <sub>2</sub> O/gN <sub>2</sub> )
Pc (MPa)	19.3	0.74
Liq. Vel. (m/s)	31.3	10.0
Den. Ratio (l/g)	117.6	117.6
Vel Ratio (l/g)	0.087	0.087
Mom Ratio (l/g)	0.286	0.286
Mix Ratio (l/g)	3.25	3.25
Liq. Re #	1.1e <sup>6</sup>	4.3e <sup>4</sup>


35<sup>th</sup> AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit

## Strobelight Imaging

Biasing shifts the liquid flow away from the wall.

Unbiased  
 Z = 0 - 45 mm (top row)  
 Z = 45 - 110 mm (bottom row)


Biased 0.48 mm  
 Z = 0 - 45 mm (top row)  
 Z = 45 - 110 mm (bottom row)

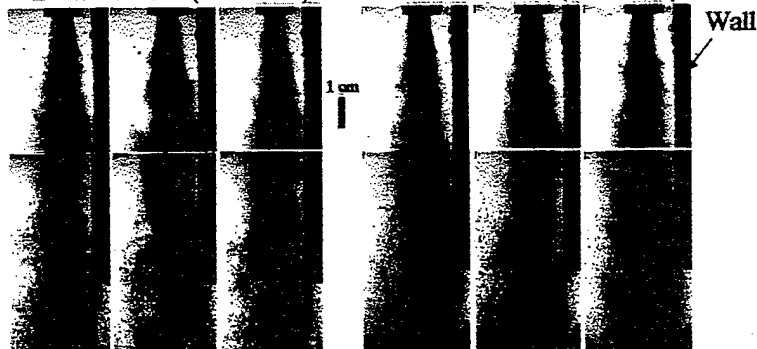

35<sup>th</sup> AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit


## Mixture Ratio Profiles

- Mixture ratio distribution is “shifted” away from the wall with LOX post biasing.
- The shift is due to a combined result of the displacement in liquid distribution away from the wall and an increase in gas flow on the wall side of injector.

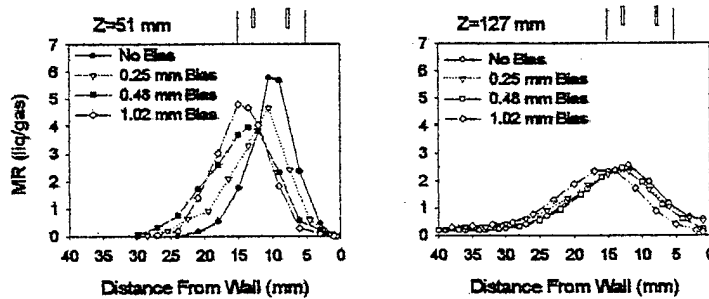



## Heat Flux Analysis

- Gas-Gas studies have shown a similitude between cold-flow data and hot-fire data at equivalent residence times.
- For the SSME,  $t=1$  ms, approximately equivalent to the 51 mm cold-flow data.

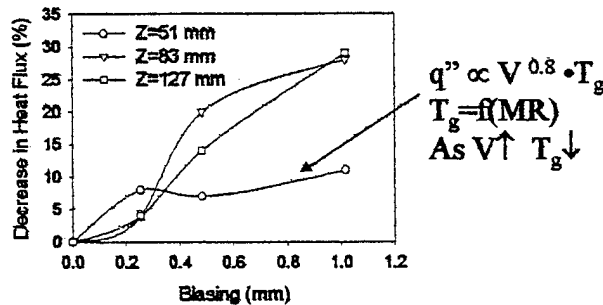

## Performance Analysis

- ISP loss for SSME (Bias=0.48 mm) between 0.3 and 0.6 s.
- $\Delta q''/\Delta Isp$  optimized at a Bias between 0.25 and 0.48 mm.

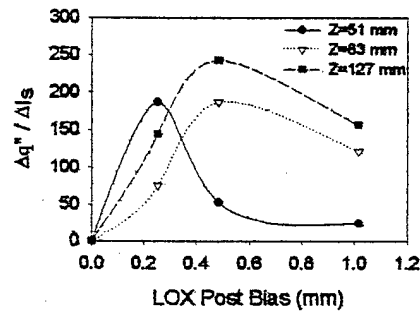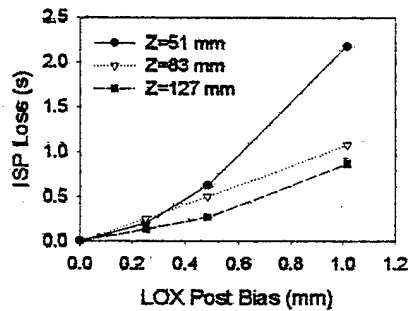

35<sup>th</sup> AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit

## Conclusions

- LOX post biasing results in displacement of liquid flow away from the wall, and higher gas velocity near wall. Net result is a decreased MR near the wall.
- Isp loss increases with increasing LOX post bias.
- Some reduction in bias could recover a small amount of Isp, while still providing adequate wall protection.
- Optimization curves can aid injector designers in choosing a level of biasing.
- Droplet size should not play a large role.

35<sup>th</sup> AIAA/ASME/SAE/ASEE Joint Propulsion Conference and Exhibit

## Planned for FY00

- **Extend post biasing studies to hot fire**
  - Reproduce and extend Penn State gas/gas coax data
    - Duplicate hardware checkout initiated in FY99 but discontinued to support PDRE work.
    - Raman measurements to be attempted closer to the injector face.
  - Develop GOX post bias data for code anchoring
- **Facility upgrades: liquid hydrocarbon and LOX capability**
- **Low cost injector design studies (proprietary)**
- **High pressure impinging injector measurements**

## Summary

- **Strategic vision**
  - *Provide design guidance before committing to full scale hardware. Reduce trial-and-error expenses.*
- **Unique facilities**
  - Cold flow, hot fire and supercritical
  - High pressure, optically accessible
- **Relevance**
  - *Short term: problem turnaround on industry time scales (e.g., months)*
  - *Long term: Validated models will apply universally.*
- **Accomplishments**
  - *Numerous real-world engines impacted.*
  - *Numerous other metrics accomplished (publications, awards, tech transfer, etc.)*