

AFRL-PR-WP-TR-2003-2031

**CARBON-PHENOLIC CAGES FOR
HIGH-SPEED BEARINGS**

**Part I - Friction and Wear Response of
Phenolic Composite Impregnated with a
Multiply-Alkylated Cyclopentane (MAC)
Lubricant and MoS₂ Solid Lubricant**



Nelson H. Forster

**Mechanical Systems Branch (AFRL/PRTM)
Turbine Engine Division
Propulsion Directorate
Air Force Research Laboratory, Air Force Materiel Command
Wright-Patterson Air Force Base, OH 45433-7251**

JANUARY 2003

Interim Report for 01 January 2001 – 01 August 2002


Approved for public release; distribution is unlimited.

**PROPULSION DIRECTORATE
AIR FORCE RESEARCH LABORATORY
AIR FORCE MATERIEL COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7251**


NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


This technical report has been reviewed and is approved for publication.

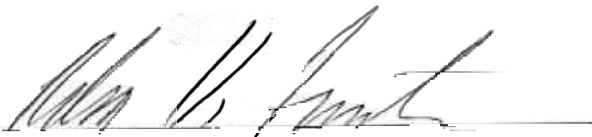

NELSON H. FORSTER, Ph.D.
Principal Mechanical Engineer
Mechanical Systems Branch

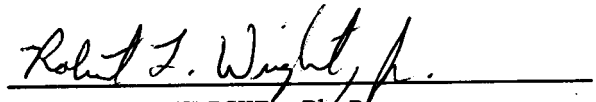

ROBERT L. WRIGHT, Ph.D.
Chief, Mechanical Systems Branch

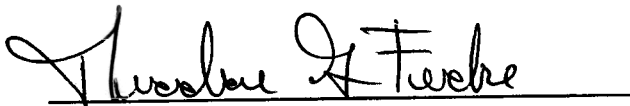

THEODORE G. FECKE
Chief Engineer
Turbine Engine Division
Propulsion Directorate

Copies of this report should not be returned unless return is required by security considerations, contractual obligations, or notice on a specific document.

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

1. REPORT DATE (DD-MM-YY) January 2003		2. REPORT TYPE Interim		3. DATES COVERED (From - To) 01/01/2001 – 08/01/2002	
4. TITLE AND SUBTITLE CARBON-PHENOLIC CAGES FOR HIGH-SPEED BEARINGS Part I - Friction and Wear Response of Phenolic Composite Impregnated with a Multiply-Alkylated Cyclopentane (MAC) Lubricant and MoS ₂ Solid Lubricant				5a. CONTRACT NUMBER IN-HOUSE	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 62203F	
6. AUTHOR(S) Nelson H. Forster				5d. PROJECT NUMBER 3048	
				5e. TASK NUMBER 06	
				5f. WORK UNIT NUMBER IH	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Mechanical Systems Branch (AFRL/PRTM) Turbine Engine Division Propulsion Directorate Air Force Research Laboratory, Air Force Materiel Command Wright-Patterson Air Force Base, OH 45433-7251				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-PR-WP-TR-2003-2031	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Propulsion Directorate Air Force Research Laboratory Air Force Materiel Command Wright-Patterson Air Force Base, OH 45433-7251				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL/PRTM	
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-PR-WP-TR-2003-2031	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES Cleared for public release by the National Reconnaissance Office (NRO). See also Part II (AFRL-PR-WP-TR-2003-2032) and Part III (AFRL-PR-WP-TR-2003-2033). This report contains color.					
14. ABSTRACT (Maximum 200 Words) This is the first part of a three-part series of reports by AFRL/PRTM to investigate carbon-phenolic bearing cages in high-speed, lightly lubricated bearings. This portion covers characterization of flat panel specimens using thermal conductivity, tensile strength, coefficient of thermal expansion measurements, and friction and wear testing in a sliding contact. The experimental data indicate that the carbon-phenolic has superior mechanical and thermal properties to the cotton-phenolic material. The friction and wear properties were similar to the cotton-phenolic baseline.					
15. SUBJECT TERMS bearings, composite cages, control moment gyroscope					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 24	19a. NAME OF RESPONSIBLE PERSON (Monitor) Nelson H. Forster 19b. TELEPHONE NUMBER (Include Area Code) (937) 255-4347
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified			

Standard Form 298 (Rev. 8-98)
Prescribed by ANSI Std. Z39-18

Table of Contents

Section	Page
List of Figures	iv
List of Tables	iv
Acknowledgements	v
1. Introduction	1
2. Experimental	2
3. Experimental Results	5
4. Conclusions	13
5. References	14

List of Figures

Figure	Page
1. Example of a Carbon-Phenolic Sample in the Test Holder	3
2. Cross Section of the Optical EHD Test Rig used for the Friction and Wear Testing	4
3. Friction Data for the Cotton-Phenolic Material with and without the Pennzane [®] Lubricant	6
4. Friction of Carbon-Phenolic Dry and with 20% by Weight MoS ₂ at 10 m/s Sliding Speed	7
5. Ball Temperature of the Carbon-Phenolic Sample with and without MoS ₂ at 10 m/s Sliding Speed	8
6. Coefficient of Friction of Cotton-Phenolic and Carbon-Phenolic with Pennzane [®] Lubricant at 5 m/s Sliding Speed	9
7. Coefficient of Friction of Cotton-Phenolic and Carbon-Phenolic with Pennzane [®] Lubricant at 10 m/s Sliding Speed	10
8. Coefficient of Friction of Cotton-Phenolic and Carbon-Phenolic with the Pennzane [®] Lubricant at 15 m/s Sliding Speed	11
9. Comparison the Carbon-Phenolic and Cotton-Phenolic in a 3-Hour Sliding Test with the Pennzane [®] Lubricant	12

List of Tables

Table	
1. Carbon-Phenolic Composite Specimens	3
2. Mechanical and Thermal Properties of Carbon-Phenolic and Cotton-Phenolic	5

Acknowledgements

This research was funded by the National Reconnaissance Office as Part of the Directors Innovation Initiative Program. Dr. Jeffrey H. Sanders of Air Force Research Laboratory Materials Directorate (AFRL/MLBT) was the program manager for the overall effort. The carbon-phenolic samples in the program were prepared by Mr. Wei Shih of Allcomp Inc., City of Industry, CA. Mr. Shih also provided the mechanical and thermal property data for the carbon-phenolic specimens. Hitesh Trivedi and Doug Eisentraut of UES Inc., Dayton, OH, performed the experimental friction testing.

1. Introduction

The objective of this effort was to develop a new bearing cage material made from a carbon fiber-phenolic resin matrix (carbon-phenolic), with the end goal of producing a material that would have better performance than cotton-phenolic cages in high-speed, lightly lubricated bearings. This is the first part of a three-part series of reports. This report addresses the initial material selection, mechanical and thermal characterization, and tribology testing. Part II covers the experimental bearing testing, and Part III covers thermal modeling of the bearing. There are also a set of reports in progress from the Air Force Research Laboratory Materials Directorate that address testing in vacuum and hard coatings on the bearing steel.

The rationale for selecting carbon-phenolic candidate material was based on the potential to significantly improve the mechanical and thermal properties of the cotton phenolic material. Based on prior experience with carbon matrix - carbon fiber cages (C-C) ^[1 2], we anticipated that replacing cotton fibers with carbon fibers would greatly improve the thermal conductivity, strength, and modulus of elasticity, while also decreasing the coefficient of thermal expansion. Additionally, there would be less cost in fabricating carbon-phenolic cages compared to C-C cages, since producing the matrix is a primary cost driver of producing C-C composite material. We also hoped to lower the coefficient of friction (COF) of the carbon-phenolic matrix by incorporating lubricants into the matrix of the cage. The following lubricants were used for this purpose; the multiply, alkylated, cyclo-pentane (MAC) liquid lubricant commercially known as Pennzane[®], powdered molybdenum disulfide (MoS₂), and powdered fluorinated graphite (CF). Ideally, if we could develop a carbon-phenolic material with equivalent or lower friction than the standard cotton-phenolic material and improved mechanical and thermal properties, we would have a better bearing cage material than the cotton-phenolic material used today. The material would also provide a lower cost cage than C-C with many of the same performance benefits.

2. Experimental

2.1 Material Samples

Flat panel specimens were generated at the beginning of the program to characterize the material properties. Allcomp Inc., City of Industry, California supplied all of the test specimens. The particular specimens used in the study are listed in Table 1. The specimen numbers, 10818 through 10827, are used to identify the specimens throughout the report. A photograph of a typical friction and wear specimen is shown in Figure 1. Each sample was 2.00 inches long by 0.50 inch wide by 0.25 inch thick. The shiny spot on the sample is a wear scar after a single test. All of the samples essentially had the same appearance and dimensions. All of the panels were produced with a T300 3k carbon fiber matt. The matt had an 8-harness satin weave with 24/23 tows/inch fabric. All of the samples were cured at 450°F for 12 hours. Specimens 10819 and 10827 had an additional postcure cycle to further stabilize the phenolic resin and intentionally open up some additional open-pore porosity.

In specimens 10822 and 10823 the CF lubricant was included into the resin matrix. The CF 3000 is an Atlantic Research Chemical, Inc. (ARC) product converted from 2-micron graphite and containing 60.4 percent fluoride. The CF 4000 is an ARC product converted from 6-micron graphite and containing 64.2 % fluoride. As stated in Table 1, specimens 10824, 10825, and 10826 had powdered MoS₂ incorporated into the matrix at a concentration of 5, 10, and 20 % by weight, respectively. The MoS₂ was obtained from Atlantic Equipment Engineers, Catalog No. MO-801, and is reported to be 99.8% pure with a range in particle size of 1 to 5 microns.

To characterize the material properties, the samples were tested under tension for modulus of elasticity and tensile strength. This testing was performed by Materials Innovation, Inc. per ASTM D 3039. The tensile testing was performed only in the in-plane direction. This is the plane of highest concern in bearing cages for tensile strength and modulus, and typically the fiber matt is wrapped circumferentially to optimize the part for hoop characteristics. However, interlaminar shear strength can also be a critical parameter in high-speed bearings, particularly those made with 2-D fiber weaves, wrapped in the manner described above. Due to the limited funds and scope of this program, the interlaminar shear strength was not measured. The thermal conductivity was measured by Dr. Hasslemann of Virginia Polytechnic Institute using laser flash thermal diffusivity. Thermal conductivity was measured in both the in-plane direction and normal to the fiber weave.

In preparation of the friction and wear testing, most of the specimens were vacuum impregnated with a MAC lubricant, commercially known as Pennzane[®]. The

impregnation of the lubricant was performed by AFRL/MLBT and a description of that process is covered in a separate report.

Table 1. Carbon-Phenolic Composite Specimens

Specimen Number	Sample Preparation
10818	T300/Phenolic (No filler, as cured)
10819	T300/Phenolic (no filler, Fast cycle postcured)
10827	T300/Phenolic (no filler, long cycle postcured)
10822	T300/phenolic (CF300 10% wt. In matrix, as cured)
10823	T300/phenolic (CF 4000 10% wt. In matrix, as cured)
10824	T300/Phenolic (MoS ₂ 5% wt. In matrix, as cured)
10825	T300/Phenolic (MoS ₂ 10% wt. In matrix, as cured)
10826	T300/Phenolic (MoS ₂ 20% wt. In matrix, as cured)



Figure 1. Example of a Carbon-Phenolic Sample in the Test Holder

2.2 Friction and Wear Testing

A cross section of the friction and wear tester used to characterize the specimens is shown in Figure 2. For these tests, the rotating disk was replaced with a dead weight holder that contained the samples shown in Figure 1. The tester has a 1.125-inch ball mounted on a shaft and can be driven at speeds up to 21,000 rpm. In the test, the friction and wear samples were dead weight loaded against the rotating ball. Friction testing was performed at a normal load of 2.0 N (0.45 lb) and at 3.5 N (0.79 lb). Testing was performed at 5, 10, and 15 m/s ball surface speed. For the 206 bearing used in Part II, the 5, 10, and 15 ms are the pitch line speed (essentially the cage land sliding speed) at bearing shaft rpm of 4,616, 9,232, and 13,847. Most of the bearing speed data in Part II was performed between 10,000 and 20,000 rpm, so the friction data obtained here provides a good estimation of the bearing friction for analysis in Part III. A thermocouple placed lightly in contact with the rotating ball was used to record the ball temperature. A torque sensor in line with the ball shaft was used to measure the ball torque and calculate the resultant friction coefficient. All of the testing was done in air environment, and the relative humidity was measured and recorded at the beginning of each test. Most of the tests ran for a duration of 15 minutes. Additionally some of the tests ran for a period of 3 hours on one spot to measure long-term effects.

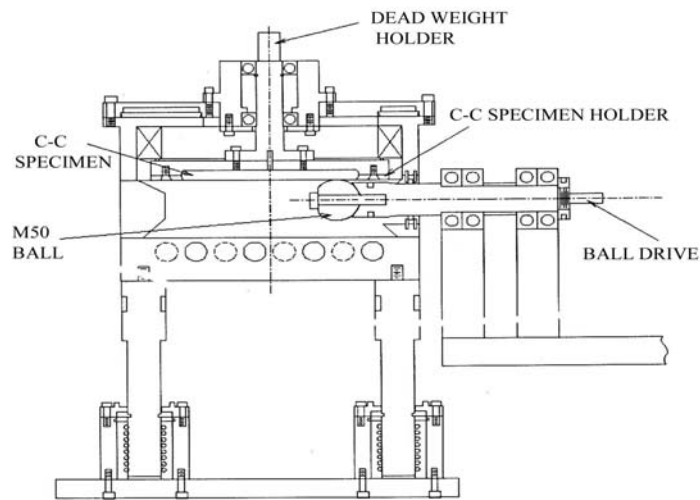


Figure 2. Cross Section of the Optical EHD Test Rig Used for the Friction and Wear Testing

3. Experimental Results

3.1 Material Samples

Values for the mechanical and thermal properties from specimens 10818 (no filler, as cured), 10825 (10 % by weight MoS₂, as cured), and a cotton-phenolic baseline material are shown in Table 2. The cotton-phenolic values were taken from the internet site www.efunda.com. As seen in Table 2, the modulus in the fiber direction is much higher with carbon fibers than cotton fibers. A higher modulus is beneficial in reducing growth from centrifugal stress in high-speed bearings. Also shown is the coefficient of thermal expansion (COTE). There is also a very large difference in the COTE, with the carbon-phenolic being much lower than the cotton-phenolic material. Similar to modulus, a low COTE will reduce growth of the cage in operation. A material with a high modulus and low COTE will be very stable at high speed, and if designed as an outer land riding cage, will essentially eliminate thermal runaway of the bearing cage.

Table 2 - Mechanical and Thermal Properties of Carbon-Phenolic and Cotton-Phenolic

	Cotton-Phenolic	Carbon-Phenolic	Carbon-Phenolic (10% MoS ₂)
Modulus - xy (GPa)	7.6 - 9.7	62.3	56.1
CTE - xy (10 ⁻⁶ / °C)	15 - 22	0.7	0.9
T Strength -xy (MPa)	41-69	637	652
k - z (W/m-K)	0.33 – 0.42	0.85	0.80
k - xy (W/m-K)	0.33 – 0.42	3.25	2.10
Density (g/cm ³)	1.30 – 1.42	1.40	

3.2 Friction and Wear Testing

A baseline test of a cotton-phenolic material, with and without the Pennzane[®] lubricant, is shown in Figure 3. At the higher load, the COF without liquid lubricant is erratic and reaches values in excess of 1.75 for short duration. At the lower load of 2 N, the material is better behaved without the liquid lubrication, but the friction is still very high. Clearly, the cotton-phenolic material does not perform well in sliding contacts without a lubricant. Also shown in Figure 3 is a plot for the cotton-phenolic material impregnated with the Pennzane[®] lubricant. The COF is a steady value of about 0.18. The wear scar for the lubricated condition was much smaller when the lubricant was present. While the COF is much lower with the liquid lubricant, it is not as low as would normally be expected with a liquid lubricant.

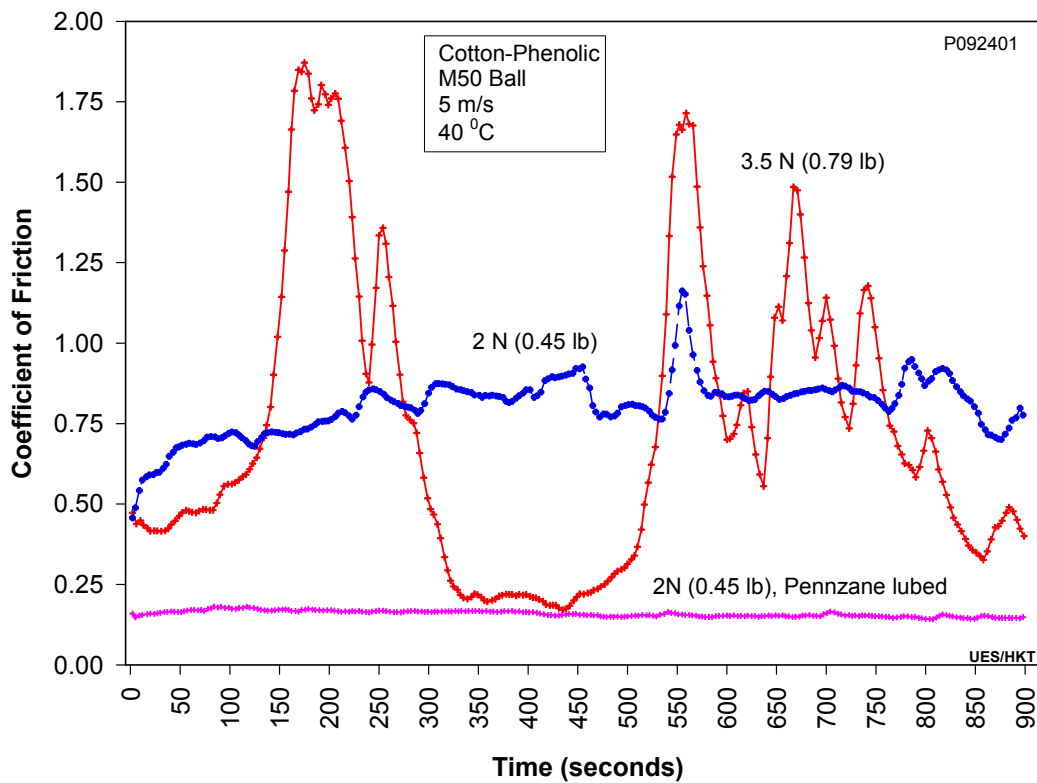


Figure 3. Friction Data for the Cotton-Phenolic Material with and Without the Pennzane[®] Lubricant

The carbon-phenolic material without the liquid lubricant is shown in Figure 4. Results are shown for sample 10818 (as cured) and 10826 (as cured with MoS₂). At start up, both samples perform better than the unlubricated cotton-phenolic, but the friction is still high for a tribo-contact where low friction is desired. With time, the sample without MoS₂ reaches a very high friction coefficient similar to the cotton-phenolic sample. Ball temperature plots corresponding to Figure 4 are shown in Figure 5. As expected, the ball temperature responds closely to the measured friction coefficient, reaching a temperature as high as 135°C with the unlubricated specimen. It should also be considered that the localized contact spot on the stationary composite specimen would be at much higher temperature than the rotating ball. The very high COF in the lubricated specimens is probably due in part to this temperature and micro seizure in the contact. In the notes on the figure, WS refers to the wear scar diameter and RH to the relative humidity measured on that particular day in the test cell.

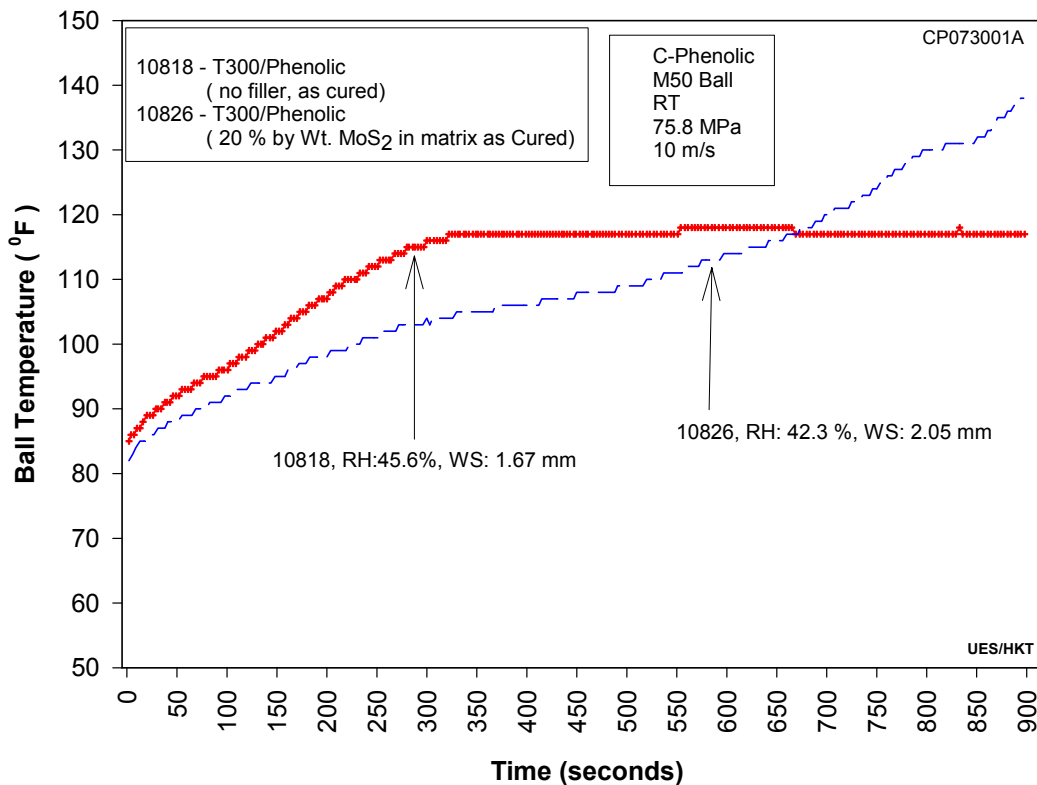


Figure 4. Friction of Carbon-Phenolic Dry and with 20% by Weight MoS₂ at 10 m/s Sliding Speed

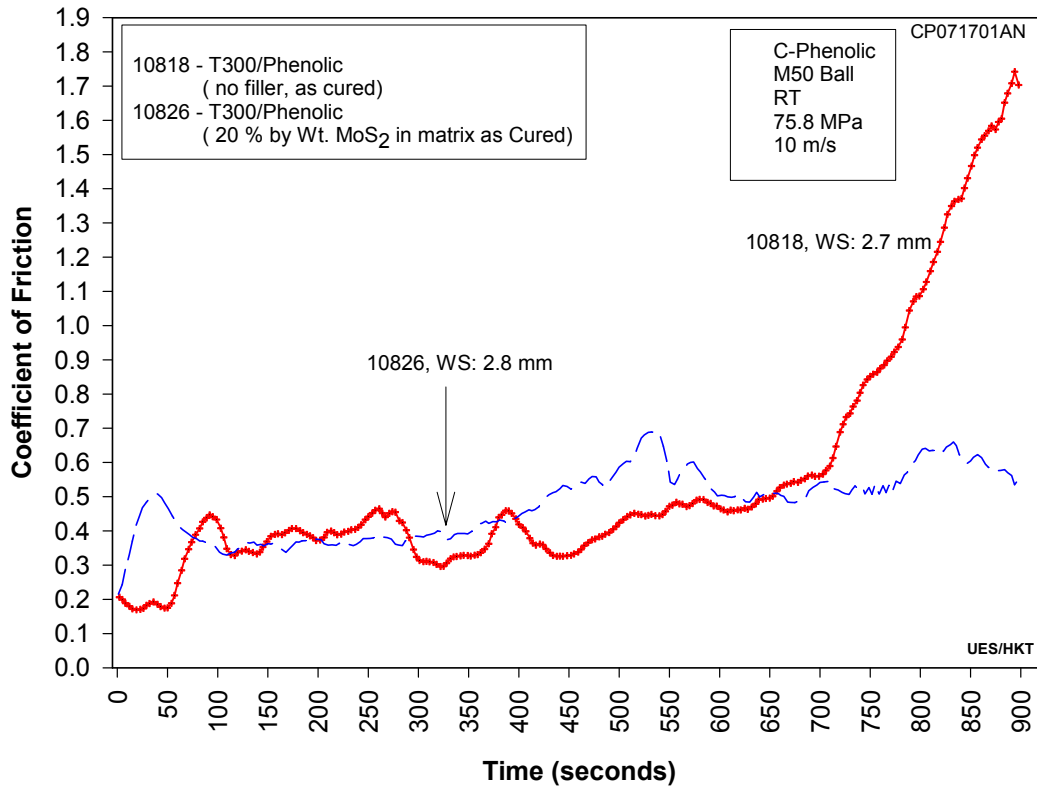


Figure 5. Ball Temperature of the Carbon-Phenolic Sample with and without MoS₂ at 10 m/s Sliding Speed

A comparison of the COF of cotton-phenolic and the three carbon-phenolic samples impregnated with the Pennzane[®] fluid, 108818, 10819, and 10827, is shown in Figure 6. All of the tests in Figure 6 are for a sliding speed of 5 m/s. Two of the samples, 10819 and 10827, show close agreement with the cotton-phenolic specimen at a value of about 0.17. One of the carbon-phenolic specimens, 10818, has a higher COF. The wear scar was fairly low in all four cases, as noted on the figure.

Friction data at 10 m/s for the cotton phenolic and samples 10818, 10819, and 10827 is shown in Figure 7. In this case, samples 10818 and 10827 show close agreement with the cotton-phenolic sample at a value of about 0.20, and sample 10819 is lower.

Friction data at 15 m/s for the cotton-phenolic and samples 10818, 10819, 10827 is shown in Figure 8. All of the carbon-phenolic specimens are higher than the cotton-phenolic and range from 0.20 to 0.26.

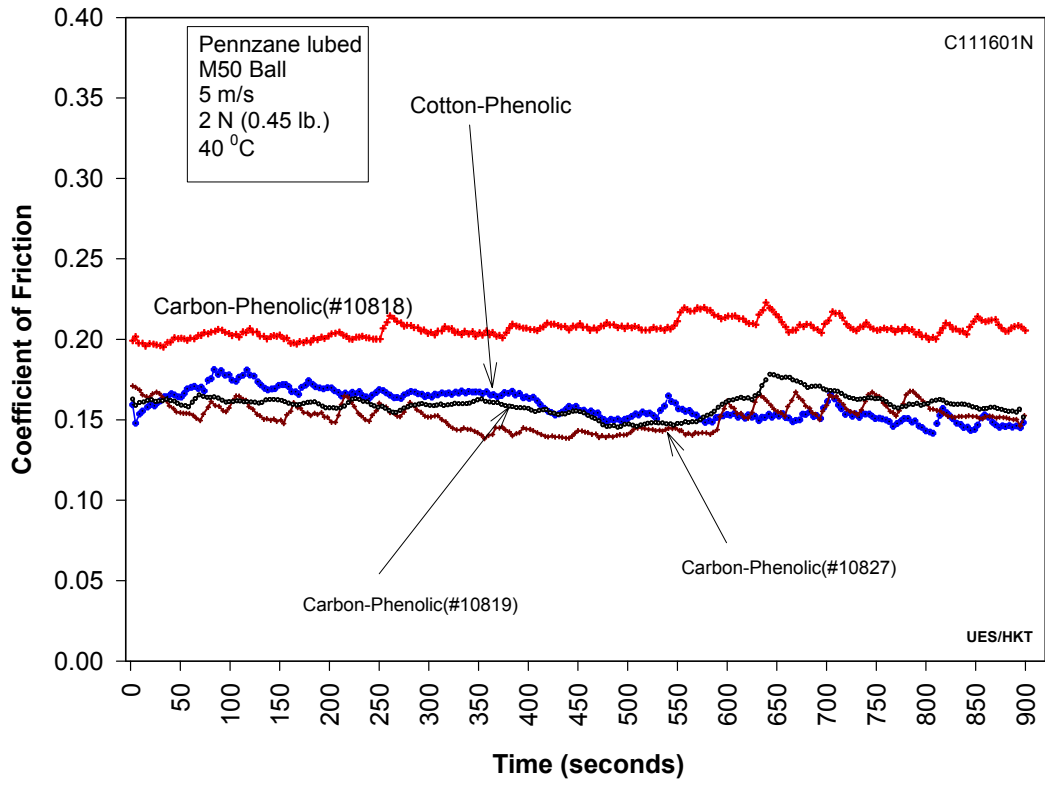


Figure 6. COF of Cotton-Phenolic and Carbon-Phenolic with Pennzane[®] Lubricant at 5 m/s Sliding Speed

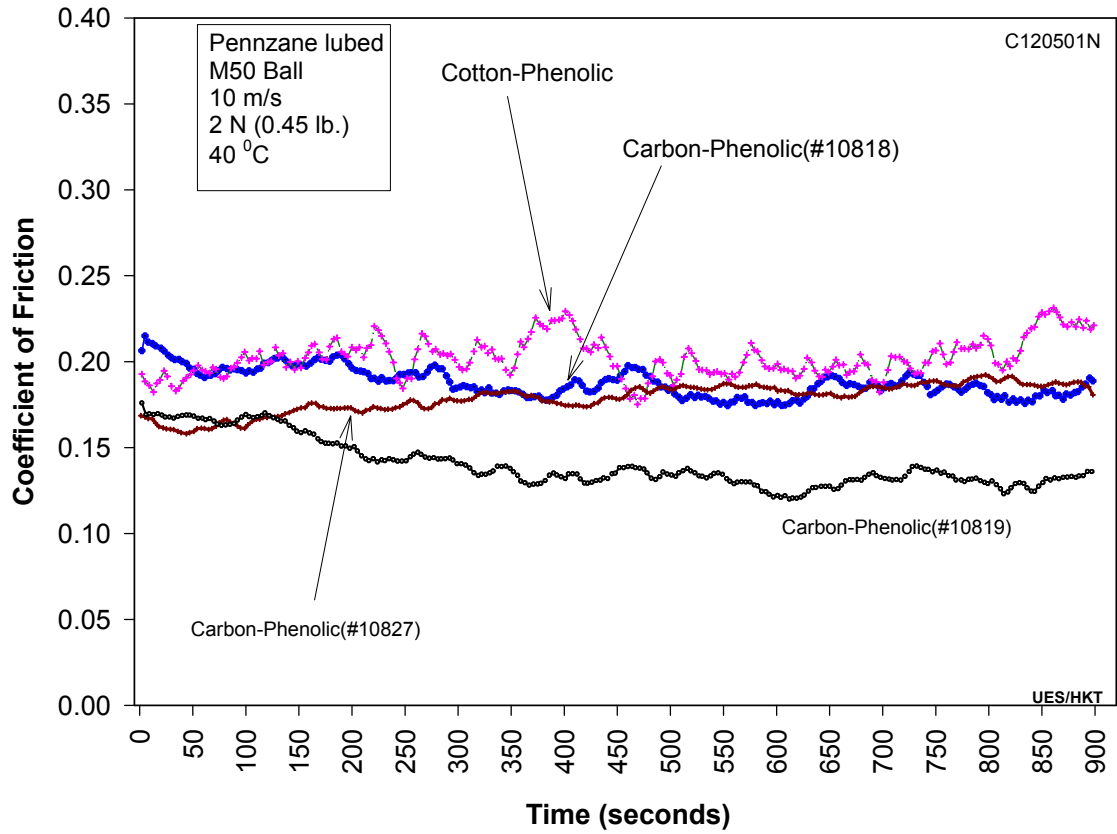


Figure 7. COF of Cotton-Phenolic and Carbon-Phenolic with Pennzane[®] Lubricant at 10 m/s Sliding Speed

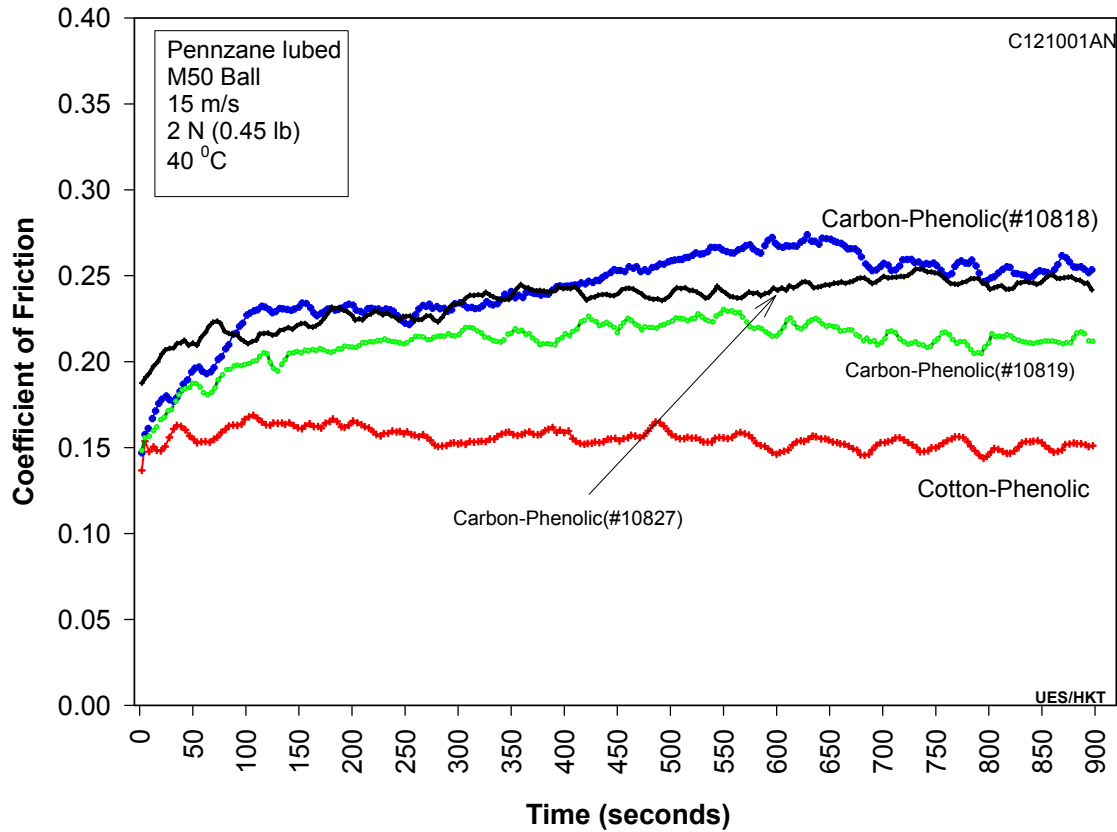


Figure 8. COF of Cotton-Phenolic and Carbon-Phenolic with the Pennzane[®] Lubricant at 15 m/s Sliding Speed

Results for the 3-hour tests with cotton-phenolic and carbon-phenolic are shown in Figure 9. Similar to the other tests, there is agreement between most of the samples but not all. In this case, carbon-phenolic specimens 10818 and 10827 ran at a COF of 0.18. The test with the cotton-phenolic ran at a COF ranging from 0.15 to 0.25 and seemed to increase with time. There was one carbon-phenolic test from sample 10819 that reached a relatively low friction of 0.05 but did not stay there. That sample ended up at a COF of about 0.13.

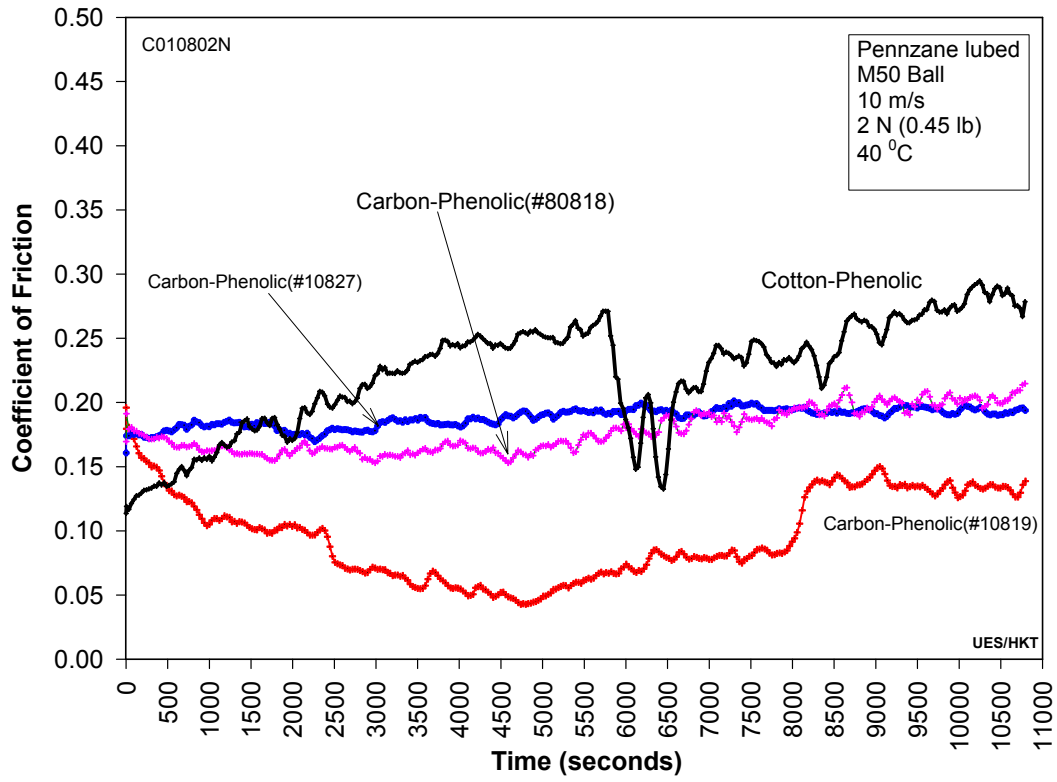


Figure 9. Comparison the Carbon-Phenolic and Cotton-Phenolic in a 3-Hour Sliding Test with the Pennzane[®] Lubricant

4. Conclusions

The strength, thermal conductivity, and COTE of carbon-phenolic samples are superior to cotton-phenolic. These three properties are particularly important for high-speed bearings, suggesting that the carbon-phenolic cages will perform better in high-speed bearings. In Part III, the thermal modeling uses the data from Part I to assess some of the potential benefits.

In general, the COF of several carbon-phenolic samples and a cotton-phenolic baseline material were similar under similar test conditions. This suggests that the phenolic matrix of the material has a dominant affect. This is probably due to the open porosity of the phenolic material.

The MoS₂ in sample 10826 may have a slight beneficial effect, but the results were not conclusive and not sufficient to be considered a low friction material. The results here suggest that solid lubricants blended in a resin matrix of carbon-phenolic is not a particularly effective means for improving the friction and wear response.

The best performance with different lubricants was with the Pennzane[®] impregnated in the composites. This produces a COF between 0.15 and 0.25 under most conditions. While these values are much better than the dry phenolic samples or the samples where solid lubricants have been blended in the matrix, they are still higher than what would be expected with a liquid lubricant. At this time, this is attributed to the porous nature of the composite materials which inhibits the formation of the traditional hydrodynamic film. Additional studies are underway to confirm this hypothesis.

5. References

1. Forster, N.H., Rosado, L., Shih, W.T., and Brown, J.R., "The Development of Carbon-Carbon Composite Cages for Rolling Element Bearings," Trib. Trans., 45, pp. 127-131 (2002).
2. Brown, J.R. and Forster, N.H., "Numerical Investigation of the Effect of Carbon-carbon Composite Cages on High-Speed Bearing Operating Temperatures," 45, 3, pp. 411-417 (2002).