

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. **PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.**

1. REPORT DATE (DD-MM-YYYY) 21-08-2003		2. REPORT TYPE Technical Viewgraph Presentation		3. DATES COVERED (From - To)	
4. TITLE AND SUBTITLE Thermodynamic Limitations of Energy Conversion in Laser Propulsion				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) C.W. Larson, F.B. Mead, Jr., S.D. Knecht (AFRL/PRSP)				5d. PROJECT NUMBER 4847	
				5e. TASK NUMBER 0159	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/PRS 5 Pollux Drive Edwards AFB CA 93524-7048				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-PR-ED-VG-2003-209	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory (AFMC) AFRL/PRS 5 Pollux Drive Edwards AFB CA 93524-7048				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S NUMBER(S) AFRL-PR-ED-VG-2003-209	
12. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution unlimited.					
13. SUPPLEMENTARY NOTES For presentation at the 10 th International Workshop of Combustion & Propulsion – In-Space in La Spezia, Italy, taking place 21-25 September 2003.					
14. ABSTRACT					
<div style="border: 1px solid black; padding: 5px; display: inline-block;"> <p style="font-size: 2em; margin: 0;">20030929 080</p> </div>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			Leilani Richardson
Unclassified	Unclassified	Unclassified	A	22	19b. TELEPHONE NUMBER (include area code) (661) 275-5015

Thermodynamic Limitations on Energy Conversion in Laser Propulsion

C. William Larson, Franklin B. Mead, Jr., and Sean D. Knecht
Propulsion Directorate
Air Force Research Laboratory
Edwards AFB, CA 93524-7680

10th International Workshop on Combustion and Propulsion
IN-SPACE PROPULSION
21-25 September 2003
Lerici, La Spezia, Italy

Approved for public release; distribution unlimited.

Outline

Tour of White Sands Laboratory (HELSTF/PLVTS) and Video of Flight Testing.

Comparison of Constant Momentum Mission and Constant Specific Impulse Mission. Δv , v_{jet} , f , m_0 , v_0 , P_{jet} , m/E_{jet}

Efficiency of conversion of laser energy to propellant kinetic energy, $\alpha\beta$.

Upper limit to conversion of laser energy to jet kinetic energy from energy conservation and definitions: $Cv_{jet} = \alpha\beta\Phi < 1$.

Comparing momentum quantities to energy quantities. The "Phi Factor" $\Phi = \langle v \rangle^2 / \langle v^2 \rangle$ and velocity distributions in propellant jet. Φ values for delta function, Maxwellian, Gaussian, Chunks and gas, supersonic expansion, etc.

Upper limits to performance based on chemical thermodynamics. Blowdown from defined equilibrium state (u , ρ) of known volume.

Conclusions


Approved for public release; distribution unlimited.



Pulsed Laser Vulnerability Test System (PLVTS)



- **Original Performance**
 - 800 joules/pulse
 - 10 Hz
 - 30 μ sec pulses
- **Modified Performance**
 - 1998
 - 400 joules/pulse
 - 28 Hz
 - 18 μ sec pulses
 - 1999
 - 150 joules/pulse
 - 30 Hz
 - 5 μ sec pulses

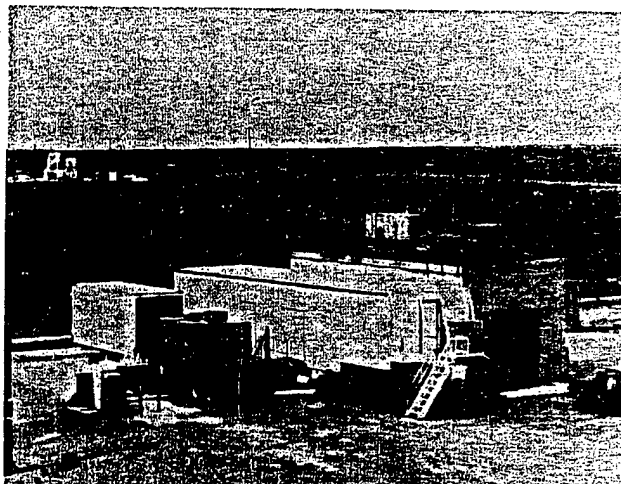


Approved for public release; distribution unlimited.



Field Test Telescope (FTT)

- 50 cm
- Cassegrainian
- Dynamic Focusing
- Minimum Acquisition Distance is 200 m


Laser Beam Handoff to This Telescope Should Allow Altitudes of ~300 m (1,000 ft)

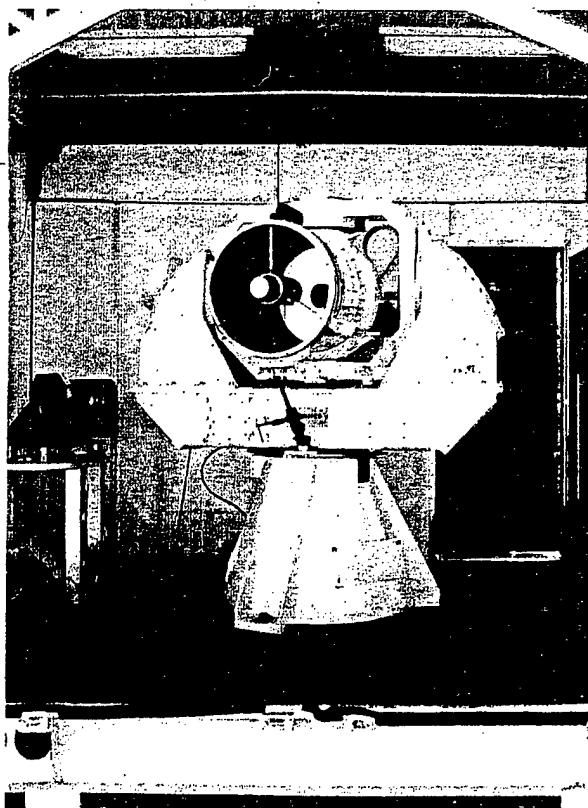

Approved for public release; distribution unlimited.




Optical Bench Set Up At 500- Ft Mark

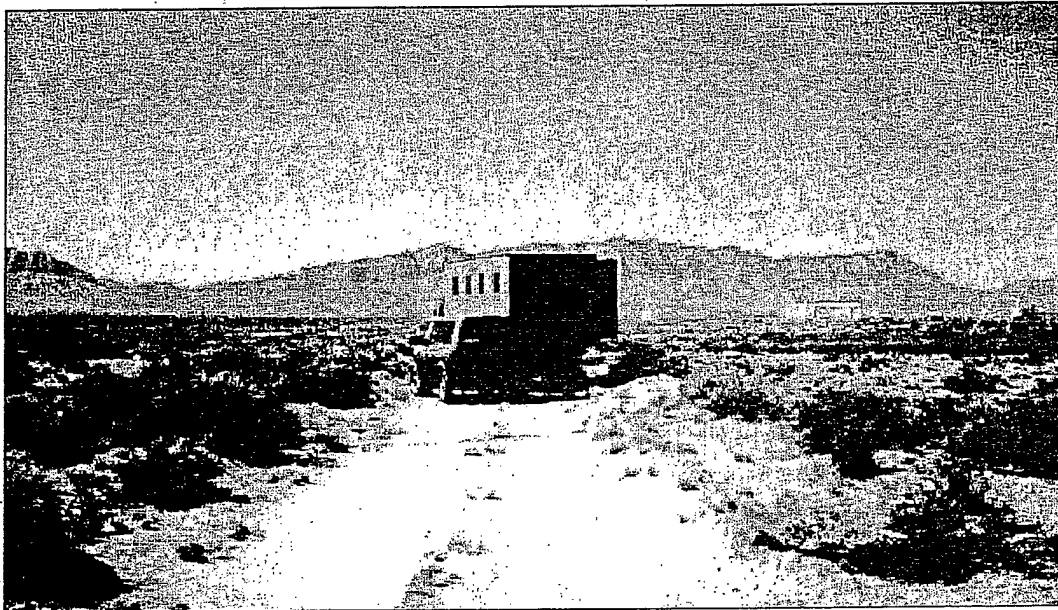

Approved for public release; distribution unlimited.



Optical Power vs Time: a) 2.5 μ s; b) 5 μ s; c) 18 μ s; d) 35 μ s

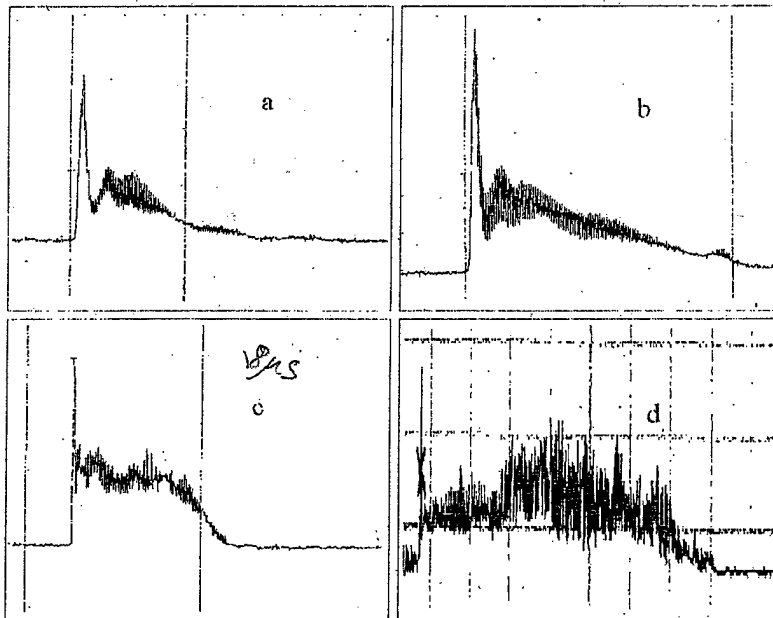

Approved for public release; distribution unlimited.




Laboratory Telescope Burn Patterns



AAA Sheet Cover 201



Near Field
At ~10 Ft

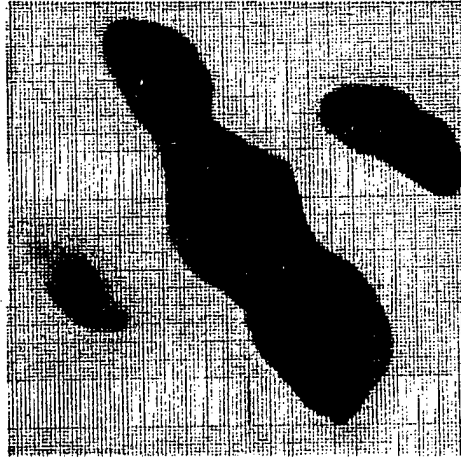

500 Ft

5 cm Ref.



Approved for public release; distribution unlimited.



FTT Beam Burn Patterns




AAA Sheet Cover 201



500 Ft



1,000 Ft

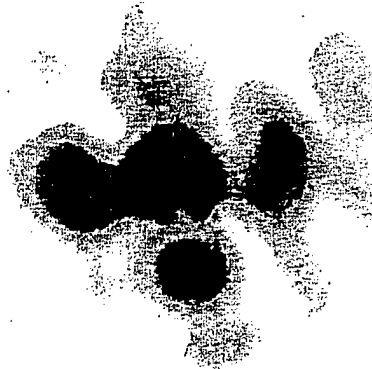

1,500 Ft


11 cm Ref.



Approved for public release; distribution unlimited.



Pendulum Impulse Test Stand

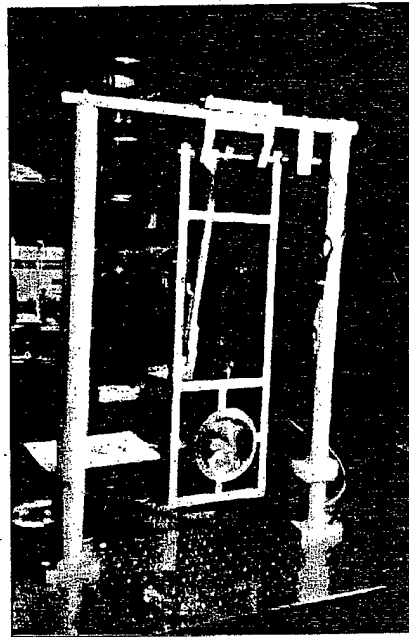

Measure:

1. Impulse
2. Laser Energy
3. Mass ablated

Approved for public release; distribution unlimited.

$350 \text{ J} / 25 \text{ cm}^2 / 18 \mu\text{s}$
 $145 / \text{cm}^2$ $0.8 \text{ MW} / \text{cm}^2$

at 350 J
 $m \sim 40 \text{ mg}$
 $\sim 11 \mu\text{m}$ thick
 layer.

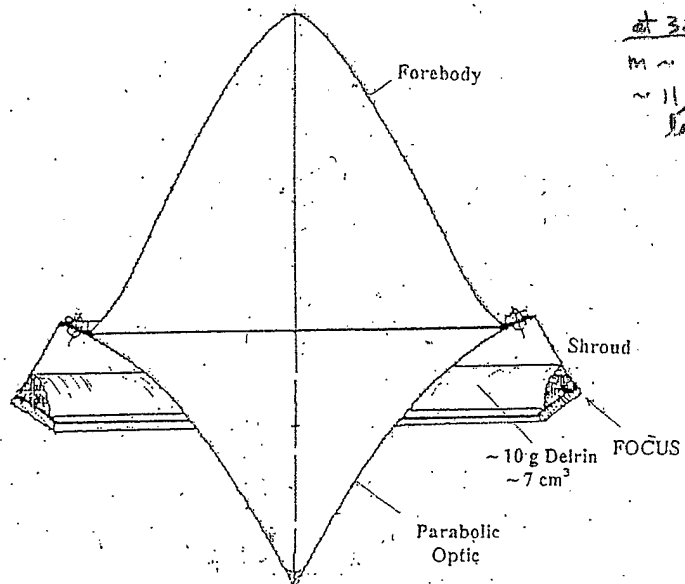


Figure 2. Cross-sectional view of Myrabo Laser Lightcraft, Model 200-3/4. The maximum diameter of the test article at the shroud is $\sim 10 \text{ cm}$. The indicated ring of Delrin weighs $\sim 10 \text{ g}$ and has a volume of $\sim 7 \text{ cm}^3$ and a surface area $\sim 25 \text{ cm}^2$. The idealized maximum plug nozzle exit area is $\sim 350 \text{ cm}^2$.

Approved for public release; distribution unlimited.

Overall Energy Conversion in Laser Propulsion Mission

$$E_f = \frac{1}{2} m_f v_f^2 = \eta \alpha \beta \gamma \delta E_{wall}$$

η = propulsion efficiency (jet kinetic energy to vehicle kinetic energy)

α = expansion efficiency (internal propellant energy to jet kinetic energy)

β = absorption efficiency (laser energy at vehicle to internal propellant energy)

γ = transmission efficiency (laser energy at ground to laser energy at vehicle)

δ = laser efficiency (electric energy to laser energy at ground)

***** Issue: separability of $\eta \alpha \beta \gamma$ *****

"\$500 worth of electricity to put 1 kg into LEO."

At \$0.10/KWH, \$500 buys 18,000MJ (1 KWH = 3.6 MJ); 1 kg at 10 km/s $\rightarrow E_f = 50$ MJ, so $\eta \alpha \beta \gamma \delta \geq 0.0028$

Phipps, Reilly, Campbell, *Laser & Particle Beams* **18** (2001) 661-695

Pirri, Monsler, Nebolsine, *AIAA Journal* **12** (1974) 1254-1261

Approved for public release; distribution unlimited.

INSTANTANEOUS PROPULSION EFFICIENCY

$$\eta_i = \frac{2(v/v_{jet})}{1 + (v/v_{jet})^2}$$

CONSTANT MOMENTUM COMPARED TO CONSTANT SPECIFIC IMPULSE MISSION

The Constant Specific Impulse Mission

$$\int_{m_0}^m \frac{dm}{m} = -\frac{1}{v_{jet}} \int_{v_0}^v dv$$


$$f = \frac{m}{m_0} = \exp\left(-\frac{v-v_0}{v_{jet}}\right) = \exp\left(-\frac{\Delta v}{v_{jet}}\right)$$

The Constant Momentum Mission

$$\int_{m_0}^m \frac{dm}{m} = -\int_{v_0}^v \frac{dv}{v}$$

$$f' = \frac{m}{m_0} = \frac{v_0}{v} = 1 - \frac{\Delta v}{v} = \left(1 + \frac{\Delta v}{v_0}\right)^{-1}$$

Approved for public release; distribution unlimited.

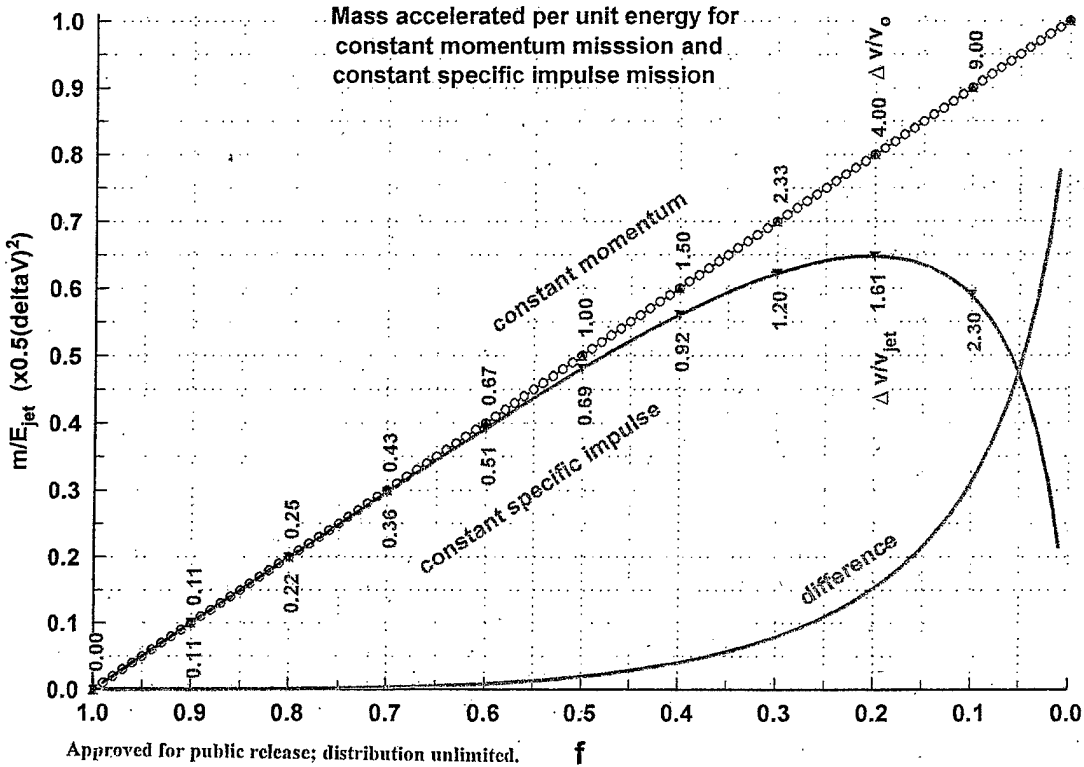

benefit3.axg July 29, 2003 9:11:47 AM

Figures of Merit for Laser Propulsion: m/E_{jet}

The Constant Specific Impulse Mission

$$E_{jet} = -\frac{1}{2} \int_{m_0}^m v_{jet}^2 dm = \frac{1}{2} (m_0 - m) v_{jet}^2$$

$$B = \frac{m}{\frac{1}{2} (m_0 - m) v_{jet}^2} = \frac{2x^2}{(e^x - 1) [\Delta v]^2} = \frac{2f(\ln f)^2}{(1-f) [\Delta v]^2}$$

The Constant Momentum Mission

$$E'_{jet} = -\frac{1}{2} \int_{m_0}^m v^2 dm = -\frac{1}{2} (m_0 v_0)^2 \int_{m_0}^m \frac{dm}{m^2} = \frac{1}{2} m v^2 - \frac{1}{2} m_0 v_0^2 = \frac{1}{2} m v \Delta v$$

$$B' = \frac{m}{\frac{1}{2} m v \Delta v} = \frac{2(1-f')}{[\Delta v]^2}$$

Approved for public release; distribution unlimited.

MISSION TIME FOR CONSTANT SPECIFIC IMPULSE AND CONSTANT MOMENTUM MISSIONS

Constant Specific Impulse

$$P_{jet} = \frac{1}{2} v_{jet}^2 \frac{dm}{dt} = \frac{1}{2} F v_{jet} \quad f = \frac{m}{m_o} = 1 - \frac{2P_{jet}}{m_o v_{jet}^2} t \quad t = \frac{m_o}{2P_{jet}} (\Delta v)^2 \frac{(1-f)}{(\ln f)^2}$$


$$\Delta v = -v_{jet} \ln \left(1 - \frac{2P_{jet}}{m_o v_{jet}^2} t \right) = \sqrt{\frac{2P_{jet}}{m_o} \frac{(\ln f)^2}{(1-f)}} t = \ln \left(\frac{BP_{jet}}{m_o} t \right) \sqrt{\frac{\frac{2P_{jet}}{m_o}}{\left(1 - \frac{BP_{jet}}{m_o} t \right)}} t$$

Constant Momentum

$$P_{jet} = \frac{1}{2} v^2 \frac{dm}{dt} = \frac{1}{2} F v \quad f' = \frac{m}{m_o} = \left[1 + \frac{2P_{jet}}{m_o v_o^2} t' \right]^{-1} \quad t' = \frac{m_o}{2P_{jet}} (\Delta' v)^2 \frac{f'}{(1-f')}$$

$$\Delta' v = \frac{2P_{jet}}{m_o v_o} t' = \sqrt{\frac{2P_{jet}}{m_o} \frac{(1-f')}{f'}} t' = \sqrt{\frac{2}{B'} - \frac{2P_{jet}}{m_o}} t'$$

Approved for public release; distribution unlimited.

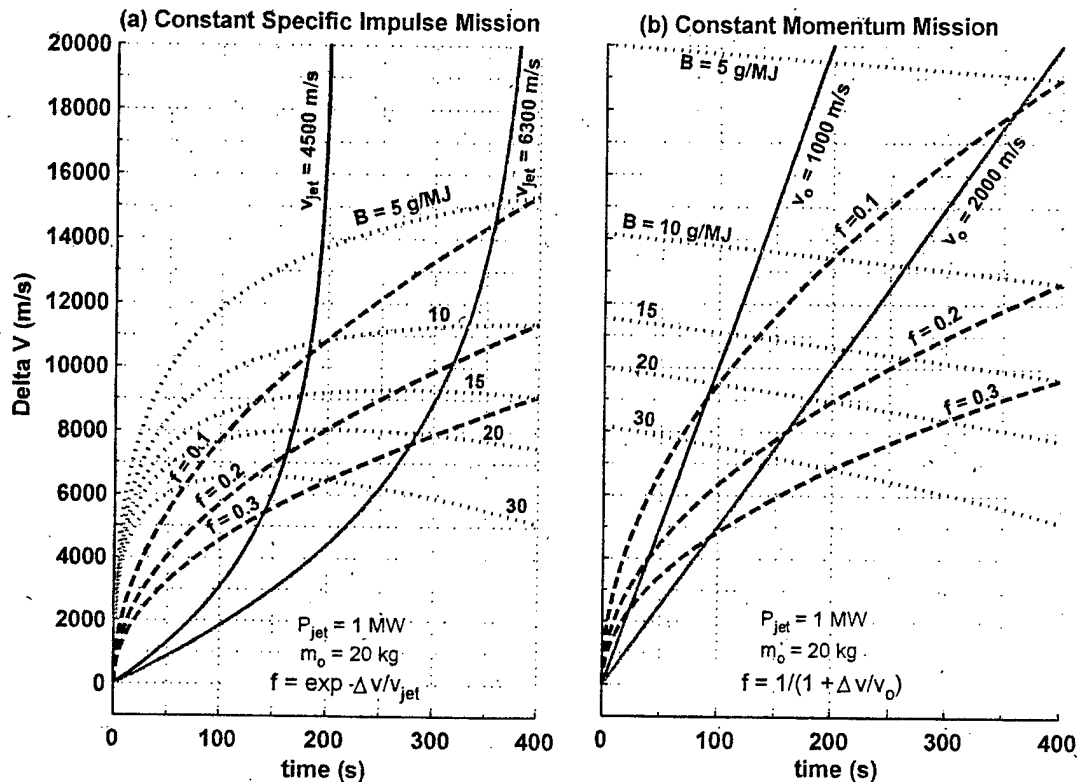

Approved for public release; distribution unlimited.

Definitions and Energy Conservation

Propellant Kinetic Energy: $E_p = \frac{1}{2} m_p \langle v_e^2 \rangle = \alpha \beta E_L$ $\langle v_e^2 \rangle = \frac{\int_{p_c}^{p_f} d(\rho v_e^2)}{\int_{p_c}^{p_f} dp}$

Propellant Impulse: $I = m_p \langle v_e \rangle$ $\langle v_e \rangle = \frac{\int_{p_c}^{p_f} d(\rho v_e)}{\int_{p_c}^{p_f} dp}$


Coupling Coefficient: $C = \frac{I}{E_L}$ $C = \frac{2\alpha\beta}{\langle v_e \rangle} \left[\frac{\langle v_e^2 \rangle}{\langle v_e^2 \rangle} \right] = \frac{2\alpha\beta\Phi}{\langle v_e \rangle}$

Energy Conservation: $\alpha\beta\Phi = \frac{I^2}{2m_p E_L} = \frac{CI}{2m_p} = \frac{C\langle v_e \rangle}{2} = \frac{I\langle v_e \rangle}{2E_L} \leq 1$


Propellant Internal Energy: $Q^* = u_c - u^0 = \frac{\beta E_L}{m_p}$ $C = \frac{\beta \langle v_e \rangle}{u_c - u^0}$

Propellant with added chemical energy, Δu : $(\alpha\beta\Phi)_{\text{apparent}} = \alpha\Phi(\beta + m_p\Delta u/E_L)$

Approved for public release; distribution unlimited.

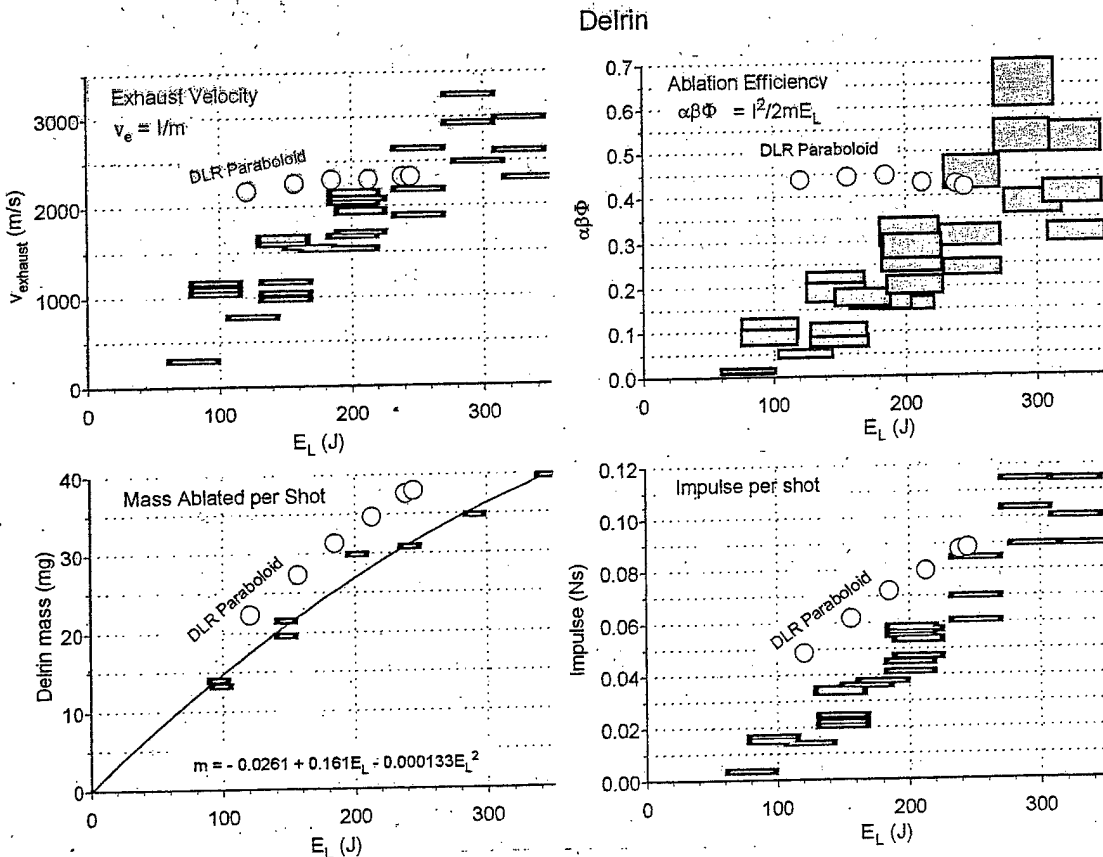


Approved for public release; distribution unlimited.

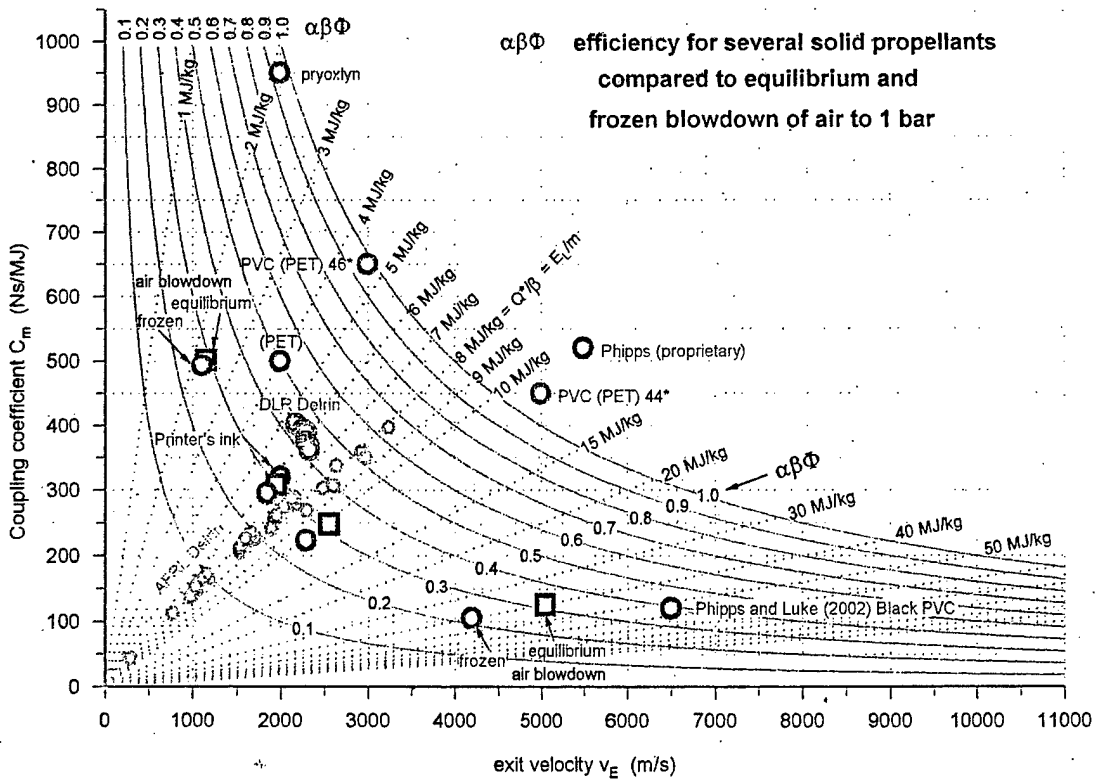

Maxwell distribution of velocity in three dimensions

$$f(v) dv = (2/\pi)^{1/2} (m/kT)^{3/2} v^2 \exp(-mv^2/2kT) dv$$

$$\langle v \rangle = (8kT/\pi m)^{1/2} \quad (\langle v^2 \rangle)^{1/2} = (3kT/m)^{1/2} \quad \Phi = \langle v \rangle^2 / \langle v^2 \rangle = 8/3\pi = 0.848826$$

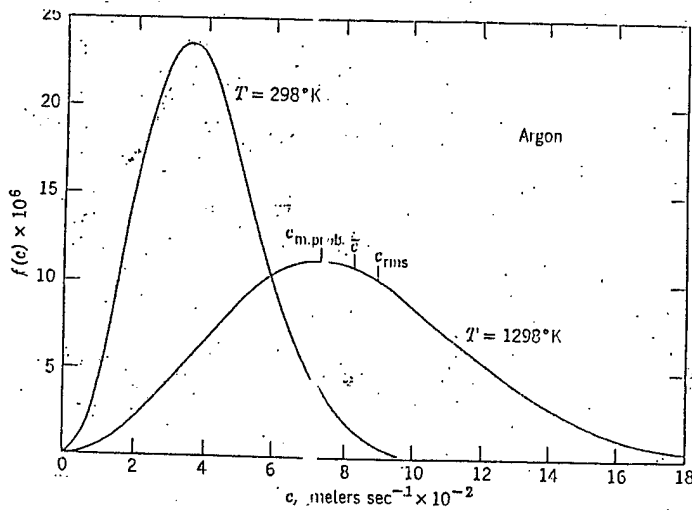


Approved for public release; distribution unlimited.

Φ for Bimodal velocity distribution

Chunks of propellant, f_{heavy} mass fraction, v_{slow} velocity
 Hot gases, f_{light} mass fraction, v_{fast} velocity

$$\langle v \rangle^2 = (f_{heavy} v_{slow} + f_{light} v_{fast})^2 \quad \langle v^2 \rangle = f_{heavy} v_{slow}^2 + f_{light} v_{fast}^2$$

$$\Phi = \langle v \rangle^2 / \langle v^2 \rangle = (f_{heavy} + f_{light} r^2) / (f_{heavy} + f_{light} r^2) \text{ where } r = v_{fast} / v_{slow} > 1$$

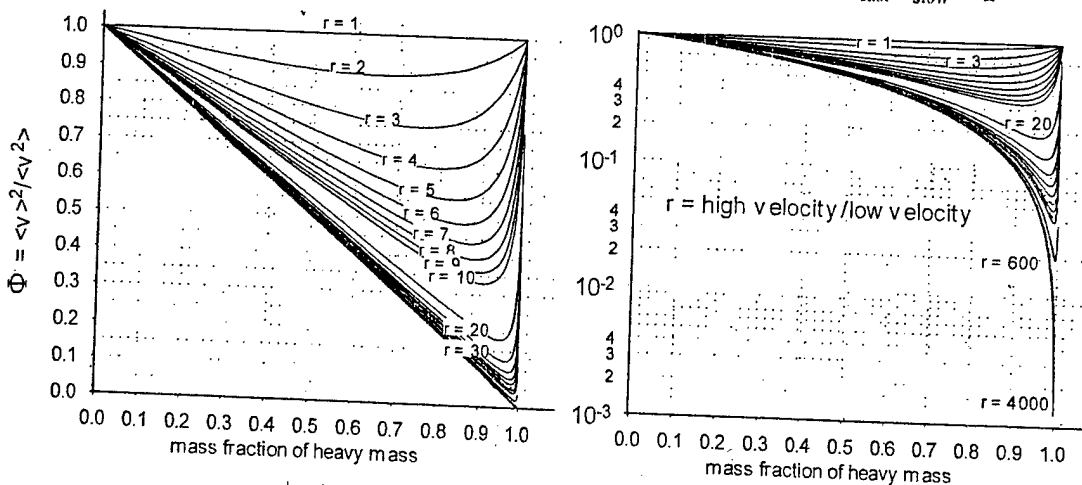

Approved for public release; distribution unlimited.

Figure 7. Time exposure of nighttime flight of Myrabo Laser Lightcraft. The time between flashes of the air plasma is 0.04 s.

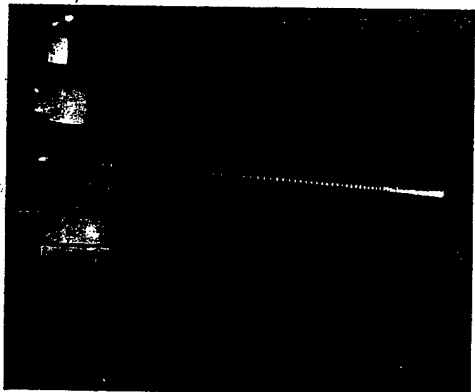


Figure 8. The Myrabo Laser Lightcraft showing air plasma. The Model 200-3/4 is ~ 0.1 m diameter at largest circumference. The aluminum model weighs ~ 30 g without DeLrin. About 10 g of DeLrin was used in the Solid Ablative Rocket (SAR) of which ~ 0.3 g was ablated during a typical flight with about 100 shots.


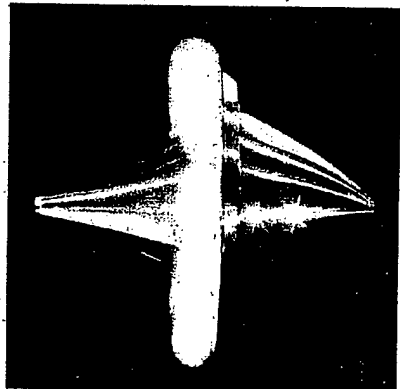


Figure 6. Laser Lightcraft flights with air with various coupling coefficients for a Model 200-3/4 laser Lightcraft, with mass of 40 grams. These flight patterns are also valid for flights with onboard propellant provided that the mass of ablated propellant is much less than the test article mass. $f > 0.99$, $T/W = 1$ when $C_p = 39.2 \text{ NS/MJ}$.

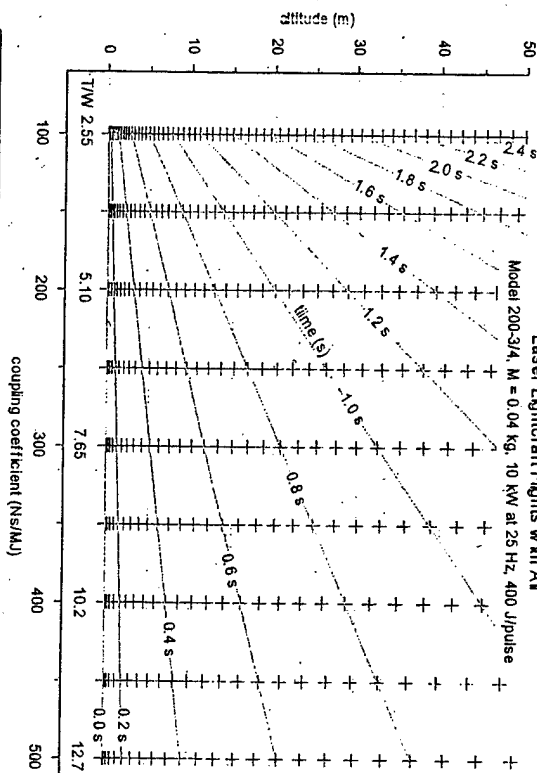

Approved for public release; distribution unlimited.

Conclusions

When $P_{\text{laser}}/m_0 \sim 0.05$ MW/kg small payloads (2 to 4 kg) may be launched into low earth orbit, $\Delta v \sim 10,000$ m/s.

At the same mass fraction, $f = 0.2$, m/E_{jet} for constant momentum mission is 23% greater than for constant specific impulse mission.

For $\Delta v = 10,000$ m/s, $m_0/P_{\text{jet}} = 20$ kg/MW, $f = 0.2$, $v_0 = 0$, the mission time for constant specific impulse propulsion is ~ 315 sec.

For $\Delta v = 10,000$ m/s, $m_0/P_{\text{jet}} = 20$ kg/MW, $f = 0.2$, $v_0 = 2000$ m/s, the mission time for constant momentum propulsion is ~ 155 sec.

At the same $m/E_{\text{jet}} = 0.013$ kg/MJ and Δv , $f(\text{constant momentum}) = 0.35$, and $f(\text{constant specific impulse}) = 0.20$.

Based on measured I , E_L , and ablated mass, overall energy conversion efficiencies (laser energy to jet kinetic energy) of $\alpha\beta \sim 50\%$ were obtained with Delrin propellant in the laser lightcraft.

Jet exit velocities of ~ 2000 m/s with Delrin (based on measured mass) and ~ 3000 m/s with air (based on estimated mass).

Approved for public release; distribution unlimited.

THE COUPLING COEFFICIENT AND THE SPECIFIC IMPULSE

$$Q^* = \beta E_L / m$$

$$E_{\text{jet}} = \frac{1}{2} m \langle v^2 \rangle = \alpha m Q^* = \alpha \beta E_L$$

$$I = m \langle v \rangle$$

$$C = \frac{I}{E_L}$$

$$\frac{1}{2} C \langle v \rangle = \alpha \beta \Phi \leq 1$$

$$P_L = \omega E_L$$

$$F = \omega E_L \bar{C}$$

$$\frac{1}{2} F \langle v \rangle = \alpha \beta \Phi P_L$$

$$P_{\text{jet}} = \frac{1}{2} \frac{F \langle v \rangle}{\Phi} = \alpha \beta P_L$$

$$(\alpha \beta \Phi)_{\text{apparent}} = \alpha \Phi (\beta + m \Delta u_{\text{chem}} / E_L)$$


Approved for public release; distribution unlimited.

BACKUP CHARTS

Approved for public release; distribution unlimited.

Laser Lightcraft Flights w th Air: $h = 1/2t^2(CE_L w / M-g) = 1/2gt^2(T/W-1)$

Model 200-3/4, M = 0.04 kg, 10 kW at w = 25 Hz, E_L = 400 J/pulse

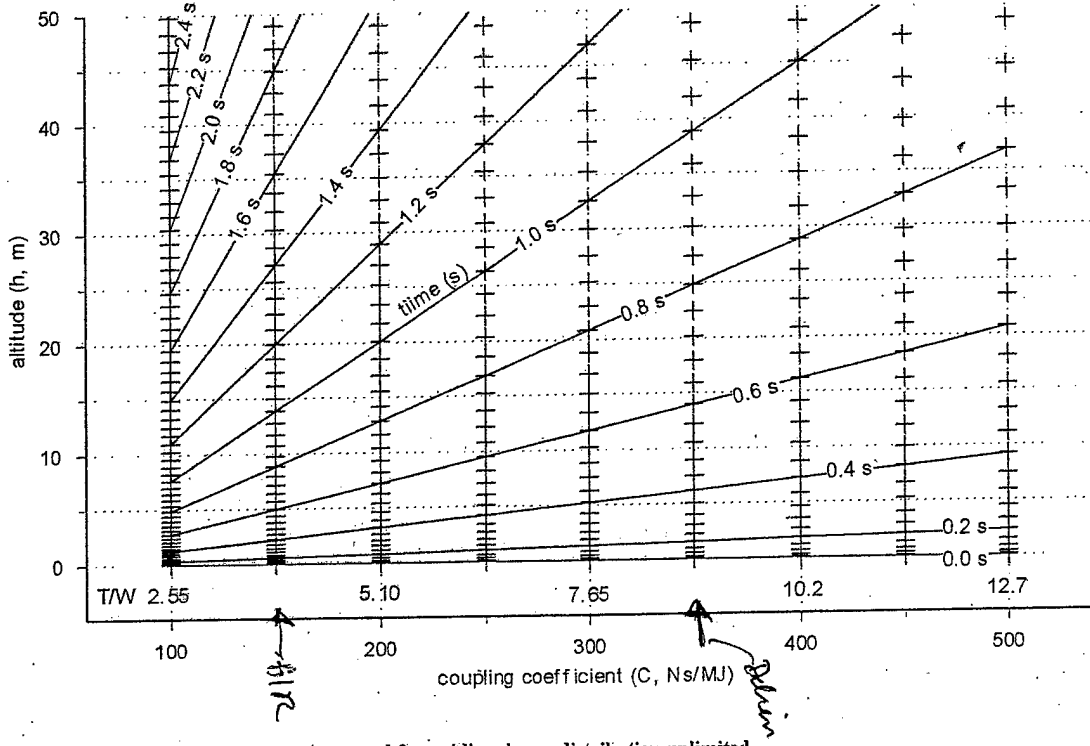

Approved for public release; distribution unlimited.

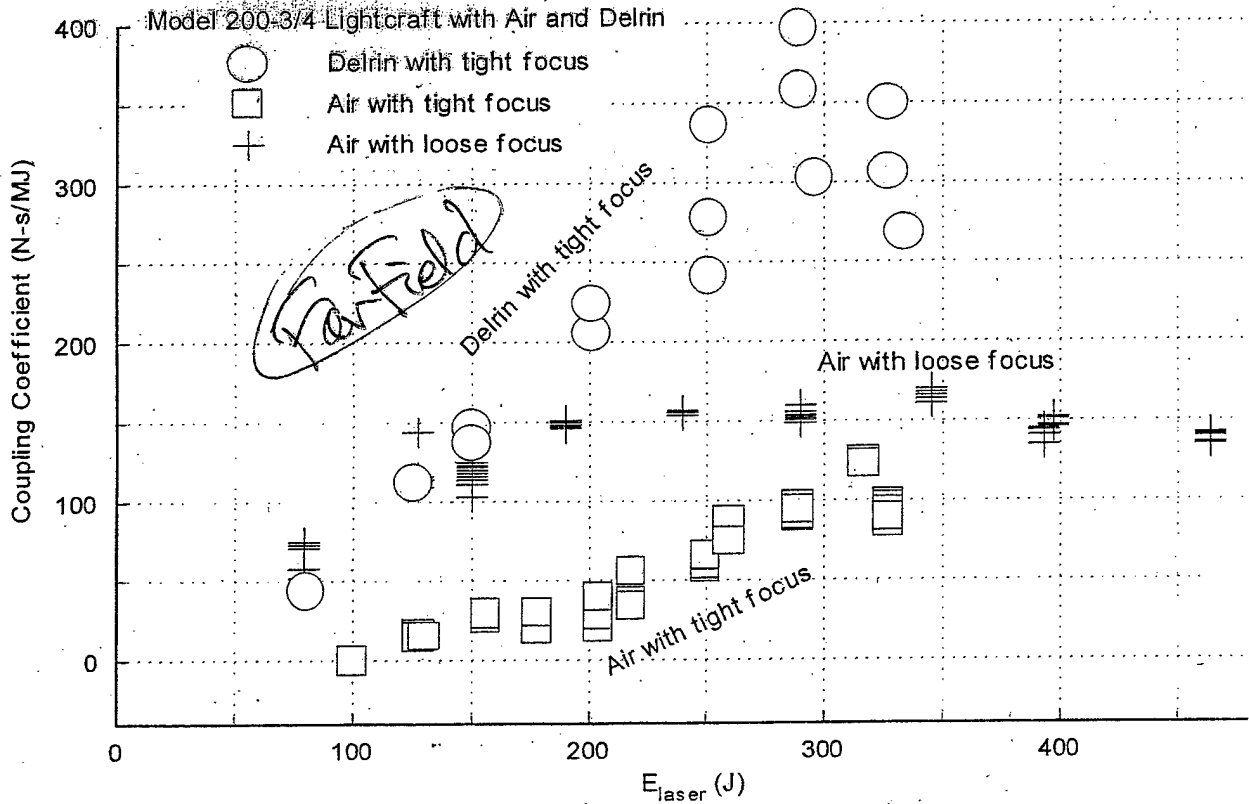


Table I. Normalized absorption volume for air at 1.18 kg/m³ as a function of internal energy and laser energy.

u MJ/kg	V _{abs} /B, normalized absorption volume, cm ³					
	E _L =50 J	E _L =100 J	E _L =150 J	E _L =200 J	E _L =300 J	E _L =400 J
1	42.3	84.7	127.1	169.4	254.2	338.9
2	21.1	42.3	63.5	84.7	127.1	169.4
3	14.1	28.2	42.3	56.5	84.7	112.9
4	10.5	21.1	31.7	42.3	63.5	84.7
5	8.47	16.9	25.4	33.9	50.8	67.8
6	7.06	14.1	21.1	28.2	42.3	56.5
7	6.05	12.1	18.1	24.2	36.3	48.4
8	5.30	10.5	15.8	21.1	31.7	42.3
9	4.71	9.42	14.1	18.8	28.2	37.6
10	4.24	8.47	12.7	16.9	25.4	33.9
15	2.82	5.65	8.47	11.3	16.9	22.6
20	2.12	4.24	6.36	8.47	12.7	16.9
30	1.41	2.82	4.24	5.65	8.47	11.3
40	1.06	2.12	3.18	4.24	6.36	8.47
50	0.85	1.69	2.54	3.39	5.08	6.78
60	0.71	1.41	2.12	2.82	4.24	5.65
70	0.61	1.21	1.82	2.42	3.63	4.84
80	0.53	1.06	1.59	2.12	3.18	4.24
90	0.47	0.94	1.41	1.88	2.82	3.77
100	0.42	0.85	1.27	1.69	2.54	3.39
110	0.39	0.77	1.16	1.54	2.31	3.08




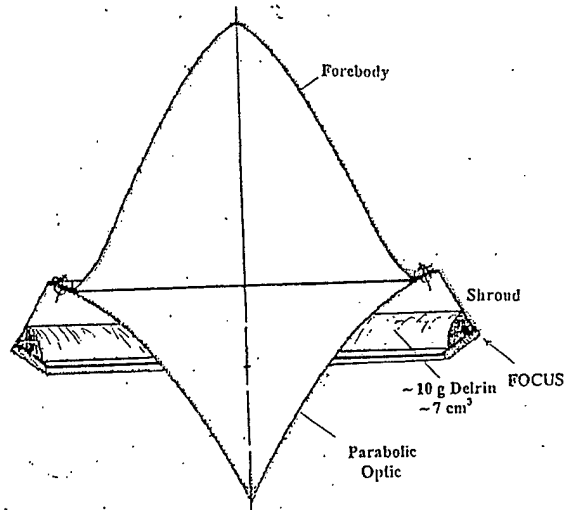


Figure 1. Cross-sectional view of Myrabo Laser Lightcraft, Model 200-3/4. The maximum diameter of the test article at the shroud is ~ 10 cm. The indicated ring of Delrin weighs ~ 10 g and has a volume of ~ 7 cm³ and a surface area ~ 25 cm². The idealized plug nozzle exit area is ~ 350 cm².



Approved for public release; distribution unlimited.

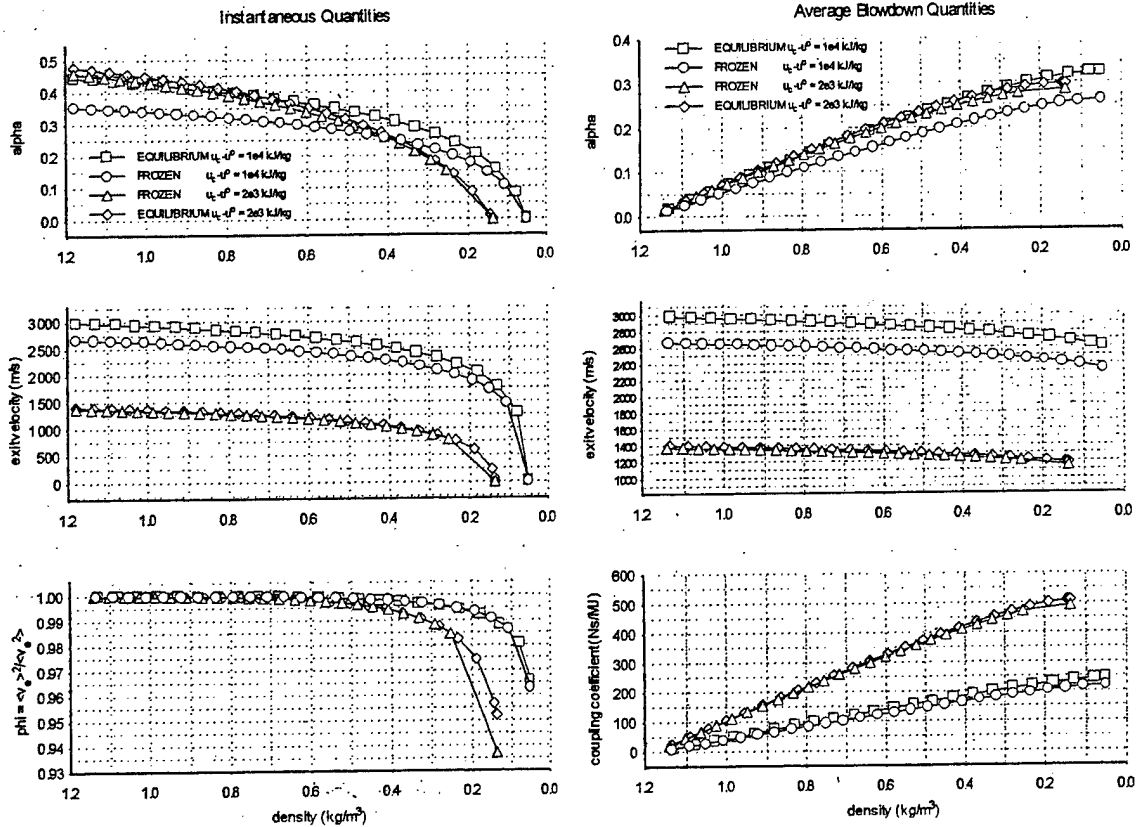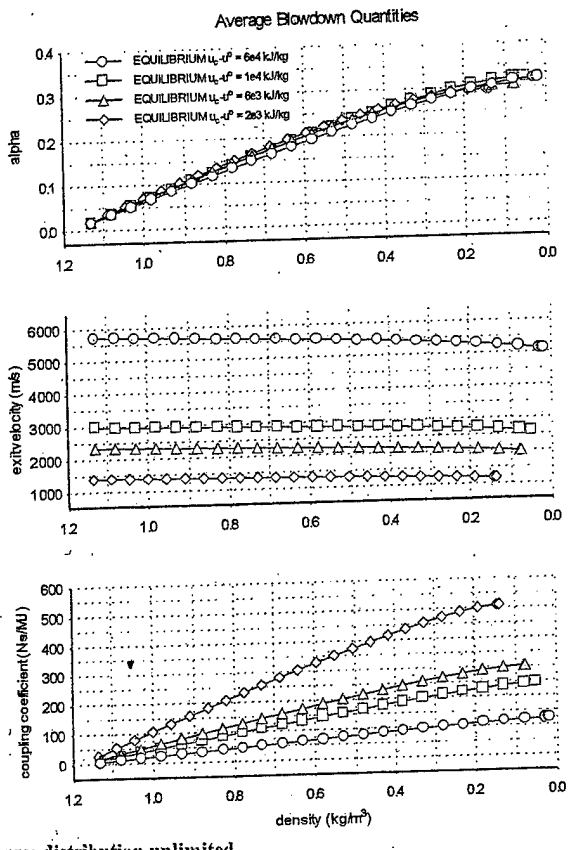


Approved for public release; distribution unlimited.

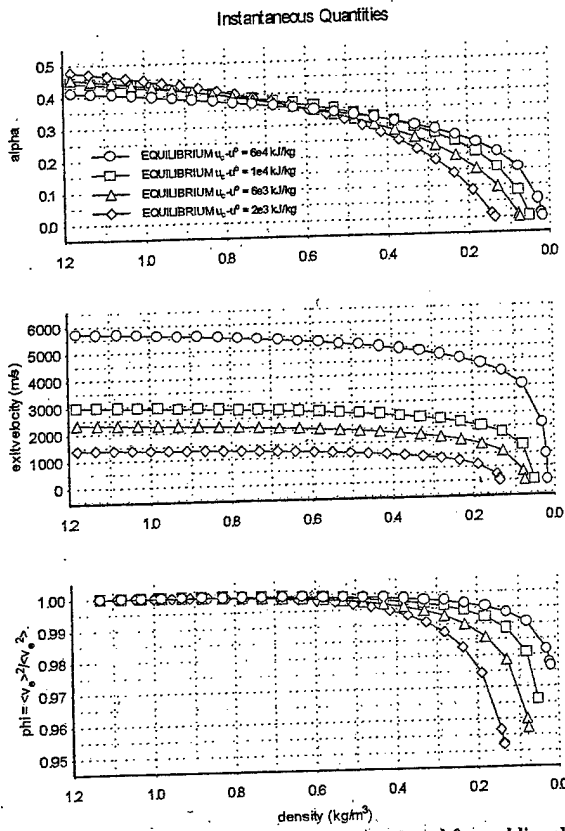

Approved for public release; distribution unlimited.

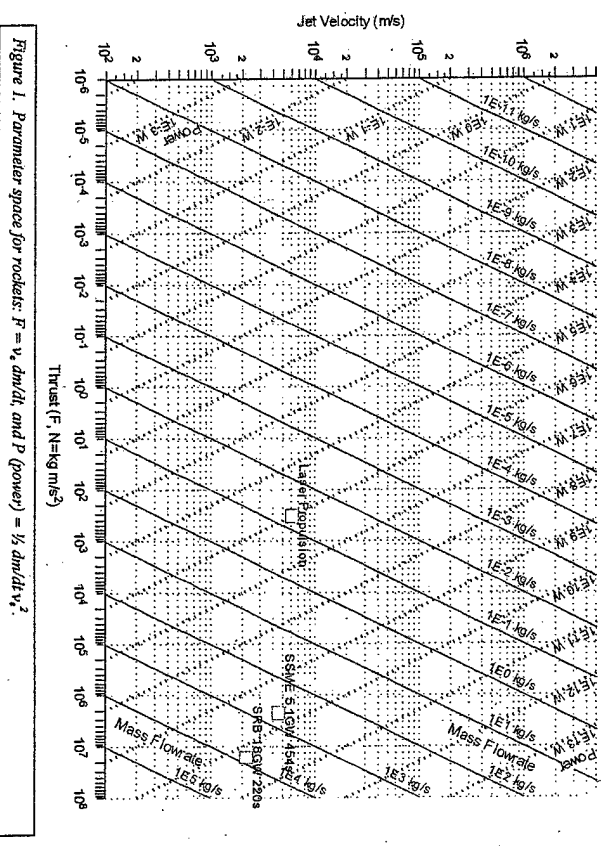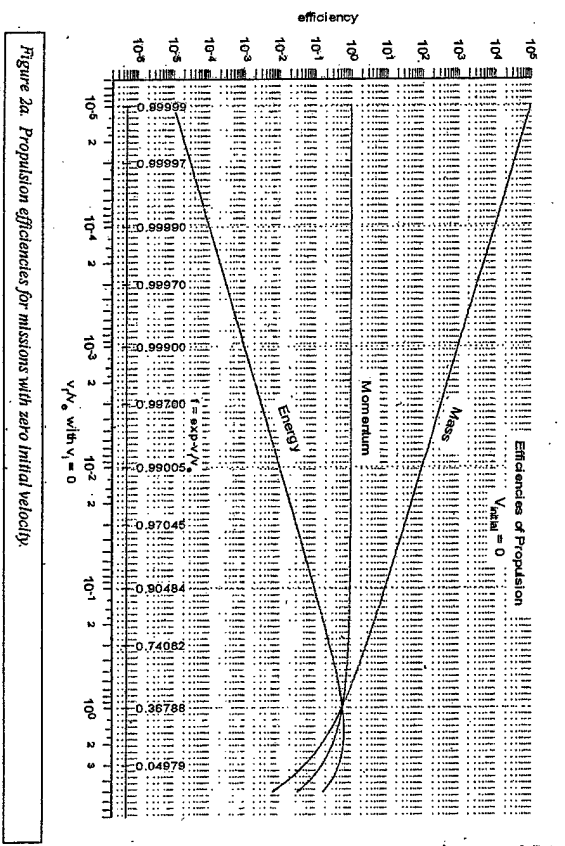

Approved for public release; distribution unlimited.

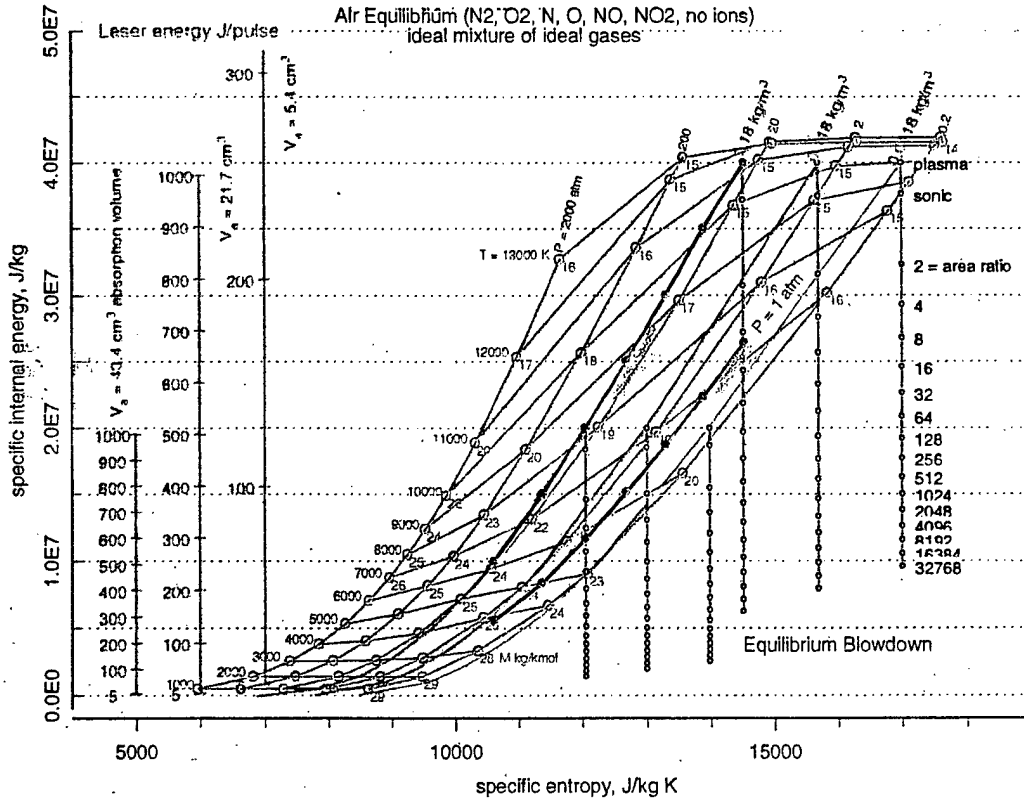

B&W Air7.airx/air.axd, air3.axd, air4.axd, airLcrt.axd, airsent.axd Feb. 3, 2000 3:17:53 PM


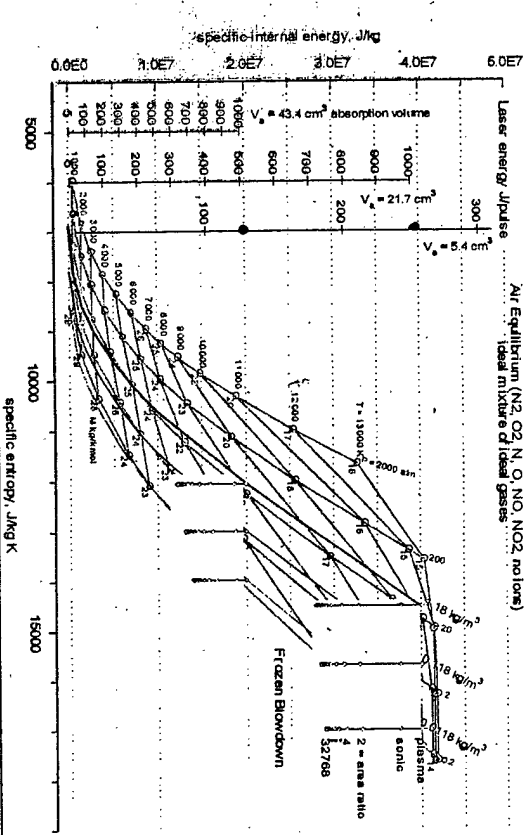


Figure 15. Mollier diagram for equilibrium air without ions. Numbers adjacent to intersections of isobars and isotherms indicate average molecular weight. Upper heavy line is a constant density = 1.18 kg/m³ line, three isotherms from u = 4e7 and 2e7 J/kg represent equilibrium blowdown for the indicated area ratios, 1 to 32768. The P = 1 atm isobar is reached with an area ratio ~ 8 from the initial u = 4e7 and ~ 4 from the u = 2e7 J/kg state, respectively. The exit velocities from these two expansions are ~ 3000 and 3000 m/s, respectively.

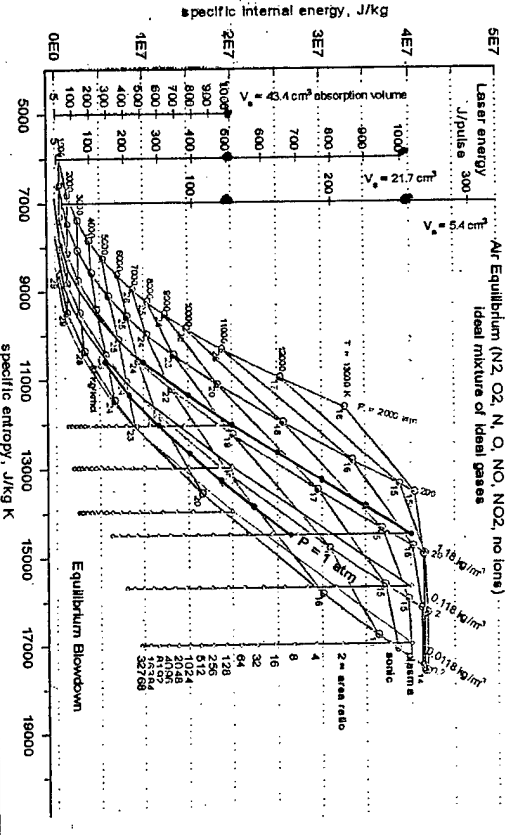

Thermodynamic properties of Mach 5 air at stagnation density,
 $\rho = 5.90 \text{ kg/m}^3$

u	T	P	h	s	c_p	c_p	M	X(e)	V_a	c_p/c_v
MJ/kg	10^3 K	bar	MJ/kg	KJ/kg K	KJ/kg K	kg/kmol			km/s	
0.102	0.560	9.492	0.263	6.864	1.042	28.965	0	0.471	1.38	
1	1.6	27.1	1.5	7.7	1.25	28.97	4e-13	0.77	1.30	
2	2.6	43.2	2.7	8.2	1.45	28.95	6.E-11	0.96	1.25	
3	3.3	56.5	4.0	8.6	1.85	28.73	2.E-08	1.08	1.21	
4	3.9	67.7	5.1	8.9	2.33	28.19	3.E-07	1.17	1.20	
5	4.4	78.2	6.3	9.1	2.65	27.46	2.E-06	1.26	1.20	
6	4.8	88.9	7.5	9.3	2.71	26.69	6.E-06	1.35	1.22	
7	5.3	100.3	8.7	9.5	2.61	25.96	2.E-05	1.45	1.23	
8	5.8	112.4	9.9	9.7	2.55	25.32	4.E-05	1.53	1.23	
9	6.3	124.5	11.1	9.9	2.69	24.79	8.E-05	1.61	1.22	
10	6.7	135.8	12.3	10.0	3.04	24.32	1.E-04	1.67	1.21	
15	8.2	182.0	18.1	10.7	5.49	22.19	6.E-04	1.91	1.18	
20	9.2	222.3	23.8	11.2	7.36	20.32	1.E-03	2.11	1.18	
30	10.8	304.9	35.2	12.2	8.05	17.41	3.E-03	2.49	1.20	
40	12.7	404.9	46.9	13.1	5.52	15.45	1.E-02	2.92	1.24	
50	15.6	534.8	59.1	13.8	4.28	14.33	3.E-02	3.39	1.27	
60	18.4	667.9	71.3	14.4	5.20	13.54	8.E-02	3.78	1.26	
70	20.8	794.6	83.5	14.9	6.32	12.81	1.E-01	4.13	1.27	
80	22.8	919.9	95.6	15.4	7.26	12.14	2.E-01	4.45	1.27	
90	24.6	1046.6	107.7	15.8	7.99	11.52	2.E-01	4.76	1.28	

Approved for public release; distribution unlimited.

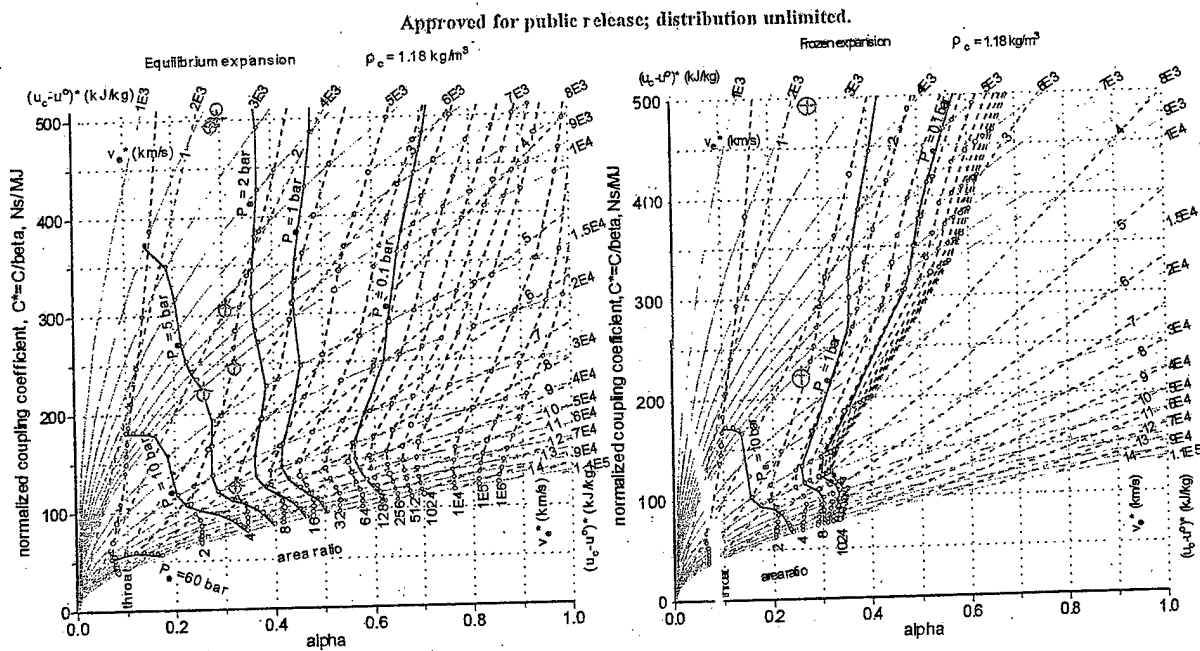


Figure 10. Comparison of Equilibrium expansion and frozen expansion of air. The circles and crosses represent the blowdown quantities obtained from initial (u, u^*) states of 2E3, and 1E4 J/kg for the frozen expansion and 2E3, 6E3, 1E4, and 4E4 J/kg for the equilibrium expansion. The results of the two frozen blowdown integrations to $P_{crit} = 1$ bar are plotted with those of the equilibrium blowdown to show that the differences in alpha are small, i.e., at low energy (2E3) 0.30 and 0.29 and at high energy (1E4) 0.32 and 0.27 for equilibrium and frozen blowdown, respectively.



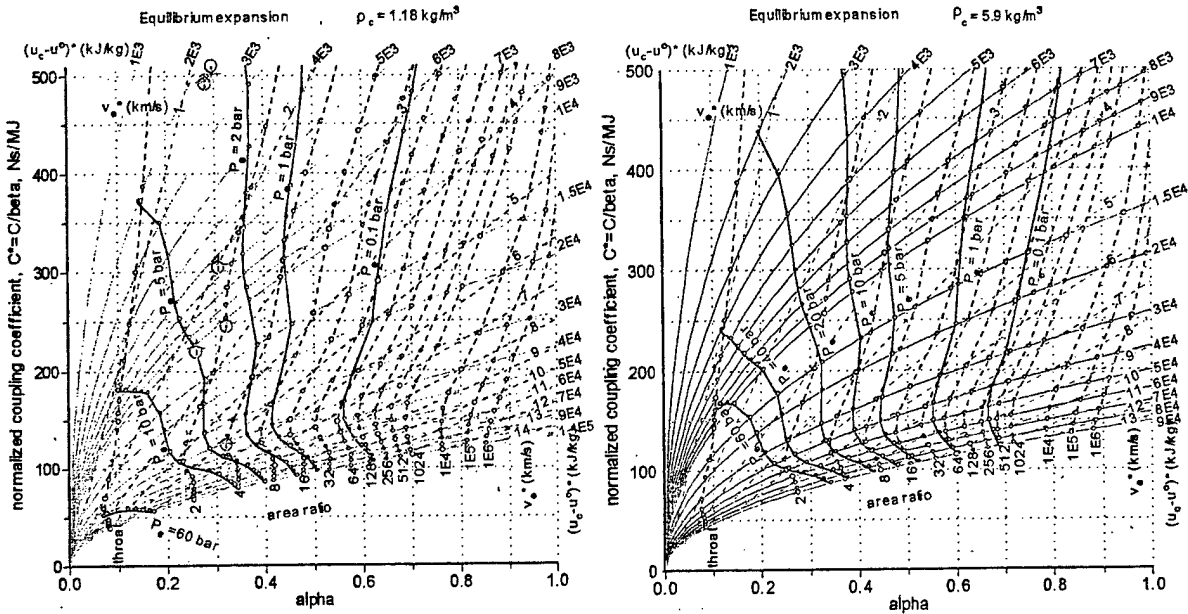


Figure 11. Comparison of Equilibrium expansion from laser heated STP air (1.18 kg/m^3) and Mach 5 air at stagnation density (5.9 kg/m^3). In the STP air diagram (on left), the circles and nearby crosses represent the blowdown quantities obtained from initial $[u_c - u^*]$ states of 2E3, and 1E4 J/kg for the frozen expansion and 2E3, 6E3, 1E4, and 4E4 kJ/kg for the equilibrium expansion.



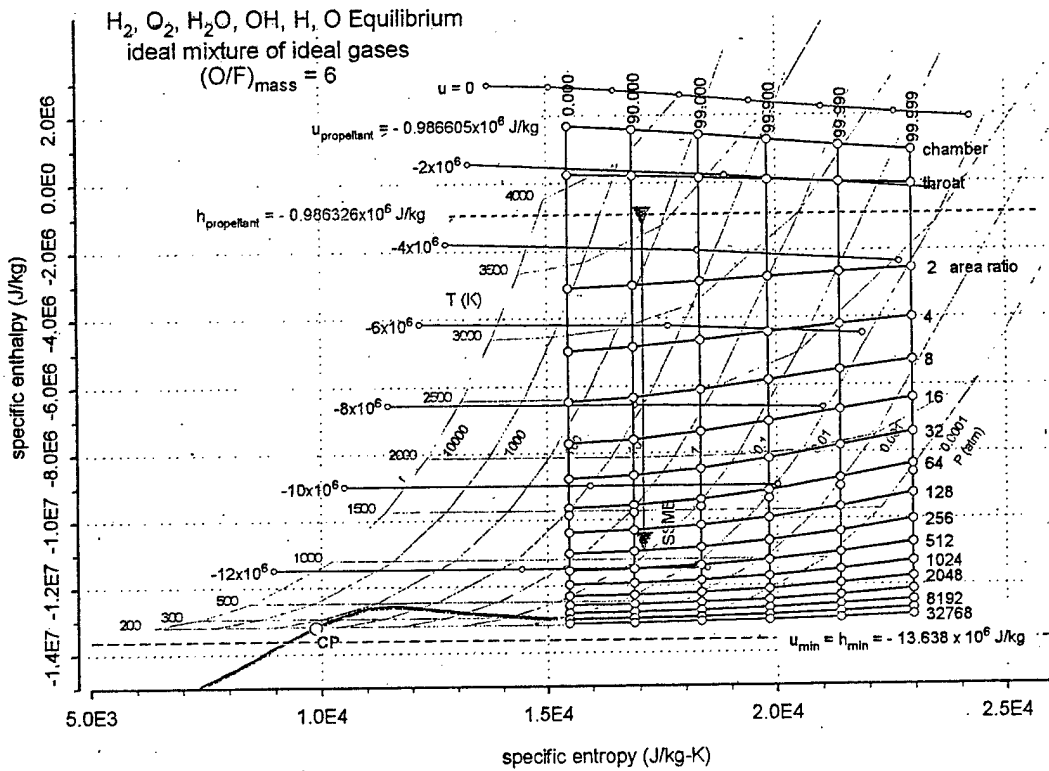

HO6-13C.axg Mar. 30, 2000 11:32:11 AM

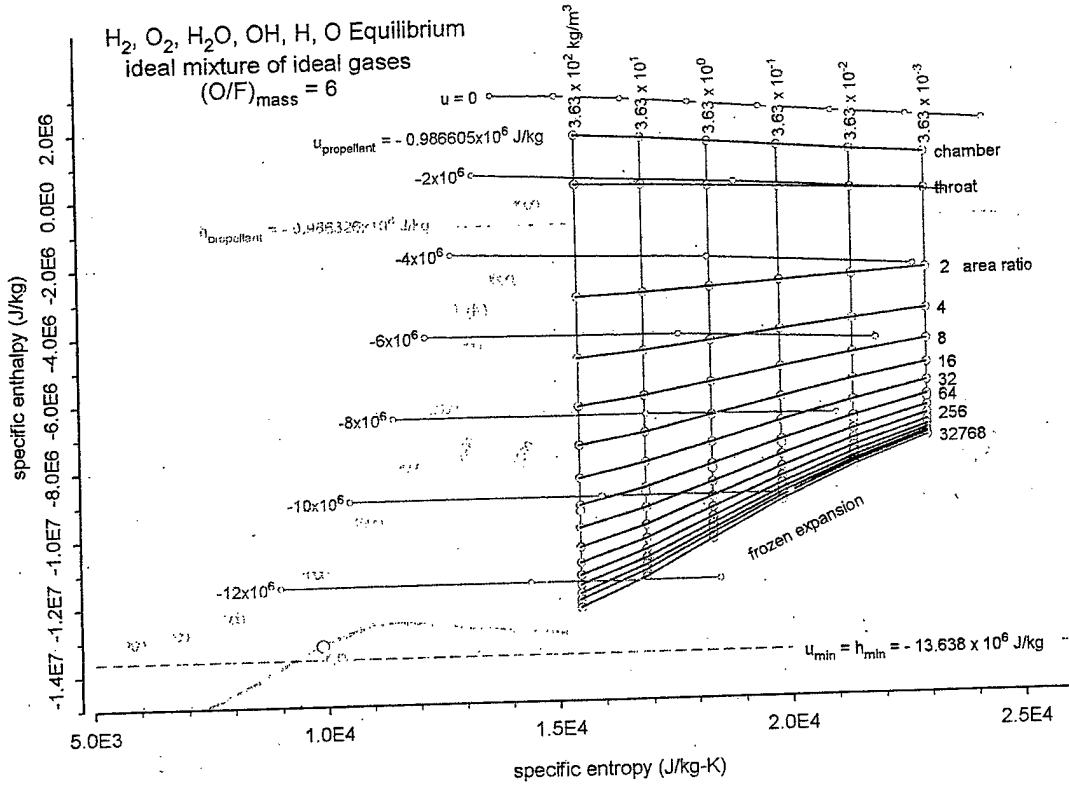