



Low-frequency shallow water reverberation and bottom scattering model

Fenghua Li, Jianjun Liu, Renhe Zhang

National Lab. Of Acoustics, IOA, CAS

Jixun Zhou

Georgia Tech

Supproted by NSFC and ONR

Report Documentation Page

*Form Approved
OMB No. 0704-0188*

Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.

1. REPORT DATE 01 DEC 2002	2. REPORT TYPE N/A	3. DATES COVERED -		
4. TITLE AND SUBTITLE Low-Frequency Shallow Water Reverberation and Bottom Scattering Model		5a. CONTRACT NUMBER		
		5b. GRANT NUMBER		
		5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)		5d. PROJECT NUMBER		
		5e. TASK NUMBER		
		5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Lab of Acoustics, IOA, CAS		8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)		
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited				
13. SUPPLEMENTARY NOTES Also See: M001452, The original document contains color images.				
14. ABSTRACT				
15. SUBJECT TERMS				
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified	UU	18. NUMBER OF PAGES 40
				19a. NAME OF RESPONSIBLE PERSON

Introduction

- The problems of reverberation model
 - Propagation model
 - Bottom parameters
 - Scattering model
 - Angle relationship
 - Frequency relationship
 - Physical mechanism
- Motivation of this talk
 - The ASIAEX01 reverberation data are used to validate different bottom scattering models.

V

? V

?


Contents

- Middle frequency (700Hz to 2000Hz, in this report) reverberation loss to validate different bottom scattering models.
- Low frequency (<700Hz) reverberation loss and sediment-basement combined scattering model.

The background is a dark blue gradient with a pattern of concentric circles and a grid of dashed lines. The circles are centered in the four quadrants of the slide. The grid lines are spaced evenly across the entire area.

1. Middle Frequency reverberation data

Experimental Data

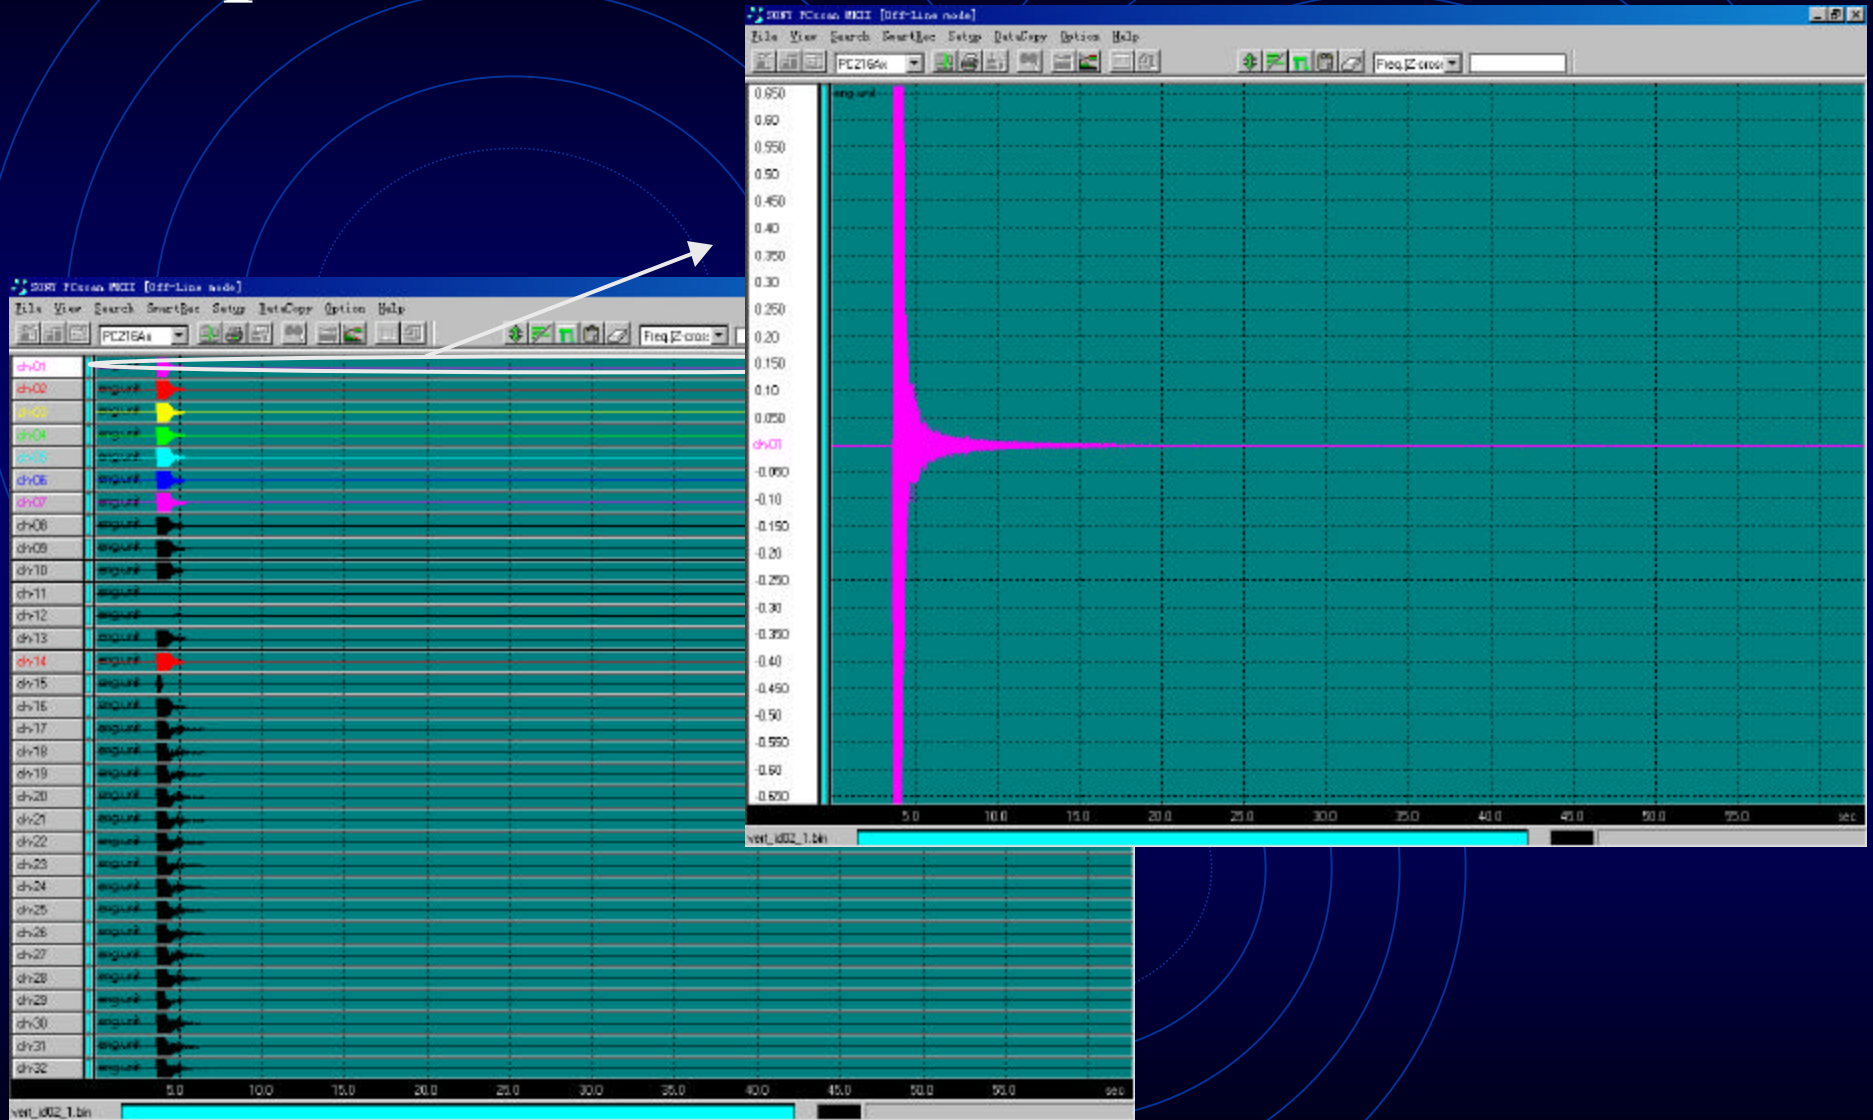

Data analysis procession


Recorded data $x(t)$

Narrow band filtering $y(t)=\text{filter}(x(t))$


Short time energy average $I(t_0)=\text{mean}(y^2(t))$
($t=t_0$ to t_0+dt)

Reverberation loss $RL(t)=10*\log_{10}(I(t))-SL$

Reverberation loss vs. time (Bomb 1)

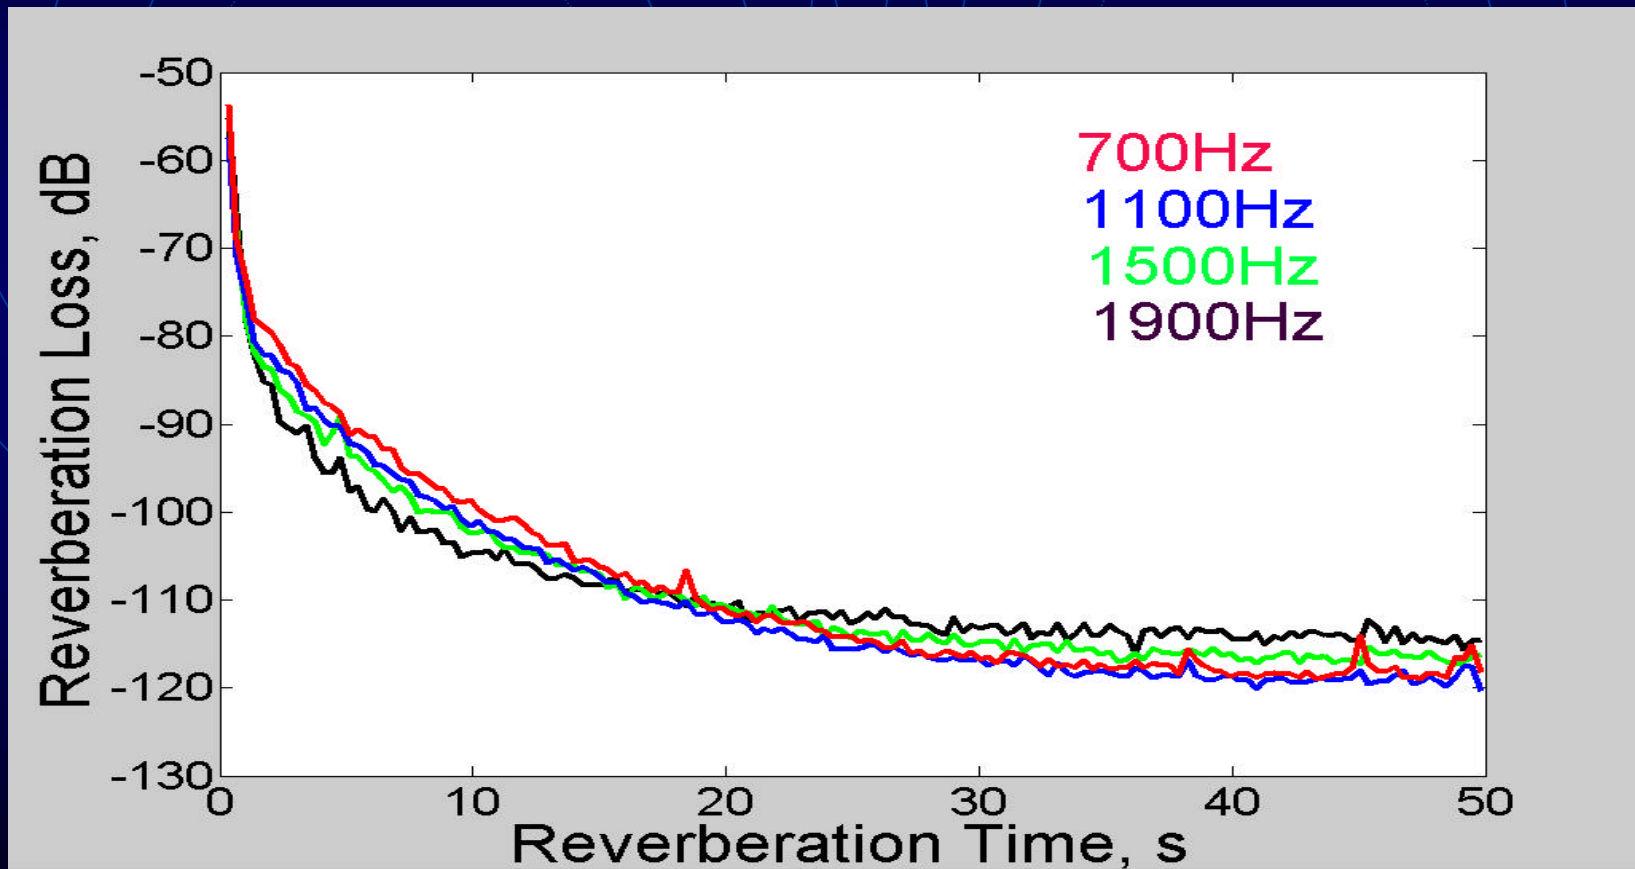

Reverberation loss vs. time (Bomb 1/2/3, Frequency 1kHz)

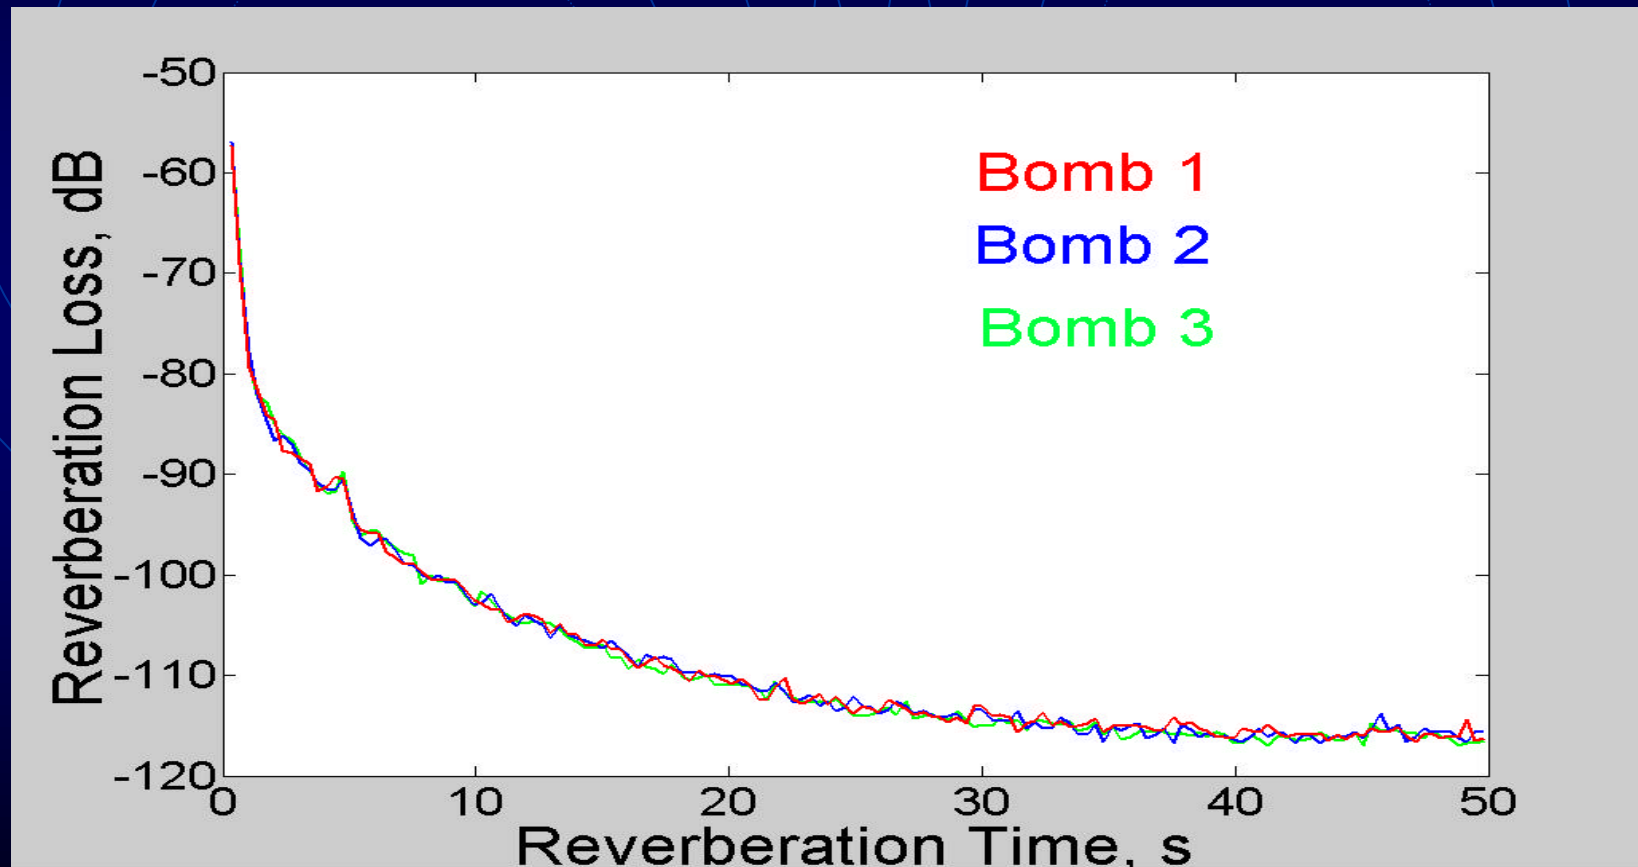


Model/data comparison procession (mathematically)

Have several different expressions of bottom scattering coefficient

Put those expressions into Reverberation model to get numerical results


Compare the numerical results with the experimental data to find out the best expression for this experiment

Sound Speed Profile

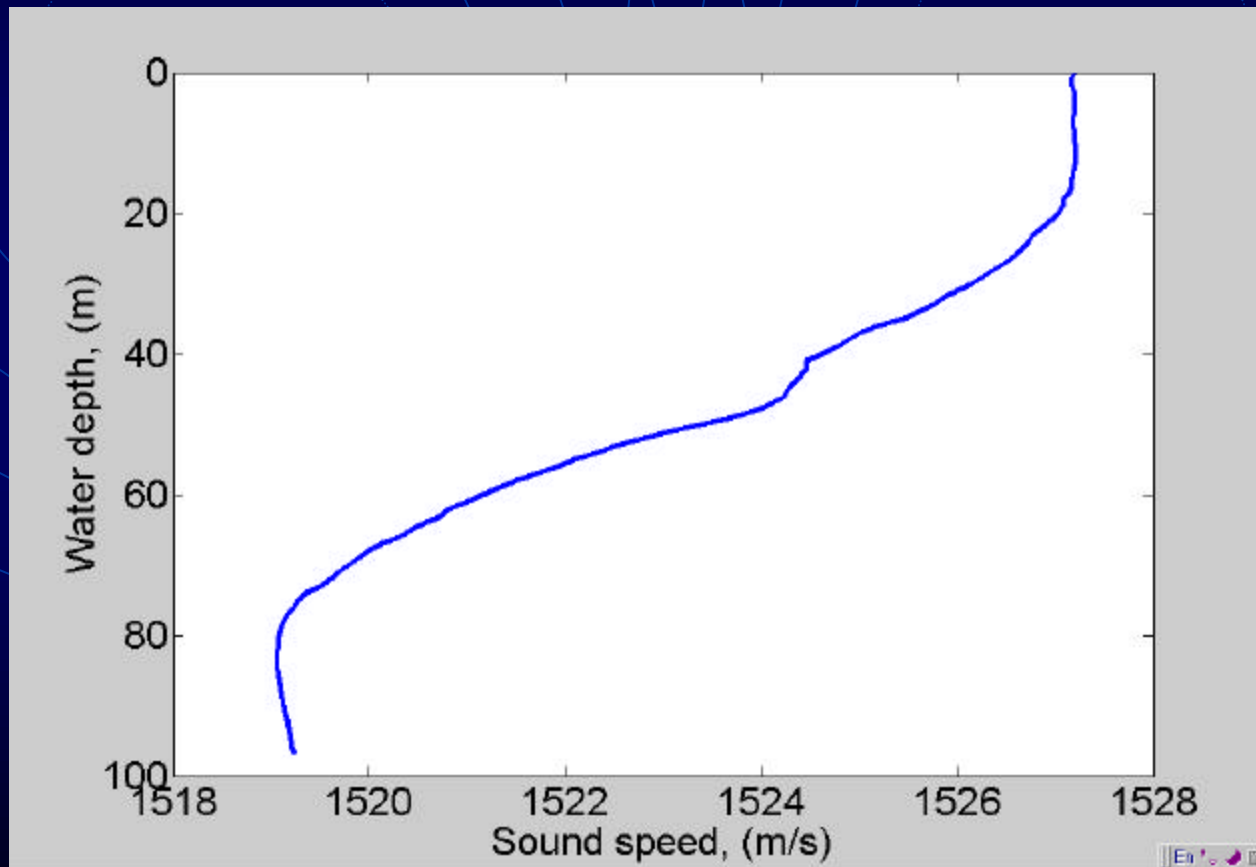

Bottom parameters


- Bottom speed, 1610.8m/s
- Bottom density 1.86g/cm³
- From Geoacoustic Inversion by Dr. Zhenlin Li

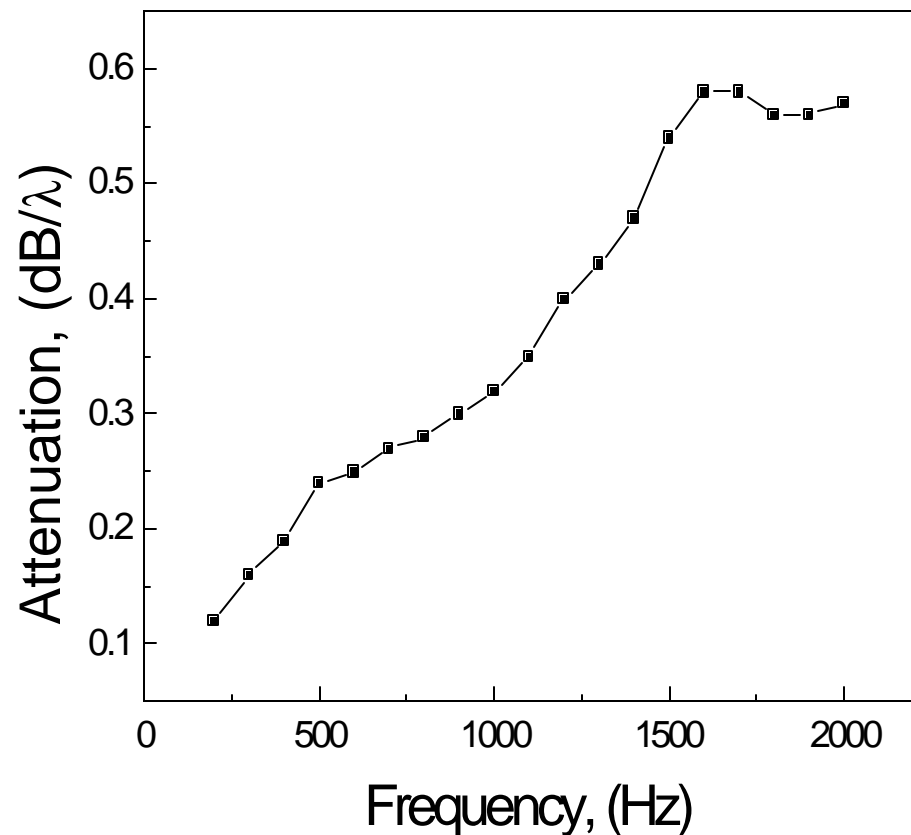

The discrete sediment inhomogeneous scattering model

Sediment inhomogeneous

Sediment

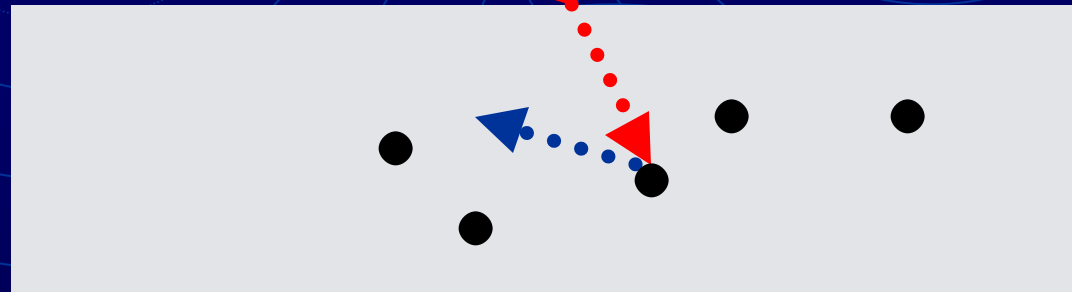

- For signal scatterer , $\mathbf{S} \propto k^4$
- Neglect multiple scattering,

$$\mathbf{S}(\mathbf{q}_i, \mathbf{q}_s) = B_L k_2^3 |1 + R_{1-2}(\mathbf{q}_i)|^2 |1 + R_{1-2}(\mathbf{q}_s)|^2 \frac{1}{2 \left[\text{Im} \sqrt{\left(\left(\frac{k}{k} \right)^2 - \cos^2 \mathbf{q}_i} \right)} + \text{Im} \sqrt{\left(\left(\frac{k}{k} \right)^2 - \cos^2 \mathbf{q}_s} \right)} \right]}$$

- The above expression approximates to the sediment inhomogeneous model from Jackson, etc. $W(k) \propto 1/k^0$
- The above expression also approximates perturbation brightness model from Jackson, etc. $W(k) \propto 1/k^1$

Published mathematical expressions of bottom scattering coefficient (incomplete)

$$1 \quad \mathbf{s}(\mathbf{q}_i, \mathbf{q}_s) = m \sin(\mathbf{q}_i) \sin(\mathbf{q}_s)$$

$$2 \quad \mathbf{s}(\mathbf{q}_i, \mathbf{q}_s) = m \sin^{1/2}(\mathbf{q}_i) \sin^{1/2}(\mathbf{q}_s)$$

$$3 \quad \mathbf{s}(\mathbf{q}_s, \mathbf{q}_i) = m \sin^l \left(\frac{\mathbf{q}_i + \mathbf{q}_s}{2} \right)$$

$$4 \quad \mathbf{s} = m \left[\frac{\sin(\mathbf{q}_i) \sin(\mathbf{q}_s)}{(\sin(\mathbf{q}_i) + \sin(\mathbf{q}_s))} \right]^l$$

$$5 \quad \mathbf{s}(\mathbf{q}_s, \mathbf{q}_i) = m \sin^l \left(\cos^{-1} \left(\frac{\cos(\mathbf{q}_i) + \cos(\mathbf{q}_s)}{2} \right) \right)$$

$$6 \quad \mathbf{s}(\mathbf{q}_i, \mathbf{q}_s) \approx \frac{1}{4p} a \left(\frac{\sin(\mathbf{q}_i) + \sin(\mathbf{q}_s)}{2} k \right)^2$$

$$7 \quad \mathbf{s}(\mathbf{q}_i, \mathbf{q}_s) = B_L k_2^3 |1 + R_{1-2}(\mathbf{q}_i)|^2 |1 + R_{1-2}(\mathbf{q}_s)|^2 \frac{1}{2 \left[\operatorname{Im} \sqrt{\left(\left(\frac{k}{k} \right)^2 - \cos^2 \mathbf{q}_i} \right)} + \operatorname{Im} \sqrt{\left(\left(\frac{k}{k} \right)^2 - \cos^2 \mathbf{q}_s} \right)} \right]}$$


The criterion for Model/data comparison

- Minimum Standard Deviation criterion

$$\text{Min}(SD) = \text{Min}(\text{sqrt}(\text{sum}(\text{RL}_e(t_i) - \text{RL}_n(t_i))^2 / N))$$

Standard Deviations for different expressions (2-15s, 700 to 2kHz)


Frequency independent

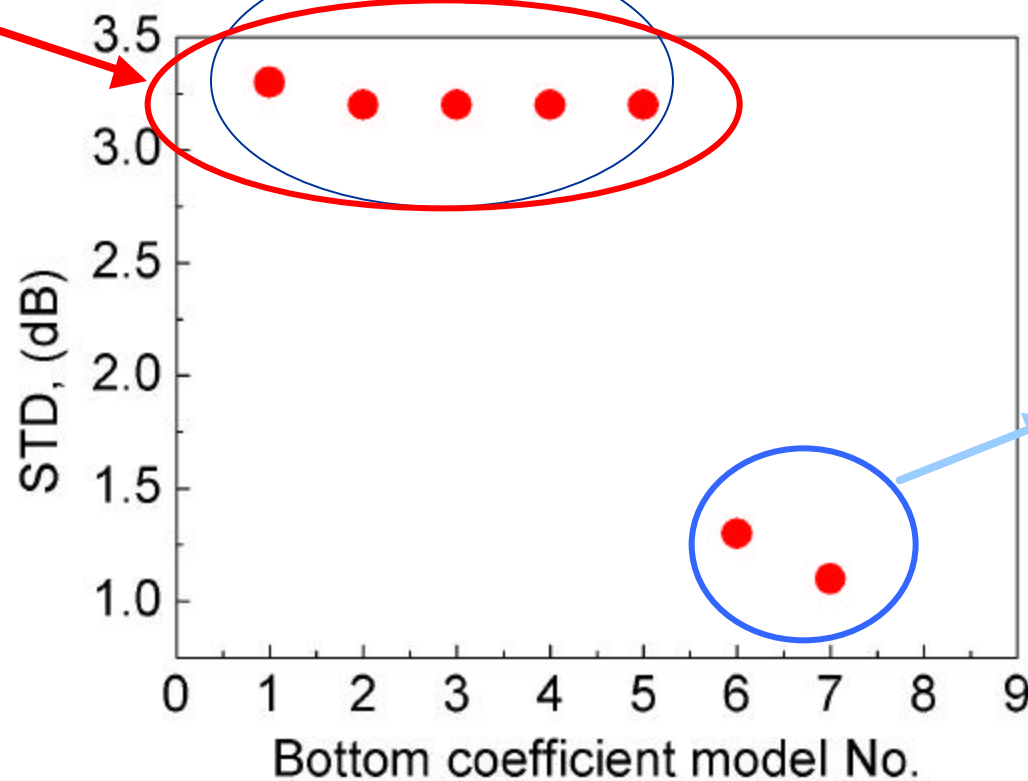


Frequency dependent

- The bottom scattering coefficient has a strong frequency relationship.
- For explaining 700Hz to 2000Hz experimental RL data, the discrete sediment inhomogeneous model is best model among the models shown in this paper.


The bottom scattering coefficient

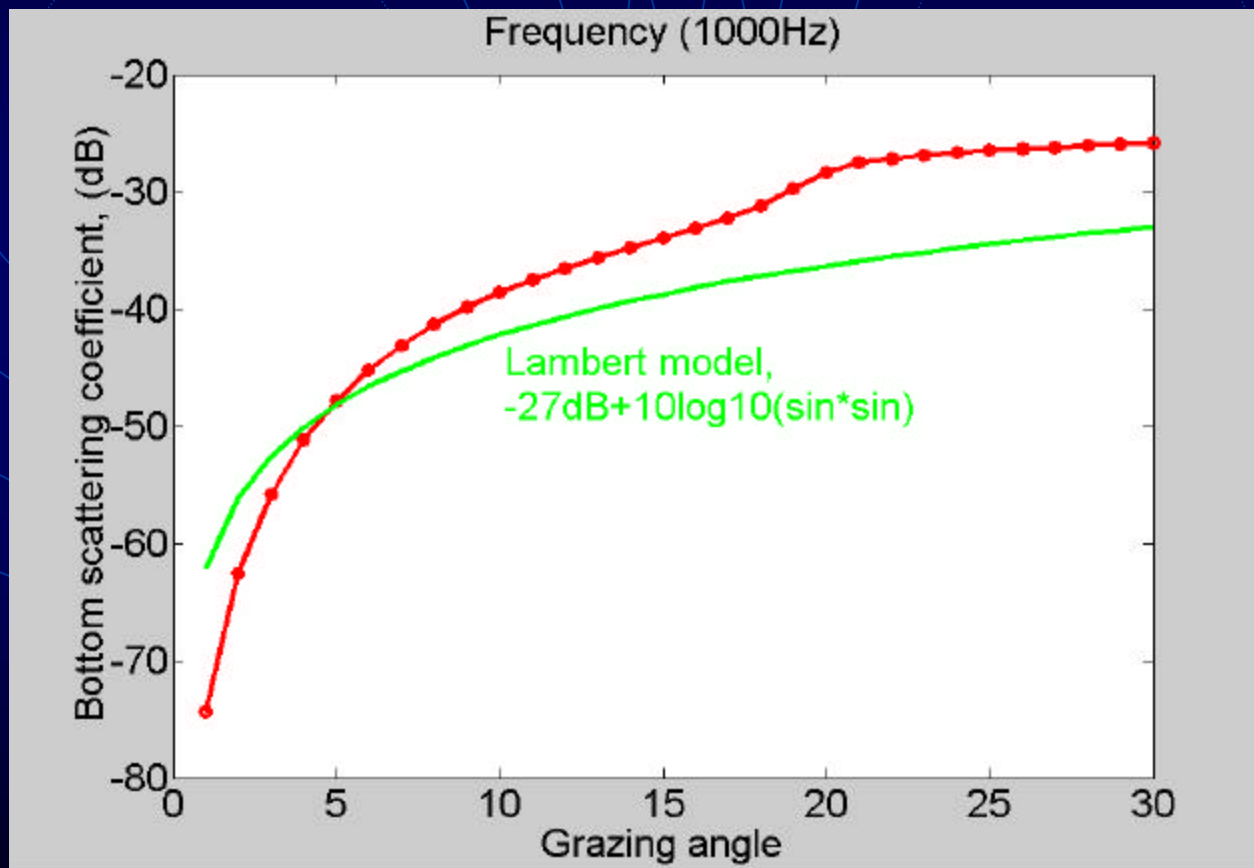


The bottom scattering coefficient (Grazing angle is 10degree)

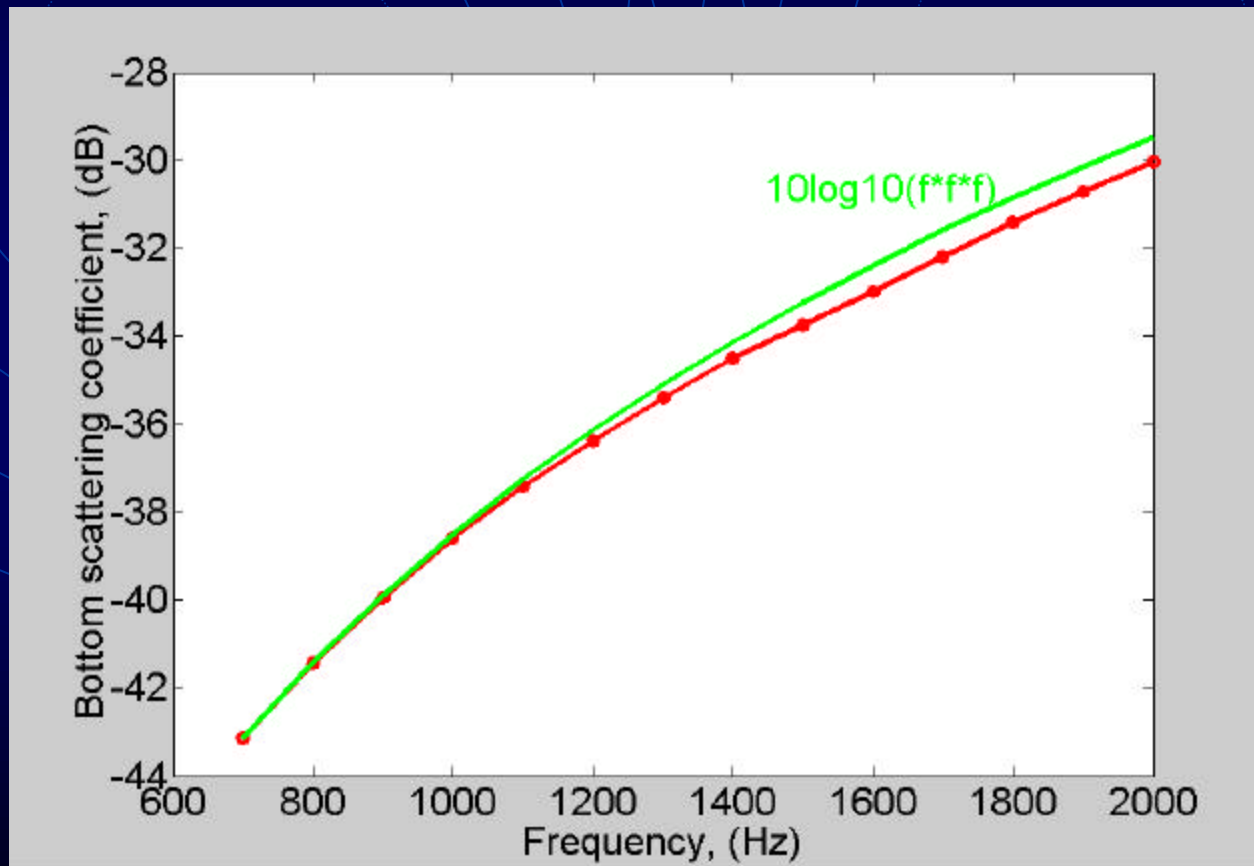


Model/data comparison (700Hz)

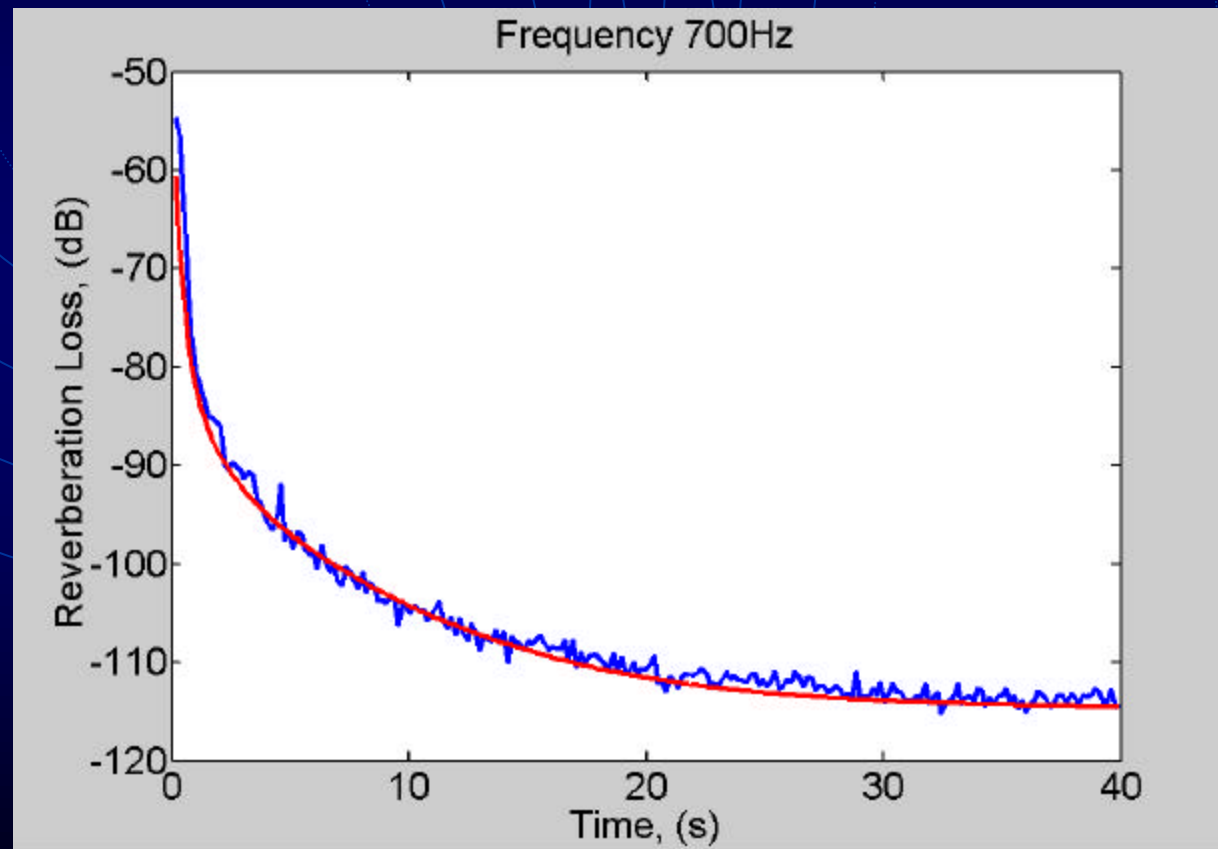


Model/data comparison (1000Hz)

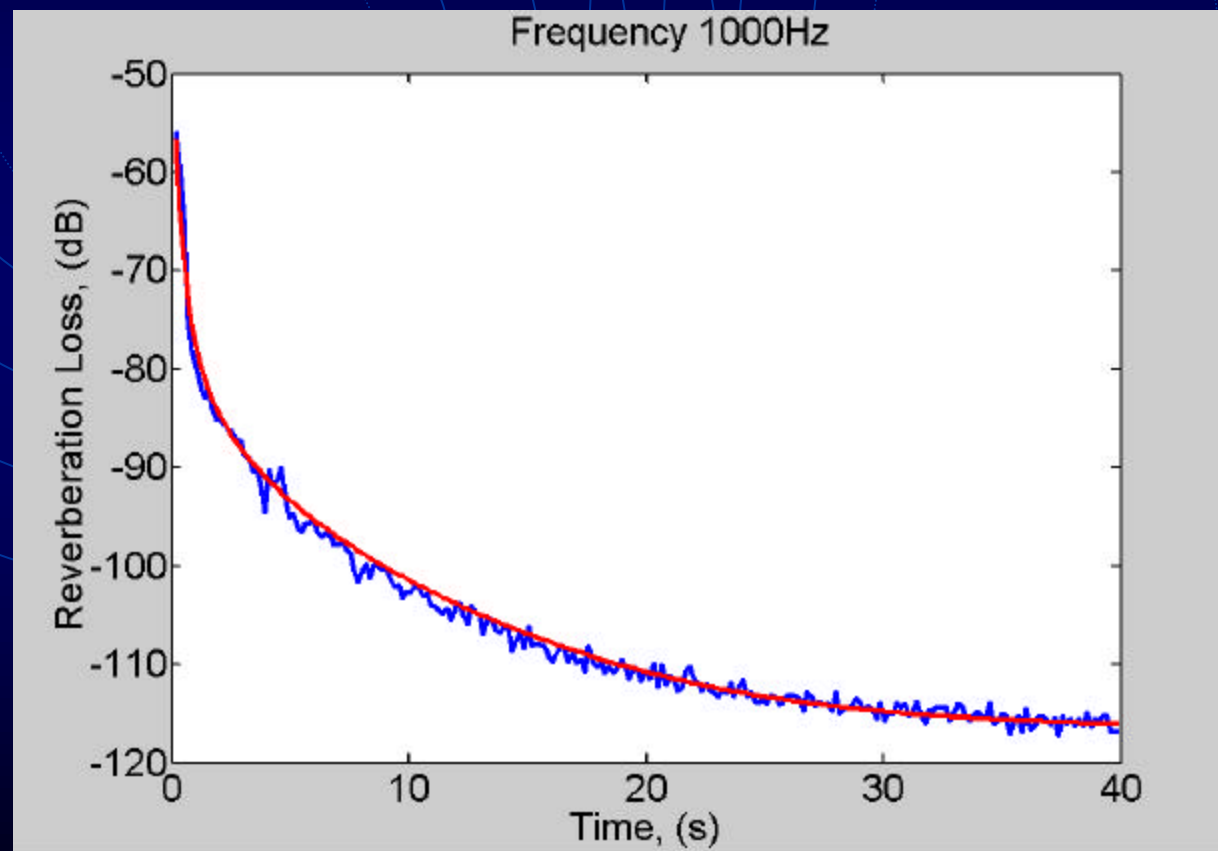

Model/data comparison (1500Hz)

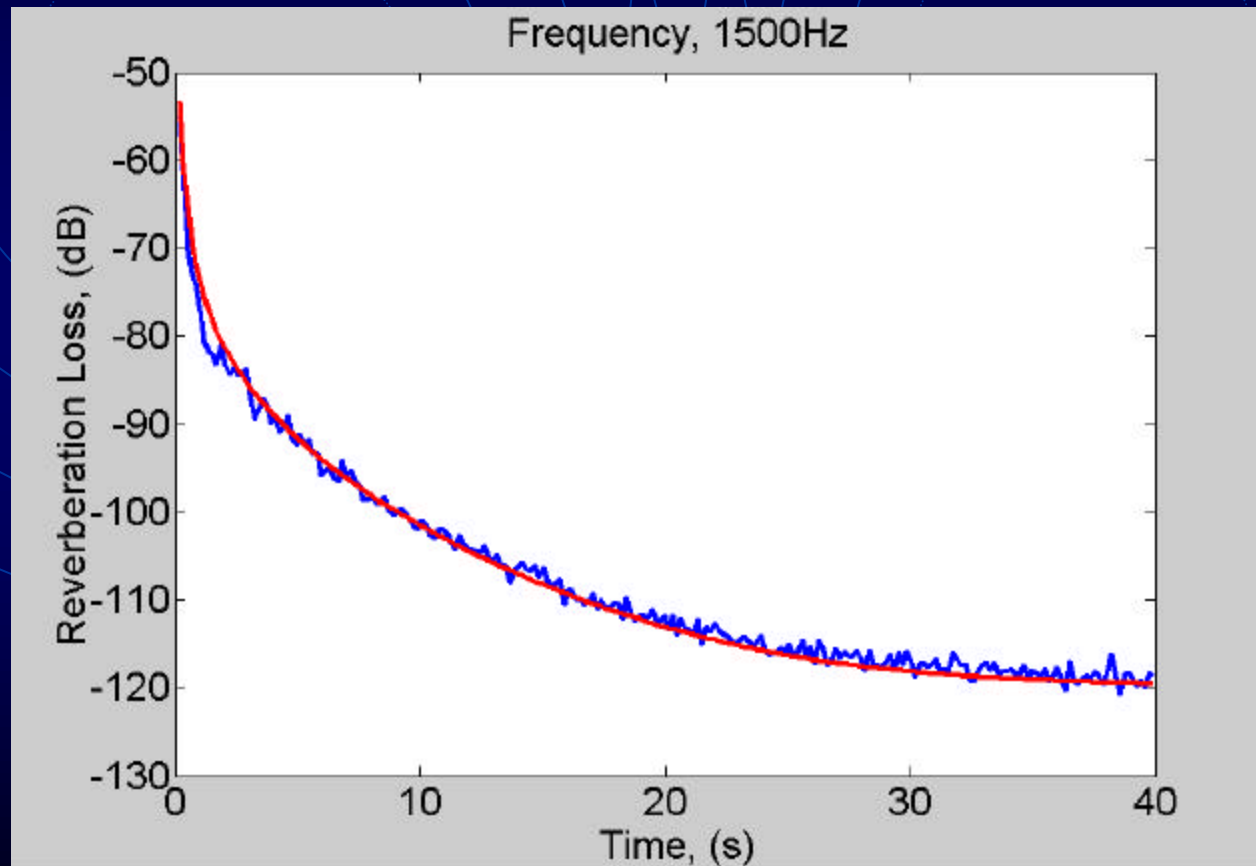


Model/data comparison (1900Hz)

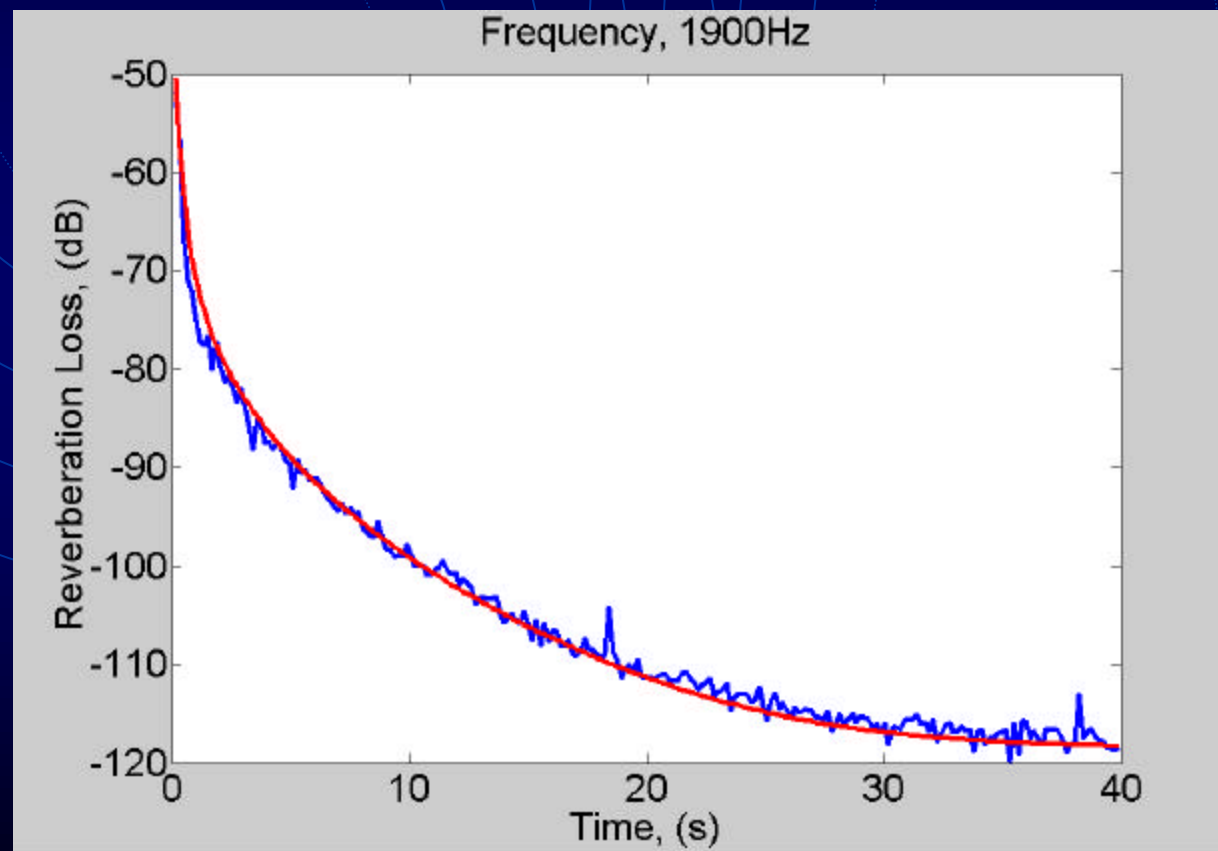




2. Low Frequency reverberation data


Model/data comparison (500Hz)

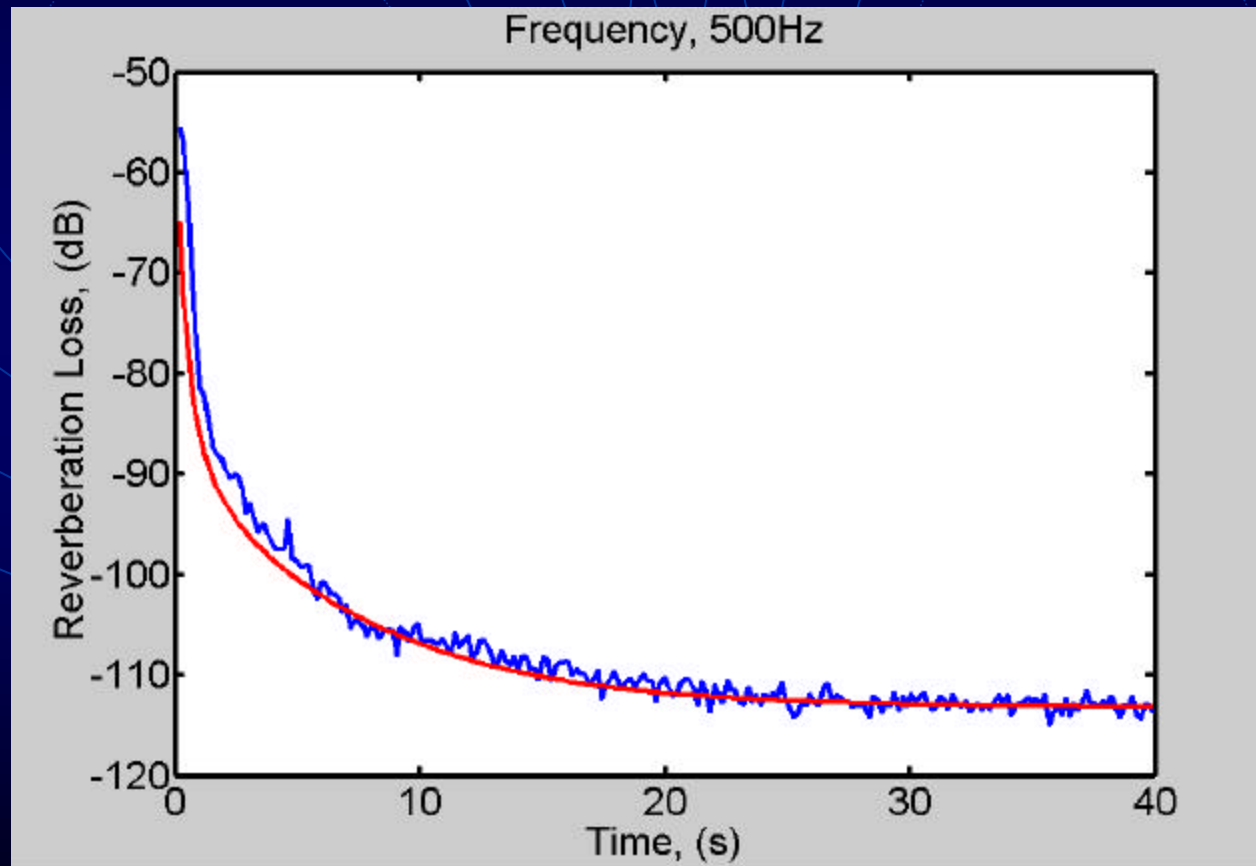


Model/data comparison (400Hz)

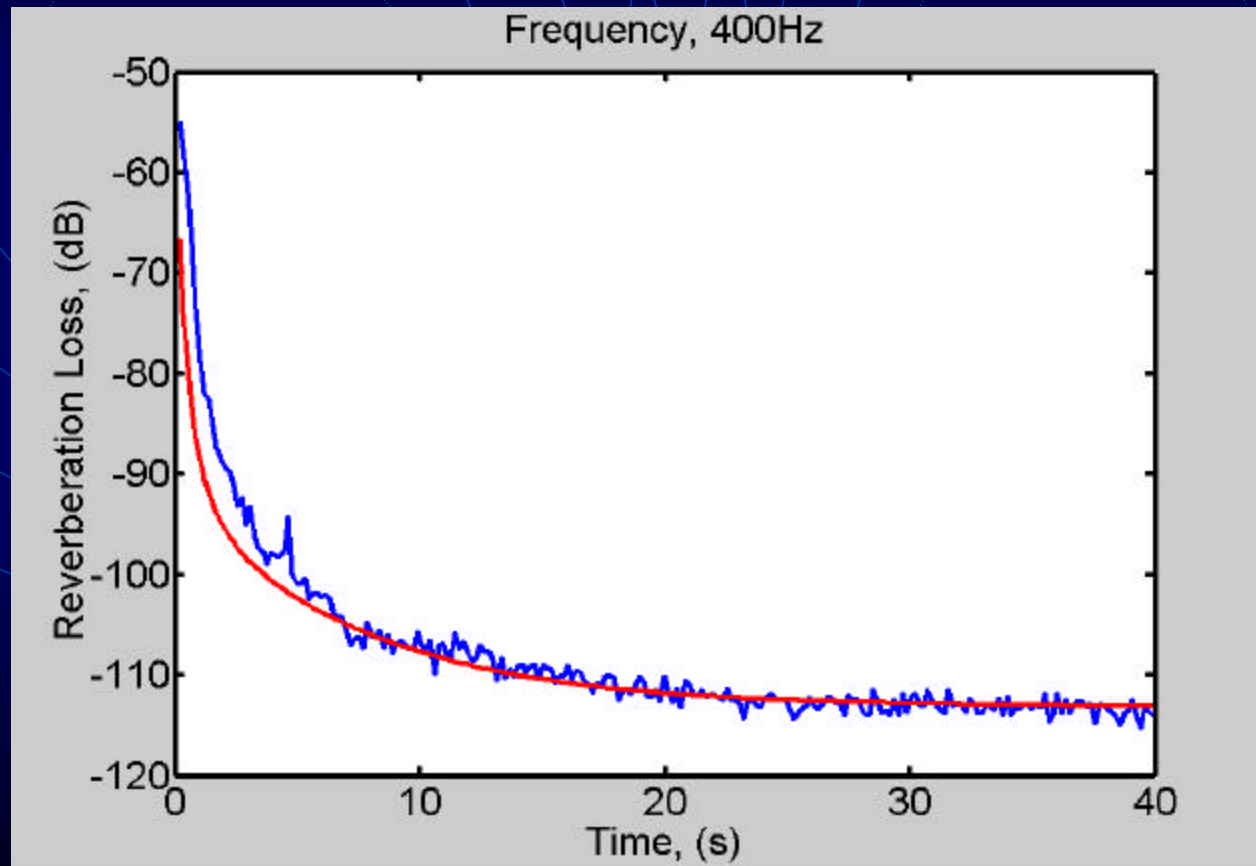

Model/data comparison (300Hz)

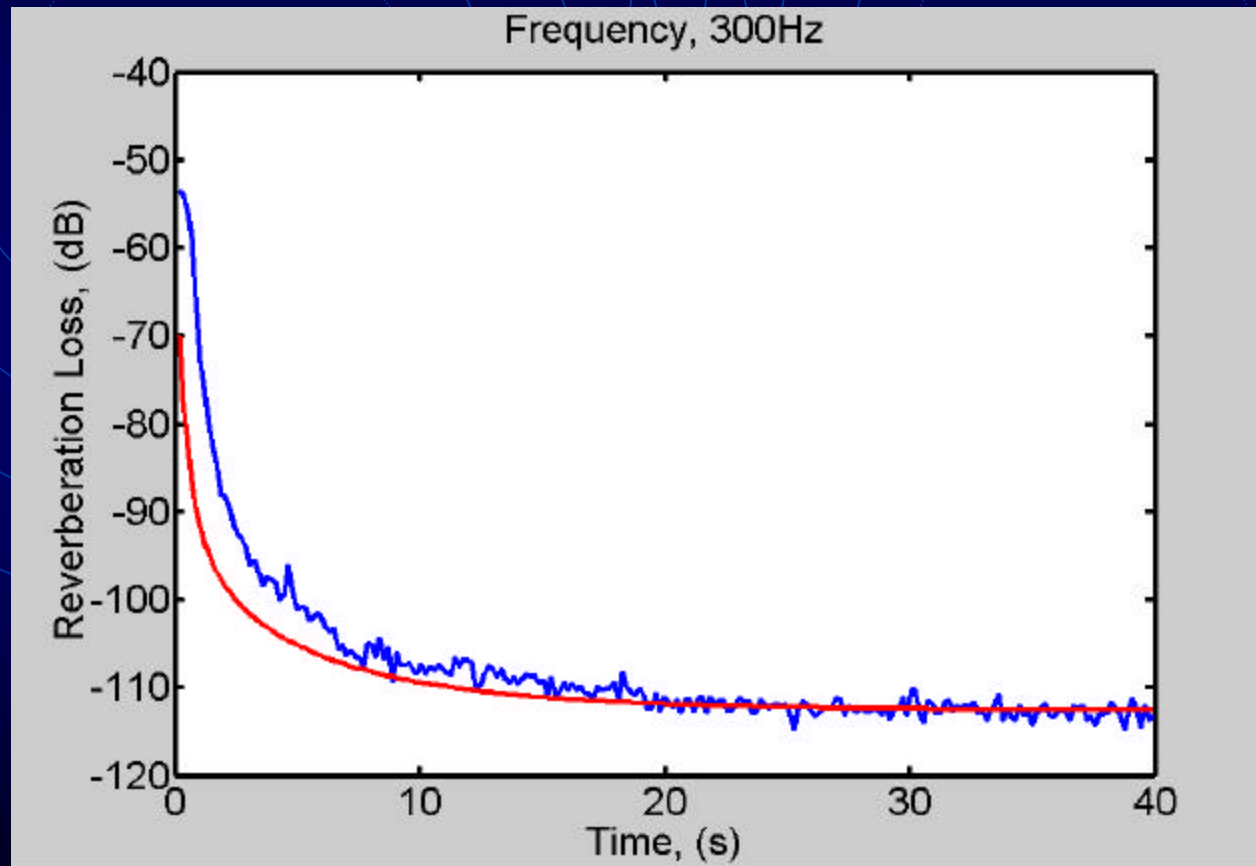

Model/data comparison (200Hz)

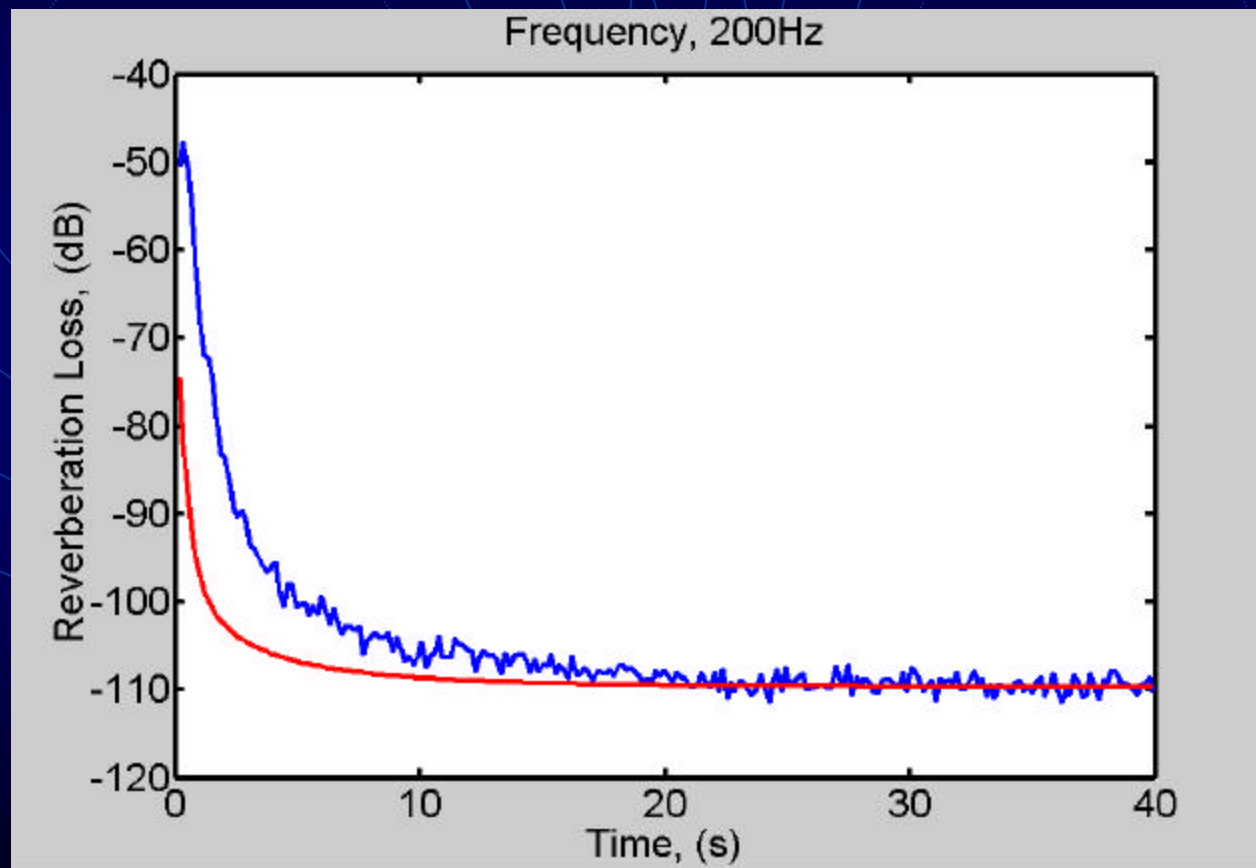

The sediment-basement combined scattering model

Sediment inhomogeneous


Surface roughness

Basement roughness

Sediment

D=15m

Basement

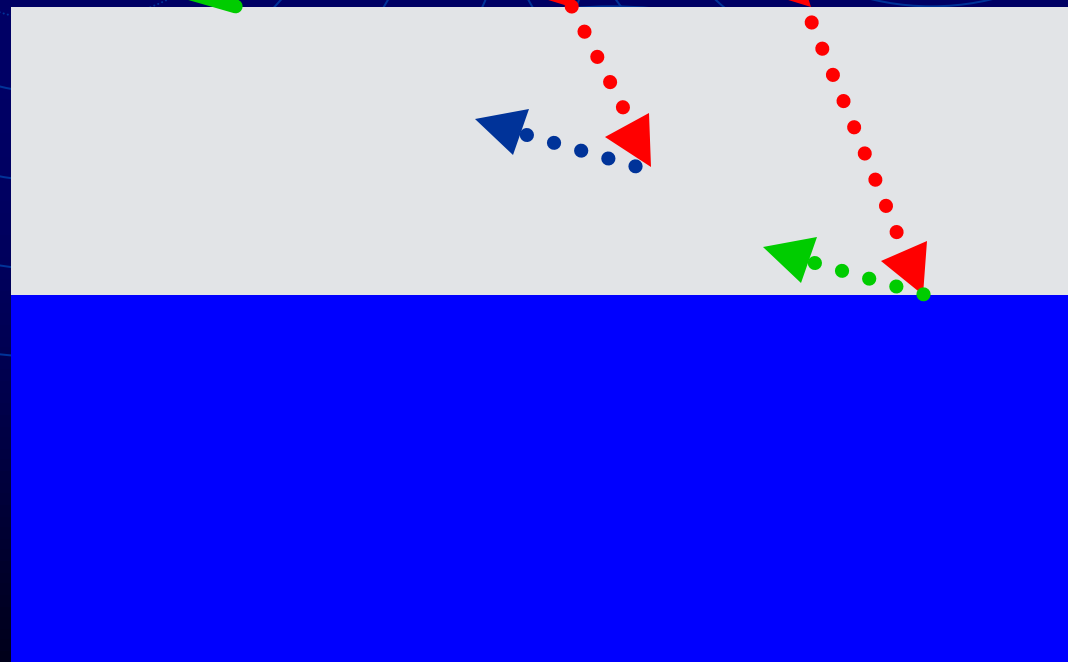

The sediment-basement combined scattering model


- Bottom scattering includes the scattering from the sediment inhomogeneous and the basement roughness.

$$s(\mathbf{q}_i, \mathbf{q}_s) = B_L k_2^3 |1 + R_{1-2}(\mathbf{q}_i)|^2 |1 + R_{1-2}(\mathbf{q}_s)|^2 \frac{1}{2 \left[\operatorname{Im} \sqrt{\left(\left(\frac{k}{k} \right)^2 - \cos^2 \mathbf{q}_i} \right)} + \operatorname{Im} \sqrt{\left(\left(\frac{k}{k} \right)^2 - \cos^2 \mathbf{q}_s} \right)} \right]} + B_L |1 + R_{1-2}(\mathbf{q}_i)|^2 |1 + R_{1-2}(\mathbf{q}_s)|^2 \exp(-2gD) W(k) |F(k)|^2$$


« Ivakin, JASA, 1998, vol. 103 »

- D=15m


Model/data comparison (200Hz)

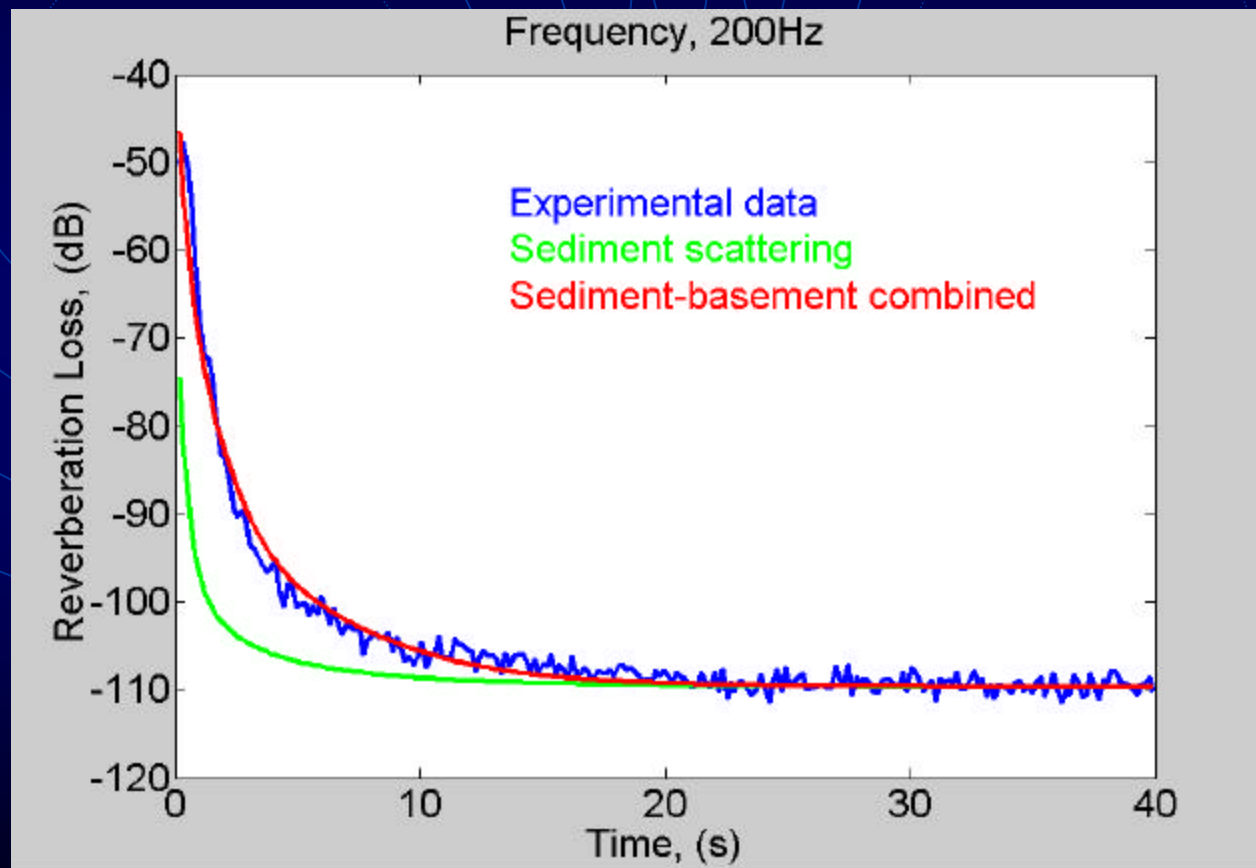


Model/data comparison (300Hz)

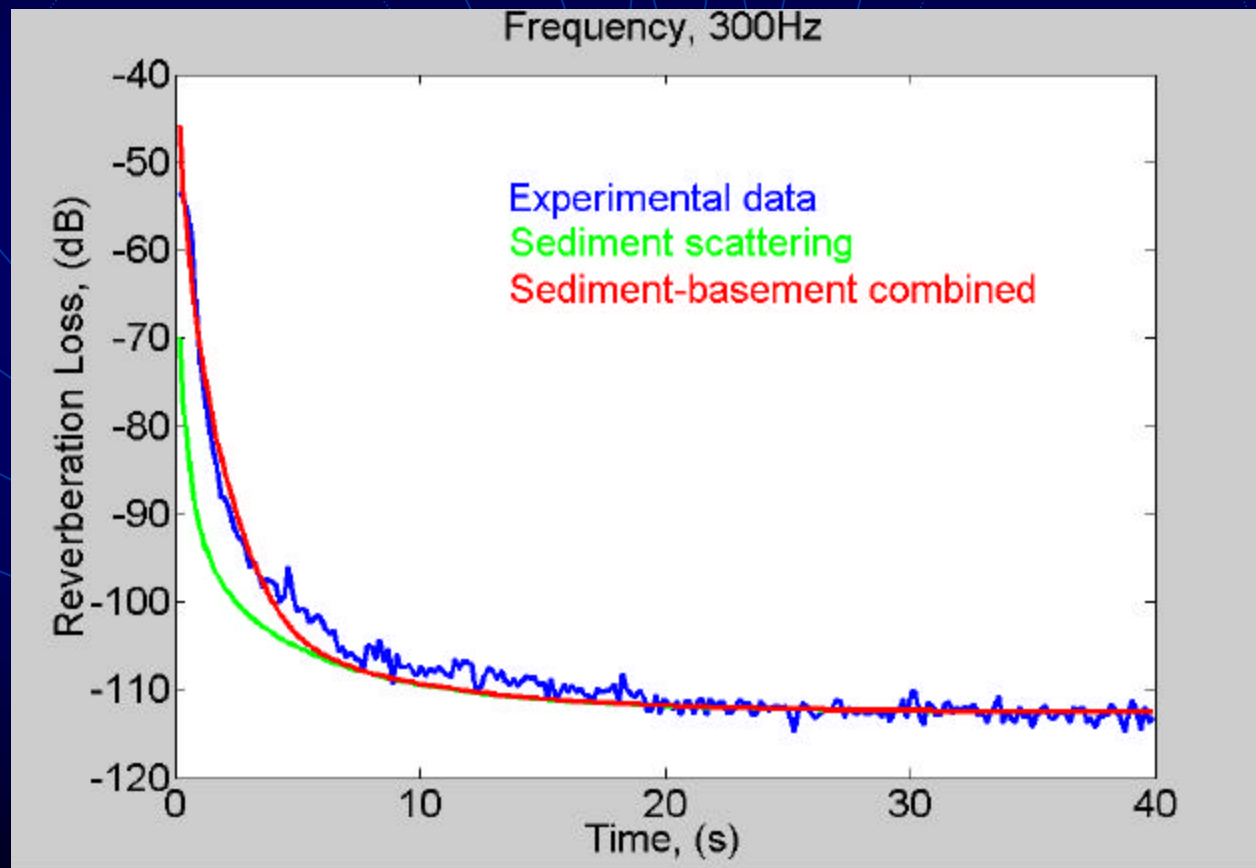


Model/data comparison (400Hz)

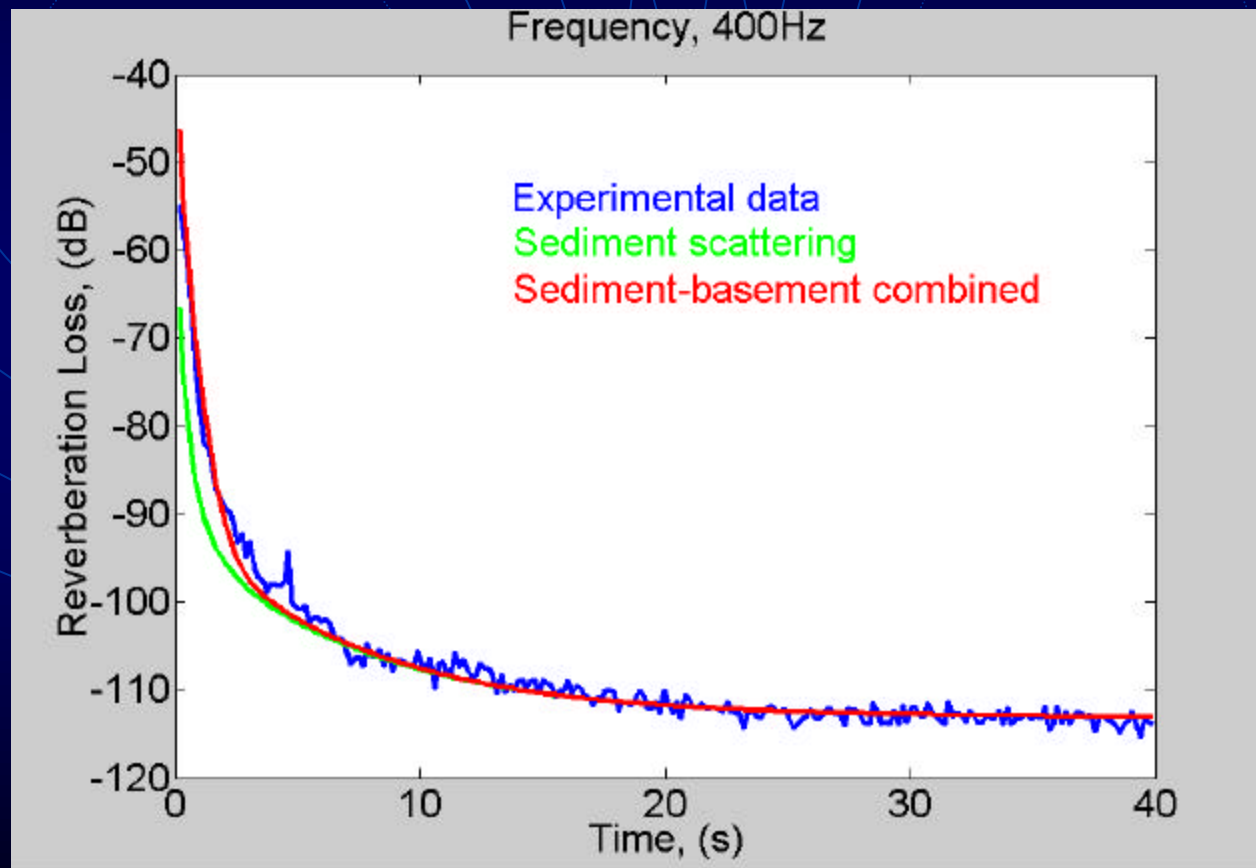





Model/data comparison (500Hz)

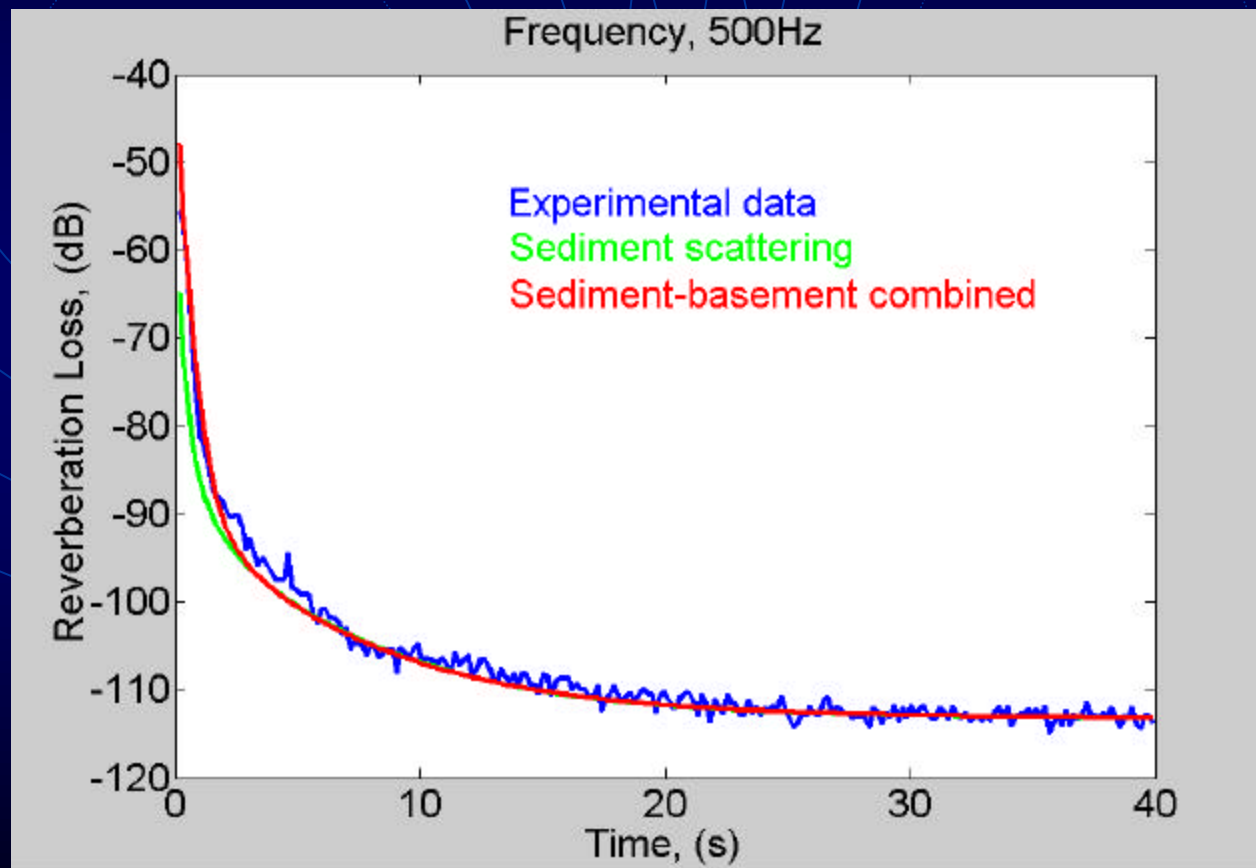

Model/data comparison (2000Hz)

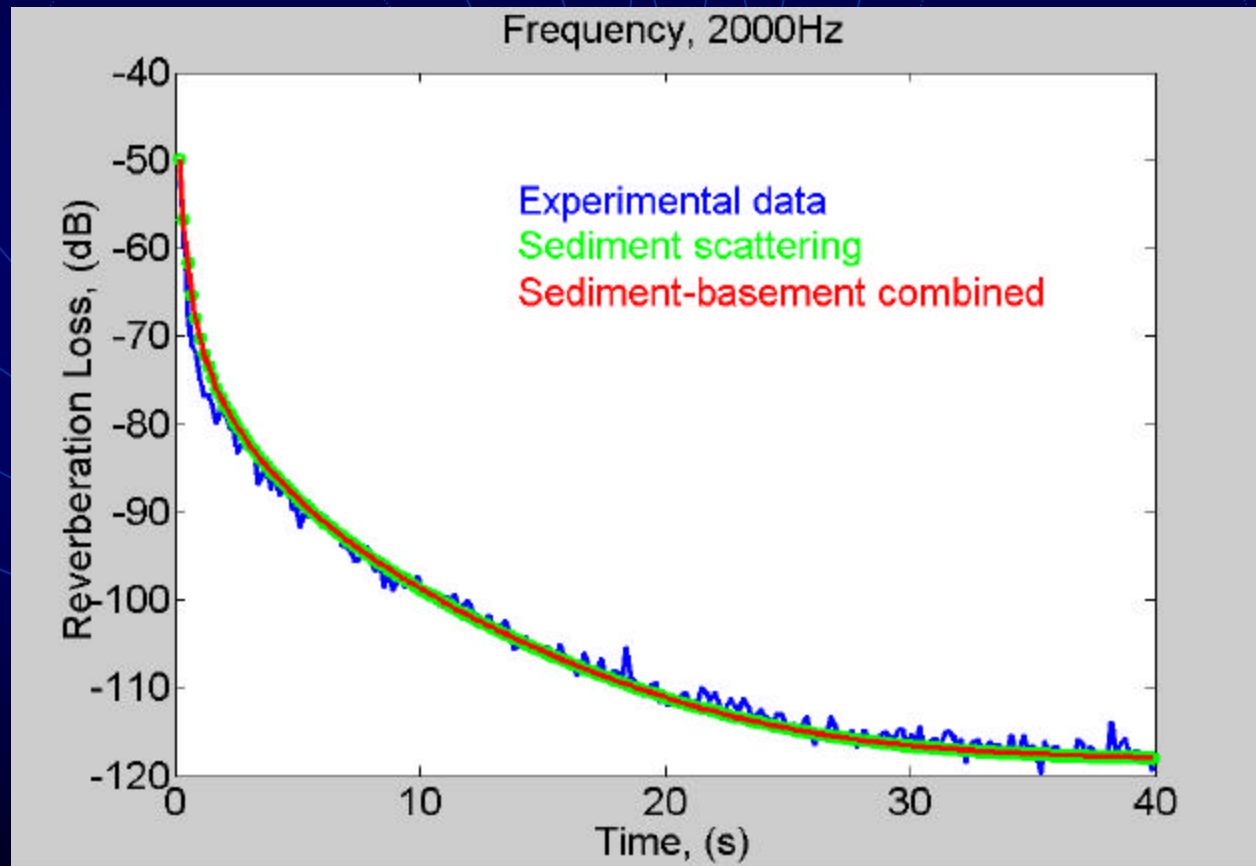

Bottom scattering coefficients

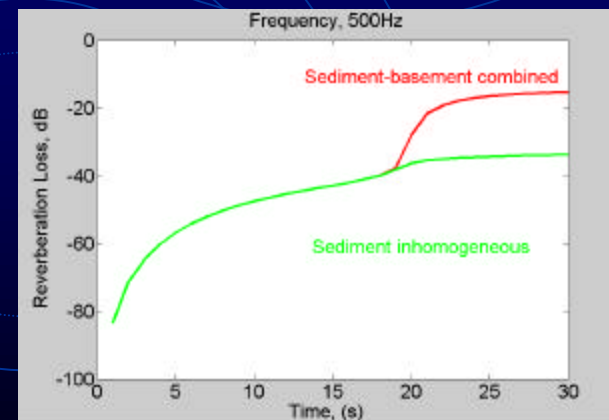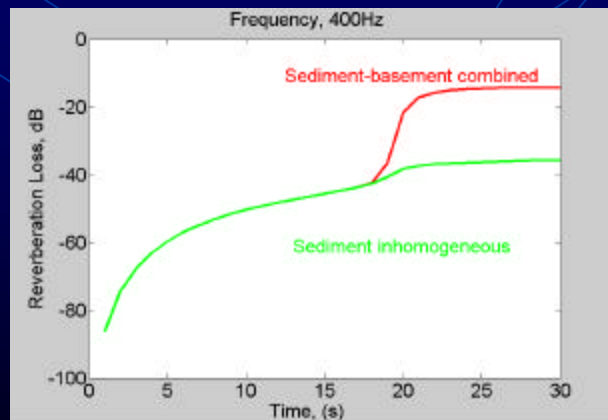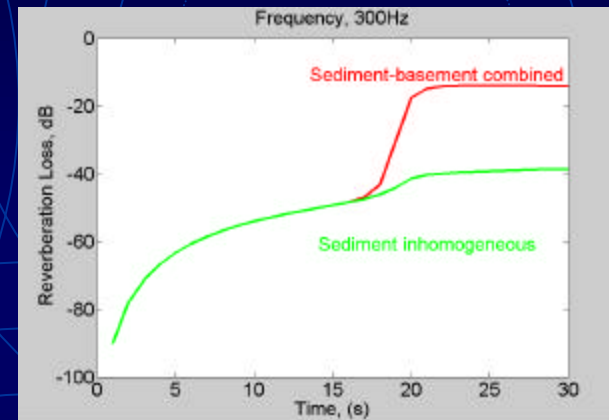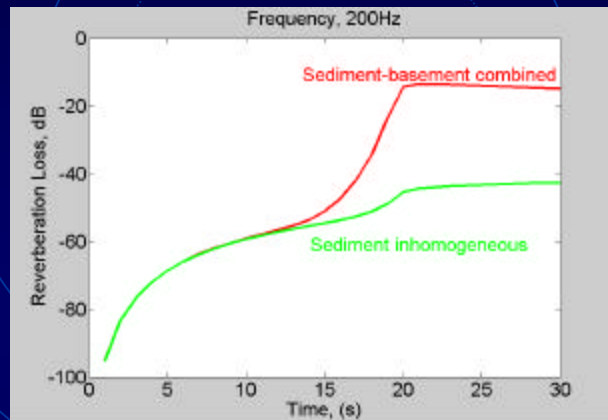

Summaries


- The bottom scattering coefficient has a strong frequency relationship (f^3).
- For 700Hz to 2000Hz experimental RL data, the discrete sediment inhomogeneous model is best model among the models shown in this paper.
- The scattering from deeper layer may be a dominating effect for low frequency reverberation data.

Other open problems!

- Can this model predict the reverberation correlation?
- How to distinguish the sediment inhomogeneous and surface roughness
- The multiple scattering effect?
- Comparison with the other scattering data?

Other open problems!

- Geoacoustic model
 - Basement is not rigid?
 - Sound speed has a positive gradient in the sediment?
 - There is a scattering layer at about 15m?

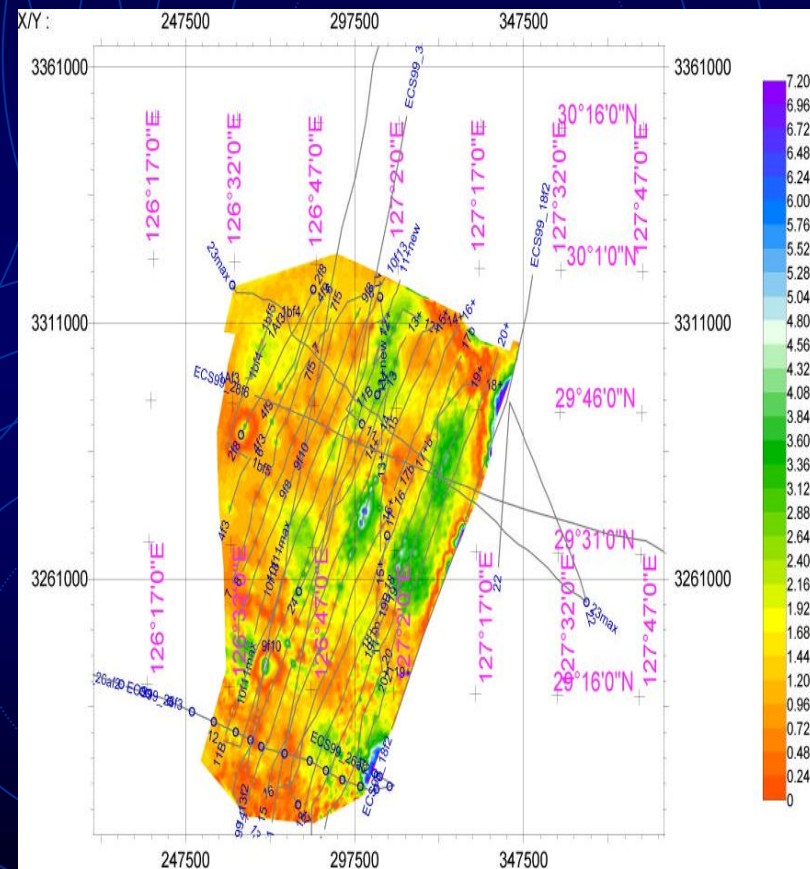

Seafloor to TST isopach or layer thickness of the top layer of sand-silt in meters. (from L. Bartek)

The background features a dark blue gradient with three sets of overlapping concentric circles. Each set consists of a solid outer circle, a dotted middle circle, and a solid inner circle. Dashed lines radiate from the centers of these circles towards the corners of the frame. The word "Thanks" is centered in a white serif font.

Thanks