

REPORT DOCUMENTATION PAGE

Form Approved
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE 27 JAN 04	3. REPORT TYPE AND DATES COVERED PROCEEDINGS 2 - 4 JUNE 2003	
4. TITLE AND SUBTITLE EXPERT WORKSHOP ON EXPLOSIVE DETECTION TECHNIQUES FOR USE IN MINE CLEARANCE AND SECURITY RELATED REQUIREMENTS			5. FUNDING NUMBERS 9442AN02 N62558-03-M-0335	
6. AUTHOR(S) MR. JERNEJ CIMPERSEK				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) INTERNATIONAL TRUST FUND FOR DEMINING AND MINE VICTIMS IG212 1292IG LAKE BLEĐ SLOVENIA			8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. ARMY - EUROPEAN RESEARCH OFFICE EDISON HOUSE 223 OLD MARYLEBONE ROAD LONDON NW1 5TH UNITED KINGDOM			10. SPONSORING / MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES				
12a. DISTRIBUTION / AVAILABILITY STATEMENT APPROVED FOR PUBLIC DISTRIBUTION DISTRIBUTION UNLIMITED WORKSHOP PROCEEDINGS			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)				
20040219 231				
14. SUBJECT TERMS EXPLOSIVES, LANDMINE, DETECTION			15. NUMBER OF PAGES 127	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT	

R8D 9442AN02

N62558-03-M-0335

PROCEEDINGS

Mr Jernej Cimpersek

EXPERT WORKSHOP ON EXPLOSIVE DETECTION TECHNIQUES FOR USE IN MINE CLEARANCE AND SECURITY RELATED REQUIREMENTS

2 – 4 JUNE 2003
BLED LAKE
SLOVENIA

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited



Content

- III *Conference Committees*
- IV *Workshop Programme*
- VII *Workshop Conclusions*

Opening

- 1 Welcome on behalf of the local organisers
Goran GACNIK, Deputy Director of ITF, Slovenia
- 2 Welcome on behalf of the Organising Committee
Alois J. SIEBER, EC - JRC, Italy

Session 1

- 6 Detection of explosives for terrorist-bombs and landmine clearance -- Different applications of similar methods
Hiltmar SCHUBERT, PSE GmbH, Germany
- 10 Chemical and physical properties and the detection of home-made explosives
Michel LEFEBVRE, RMA, Belgium
- 21 Overview of technology development in explosive detection
Louis WASSERZUG, TSWG, Special Operations Washington, USA

Session 2

- 25 Detection of plastic explosives in explosive devices
Petr MOSTAK, Czech Republic
- 32 Detection and Imaging with NQR, THz, and X-ray Techniques
Garth SHILSTONE, DSTL Fort Halstead, UK
- 39 THz detection of explosives and biologicals
Daniel VAN DER WEIDE, University of Wisconsin-Madison, USA
- 46 Vapour detection and canine/bee olfaction
John GILBERT, DSTL Fort Halstead, UK
- 51 An Overview of the APOPO Program, rats for landmine detection
Christophe COX, APOPO, Belgium

Session 3

- 52 Neutron Resonance Radiography for Security Applications
Richard LANZA, Massachusetts Institute of Technology, USA
- 64 Portable multi-sensor for detection and identification of explosives substances
Andrey KUTZENTSOV, V.G. Klopin Radium Institute, Russia

- 70 Practical aspects of using explosive detection techniques
Israel HIRSCH, Aphelion Ltd., Israel
- 84 An emerging analytical technology for military and homeland defense applications
Russel HARMON, U.S. Army Research Office, USA

Session 4

- 90 Detection of explosives by quadrupole resonance
Tomaz APIH; Robert BLINC, Institute Jozef Stefan, Slovenia
- 95 Improvement of nitrogen NQR detection in explosives by proton polarization.
Janko LUZNIK, IMFM, Slovenia
- 97 Explosive detection in mine clearance: chemical behavior in the field
Vernon JOYNT, CSIR, South Africa

Session 5

- 106 Demands on chemical vapor detection of landmines and explosives for counter-terrorism
Michael KRAUSA, ICT, Germany
- 114 The IAEA coordinated research project on nuclear techniques for anti personnel landmine identification
Ulf ROSENGÅRD, IAEA, Austria
- 120 Imaging techniques (optical and infrared) in landmine detection
Chris WEICKERT, CCMAT, Canada
- 124 **List of participants**

Conference Committees

Members of the Organizing Committee

Alois J. SIEBER
European Commission
Joint Research Centre
IPSC/HSU
T.P. 723, Via E. Fermi
I-21020 Ispra (VA)
Tel. +39 0332 78 9089
Fax +39 0332 785469
e-mail: alois.sieber@jrc.it

Jernej CIMPERŠEK
Director
International Trust
Fund for Demining
and Mine Victims
Assistance (ITF)
SI- 212 Ig
1292 Ig, Slovenia
Tel. +386 1 4796585
Fax +386 1 4796590
e-mail: ljubljana@itf-fund.si

Sam SAMPATH
Us Army European Research
Office (ERO)
Edison House, 223 Old
Marylebone Road
London NW1 5TH
Tel. +44 207 514 4904
Fax +44 207 724 1433
e-mail:
ssampath@usardsguk.army.mil

Members of the Technical Committee

Prof. M. Acheroy, Director Signal Processing, Royal Military Academy (RMA), Belgium
acheroy@elec.rma.ac.be

Mr. J. Cimperšek, Director International Trust Fund for Demining and Mine Victims (ITF), Slovenia
Cimpersek@itf-fund.si

Dr. Don Hardy, Technical Capability Leader (Special Projects), Defence Science and Technology Laboratory (DSTL), UK
DWHARDY@mail.dstl.gov.uk

Mr. J. Reingruber, Deputy Director, Technology Programs, European Research Office (ERO), USA
John.Reingruber@osd.mil

Dr. S. G. Sampath, European Research Office (ERO), USA
ssampath@usardsguk.army.mil
sg_sampath@yahoo.co.uk

Prof. H. Schubert, Fraunhofer Institute for Chemical Technologies (ICT), Pfaffzettel, Germany
Schu@ict.fhg.de

Dr. A. J. Sieber, Joint Research Centre (JRC), European Commission
Alois.sieber@jrc.it

Dr. R. Suart, Director, Canada Centre for Mine Action Technologies (CCMAT), Canada
Robert.Suart@drdc-rddc.gc.ca

Workshop Programme

02 June 2003

09:00 - 18:30 Workshop Registration at the reception desk of the GOLF HOTEL BLEED
20:00 Reception hosted by ITF

03 June 2003

08:30 - 08:45 Jernej CIMPERŠEK, ITF (Slovenia) Welcome on behalf of local organizers
08:45 - 09:00 Alois J. SIEBER, EC - JRC (Italy) Welcome on behalf of the Organizing Committee

SESSION 1 Chairman: Dick WEAVER

09:00 - 09:30 Hiltmar SCHUBERT, PSE GmbH (Germany) Detection of explosives for terrorist-bombs and landmine clearance -- Different applications of similar methods
09:30 - 09:45 Michel LEFEBVRE, RMA (Belgium) Chemical and physical properties and the detection of home-made explosives
09:45 - 10:00 Louis WASSERZUG, TSWG, Special Operations Washington (USA) Overview of technology development in explosive detection.
10:00 - 10:30 DISCUSSION. Conclusions Session 1
10:30 - 11:00 Coffee Break

SESSION 2 Chairman: Marc ACHEROY

11:00 - 11:15 Petr MOSTAK (Czech Republic) Detection of plastic explosives in explosive devices
11:15 - 11:45 Garth SHILSTONE, DSTL (UK) Detection and Imaging with NQR, THz, and X-ray Techniques
11:45 - 12:00 Daniel VAN DER WEIDE, University of Wisconsin-Madison (USA) THz detection of explosives and biologicals
12:0 - 12:15 John GILBERT, DSTL (UK) Vapour detection and canine/bee olfaction
12:15 - 12:30 Christophe COX, APOPO (Belgium) An Overview of the APOPO Program, rats for landmine detection
12:30 - 13:00 DISCUSSION. Conclusions Session 2
13:00 - 14:30 Lunch Time

SESSION 3 Chairman: Ulf ROSENGÅRD

14:30 - 14:45 Richard LANZA, Massachusetts Institute of Technology (USA) Neutron Resonance Radiography for Security Applications

14:45 - 15:00	Andrey KUTZENTSOV, V.G. Khlopin Radium Institute (Russia)	Portable multi-sensor for detection and identification of explosives substances
15:00 - 15:15	Israel HIRSCH, Aphelion Ltd. (Israel)	Practical aspects of using explosive detection techniques
15:15 - 15:30	Russel HARMON, U.S. Army Research Office (USA)	An emerging analytical technology for military and homeland defence applications
15:30 - 16:00		<u>DISCUSSION. Conclusions Session 3</u>
16:00 - 16:45		<i>Coffee break</i>
16:45 - 17:30	Chairman: Alois J. Sieber	Open discussion
19:00	<i>Welcome Dinner hosted by S. Zbogar, State Secretary at the Ministry of Foreign Affairs of the Republic of Slovenia</i>	

04 June 2003

SESSION 4 Chairman: Garth SHILSTONE		
09:00 - 09:30	Tomaz APIH; Robert BLINC Institute Jozef Stefan (Slovenia)	Detection of explosives by quadrupole resonance
09:30 - 09:45	Janko LUZNIK, IMFM (Slovenia)	Improvement of nitrogen NQR detection in explosives by proton polarization.
09:45 - 10:00	Vernon JOYNT, CSIR (South Africa)	Explosive detection in mine clearance: chemical behavior in the field
10:00 - 10:30		<u>DISCUSSION. Conclusions Session 4</u>
10:30 - 11:00		<i>Coffee break</i>
SESSION 5 Chairman: Tomaz APIH		
11:00 - 11:15	Michael KRAUSA, ICT (Germany)	Demands on chemical vapor detection of landmines and explosives for counter-terrorism
11:15 - 11:30	Ulf ROSENGÅRD, IAEA (Austria)	The IAEA coordinated research project on nuclear techniques for anti personnel landmine identification
11:30 - 11:45	Chris WEICKERT, CCMAT (Canada)	Imaging techniques (optical and infrared) in landmine detection
11:45 - 12:00	Lawrence CARIN, Duke University, Durham, NC, USA	New Developments in Coupling Radar, EMI and NQR for sensing anti-personnel land mines
12:00 - 12:45		<u>DISCUSSION. Conclusions Session 5</u>
12:45 - 14:30		<i>Lunch time</i>

ROUND-TABLE DISCUSSION	Chairman: John REINGRUBER
-----------------------------------	----------------------------------

14:30 - 14:50

Current Capability, Current and Anticipated
Requirements, Future Directions and Research
Priorities.

14:50 - 16:00

Panelists
John REINGRUBER
Hiltmar SCHUBERT
Garth SHILSTONE
Daniel VAN DER WEIDE
Ulf ROSENGÅRD

Discussions

19:30

Workshop Banquet

**Conclusions of the expert workshop on
explosive detection techniques for use in
mine clearance and security related requirements**

2 to 4 June 2003, at the Lake Bled, Republic of Slovenia

In spite of intensive efforts in the research and development of improved tools in the detection and identification of anti personal landmines, no advanced tool has yet been fielded. The use of metal detectors together with the use of dogs and mechanical devices are the present standard. A first prototype combining the detection of metal components (metal detector) and the search for anomalies (GPR) will pass in the very near future a systematic test phase. However, mine clearance could significantly benefit from the availability of a reliable device for the location explosive material. Moreover, it could become a key component in the context of countermeasures against terrorism and enhancing security of commercial aviation, container shipment, crucial infrastructure etc.

In order

- to assess similarities in the detection of landmines and countermeasures against terrorism,
- identify needs for further research and development, and
- for testing protocols and performance criteria

it the workshop was organized bringing together experts from the community of mine clearance, from counterterrorism, from organizations in charge of security of aviation, shipping of containers, etc and research and testing organizations.

The presentations and subsequent discussions have reached a consensus by all participants with the following conclusions:

- Terahertz technology seems to be very interesting for several applications like detection of explosives as well as biological bacteria; in order to be able to appreciate the full potential of this new technology it has been agreed to stimulate a systematic exploitation phase. It has been agreed to launch this process through an expert meeting which will be hosted by DSTL, UK in September 2003;
- This workshop has been regarded as one milestone which must have a follow up in order to assess progress made and to evaluate emerging technologies as well as needs. The participants agreed to reconvene in about two years time.

The discussions on the different needs and available technology are summarised in the following table:

CHECKPOINT PERSONNEL

Technology	Multi Sensor Combinations	Further Research/Actions
Canines	Trace Portal	Odor Phenomenology
Microwave		prototype development
NQR		Demonstration
Particle Detection		Improved Sampling, preconcentration, additional compounds
Rats		Pilot Operation
THz		Feasibility
Vapor Detection		Improved Sampling, preconcentration, additional compounds

CHECKPOINT VEHICLES

Technology	Multi Sensor Combinations	Further Research/Actions
Automatic / Colorimetric	Combined with gammatransmission	Prototype
Neutron Activation		Prototype
NQR		Prototype

STANDOFF PERSONNEL

Technology	Multi Sensor Combinations	Further Research/Actions
Canines		Training/Demonstration
MMW		Determine Potential
THz		Determine Potential
Vapor Detection		Determine Potential, signal processing
Acoustics		Determine Potential
Thermal Imaging		Time reversed acoustics
Vapor Detection		Determine Potential
		Improved Sampling, preconcentration, additional compounds

STANDOFF VEHICLES

Technology	Multi Sensor Combinations	Further Research/Actions
Neutron Activation	Plus Gamma	Prototype Development
NQR		Breadboard Demonstration
Rats		Breadboard radio rat
Gamma Ray		Demonstration
Vapor Detection		Improved Sampling, preconcentration, additional compounds

The workshop was also supported by the "Demining Technologies – International Forum (DTIF)". It was the fourth DTIF workshop and at the same time, the second one co-sponsored by the European Research Office (ERO).

Furthermore, it is requested that Conference literature acknowledges support by the U.S. Army Research Laboratory European Research Office, the U.S. Army Communications and Electronics Command Night Vision Laboratory, OSD, the U.S. Army Communications and Electronics Command European Research Office and the Office of Naval Research International Field Office.

**Welcome on behalf of the local organisers
Goran GACNIK, Deputy Director ITF, Slovenia**

Bled, 4 June 2003

A word from

Goran Gacnik, Deputy Director

When choosing the venue for the fourth Expert Workshop on the Explosive Detection Techniques for Use in Mine Clearance and Security Related Requirements the organizing committee decided for it to be Bled.

The International Trust Fund for Demining and Mine Victims Assistance took it as an honor when asked to help to facilitate this, in our opinion very significant workshop, so we accepted it without hesitation.

It is my firm belief that the workshop proved very successful as it managed to bring together so many experts and consequently introduced the latest techniques and tools as well as research to help in the fight against the hidden killers, ie. landmines still contaminating in more than 60 countries around the world.

The presentations showed the efforts of the organizations as well as the individuals how important is supporting the cooperative relationships that could contribute to the common goals.

I hope that we provided good enough hospitality that you will decide to visit our country again not only by business but also as private. It will be our honor to host such an important event again and we hope to see you there.

Goran Gacnik
Deputy Director

Welcome on behalf of the organizing committee
Alois J. SIEBER, EC – JRC, Italy

Expert workshop on explosive detection techniques for use in mine clearance and security related requirements

Dr. Alois J. Sieber
Humanitarian Security Unit
Institute for the Protection & Security of the Citizen
Joint Research Centre, Ispra, Italy
European Commission

Concertation meeting
Brussels 24 March 2003



Content

- The problem & a possible definition
- Short list of topics
- Example 1: Container security
- Example 2: International crime
- Example 3: Weather forecast vs. terrorism
- A possible common systems approach
- Needs for actions

Workshop
Bled 2 & 4 June 2003




Observations

- The security of the citizen depends increasingly on the ability to handle non-military crisis.
- The vulnerability of modern society does not end at the boarder line of the country the citizen is living in.
- Every place of existence for every citizen is potentially under threat at any time.
- The living environment and any supply line of every citizen is potentially under threat at any time.

Workshop
Bled 2 & 4 June 2003



Aspects of Humanitarian Security

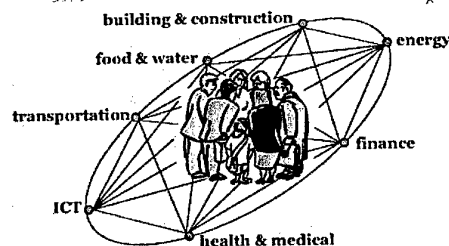

Workshop
Bled 2 & 4 June 2003



How to define HS ?

- JRC started with expert study on "Science and Technology in support to European Security" (ToR clearly specified non-military security aspects)
- Study included an expert workshop at high level hosted by the Swedish Minister for Foreign Affairs (Stockholm, April 2002 - http://demining.jrc.it/aris/news/security_workshop/s-n-4-2002-0619.pdf)
- In consequence, JRC facilitated and is organizing a number of expert meetings and workshops, e. g. container security, detection of explosives

Workshop
Bled 2 & 4 June 2003



Security issue of potential relevance

- The vulnerability of the modern societies
 - Terrorism
 - International Crime, Drugs and Illegal Trafficking.
 - "Information warfare"
 - Disaster mitigation
- Non-proliferation of weapons of mass destruction: nuclear, chemical and biological
- Disarmament and arms control and confidence building measures

Workshop
Bled 2 & 4 June 2003



non-military threats to the security of societies and citizens in Europe

- Our ability to handle non-state actors on a global basis is key to our security
- Need for European leadership in preserving existing treaties and in finding new fora and new forms for multilateral arms control discussions.
- Prevent the proliferation of weapons of mass destruction.
- Threat from well organized crime is increasing and requires development of the national police forces and improved European police cooperation.

Workshop

Bled 2 & 4 June 2003

7



Cont.

- Threat from well organized crime is increasing and requires development of the national police forces and improved European police cooperation

Workshop

Bled 2 & 4 June 2003

8



Example

Container Security

Workshop

Bled 2 & 4 June 2003

9



Container Security - WS Conclusions

- 200 mio containers transported world wide p.y.
- 90 % of world trade through containers
- major harbor ~ 15000 container in/out p.d.
- only 1 % checked
- CS not existing today
- Stakeholders no incentive to implement security measures- besides 9/11
- today seals applied to establish liability

Workshop

Bled 2 & 4 June 2003

10



Container Security

Key stakeholders Include:

- shippers,
- shipping lines,
- consolidators,
- terminal operators,
- government and port authorities (at ports of loading and discharge) for different trade lanes,
- insurance companies,
- etc

Workshop

Bled 2 & 4 June 2003

11



Container Security

Key Components

- Scenarios & Assessment of Possible Impacts (Gaming)
- + Intelligence (hard and soft intelligence; private and government; analyses)
- + Shipment Profile and Information (booking, cargo information, manufacturer, shipper, consignee)
- + Container Tracking and Security Monitoring (from packing to port of loading to port of discharge to final delivery)
- + Intelligent Container (reading of seals, sensors for detection, monitoring of in/out, etc)

Workshop

Bled 2 & 4 June 2003

12



Container Security

• Tasks

- to design, test and validate a complete system based on the key identified components

+

- assess the possibility to detect explosive material hidden inside a container

Workshop
Bled 2 & 4 June 2003

13



Problem

- After almost 10 years of work on the improvement of the detection and identification of landmines, only dogs are used to search for explosive components.

==> question ????

Workshop
Bled 2 & 4 June 2003

14



Questions

- Which technologies could be used to detect explosive materials, be inside landmines, containers, etc?
- What are the commonalties/difference in mine clearance, counter-terrorism, other security related tasks?
- Can we identify areas of RTD?
- Can we establish a common strategy?

Workshop
Bled 2 & 4 June 2003

15



Detection of Explosives for Terrorist-Bombs and Landmine Clearance
Different Applications of Similar Methods
Hiltmar SCHUBERT, PSE GmbH, Germany

1. Introduction

Since the development of modern analysis and detection methods supported by electronic means several different methods are available, which have been improved within the last decades with regard to precision, reliability, quickness and minimum test sample volume. These developments enable us to analyse substances very quickly - in some cases also on-line. The question is, which methods are suitable for application in the field under conditions of mine- and/or terrorist bomb detection. The importance of "Humanitarian Demining" in the last decades aiming at removing millions of landmines in the third world initiated research and development in the industrial countries. National and international programs were started and institutions were founded to solve one of the largest problems of our days. Non-government organisations, the "NGOs" have done an outstanding work in demining. But up to now, the deminers are working with relatively simple devices with very low frequencies and efficiency: Prodding, Dogs and Metal Detection.

The reason for this situation is very simple: all these efforts are financed by humanitarian programmes sponsored by international organisations or governments of industrial countries. This financial help is caused by bad conscience and responsibility felt for the third world and given without any future legal obligation. These unstable circumstances prevent the development of a free and open market, because nobody wants to guarantee the payback of investments producing an expensive demining artificial device.

There will be a quite another situation in the fight against terrorism. The danger addresses all of us, and the authorities are requested to protect people. One of the dangers are assaults of terrorists by the use of explosives. These circumstances produce a demand of detection devices, and, therefore, a market for industry will be formed. The consequence: Sophisticated devices for special applications to detect explosives will be on the market!

2. Sensor Technologies

In Fig. 1 a list of possible detection technologies is shown with a comment of maturity, cost and complexity. These comments may be changed, if we gain other understandings during the workshops of this year. May be, we will also add new technologies to this list.

It is not my intention to go into detail, because this is the theme of our workshop and two or three others this year.

I would like to concentrate my talk on the different conditions, behaviour, design, composition and properties of these explosive charges, because I have been director of a Fraunhofer Institute (ICT) for over 30 years, dealing with all kinds of energetic materials, and being an explosive materials expert in many working groups about demining.

3. Conditions of Detection

3.1 Detection of Landmines

Landmines, usually produced in an explosive factory with professional knowledge, have a relatively small explosive charge of 25 – 250g of TNT. Sometimes also PETN, RDX or other explosives with high performance are used, but more for anti tank mines. The shape of the mines has mostly a rounded design, the charge is in a case made of plastic, steel or sometimes of wood and will be hidden in the ground 5 – 25cm deep. Mines which are connected by trip wires are fixed above the ground. The initiator reacts by pressure or by drawing the trip wire and consists of primary explosive in a metal tube.

The detection will usually be carried out in a rather simple manner by a time consuming prodding.

Most of the demining companies and NGOs are using also trained dogs. Training a dog costs about 2000 Euro, and additional cost of 2000 Euro per year is necessary for livelihood, if a good performance is aspired. In recent years, researchers came to an understanding that the dogs do not smell TNT. It will be more a bouquet of odour of different items. Dinitrotoluol (DNT) is only one example.

If the mines contain metals, a metal detector can be very useful, improved devices are able to detect mines with minimum metal content. If other metal parts are in the ground, more or less false alarms will be the rule.

In a more homogeneous ground, "under ground radar" can be very helpful. The detection of landmines has to be done remotely controlled or with stand-off devices. Very often vegetation has to be removed before the detection can start. This must be done with a cutter also remotely controlled or under protection.

To my knowledge no sophisticated devices for mine detection are used in practice.

During the detection of landmines a distinct area is marked. Therefore only the deminer is acting in such an area. Therefore the danger for other people is limited.

3.2 Detection of Explosives Used by Terrorists

The spectrum of terrorist charges regarding size, shape, confinement, composition and environment is extremely different to landmines.

3.2.1 Size and Shape

The size of a charge may be between less than 1kg up to 1t and more. The different shape of the charge is dependent on the application. Usually the charge has an initiator cap, which is in some cases home made and therefore very dangerous to handle.

Explosive materials which are only transported to another place are more difficult to detect. Plastic explosives can be transported for instance in small quantities and can be transformed later on in a larger charge.

Explosive material may look like any subject you may imagine: Examples are tooth paste, textile rugs and clothing, flower pots, tablets, books, etc.

3.2.2 Confinement

Charges may be used with a soft or strong confinement consisting of metal, plastic, wood, cardboard or any other material in different thickness. The stronger the confinement used is, the more effective will be the detonation effect, also belonging to fragments.

3.2.3 Composition of the Explosives

We must admit, that terrorists have sufficient knowledge about the behaviour of explosives, how to handle the material and how to prepare explosive charges with the different possibilities of composition. Beside literature there is also an access for everybody to the Internet, where you find informations how to prepare explosives and recipes for terrorist usage. ("Terrorist Handbook", "Black Book", "Anarchist Handbook", Home-made Detonators", etc.).

There are different sources to get explosive materials:

1. Military Explosives

Under normal circumstances it is relatively difficult to have access to explosives like the relative powerful TNT, RDX, HMX, Nitropenta, Semtex, etc.

2. Commercial Explosives

These are explosives for road-building, for quarries and mining. Mainly Ammoniumnitrate based composition with fuel oil and/or with Nitrocompounds are used. For high performance also Straight Dynamites or Gelatine Dynamites based on Nitrocellulose and liquid organic nitrates with absorbents.

All these commercialized explosives are accessible in most countries only by special licenses. Certainly, in some countries regulations are sometimes handled very careless – as the Oklahoma disaster has shown.

In all Ammoniumnitrate based explosives a strong booster charge of high explosives for the initiation is necessary.

Ammoniumnitrate is also used in large amounts as a component in fertilizers. But additional other components like Ammoniumsulfate cause the non-explosive behaviour of these mixtures.

3. Commercial Substances Suitable for Explosives

These materials for explosives with relatively low performance are in most cases freely available. Examples are Black Powder, Smokeless Powder and many kinds of fire-works. Though these substances do not detonate, in most cases the effects in further distance are still remarkable.

4. Improvised Explosives

All chemical compounds can be used as components for explosives if the oxygen content in the compound is more or less high enough for a combustion without air.

Mainly molecules with functional groups like:

- NO_2 , - NH-NO_2 , - O-NO_2 and NO_3^+ (Nitro-, Nitramine-, Nitroxy-compounds and Nitrates as salts) and Peroxides are used.

Also mixtures of salts like Nitrates, Chlorates and mainly Perchlorates with organic substances like plastic materials, plastizisers, organic liquids, solvents, etc. can be used.

These combinations are very numerous and will reach quite more than 100 possibilities.

Explosive materials can be prepared in liquid, plastic, slurry and solid state. Very easy to prepare are liquid systems with very high performance. These systems are mixtures of nitric acid, kerosin or nitrobenzene, etc. and were used in World War II from the allied air forces known as "House-Crackers".

5. Primary Explosives

To detonate explosives a detonator primer is necessary. The primer is a capsule made from copper or aluminium with a small pressed charge of a primary explosive like lead azide. The charge will be detonated by an ignition device which reacts by a relative weak shock or by an electric impulse. Therefore terrorists try to get these initiators by an illegal way. Some terror assaults fail not having suitable detonators. In most cases only professionals prepare primary explosives. For the initiation of low energy explosive charges an additional booster with high energetic material like Nitropenta or RDX is necessary.

6. Powder Trains

Experiences have shown that terrorists also use powder trains to ignite combustible materials in large volumes. In most cases pyrotechnic material is used for this purpose. The event of September 11th has shown, that catastrophic disasters can occur also without powder trains.

3.2.4 Environment

In opposition to landmines which are hidden in the ground in relatively lowly populated areas, for instance in open fields, roads, buildings, ditches or frontgardens, etc. explosive charges of terrorists can be found everywhere, also in highly populated surroundings even to cause an effect as large as possible.

The detonation can be fired by the cap directly, by remote control or with delay.

Because of the different surroundings detection methods may be different between landmines and terrorist bombs.

Spectroscopic means can be used for landmines only by stand off reflection while terrorist objects may be inspected also by transmission.

To prevent terrorist attacks, a main task will be to detect the explosive devices during the underground transport. This can be managed with objects ready to initiate, or the explosive is handled without an initiator only for transport.

Terrorist bombs are relatively easy to detect, because there is a case or box filled with a homogeneous material equipped with an initiating cap fitted with an electric time fuse. Sometimes the explosive charge is screened by a camouflage.

For transport reasons the explosive material may have any shape adapted to the environment. Therefore, such materials are only to be detected by their chemical composition. The relative high density of the material may be a useful indication.

3.3 Explosives Used as Disperser

To distribute nuclear, chemical or biological agents, explosives are used also. If grenades or missiles are filled with these materials, an explosive is used with relatively low energy not to destroy the material to be distributed. Otherwise, the agents are distributed by pyrotechnical means.

4. Conclusion

The global political situation will cause an increase of terrorist actions in future. To protect people against this danger, an increase of efforts fighting against terrorism is urgent, and detection of explosives is one of the key problems of antiterrorism.

Because explosive materials can be transported in any shape and design, sensors are necessary which analyse the chemical composition of the material. Alternative measures are dogs or means which are called artificial noses.
We should keep in mind that we will never overcome terrorism, if we fight only against the symptoms. We should think about the reasons why terrorism is coming up.
The truth will be sometimes very inconvenient.

5. Literatur

1. S. Zeman et M. Hanus
"Improvised Explosives and their Abuse for Bomb Attacks"
NATO ARW Proceedings, Prague, 1997, "Explosives Detection and Decontamination of the Environment", published by University of Pardubice (Czech Republic), Explosive Holding, Prague
2. Carl E. Baum
"Detection and Identification of Visually Obscured Targets"
Braun-Brumfield, Ann Arbor, Mi 1998, ISBN 1-56032-533-X (case)
3. Hiltmar Schubert et Andrey Kuznetsov (Editors)
"Detection of Explosive and Landmines"
Proceedings, NATO ARW St. Petersburg,
NATO Science Series II Vol. 66 Kluwe Academic Publishers 2001,
ISBN 1-4020-0692-6 (HB) / ISBN 1-4020-0693-4 (PB)
4. NATO ARW "Advanced Research and Technologies for Detection and Destruction"
Of Buried/Hidden, Anti Personal
Landmines, Moscow, 1997 (not published)
5. International Symposium on Analysis and Detection of Explosives (ISADE)
1st – 7th (1983 – 2001) – every 3 years

**Chemical and physical properties and the detection of home-made
explosives
Michel LEFEBVRE, RMA, Belgium**




Detection of *non-regular* explosives - Comparison with military explosives

M.H. Lefebvre

Laboratory for Energetic Materials
Department of Chemistry - RMA
Brussels - Belgium




INTRODUCTION



TATP

- White solid
- Primary explosive
- Very sensitive
- Not stable (sublimation)




HMTD

- White solid
- Primary explosive
- Very sensitive



CHEMICAL SYNTHESIS

• HMTD

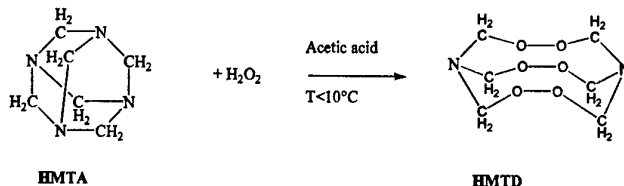


- HMTA: Hexamethylenetetramine, flammable, used in camping 'solid fuel'.
- H_2O_2 : Hydrogen peroxide; causes burns, used in pharmacy, easily found in drugstore.
- Acetic acid is used pure, is corrosive and can cause burns. It can be found in drugstore or supermarket (diluted).
- Synthesis: easy to perform, temperature needs to be controlled.





CHEMICAL SYNTHESIS

• TATP

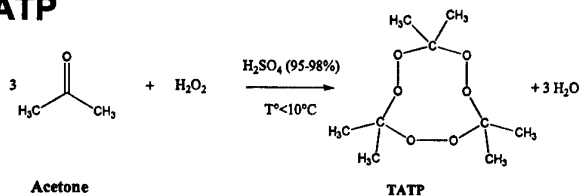


- Acetone: very flammable and slightly toxic, easy to find in supermarket or drugstore.
- H_2O_2 : Hydrogen peroxide; causes burns, used in pharmacy, easily found in drugstore.
- Sulphuric acid is a very strong acid, is very corrosive and causes burns.
- Synthesis is not quite easy, the temperature must be very well controlled in order to obtain a high purity product.

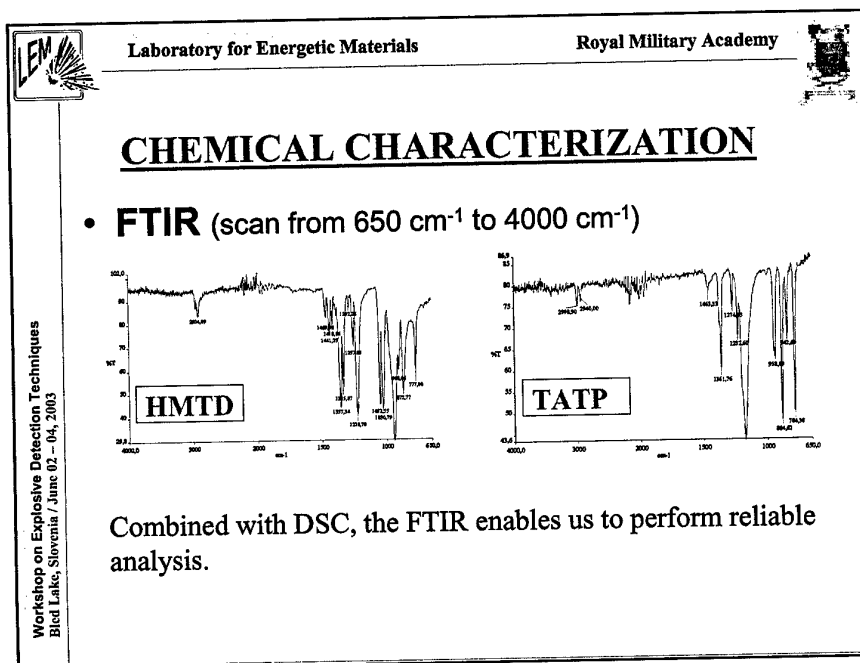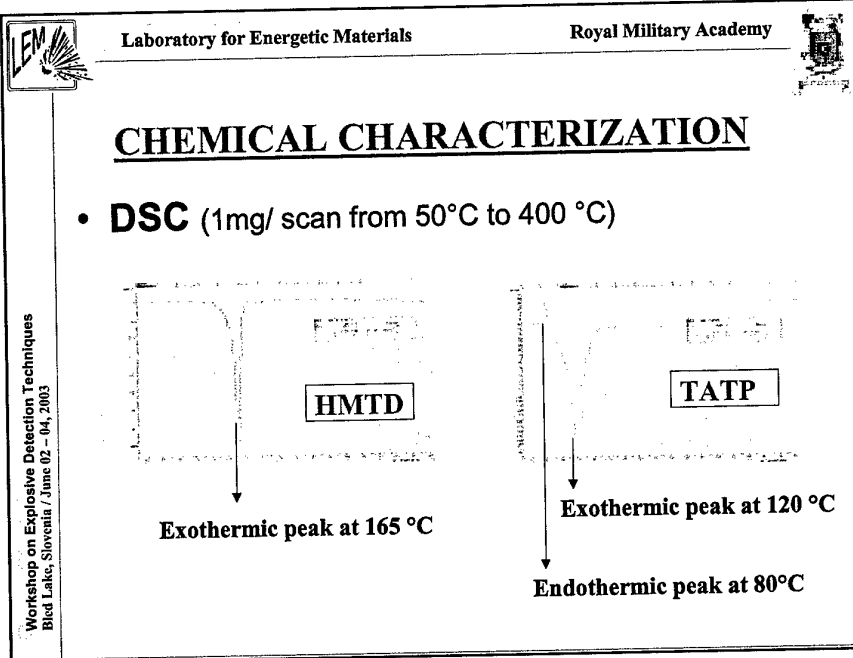



Sampling / Detection Chain

Closed vessel containing
the sample...or


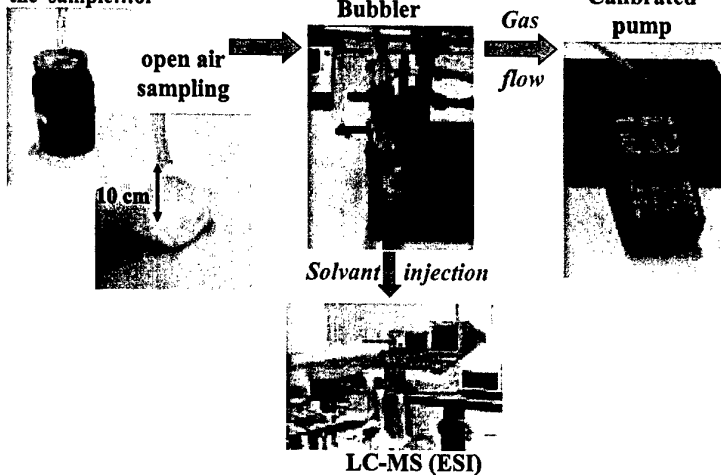


Workshop on Explosive Detection Techniques
Bled Lake, Slovenia / June 02 - 04, 2003





Detection of TATP

Open air
sampling

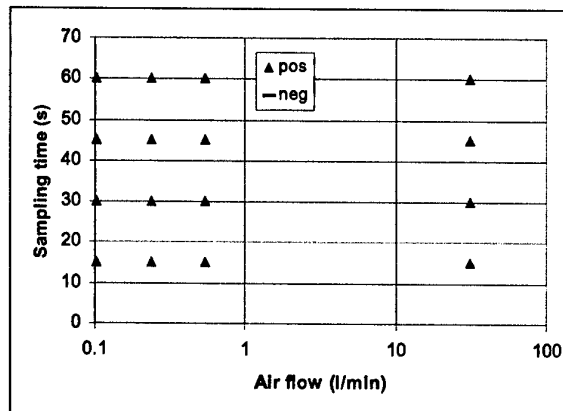


Workshop on Explosive Detection Techniques
Bled Lake, Slovenia / June 02 - 04, 2003

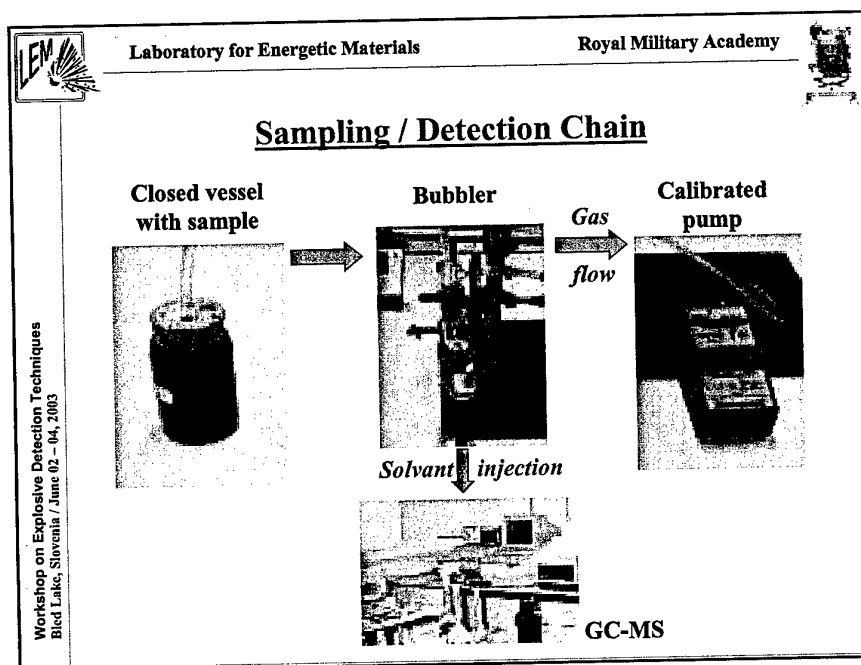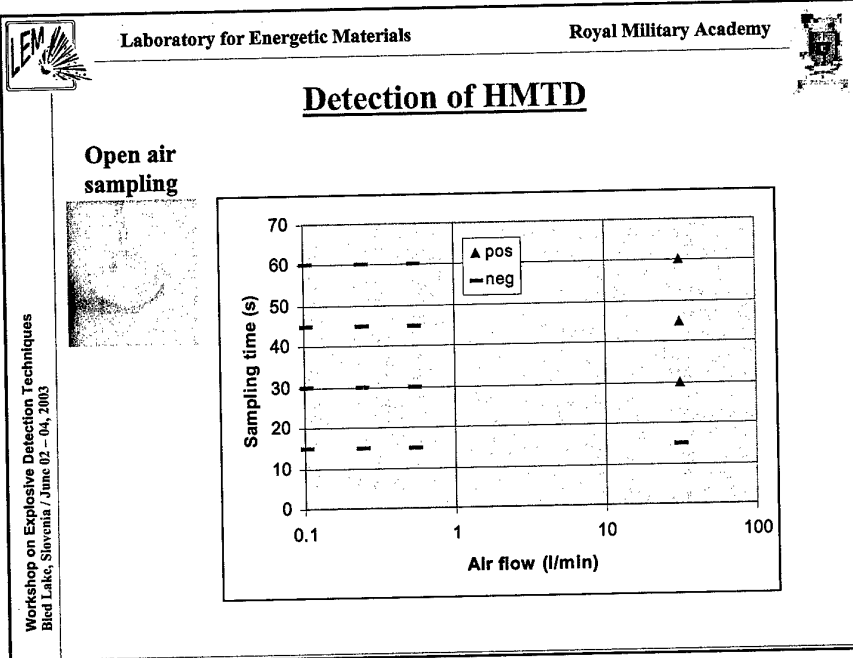



Detection of TNT

Closed vessel
with sample

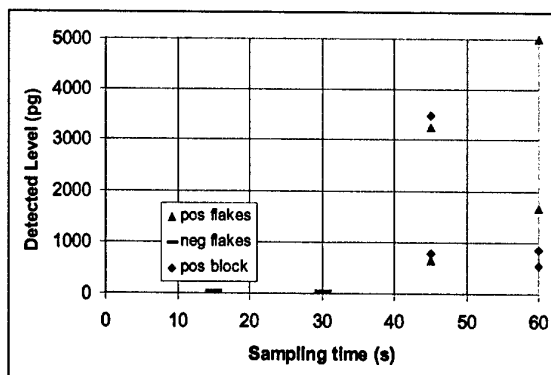


Rem: heated to 40°C
air flow 31 l/min





Detection of DNT

Comparison TNT - DNT

Closed vessel
with sample

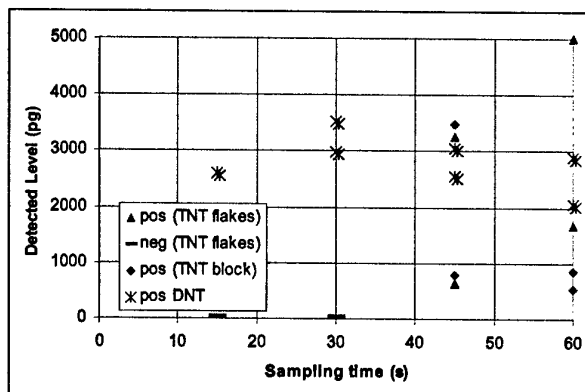


Rem: heated to 40°C

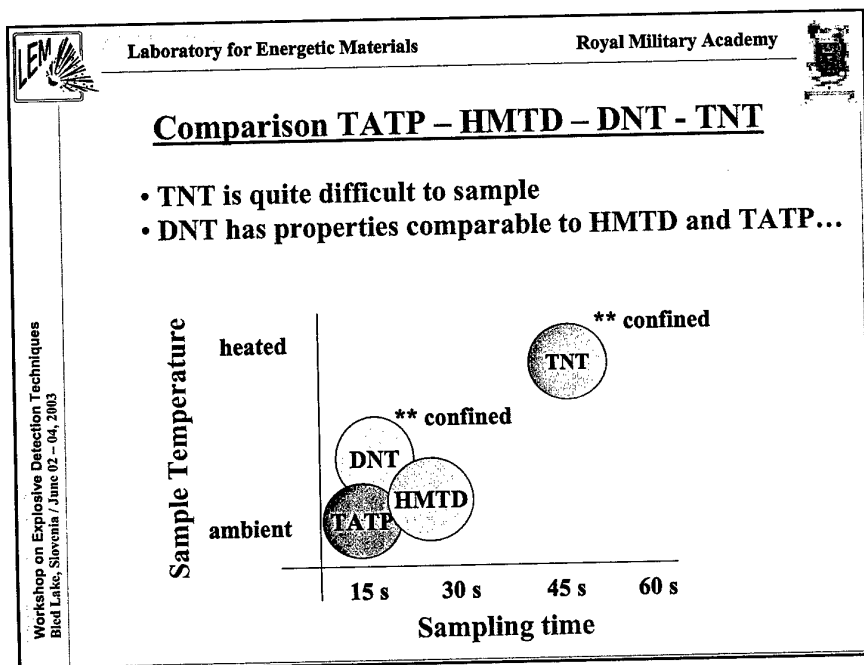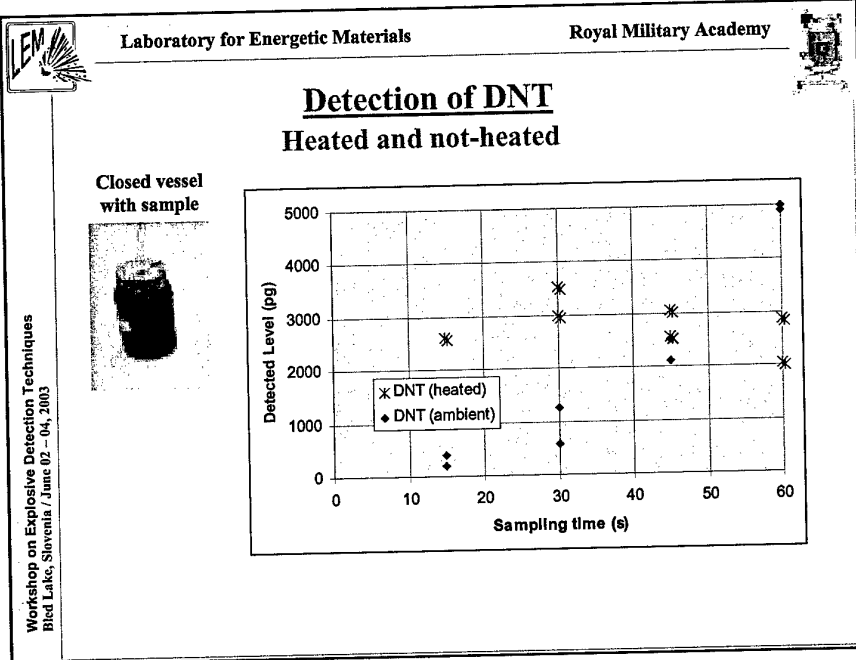




Comparison TATP – HMTD – DNT – TNT

- TATP can be easily detected
- Both TNT and DNT require high sampling flow (similar to HMTD)

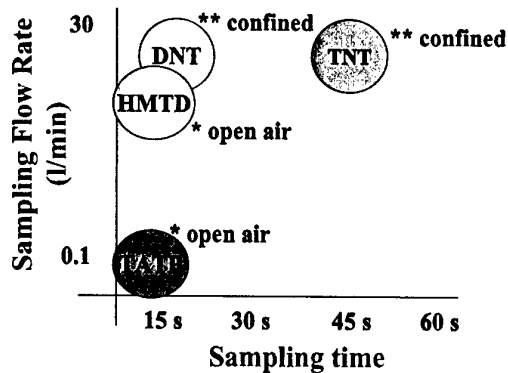


Vapor Pressure of various high explosives


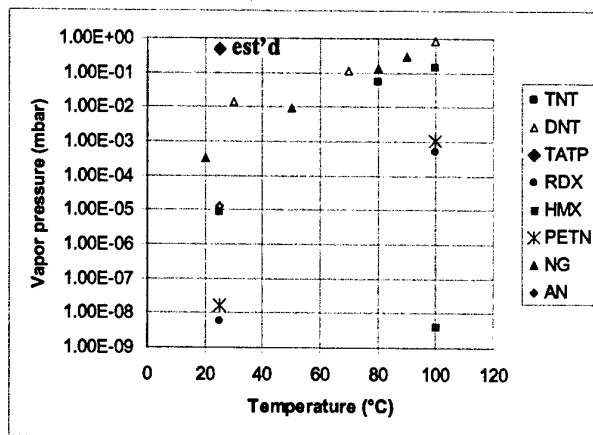




Melting Temperature of various high explosives

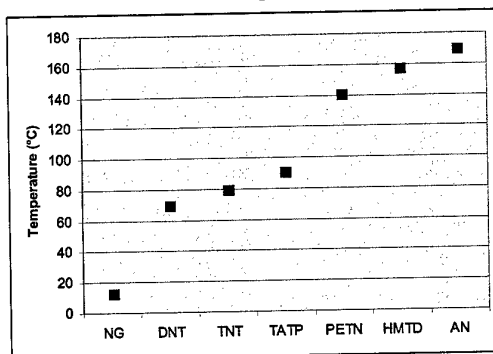


Discussion



- Near melting temperature $\neq$ near vapor pressure @ ambient temperature
- In the (L)-phase domain, vapor pressure are of the same order of magnitude
- Large influence of temperature on 'detectability' in the range 20°C – 40°C (see experiments)

Overview of technology development in explosive detection
Louis WASSERZUG, TSWG, Special Operations Washington, USA

TECHNICAL SUPPORT WORKING GROUP

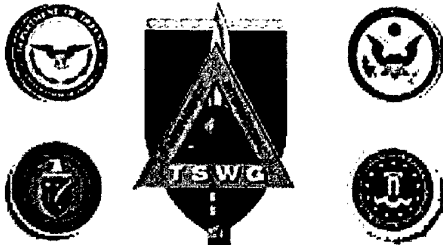

Explosive Detection Brief
June 2, 2003

Subgroup Mission

- Identify, prioritize and execute research and development projects
- Satisfy DoD, interagency, state and local user requirements
- Focus existing and emerging technology in the area of explosives detection and diagnostics.
- Long term sustained approach.

Explosive Detection Focus Areas

- **Standoff Detection**
 - remote detection, large vehicle bombs
- **Suicide Bomber Detection**
- **Short Range Detection & Diagnostics**
- **Marking Agents**
- **Canines**
- **Cargo Screening**

Technical Approaches

- **Nuclear**
 - Neutrons
 - X-rays
- **Optical**
 - Infrared (Heat Lamp or Laser)
 - Ultraviolet (Laser)
- **Electromagnetic (Other)**
 - Millimeter/Terahertz
 - Nuclear Quadrupole Resonance
- **Biosensors**

Standoff Detection

Focus: Technologies for detection of large vehicle bombs.

Completed Tasks

- Residue Detection by Differential IR Absorption
- Laser Based Detection of Explosives
- TNT Detection by Laser Induced Fluorescence

Current Task

- Associated Particle Explosive Imaging System

TNT Detection by Laser Induced Fluorescence

Technology:

- Laser induced photo dissociation
- Laser Induced fluorescence of fragments


Issues:

- Environment can impede performance
- Laser can cause physical damage



Associated Particle Imaging (API)


- Technology
 - Fast neutrons in, gamma rays out
- Status:
 - Demonstrated C-4 (100 lbs) detection at 10 feet
- Issues:
 - Significant background noise
 - Interrogation times long (hours)
 - Significant engineering issues
- Prognosis:
 - High risk
 - Possible remote application



Prompt gamma rays provide material ID
Deuteron beam strikes titrated target
14 MeV neutrons provide penetration



Associated Particle Imaging (API)





Suicide Bomber Detection

Focus: Technologies to detect human carried explosive devices

Current Tasks

- Man Portable Passive Millimeter Wave
- Non-Imaging Millimeter Wave
- Terahertz Spectroscopy/Imaging



Way Forward

- Adapt concept of operations to implement practical alternatives
- Look at imaging systems as an alternative to detection
- Look at remote detection as an alternative
 - DHS BAA closes June 13
- Consider partial solutions



Interim Solutions

Requirement: Suicide bomber detection in entry-point and standoff applications

- Evaluate commercial technologies
- Move entry-point away from assets

Approach: Low Dose X-ray









Short Range Detection and Diagnostics

- NQR/CT False Alarm Reduction
- NQR Personnel Screening
- Walk-Through Portals for Personnel Screening
- Next Generation Handheld Detectors
- Explosives Detection for Passengers and Baggage



Marking Agents

Focus: Develop technologies that enables the marking of plastic explosives that will make them easier to detect. This includes fostering the means to make marking agents available and affordable to all manufacturers of plastic based explosives.

- Low Cost Production of DMNB
- Low Cost Detectors for Taggants



Canines

Scope: Develop better understanding of canine detection ability and canine/human interaction. Improve effectiveness and consistency of canine/handler team.

- Canine Training Aids
- Generalization and Contamination
- Canine Selection and Rearing
- Handler Selection and Training
- Canine Stress

Detection of plastic explosives in explosive devices

Petr MOSTAK, Research Institute of Industrial Chemistry, Czech Republic

Abstract

Plastic explosives have been often used as explosive charge in military products and also misused in improvised explosive devices for terrorist attacks.

The application of vapour and trace detection by electronic detectors for detection of plastic explosives is evaluated, the effectiveness of detection by colour chemical reactions is discussed. The marking of plastic explosives for detection can substantially increase the ability of the vapour detection.

The detection of plastic explosives by dogs is a very effective method, it is possible that the dogs are looking for, similarly as in the detection of mines, not only vapours of the main component as RDX or PETN but also the "smell" of the plastic explosive.

Bulk detection technologies, which can bring the image of content of suspicious object are important tools to identify a presence of the improvised explosive device. The promise for near future are the methods which are giving the confirmation of explosive presence by determination of the density typical for plastic explosive and analyse the chemical composition by x-ray angular diffraction or other radiation analysis.

Simultaneous use of the vapour and trace detection performed by electronic detectors and/or dogs and bulk detection can give the substantial synergy in detection of hidden explosive charge including improvised explosive devices used in terrorist attacks.

1. Introduction

Plastic explosives have been used in many criminal acts, in which improvised explosive devices was a tool of criminal or terrorist bomb attacks. Well known are the attacks on civil aeroplanes at which the big number of passengers was killed and these criminal events shocked the world public opinion.

The danger of plastic explosives is usually connected with the high explosive strength, easy forming of this product and poor detection of plastic explosives.

The destructive and further properties of plastic explosives have been strongly exaggerated in information spread by mass media and an unrealistic image of this product was implemented to public and to some part of scientific community.

This contribution deals with the methods, which are used for detection of plastic explosives, considering the feasibility and effectiveness of detection and also conditions, which can influence the performance of detection procedures.

2. Composition of plastic explosives

The plastic explosives are composed from two main parts, crystalline high explosive and plastic binder. The usual explosive components of plastic explosives are RDX or PETN, in some plastic explosives both these components are used. The content of high explosive is usually in the range 80-95 %

The plastic binder is composed from a polymeric substance and suitable plasticizer. Polyisobutylene, polystyrene, polyacrylonitrile, or polyethylene are often used as polymers. The usual plasticizers are dioctylphthalate, dibutylphthalate or dioctylsebacate.

3. Detection methods

The detection procedures used in detection of plastic explosives are in principle similar to methods used for detection of other explosives. The detection is based on the identification of RDX or/and PETN, which are the main components of these explosives.

The trace analysis detection is based on the following possibilities:

- vapour detection
- particles detection
- combination of vapour and particles detection
- detection by colour reactions
- detection by dogs or other animals

Further important group of detection methods is bulk detection, which is using such systems as enhanced X-ray, neutron radiation, NQR, computing tomography or MM wave imaging.

4. Detection of vapours

Detection of plastic explosives by vapours is uneasy taking into account the very low vapour pressure of RDX and PETN. The substantial difference in the vapour pressure among RDX and PETN and other explosives can be seen from the Table 1.

Table1 Vapour pressure of some explosives and by-products at 25°C

Compound	Vapour pressure (ng/l)
RDX	0.04
PETN	0.09
HMX	0.38
TNT	70
NG	4000
2,4 DNT	1440
1,3 DNB	8140

The low vapour pressure of RDX and PETN was the reason, that in former times, when vapour detection by electronic detectors was the main detection method, the view was appeared, that the detection of hidden plastic explosive is not feasible.

It can be also understood, from the values of vapour pressure of TNT and some by-products why the mines containing TNT can be detected rather by identification of vapours of DNT than vapours of TNT. The further reason, why detection of plastic explosives by vapour detection is in some conditions complicated is the influence of temperature on the vapour pressure of explosives.

The vapour pressure of any chemical compound is dependent on the temperature by the logarithmic equation: $\log P = A - B/T$

The dependence of the vapour pressure on temperature at some explosives was experimentally estimated and published [1].

The relevant equations are presented in the Table 2. The graphic demonstration of this dependence at RDX and PETN is shown in the Figure 1 and 2.

Table 2 Dependence of vapour pressure of some explosives on temperature

Compound	Equation
RDX	$\log P \text{ (ppt)} = -6473/T(K) + 22.50$
PETN	$\log P \text{ (ppt)} = -7243/T(K) + 25.56$
TNT	$\log P \text{ (ppb)} = -5481/T(K) + 19.37$
NG	$\log P \text{ (ppb)} = -4602/T(K) + 18.21$
AN	$\log P \text{ (ppb)} = -3541/T(K) + 12.97$

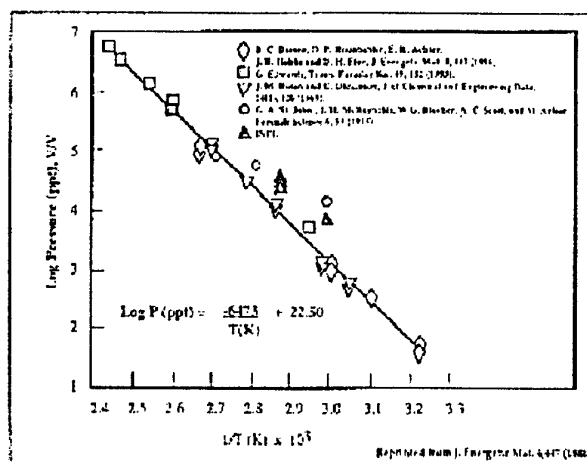


Figure 1 Change of vapour pressure of RDX with temperature

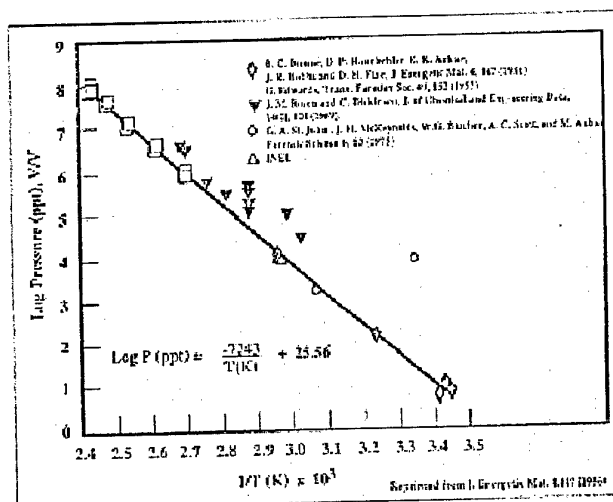


Figure 2 Change of vapour pressure of PETN with temperature

The dependence of vapour pressure on temperature is unfortunately most profound at RDX and PETN, compounds, that have the low vapour pressure even at higher temperatures. The dramatic change of the vapour pressure of some energetic materials at decreased temperatures can be the basic reason, why the detection of plastic explosives but also the detection of other explosives containing RDX and PETN using electronic detectors is not easy. The good preconcentrator having the preconcentration factor 100 at minimum can improve the feasibility of vapour detection of plastic explosives at temperatures lower than 10°C. The change of vapour pressures of some explosives in the temperature range 0-30°C is demonstrated in the Table 3. [2]

Table 3 Vapour pressure in temperature range 0 – 30 °C

Vapour pressure	0°C	10°C	20°C	25°C	30°C
RDX (ppt)	0.06	0.43	2.57	6.03	14.45
PETN (ppt)	0.11	0.93	6.92	18.20	45.71
TNT (ppb)	0.19	1.00	4.57	9.55	19.05
NG (ppb)	22.39	89.12	316.2	588.8	1047.1
AN (ppb)	1.00	2.88	7.35	12.30	19.05

They are also further factors influencing the presence of explosive vapours near the object in which the improvised explosive device is hidden. The diffusion and effusion of vapours from the surface of explosive charge through the various barrier materials, including packing, results in the emission flow of vapour. The adsorption of vapours on various surfaces and the dissipation of vapours into surroundings of the object in which the explosive charge is hidden are decreasing the quantity of vapours which could be collected by sampling parts of electronic detectors.

Taking into account cases, when plastic explosives were used in improvised explosive devices for bomb attacks on civil planes, and the uneasy detection of plastic explosives, the UNO decided to establish the marking of plastic explosive for detection. The objective of this initiative was the significant increase the feasibility of the vapour detection of plastic explosives used as explosive charge in bombing devices.

The Convention on the Marking of Plastic Explosives for the Purpose of Detection was prepared by ICAO and agreed during the International Conference in Montreal in March 1991.

The detection agents and their minimum concentration in the finished plastic explosives at the time of manufacture have been specified in the Technical Annex to the Convention [3].

Some changes in the Technical Annex was later accepted on the base of practical experience achieved in marking of plastic explosives.

The actual specification of detection agents is shown in the Table 4.

Table 4 Detection agents and minimum concentration

Name of detection agent	Molecular formula	Minimum concentration
Ethyleneglycoldinitrate (EGDN)	$C_2 H_4(NO_3)_2$	0.2 % by mass
2,3-Dimethyl-2,3-dinitrobutane (DMNB)	$C_6 H_{12} NO_2)_2$	0.1 % by mass
para-Mononitrotoluene (p-MNT)	$C_7 H_7 NO_2$	0.5 % by mass

The further change is in preparatory phase. The theme for discussion is the raising of minimum concentration of DMNB to 1%. This measure should ensure the sufficient DMNB concentration and a suitable emission flow of this marking agent during the whole shelf-life of plastic explosive. Some producers increased already voluntarily the DMNB content to 1% to achieve this goal.

The main effect of marking agent on detection is its high vapour pressure, which enables to gain the sufficient mass of vapour by electronic detectors.

The vapour pressures of some explosives and marking agents are presented in the Table 5.

It was found, that the vapour pressure of DMNB emitted from the marked plastic explosive is approx. 50% of the vapour pressure of pure DMNB. It means, that the vapour pressure of this marking agent is by 5 orders higher than the vapour pressure of PETN or RDX. Thus the marking of plastic explosives by DMNB gives to this product the easy detection similar to NG containing explosives.

Table 5 Vapour pressures of explosives and marking agents at 25°C

Compound	Vapour pressure (ng/ml)
o-MNT	860
EGDN	320
p-MNT	170
DMNB	12
NG	4
TNT	0.07
RDX	0.04×10^{-3}
PETN	0.09×10^{-3}

In the Czech Republic, all plastic explosives produced, including Semtex plastic explosives, are marked for detection according to the conditions of Montreal Convention from May 1991. The intention to mark additionally the old stocks of plastic explosives is considered.

5. Trace detection

5.1. Detection of fingerprints

The trace or particle detection of plastic explosives is oriented on the 2 basic types of traces: fingerprints and particles of explosives. These particles are dissipated on the surfaces near to the place, where the explosive preparation, forming or other manipulation was done.

The quantification of fingerprints prepared from plastic explosives on various surfaces was studied by many authors, and interesting results were obtained [4,5,6,]. It was found, that hands contaminated by plastic explosives are producing massive fingerprints, one fingerprint contains according to the conditions 500-3000 ng of RDX or PETN. The mass of fingerprints prepared from Semtex H by the bare thumb and thumb in glove, and the mass of explosive, which was collected from the fingerprint by swabbing, is presented in the Table 6.

The data presented in the Table 6 are proving, that we can collect by swabbing 50-70 % of the fingerprint mass. It can be seen, that the use of gloves has not substantial effect on the mass of explosive contained in fingerprints.

Taking into account the sensitivity of up-to-date electronic detectors, which is in the range of 20-200 pg, it is very clear that we are able to collect by swabbing of only 1 fingerprint much more explosive, than we need to positive detection.

Table 6 RDX content in fingerprints prepared by Semtex H on polyethylene

Sample	Fingerprint mass	Swab	Mass of rest
Blank 1	0	0	0
Glove	3 135 ng	2 334 ng	978 ng
Blank 2	0	0	0
Bare thumb	2 303 ng	1 124 ng	1 155 ng

The secondary contamination can arise by touch or other type of contact with fingerprints of plastic explosives. Also from these secondary traces the sufficient mass of explosive for positive detection can be gained by standard collection methods (swabs or vacuum sampler).

5.2. Detection of further types of contamination.

There are further principles of contamination by plastic explosives. It was found, that in the process of moulding, forming and manipulation, the substantial number of particles of plastic explosives is dispersed in the air. These particles, transported by the movement of air, cause the contamination of surfaces in surroundings including persons, working tables, walls and various objects. Taking into account, that the average particle size of crystalline explosive present in plastic explosive is approx. 30 microns having the mass 40 ng, we can assume, that the collection of 1 such particle is sufficient for successful detection.

The experience from model and field-testing confirms, that the contamination of surfaces, persons and objects at working and manipulation with plastic explosives is high. The detection of this contamination can be effectively used as the signal that a further detail search is necessary. This signal cannot be considered as a relevant information, that some hidden explosive charge or person preparing some bomb attack was found. Unfortunately, they are many other situations from which, the contamination by particles can arise.

6. Simultaneous vapour and particles detection

The low vapour pressure of explosive components of plastic explosives is the reason, why detection of plastic explosives by vapours is rather uneasy. The marking of plastic explosives for detection is substantially improving the vapour detection, but there is still some quantity of old stocks of unmarked plastic explosives in many countries. There are also problems with detection of marking agents by some detectors.

Therefore, detectors, which are able to detect both vapours and particles will be more effective in the detection of hidden explosive devices.

In fact, the detection of vapours gives us not quite the same information as detection of explosive particles. The detection of traces gives us the information about the contamination of persons or objects by explosives but not the prove or strong suspicion, that explosive charge is present. On the other hand, the vapour detection enables the assumption that some explosive charge was probably found.

The differentiation between these 2 possibilities is at most detectors complicated because in both cases the collected samples enter the analytic part of detector after thermal desorption in the form of vapours.

Anyway, the simultaneous vapour and particles detection gives us the synergetic effect, because in various scenarios, each of both methods has a different effectiveness and the combination will increase the probability of positive detection.

7. Detection by colour reactions

The detection of plastic explosives by colour reactions is a version of trace detection. The particles collected by swabs or vacuum collectors on filter paper are reacting with testing solutions and specific colours are obtained in reactions of explosives with reactants. In application of the detection set DETEX II, which was developed in our research institute, the pink colour is evolved at the detection of plastic explosives containing RDX and/or PETN.

The sensitivity of colour reaction is lower, than the sensitivity of electronic detectors. The advantage of this method is low costs and easy operation. The fact, that we have no losses of explosive during the analytical procedure, results in quite good effectiveness of this method.

The developing of characteristic pink colour at plastic explosive takes more time than in case of pure RDX or PETN. The reason is the time necessary for diffusion of reaction solutions through the layer of binder to the surface of crystalline RDX or PETN.

8. Detection of plastic explosives by dogs

It is well known, that dogs are the effective tools in detection of hidden explosive charges. Therefore, the use of dogs in detection of improvised explosive devices, mines and other types of ammunition is used in many countries.

Substantial effort has been expended to understand the mechanism of dog sensing and estimate the sensitivity of the dog's olfaction system. Some aspects of dog work are clear, some need the further work.

Dogs are able to detect the hidden charges of plastic explosives with high effectiveness. In fact, the dogs are able to detect hidden charges also at decreased temperature, when electronic detectors are not able to detect plastic explosives do to very low vapour pressure of RDX and PETN.

Some field tests performed last year in collaboration with Czech police confirmed this conclusion and some further knowledge was gained [7].

The general ability of tested dogs to detect explosives is seen from the results presented the Table 7

Table 7 Detection of hidden explosives by dogs

Compound	Name of dog (dog's No)				
	Dany (1)	Adeline (2)	Bordaux (3)	Fox (4)	Tom (5)
HMX	+	+	+	+	+
RDX	-	(+) (+) +	(+) +		
Permonex				+	+
TNT	+	+			
SEMTEX H			+	+	
SEMTEX 1A	+				+
SEMTEX 1A + DMNB		+	+		
PETN				+	+
NG SP	+	-			
Perunit			+	- +	
DMNB			+	-	

Note: + detection (+) mistaken detection
- miss

The dogs No 1,4,5 were German shepherds trained in the Czech Republic, dogs No 2 and 3 were Labradors trained in the USA.

The dogs were looking for 50g of explosive inserted in PE bag which was closed by weld. The explosive charge was inserted in the paper box 30 min before testing. In the test 4 blank boxes and 1 box with explosive were examined at each explosive.

The results obtained confirmed, that dogs can detect plastic explosives without any problem.

The ability of dogs to detect the fingerprints including fingerprints of the plastic explosive SEMTEX 1A was studied in further tests. It was proved, that the dogs can effectively detect the presence of plastic explosive in fingerprints and also the contamination of surfaces by dispersed particles, evolved at moulding and forming of plastic explosives.

It is not very clear, if detection of plastic explosives from fingerprints and particles on surfaces is achieved only by collecting of vapours from natural vapour pressure, which is very low. The dog can possibly collect more vapour in the process of sniffing by emitting the stream of warm and wet air in quick short intervals and sucking in back the air enriched by evolved explosive vapours increasing thus the detection effect.

The model test was also performed in which inert aerosil (very fine SiO_2) was saturated by vapours of several explosives. After 14 days of saturation 50g sample was inserted in PE bag and closed by weld. Dogs in various scenarios positively identified the samples.

This result could bring some contribution to the discussion, that inert dust particle are able to adsorb on its surface some quantity of explosive vapours and act as microconcentrator. The warm and wet air used by dog at sniffing could evolve the explosive vapour from the particle surface.

9. Bulk detection

The radiation technologies are considered to be the main component of the bulk detection. These methods enable to produce the image of the hidden object shape and many of methods can characterise the inner content of the object.

Very often x-ray systems are used, the enhanced version as scan x-ray and computing tomography are increasing the identification possibility for improvised explosive devices.

The type of explosive is not very important for successful detection, the substantial role is playing the design of explosive device including type of starting mechanism, sort of detonator and configuration of the device.

Some small advantage for bomb maker is the plasticity of plastic explosives, which enables the easy forming of explosive charge to required shape.

The systems, which are able to identify the chemical structure of components such as TNA, FNA, NQR or angular X-ray diffraction, have the same effectiveness for plastic explosives as for such explosives as HMX, RDX, and PETN. The reason is that plastic explosives contain usually 80-95 % of RDX or PETN, and the small quantity of plastic binder does not influence the result of the radiation analysis in important manner.

10. Conclusions

The detection of plastic explosives used in improvised explosive devices, which are usually hidden in various objects, is not very different from the detection techniques used at other explosives. .

The low vapour pressure of plastic explosives, which decrease the feasibility of vapour detection of plastic explosives especially at lower temperatures, is not specific property only of plastic explosives but also many other explosives based on HMX, RDX or PETN have the similar problem. Therefore, the view, that plastic explosives in contradiction with other explosives are not detectable, is not proper and has not any technical background

The problem of low vapour pressure can be solved by marking of plastic explosives for detection, or/and by the use of effective preconcentrators having the concentration factor at least 100.

The dogs are very efficient tools for detection of hidden charges of plastic explosives, they can detect plastic explosives also at lower temperature. At this condition are dogs much better than electronic detectors. We can suppose, that the sensitivity of dog is higher in comparison with electronic detectors by approx. 3 orders.

The plasticity of plastic explosives enables to form this product in various shapes including sheets. Some shapes, as sheets for instance, can complicate the bulk detection in the phase of evaluation of the image obtained and also at radiation analysis of the content of suspicious object.

11. References

- [1] B.C. Dionne, D.P.Rounbehler, E.K.Achter, J.R.Hobbs, D.H.Fine, Vapour Pressure of Explosives, Journal of Energetic Materials, 4, 447-472 (1986)
- [2] P. Mostak, Vapour and Trace Detection, Proceedings of the NATO ARW on Vapour and Trace Detection of Explosives for Anti-Terrorism Purposes, March 19-20, 2003 Moscow, Russia
- [3] Convention on the Marking of Plastic Explosives for the Purpose of Detection, ICAO Montreal 1991
- [4] P.Neudorfl, M.A.Mc Coeeye, L.Elias, Testing Protocol for Surface Testing Detectors, Proceedings of the 4th International Symposium on Analysis and Detection of Explosives, September 7-10, 1992 Jerusalem, Israel
- [5] L.Elias, Swab Sampling of PETN and RDX Deposits on Various Surfaces, 4th Workshop on the detection of explosives, Ascot, Berkshire, UK
- [6] P.Mostak, M.Stancl, Detection of Semtex Plastic Explosives, Proceedings of the NATO ARW on Detection of Explosives and Landmines, September 9-14 2001 Saint Petersburg, Russia
- [7] M. Stancl, Detection of Traces of Explosives by Means of Sniffing Dogs, Proceedings of the NATO ARW on Vapour and Trace Detection for Anti-terrorist Purposes, March 19-20, 2003, Moscow, Russia

Detection and Imaging with NQR, THz, and X-ray techniques
Garth SHILSTONE, DSTL Fort Halstead, UK

Notes

[dstl] Detection and Imaging with NQR, THz, and X-ray Techniques

Dr. Garth Shillstone
Dr. Ian Jupp

ITF Workshop, Bled, Slovenia, 2-4 June 2003


[dstl] Nuclear Quadrupole Resonance (NQR)

NQR - Basic Physics

- ^{14}N : $I=1$; 0 (400kHz) - 6MHz ($\lambda > 50\text{m}$)
- Detection only (imaging possible, but time consuming)
- Penetration - relatively good through non-metals
 - 20-30cm through most materials (wet or dry)
- Water has little effect
- Highly discriminating
 - frequency depends on crystal structure
- Health issues
 - radiowaves - low risk

[dstl]

15 August 2003
© DST 2003



NQR - Detection

- Excite sample with a series of radio frequency (rf) pulses from a tuned probe
- Detect response of sample
 - unique to a particular material
- Probe design
 - Simple coil
 - Cheap components
 - Uses rf engineering techniques




[dstl]

15 August 2003
© DST 2003




NQR - Interaction

- Interaction of nuclear quadrupole moment with surrounding electric field gradient

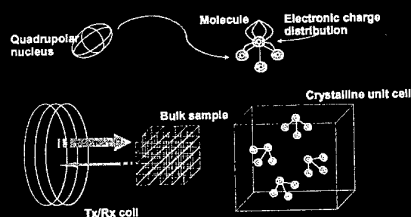

[dstl]

15 August 2003
© DST 2003



NQR - Signal processing

- Simple thresholding
 - FT (time domain data to frequency spectrum)
 - threshold signals above noise
- Complex processing
 - Correlation of frequency, phase, relaxation decay constants
 - Correlation of more than one resonance line
 - Matched filter (time domain or frequency spectrum)
 - Maximum entropy or linear prediction methods


[dstl]

15 August 2003
© DST 2003



Notes

NQR - Signal processing (threshold)

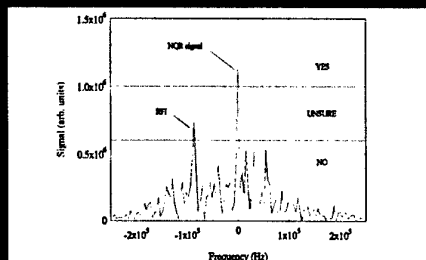

[dstl]

13 August 2009
© DST 2009



DST is part of the
Ministry of Defence

NQR - Current Capability

- Landmine detection
 - RDX fills
 - all AP and AT non-metal mine types
 - TNT fills
 - non-metal AT mines
 - non-metal AP mines still difficult (detection time ~minutes)
- Other explosives
 - PETN, AN, Tetryl, HMX (all N or Cl containing explosives)
- Other applications
 - luggage screening, people screening, vehicle screening

[dstl]

13 August 2009
© DST 2009



DST is part of the
Ministry of Defence

NQR - Scenarios

- Mine detection
 - AP mines (10-15cm depth)
 - AT mines (25-30cm depth)
- People screening
 - Hand-held (wand)
 - Portal
- General search
 - Luggage (aviation/transport security)
 - Vehicle (port of entry, building protection)

[dstl]

13 August 2009
© DST 2009



DST is part of the
Ministry of Defence

NQR - Maturity

- Quantum Magnetics (US)
 - prototype equipment (hold baggage screening)
 - lab/prototype equipment (mine detection & people screening)
- QR Sciences (Australia)
 - prototype equipment (hold baggage screening)
- Other organisations
 - R&D only
 - NRL, King's College London, Dstl, etc.

[dstl]

13 August 2009
© DST 2009



DST is part of the
Ministry of Defence

NQR - Detection Summary

- Detects threat (explosive) directly
 - clutter & background materials not a problem
- Penetrates all barriers except metal
 - up to about 30cm readily achievable
- Most explosives detectable
- Only prototypes available right now
- High power consumption

[dstl]

13 August 2009
© DST 2009



DST is part of the
Ministry of Defence

NQR - Pros and Cons

- | | |
|---|--|
| <ul style="list-style-type: none"> • Pros <ul style="list-style-type: none"> - Penetrates all non-metal materials, including wet soil - Metal detection - Detects almost all explosives - User friendly (red/green light) - High PoD, low FP/FN - Works at useful distances - Works on uneven surfaces - Works in presence of metal (cans, wires, nails, etc) | <ul style="list-style-type: none"> • Cons <ul style="list-style-type: none"> - Will not penetrate metal - Will only detect explosives for which it has been 'tuned' - requires intelligence as to target material - Relatively high power consumption |
|---|--|

[dstl]

13 August 2009
© DST 2009



DST is part of the
Ministry of Defence

Notes

[dstl] TeraHertz (THz)


THz - Basic Physics

- 300-10,000GHz (0.3-10THz); 1mm - 30 μ m
- Imaging: sub-mm resolution
- Penetration - generally poor
 - good penetration through normal clothing
 - >1cm dry materials (using 'portable' equipment)
- Strongly absorbed by water
 - difficult to 'see' through wet materials
- Possible material discrimination (spectroscopy)
- Health risks unknown
 - similar to mm-wave?

[dstl] 15 August 2003
© Def 2003

Def is part of the
Ministry of Defence

THz - Interaction Mechanism

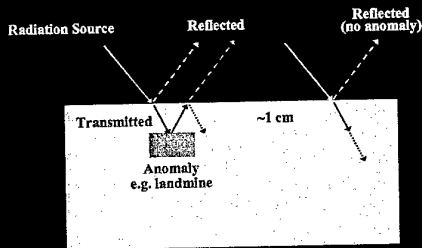


[dstl] 15 August 2003
© Def 2003

Def is part of the
Ministry of Defence

THz - Medical Imaging

- Dentistry (TeraView)
 - Image of tooth
 - sub-mm resolution
 - good contrast ratio
 - 3D information




[dstl] 15 August 2003
© Def 2003

Def is part of the
Ministry of Defence

THz - Remote Detection

- Steel washer buried up to 1cm in dry sand (TeraView)

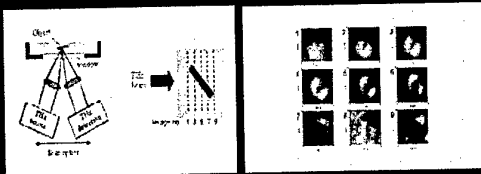


[dstl] 15 August 2003
© Def 2003

Def is part of the
Ministry of Defence

THz - Detection under clothing

- Sheet SX2 explosive under 2 sweaters and 4 shirts (TeraView)

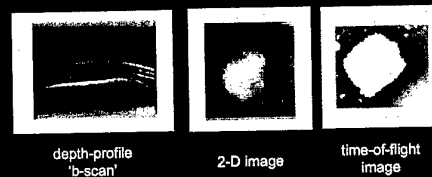


[dstl] 15 August 2003
© Def 2003

Def is part of the
Ministry of Defence

Notes

THz - Material discrimination

- THz spectra of common explosive materials (TeraView)



[dstl] 13 August 2003
© DST 2003

DST is part of the
Ministry of Defence

THz - Current Capability

- Medical imaging and diagnosis
 - dentistry
 - cavities
 - skin conditions
 - skin cancers
- Buried object detection
 - range >1 cm in sand
 - very good resolution (sub-mm)
- Material discrimination
 - common explosives

[dstl] 13 August 2003
© DST 2003

DST is part of the
Ministry of Defence

THz - Security Scenarios

- Mine detection?
 - surface laid mines
 - shallow buried (~1cm), dry soil
 - trip wires?
- People screening?
 - weapons (metal and non-metal)
 - explosives
- General search
 - high resolution 3-D imaging
 - limited diagnostic capability

[dstl] 13 August 2003
© DST 2003

DST is part of the
Ministry of Defence

THz - Maturity

- Teraview Ltd. (UK company)
 - 'portable' prototype equipment (medical applications)
 - remote detection capability being developed
 - THz spectroscopy
- Johns Hopkins University, US
 - 'lab' equipment
 - penetration up to 3cm in 'moist' sand(?)
- Other universities (e.g. Wisconsin-Madison, Leeds, Strathclyde)
 - research only

[dstl] 13 August 2003
© DST 2003

DST is part of the
Ministry of Defence

THz - Pros and Cons

- | • Pros | • Cons |
|--|---|
| – Very good resolution | – Water/damp would attenuate the signal |
| – Reflects strongly from metal and dense materials | – Current system expensive and only 'semi-portable' |
| – Remote detection possible | – Limited penetration (no penetration of metal) |
| – Some material discrimination possible | |
| – Health and Safety issues likely to be low - similar to mm-wave | |

[dstl] 13 August 2003
© DST 2003

DST is part of the
Ministry of Defence

[dstl] X-ray Imaging

Notes

X-ray Imaging - Basic Physics

- 10 keV - 10 MeV photons (10^{-10} - 10^{-12} m, 10^{18} - 10^{20} Hz).
- Conventional modes of imaging (mm resolution)
 - Transmission (including stereoscopy, computed tomography).
 - Scatter (including single-sided 'backscatter', diffraction).
- Material discrimination (dual energy or diffraction modes)
- Penetration
 - very good in transmission (cm steel)
 - limited in backscatter (due to scattering background from barrier)
- Health issues
 - well known, requires lead shielding

[dstl]


13 August 2003
© Def 2003



Def is part of the
Ministry of Defence

X-ray - Interaction Mechanism

Backscatter Imaging

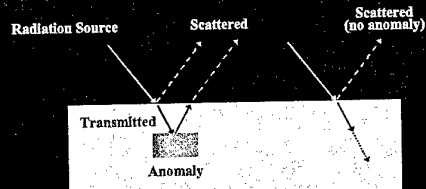

[dstl]

13 August 2003
© Def 2003



Def is part of the
Ministry of Defence

X-ray - Applications

- Airport security:
 - Baggage transmission imaging.
- Cargo screening:
 - Transmission imaging for contraband / illegal immigrants.
- People screening:
 - Backscatter imaging for concealed weapons / explosives.
- Mine detection:
 - Backscatter imaging of explosive fill - confused by clutter and bright background signal.

[dstl]


13 August 2003
© Def 2003




Def is part of the
Ministry of Defence

X-ray - Airport Security

Transmission Imaging:



Metallic



Organic

[dstl]

13 August 2003
© Def 2003



Def is part of the
Ministry of Defence

X-ray - Cargo Screening

Transmission imaging:



Backscatter imaging:



[dstl]

13 August 2003
© Def 2003




Def is part of the
Ministry of Defence

X-ray - People Screening

Backscatter imaging:

- AS&E system
- explosives and weapons detectable
- very good resolution



[dstl]

13 August 2003
© Def 2003



Def is part of the
Ministry of Defence

Notes

X-ray - Maturity

- Many commercially available transmission systems:

- small-area digital imagers
- large-area scanning (cargo systems)

- Some commercially available backscatter systems:

- Not portable (bulky, heavy, not rugged).
- Portability versus Health and Safety trade-off.

- Future development areas:

- High-efficiency, flat-panel digital imagers, high-E X-ray tubes.
- Compact backscatter imaging systems.

[dstl]

13 August 2003
© DST 2003



DST is part of the
Ministry of Defence

X-ray - Imaging Summary

- People screening

- Very good resolution & contrast for explosives and weapons
- very low dose (in enclosed area)

- Mine detection?

- Poor contrast against soil, clutter (e.g. rocks) - limited to shallow or surface mines

- General search

- Not remotel
- Limited use against building materials

[dstl]

13 August 2003
© DST 2003



DST is part of the
Ministry of Defence

X-ray - Pros and Cons

- Pros

- Backscatter imaging:

- Good (5mm) spatial resolution.
- Remote, one-sided access.
- Imaging through metal
- Health and Safety issues well understood.

- Transmission imaging:

- Good penetration through thick materials.

- Cons

- Limited image contrast against brick, concrete, thick steel (few mm), soil (few cm).
- 1/R² image quality reduction.

- Two-sided access required.

[dstl]

13 August 2003
© DST 2003



DST is part of the
Ministry of Defence

Acknowledgements

TeraView Ltd, Cambridge, UK

THz images and spectra

Questions?

[dstl]

13 August 2003
© DST 2003



DST is part of the
Ministry of Defence

THz detection of explosives and biologicals
Daniel VAN DER WEIDE, University of Wisconsin-Madison, USA

Electronic THz Imaging of Explosives

Daniel van der Weide
Associate Professor
Dept. of Electrical & Computer Engineering
University of Wisconsin-Madison

Acknowledgements: Min Choi, Fritz Kellermann, Janusz Murawski, Vitek Agnew, Scott Lee, Prayson Abusarkhalin, Björn Roemer

Support: FAA and Ford University Research Award; DARPA Ultra Electronics, ONR YIP, NSF PECASE

We will discuss our concept, progress and outlook for electronic THz sensors

- Nonlinear transmission lines (NLTs)
- Coherent pulse generation/detection (equivalent-time sampling) systems
- Transmission spectroscopy of gasses
- Reflection spectroscopy of energetic materials
- Compact, integrated frequency translator for integrated coherent measurements


Our THz electronic spectrometer generates and detects picosecond pulses for wideband (1-1000 GHz) transmission and reflection spectra

- Sources based on microwave-pumped nonlinear transmission lines
 - Works like ultrafast laser-based systems, but without lasers
 - Upper frequency limit can reach THz regime
 - Pulse repetition rate is ~ 100 ps-wide harmonic spacing
 - Output power controllable
 - Harmonic frequencies tunable at ~ 1-10 Hz level
- Detectors: diode samplers integrated in same process as NLTs, or use incoherent detectors
- Ultimately, the entire system could be a single IC with our new frequency translator


Needs, opportunities and applications

- Spectroscopic imaging for illicit substance detection, both as a portal and handheld
- Inexpensive microwave network analyzer, time-domain reflectometer
- Gas spectroscopy/sensing
- Subsurface imaging
 - Mine detection
 - Nondestructive evaluation of samples
- Testing phased-array radar in the field

Nonlinear transmission lines (NLTs) create fast edges from sinusoidal inputs, and can also be used for frequency translation




We currently fabricate NLTs on GaAs that can produce < 1 ps edges




D.W. van der Weide, A/E 65 (7) 881, 1994


An electronic THz transmission spectroscopy system uses optical techniques to collect, focus, and collimate the radiation



With a 3.5 V, 880 fs pulse at the generator antenna...



Freely-propagating pulses are seen at the detector with harmonics beyond 3 THz




D.W. van der Weide, et al., A/E 62, 22 (1993)

Using time-domain wave generation and detection is different from traditional microwave techniques

- Picosecond electrical pulses can be generated with integrated-circuit nonlinear transmission lines driven by microwave sources
- These waveforms can be coherently detected using room temperature Schottky diode samplers with a stroboscopic (equivalent-time sampling) technique
- We can also coherently combine two sources and use a bolometer as a detector


University of Wisconsin-Madison

The THz electronic system can be configured to measure reflections:



University of Wisconsin-Madison


Reflection data from a human hand vs. a leather wallet



Data uncorrected for standing waves


University of Wisconsin-Madison

Reflection data from C-4




University of Wisconsin-Madison

Reflection data from RDX




University of Wisconsin-Madison

Reflection data from HMX




University of Wisconsin-Madison

Hand




Credit card




University of Wisconsin-Madison

Empty card-board box




Keys




University of Wisconsin-Madison

Note-book



Wallet



University of Wisconsin-Madison


THz systems can work as broadband reflection sensors in a hard-to-reach frequency regime

- Showed THz reflection spectra of several samples
 - Common objects
 - Energetic materials
- Results have identifiable spectra/unique signatures
- Cons of lab system:
 - Expensive synthesizers, amplifiers: Can use a new delay line frequency translator for THz systems on a chip
 - Total power < 100 microwatts: OK for handheld use but won't penetrate luggage at this level


Microwaves have some advantages over traditional near- and mid-IR gas spectroscopy

- | | |
|---|--|
| <p>Microwaves</p> <ul style="list-style-type: none"> • Usually very tunable • Molecule must have permanent electric dipole moment • Highly selective (~1 Hz possible in some cases) • Radiation not scattered by particulates • Traditionally very expensive and bulky equipment <p>Electronic THz system advantages</p> <ul style="list-style-type: none"> • Could be 1-3 IC's: inexpensive, compact and rugged • Integrates directly with signal processing electronics • Multi-species sensitivity • Could be used in other areas, e.g. stacks, mines, etc. | <p>Mid- and Near-IR</p> <ul style="list-style-type: none"> • Usually not tunable • Vibrational or rotational absorption possible • Quite broad; not very selective • Radiation scattered by particulates • Less expensive and lighter-weight equipment |
|---|--|


The system can be configured for gas spectroscopy




Microwave transmission measurements of OCS show pressure-broadening effect




7.6 cm⁻¹ CO line measured in swept frequency mode




NH₃ line at 140 GHz also resolved



Broadband OCS absorption tracks HITRAN predictions



Integrating the demonstrated components onto 1-3 chips + cavity is the next step



Conclusion: THz electronic sensor systems can address important security needs

- THz electronics offer new sensing opportunities in a hard-to-reach spectrum
- Integrated circuits will lead to inexpensive sensors for a wide variety of applications
- Current systems are in GaAs, but could be realized in Si CMOS, as well

Two possibilities for coherent generation and detection



Block diagram of conventional superheterodyne receiver. This system with sampling detector, which coherently downconverts the detected pulse to baseband.


Dual-source heterodyne receiver (DSR) with co-propagating pulse front and waveguide. This system has frequency spectrum is low enough to fit within the response bandwidth of a composite heterodyne.

Scanning the delay of a NLTTL enables frequency translation for small signals


- To make the reflection or transmission system inexpensive and practical for array imaging, we need low-cost integrated frequency translation
- This circuit shows very high carrier suppression and very little added phase noise

Frequency translators replace dual microwave sources at much lower cost


Coherent measurement systems



Linear modulation of phase with time results in translation of frequency




Frequency translators can be rotary phase shifters




Rotary phase shifter: HP J885 A

ADVANTAGES: simple, low losses, and very rugged
LIMITATIONS: only slower hollow-waveguide, bulky, fragile, and low speed (f_m)

Frequency translators can also be realized with serrrodyne modulation of delay




We have built large scale NLTTLs as delay lines for serrrodyne frequency translation




Section: 30 diodes ($C_p=5pF$) with 4.6 mm lateral spacing
Section: 20 diodes ($C_p=5pF$) with 0.6 mm lateral spacing










The raw output shows hope but needs correction as well



We measured the amplitude and phase distortion over frequency to correct it




P. Aikens, R. K. Kuo and D. W. van der Weide, "Distributed broadband frequency translators and the use of a 1.5 GHz coherent heterodyne," IEEE Transactions on Microwave Theory and Techniques, vol. 48, pp. 2244-2250, December 1998.




The result from a 25Ω load almost exactly corresponds to a commercial instrument

Reflection coefficient compared to HP 8720B network analyzer



An arbitrary load also shows excellent correspondence



Alkarakkathil, Koo, and van der Weide, IEEE Trans MTT December 1999

The frequency translator performed well in its first system application

- We proposed a new reflectometer using a heterodyne technique with the distributed frequency translator
- We analyzed the error correction for the reflectometer
- We designed and built an *inexpensive* automatic reflectometer controlled by a PC
- Excellent correspondence with a commercial network analyzer (HP 8720B)

University of Wisconsin-Madison

Future work for the frequency translator

- Increase bandwidth of frequency translator by using new devices and structure of the NLT
- Integrate several parts into an IC (MIC or MMIC)
- Improve control and bias circuits for increasing carrier and sideband suppression and lowering phase noise, i.e. high-speed circuits
- Develop hardware/software to increase the accuracy and speed of the NLT reflectometer
- Develop new applications, i.e. an *inexpensive* full two-port network analyzer, gas sensor, etc.

University of Wisconsin-Madison

Vapour detection and canine/bee olfaction
John GILBERT, DSTL Fort Halstead, UK

Notes

[dstl] **Detection of Explosives using Bees**

Presented by John Gilbert
Energetics Materials Department
Dstl Fort Halstead

Aim

- Explore fundamental aspects of the detection of explosive using insects
 - Probe sensitivity for explosive detection
 - Probe mechanism and specificity
- Collaboration with InSense
 - spin out company from Unilever
- Here studied New Zealand honey bees
 - potentially other insects in future

[dstl] 13 August 2003
© Dstl 2003

Dstl is part of the Ministry of Defence



Bee Olfaction (1)

- Potential advantages
 - Biological levels of sensitivity and selectivity
 - Multi-target sensing using bee arrays
 - Quick and easy re-training of bees for new analytes
 - Bees don't get distracted or bored
 - Cost effective & free ranging

Micrograph of bee antennae

Micrograph of sensillum showing pores

[dstl] 13 August 2003
© Dstl 2003

Dstl is part of the Ministry of Defence



Insect Olfaction

Volatile molecules in air

Sensillum cuticle with pores
Empty ORP

Sensillum lymph space

Dendrite membrane

Dendrite cytoplasm

Action potential triggered


Neural signal processing

Behaviour response

Micro-electron antennagram

[dstl] 13 August 2003
© Dstl 2003

Dstl is part of the Ministry of Defence

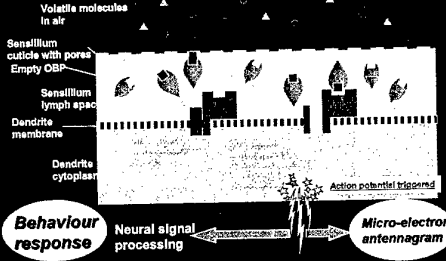

Related Work

- DARPA multi \$M Programme 'Engineered Bee Colonies'
 - Alan Rudolph, DARPA
 - Bromenshenk, University of Montana
 - Rodacy & Bender, Sandia NL
 - Sigman & Guerin, ORNL
- Goal:
 - "To move from passive environmental monitoring to engineering bees for active operational modes, where training, enhanced detection of chemicals or biologicals and microelectronics are combined to provide real time detection of specific agents, devices or changes in bee sentinel systems."

[dstl] 13 August 2003
© Dstl 2003

Dstl is part of the Ministry of Defence



Related Work (2)

- "Flying dust mops"
 - collect dust, pollen, airborne chemicals, spores and carry back to the hive, analyse contents
- Studying plant uptake of TNT
 - Tests in controlled greenhouse and minefield
- Considerable news interests
 - few journal papers

Illustration Model of Annotated Bees used for Flying Bees used in Validation, Prior, Lightfoot and Brown, Environmental Biotechnology 35 (6): 1166-1174 Dec 2001

[dstl] 13 August 2003
© Dstl 2003

Dstl is part of the Ministry of Defence



Notes

Insense Concept of Usage

- Insects are restrained in cassette inside instrument
 - not free ranging
 - potential of enhanced sensitivity





[dstl] 13 August 2003
© DST 2003

Defence of the Ministry of Defence

Detection

- Detection of target analyte indicated by proboscis extension reflex (PER)
 - a reflex rather than intelligent interpretation.
 - PER is clear-cut and can be recognised by instrumentation
 - no need for handler nor behaviour interpretation.
- PER can be checked at any time to confirm performance





[dstl] 13 August 2003
© DST 2003

Defence of the Ministry of Defence

Programme of Work

- Two parts:
 - Determine bee LoD for DMNB
 - ICAO taggant
 - Which component(s) of a multi-component plastic explosive mixture are important for detection?
 - How do bees detect?
 - Likely FAR

[dstl] 13 August 2003
© DST 2003

Defence of the Ministry of Defence

Rowanex Study

- Samples produced for on-going canine olfaction study¹
 - how do dogs detect plastic explosives?
- Manufacture a set of plastic explosive samples where each sample lacks one or more ingredients
- Thoroughly analyse samples to compile a database of compounds present in the headspace and their origin
- Train bees on full explosive and then test them using incomplete samples
- Analyse and correlate results, compare to canines

¹ Analysis of Explosive Vapor Samples to Aid the Development of Vapor Detection Equipment, Proceedings TO 35426, 1-26-2003, April 2003

[dstl] 13 August 2003
© DST 2003

Defence of the Ministry of Defence

Notes

Composition of Rowanex 4100

-

 Dat is part of the
Ministry of Defence

Results - DMNB LoD

- * Saturated DMNB vapour 15.8 ug/l @ 25 °C



Defence is part of the
Ministry of Defence

Results - Accuracy of Static Method

- 13 August 2003
© Delft 2003

Results - Dstl pulsed vapour generator

-


13 August 2003
© Del 2003

Results - Rowanex Study

- | Dilution factor* of SRV (the flow through the wetters FM3/FM2) of the dynamic system is shown in brackets | | | | | | |
|---|-----------|-----------|----------|-----------|-----------|---|
| 4.3 | 2.8 | 20.5 | 40 | 79 | 191 | |
| (0.1/500) | (250/250) | (400/100) | (450/90) | (475/250) | (600/100) | |
| % of base
responding to the
dilution of SRV | 91.4 | 90.9 | 39.1 | 31.8 | 13.6 | 0 |
- * Dilution factor X corresponds to a mixture containing 1 part of SRV and (X-1) parts of pure air. The final dilution of SRV was calculated from the dilution of flow FM2 into the main flow (1550 ml min⁻¹). For example: 1 (500)/100 = 500 - 1 = 499 (as above).

- 15 Aug at 2003
C.D.1 2003

Results - Rowanex Study

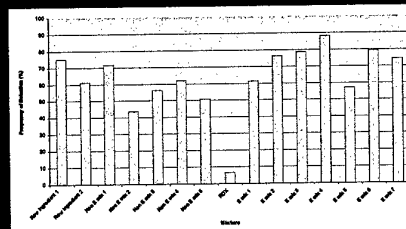

- 13 August 2003
© DSI 2003

Notes

Conclusions

- Bees can be trained to detect synthetic explosives and taggants
 - DMNB and Rowanex 4100
- Indicative LoD for DMNB ~ 110 ppt_v
 - impressive but not startling, comparable to instruments
 - Insense confident this can be improved
- Bee appears to be keying in on a small number of odours
 - not as sophisticated pattern recognition machines as dogs

[dstl]

13 August 2003
© DST 2003



DST is part of the
Ministry of Defence

Way Forward

- Considerable further fundamental work required to understand insect olfaction
 - underpins all applications
- Free ranging bees more attractive applications
 - LoD not only factor in determining whether insect finds target or not
 - LoD's not sufficiently impressive to overcome practical issues associated with 'bee-in-a-box'.

[dstl]

13 August 2003
© DST 2003



DST is part of the
Ministry of Defence

Acknowledgements

- John Wilkins INSENSE
- David Groves DSTL

[dstl]

13 August 2003
© DST 2003



DST is part of the
Ministry of Defence

Questions?



"However, bees are pretty damn lazy, really. If there is something else more tempting on offer, they will go for that instead" Richard Jones, International Bee Research Association

"It's important to look after them (bees), as their only work if they're totally happy and comfortable." Prof Paul David Innes

[dstl]

13 August 2003
© DST 2003



DST is part of the
Ministry of Defence

An overview of the APOPO program, rats for landmine detection

Christophe COX, APOPO, Belgium

The APOPO project is training rats for the detection of landmines. The rats are trained to indicate the presence of explosive vapours, and are rewarded upon with food. The animals are both trained for direct detection of the location of the buried landmine, as well for the detection of explosive vapours in air samples.

APOPO, a Belgian research organisation, started looking for a cheap and efficient landmine detection technique from 1997. After a feasibility study of two years in Belgium, the whole project shifted toward the Sokoine University of Agriculture, in Morogoro, Tanzania, where the training methodology and detection technologies were further developed. At this moment, APOPO is training over 100 rats daily and has a total capacity of over 300 animals.

One of the main reasons for using rats is their highly developed sense of smell. Moreover, they are very trainable, cheap and easy to maintain. With an initial focus on the African landmine problem, APOPO choose the '*Cricetomys gambianus*' or Giant African Pouched Rat for the landmine detection task. This rat has the additional advantage of being a relatively calm animal and has a lifespan up to eight years.

For direct detection, APOPO has a 28 ha test and training field, with over 1000 mapped landmines. Currently, the rats are trained on 100m² boxes, which they search in 28 minutes on average. The rats are attached with a leash to a search bar, which makes them to search in 0,5 meter lanes, moving forward progressively.

First tests are being carried out in Mozambique in co-operation with MgM and NPA. APOPO is expecting the go ahead of the national demining authorities to work on sharp mines by next month.

For Residual Explosive Scent Tracing (REST), the rats evaluate filters drawn from above the suspected minefield on the occurrence of explosive traces. The purpose of the REST technology is to quickly scan big suspected areas and release the mine free land. APOPO has developed some evaluation set-ups, in which a rat evaluates 150 filters in 20 minutes. In collaboration with GICHD, APOPO is also investigating which factors influence the availability and spread of the explosive vapour, such as climatic and environmental factors. Also different types of filters are being tested within this program. This research will allow the documentation of this technology, where and under which circumstances it can be used with adequate reliability.

Apart from demining, vapour detection by rats has a series of other potential applications, both in the medical, environmental, transport and security sectors. The rat is one of the most sensitive animals to any kind of vapour compared with other technologies currently available.

Neutron Resonance Radiography for Security Applications

Richard C. LANZA*
Massachusetts Institute of Technology, USA

ABSTRACT

Fast Neutron Resonance Radiography (NRR) has been devised as an elemental imaging method, with applications such as contraband detection and mineral analysis. In the NRR method, a 2-D elemental mapping of hydrogen, carbon, nitrogen, oxygen and the sum of other elements is obtained from fast neutron radiographic images taken at different neutron energies chosen to cover the resonance cross section features of one or more elements. Images are formed using a lens-coupled plastic scintillator-CCD combination. In preliminary experiments, we have produced NRR images of various simulants using a variable energy neutron beam based on the $\text{Li}(p,n)\text{Be}$ reaction and a variable energy proton beam. In order to overcome practical limitations to this method, we have studied NRR imaging using the D-D reaction at a fixed incident D energy and scanning through various neutron energies by using the angular variation in neutron energy. The object-detector assembly rotates around the neutron source and different energy (2-6 MeV) neutrons can be obtained at different angles from a D-D neutron source. The radiographic image provides a 2-D mapping of the sum of elemental contents (weighted by the attenuation coefficients). Transmission measurements taken at different neutron energies (angles) form a set of linear equations, which can then be solved to map individual elemental contents.

Keywords: Neutron radiography, imaging fast neutron, aircraft security, explosive detection, contraband detection

1. OVERVIEW

The problem of aircraft security has had renewed interest and urgency since the events of September 11, 2002. The problem of explosive and contraband detection has been extensively studied [1]. Current technology for checked baggage inspection has centered on the use x-ray CT as the screening technique of choice with the use of trace detectors as a confirmatory measurement. Air cargo remains a more difficult task due to the size of the containers and this has led to the idea of a combination of trusted shippers and breaking out of cargo into individual (smaller) objects for screening. Although CT is a powerful technique, the results of initial field deployment were plagued by false alarms and ambiguous results. Part of this was due to the normal expected problems of deployment of new technology and part was inherent in the use of x-ray technology.

The basis for any inspection technique is a method for discerning the difference between common materials and the rare presence of explosive materials. Since common materials are the norm, it is important that the trade-off between sensitivity and specificity be carefully defined so as to avoid excess numbers of false alarms which will not only waste time and money but, if too high, will also create a chaotic situation in the airport. X-rays are currently used to determine apparent density of materials and, with less sensitivity, the average atomic number of materials. With respect to the issue of sensitivity, most common explosives contain high concentrations of nitrogen and oxygen but there are non-nitrogenous explosives as well, some of which have been used in the recent past, such as TATP, with a density of ~ 1.2 and no nitrogen.

A more vexing problem is in specificity; when only density is measured; many common materials such as sugar, chocolate, marzipan, honey, jams and jellies may look like explosives to x-rays. Figure 1 shows the density and average atomic number of many explosives and several more common materials found in luggage. With conventional, single energy spectrum x-ray CT systems, only the apparent density may be determined; with dual energy systems, some information about the average atomic number may also be obtained. Although average atomic number may be a useful

*lanza@mit.edu; phone 1 617 253-2399; fax 1 617 253-2343; Department of Nuclear Engineering, Massachusetts Institute of Technology, 77 Massachusetts Avenue Room NW13-221, Cambridge, MA, USA 02139

number, it does not directly give information about the elemental composition of materials. If elemental composition is to be determined, nuclear techniques offer the most straightforward way to make measurements of the elemental and spatial distributions of the contents of containers.

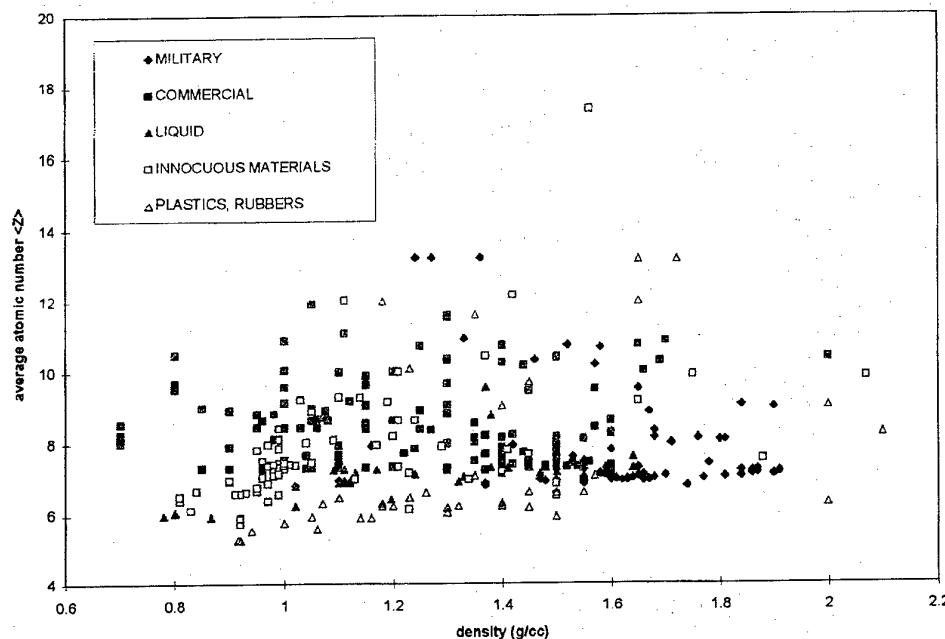


Figure 1 Relationship between average atomic number and density for selected materials. Note the concentration of relatively high density and average atomic number between 7 and 8 for military explosives [2].

The advantages of nuclear techniques, in particular those using neutrons as probes, are well known and may be summarized as follows:

- Determination of elemental composition, not just density
- Great penetration for dense objects or for cargo inspection
- Difficult to shield contraband from probing radiation

Unfortunately, these very advantages also have their corresponding disadvantages in practice:

- Elemental composition often means only nitrogen determination
- Great penetration requires significant shielding for use in an airport or seaport applications
- They generally are based on accelerator technologies which may be large and expensive

For example, Figure 2 shows the density and nitrogen fraction for various materials. Although nitrogen content is generally high for explosives, there still is a significant overlap with ordinary materials. Nitrogen alone is not usually a sufficient discriminate to avoid false alarms, especially if the system does not have sufficient spatial resolution to determine nitrogen density. For example, ordinary air has a nitrogen density of 1.2 Kg/m³ and there is sufficient nitrogen from the air in a large suitcase to be comparable to that in a threat quantity of explosive. It is usually necessary to have measurements of several elements to more unambiguously discriminate threat materials from ordinary materials. Figure 3 shows the distribution of nitrogen and oxygen in a large number of explosives and illustrates the potential power of elemental composition measurements. Other elements that are relevant for improving specificity are carbon

and hydrogen. Thus, a system with the ability to produce spatially resolved elemental composition images would have greatly enhanced specificity in the determination of potential threats.

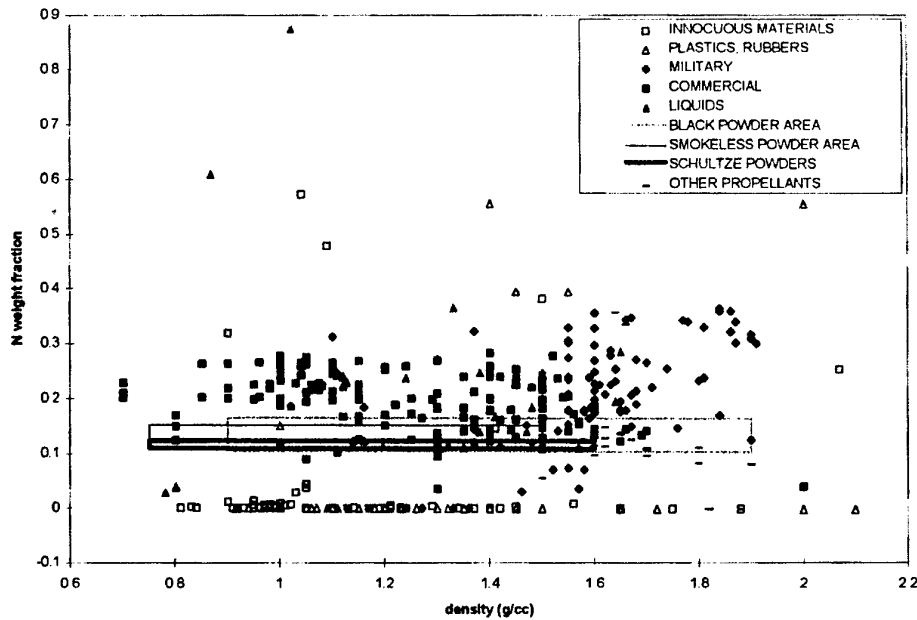


Figure 2 Relationship between density and nitrogen fraction for various materials. Although nitrogen content is generally high for explosives, there still is a significant overlap with ordinary materials [2]

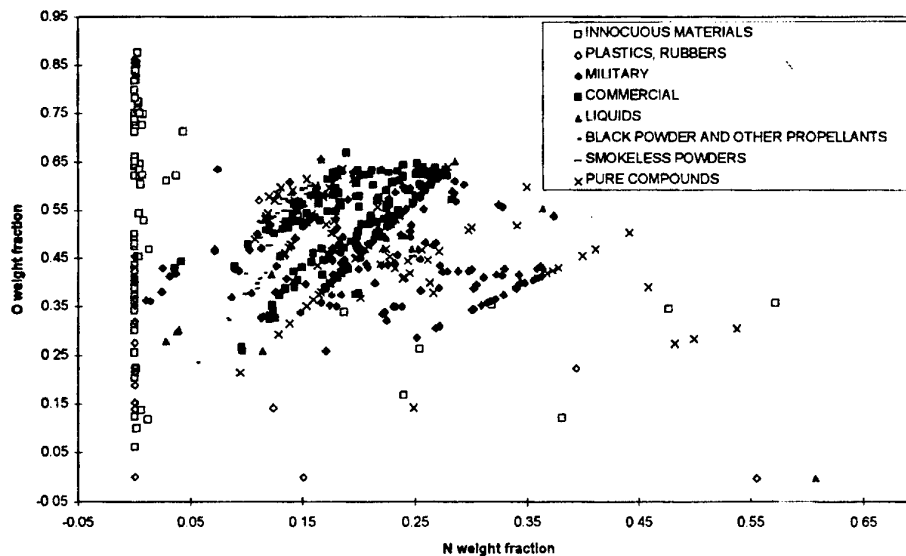


Figure 3. Relationship between nitrogen and oxygen densities for various materials. Note that many military explosives are concentrated in a narrow region of high oxygen content and high nitrogen content [2].

2. NEUTRON RESONANCE RADIOGRAPHY

Neutron Resonance Radiography (NRR) utilizes the element specific resonances in total neutron attenuation cross-sections, in our case in the 1 to 8 MeV range, which are exploited to enhance the contrast for imaging light elements such as carbon, oxygen and nitrogen. The goal of this work is to utilize this contrast enhancement mechanism to produce elementally resolved images of objects under inspection and to have sufficient penetration so that thick objects may be imaged.

A straightforward way of doing neutron resonance radiography is to map one element at a time. At an energy region with a resonance peak or valley for one element where the cross sections of other elements are flat over the same energy range, we take radiographic images at on-resonance energy and off-resonance energy and then compute the pixel-by-pixel difference of the two images. Early work in this area for the detection of explosives was reported by a group in South Africa using the National Accelerator Centre van der Graaff to explore the low energy resonances in nitrogen. Nitrogen is characterized by a very narrow peak at 433 keV as is seen in Figure 4, but this group was able to clearly image explosives and separate them from ordinary materials for small samples [3].

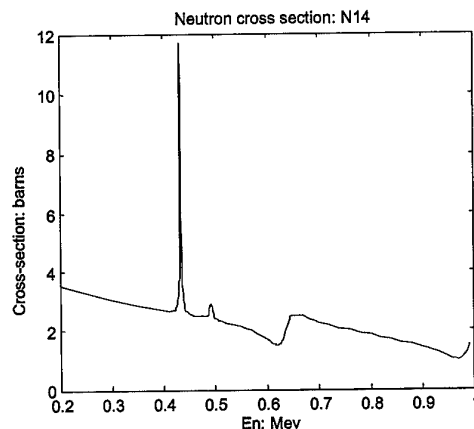


Figure 4. Nitrogen cross-section in the low energy region

As will be discussed later, the use of low energy resonances has several major difficulties in practice. If higher energies are used, some of these problems may be overcome. With a mono-energetic neutron source, one can map one element at a time, looking for an energy region with a resonance peak/valley for one element while the cross sections of other elements are flat over the same energy range. For example, referring to Figure 5 which shows the cross-section for carbon in the 0.5 to 10 MeV range, we might choose the sharp resonance peak at 2.077 MeV for carbon or the relatively broad peak in the 7 to 8 MeV range.

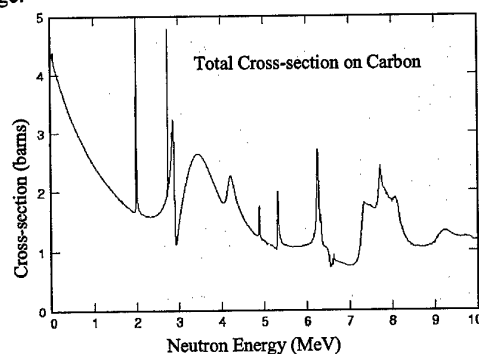


Figure 5. Resonance structure for carbon in the 0.5 to 10 MeV range

A radiographic image is taken on-resonance, and another taken off-resonance; the difference of the two images gives a 2-D map of the corresponding element. In the case of imaging only carbon, the broad peak in the 7 to 8 MeV range is more useful since the width of the peak is so much larger and thus a thicker target can be used.

3. FAST NEUTRON PRODUCTION

The most common way of producing fast neutrons for radiography is through nuclear reactions using a particle accelerator and a target. Two reactions were used in our preliminary experiments and in subsequent simulations; the (endothermic) reaction $p + {}^7\text{Li} \rightarrow {}^7\text{Be} + n$ and the (exothermic) reaction $D + D \rightarrow {}^3\text{He} + n$. The $p\text{-}{}^7\text{Li}$ source has slower energy fall-off with neutron angle than the D-D source, so it is a better mono-energetic neutron source for imaging applications with a single element. With energy falling off at increasing angle, different parts of the image will experience different energy neutrons, which is important if the imaging method requires mono-energetic neutrons, such as NRR with single peaks. The applicable angles beyond which the object should not extend are 10° and 5° for both sources, respectively. In addition, the $p\text{-}{}^7\text{Li}$ source is usually contaminated with gamma rays while the D-D source is generally not.

In order to examine the potential of this method for detection of other elements, we examined the energy range from 1.5-2.5 MeV and used the peaks shown in Figure 6. Experiments were carried out using a $p\text{-}{}^7\text{Li}$ neutron source with a 2 to 6 MeV proton beam from the University of Massachusetts (Lowell) Van de Graaff accelerator. Neutron yield was about 5×10^7 neutrons/sr/s at 0° with typical proton currents of 5-10 μA . Resonance peaks are typically 10-30 keV in width, requiring a thin target for mono-energetic neutron generation.

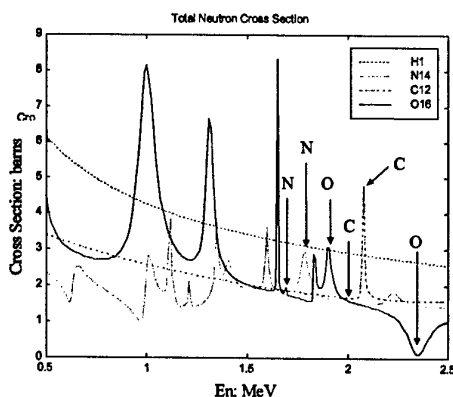


Figure 6. Peaks in the 0.5 to 2.5 MeV range that were investigated for neutron resonance radiography

The transmitted neutrons were imaged using the camera system of Figure 7 [4]. The imaging system uses a single large piece of plastic scintillator as a detector, providing reasonable efficiency without significant loss of resolution. Since the detection system uses a lens-coupled detector, the spatial resolution is limited by a combination of parallax and depth of focus [5].

Figure 8 shows images taken of a series of test objects: drug simulant (top left), explosive simulant (bottom left), graphite powder (top right) and melamine (bottom right), in 35 mm photographic film containers. The axes are in units of pixels, each pixel is about 0.5 mm. The source-object distance was ~ 30 cm and object-detector distance was ~ 15 cm. The objects are within a 10° beam cone. ($S1 \sim 30$ cm, $S2 \sim 15$ cm, $\theta < 10^\circ$)

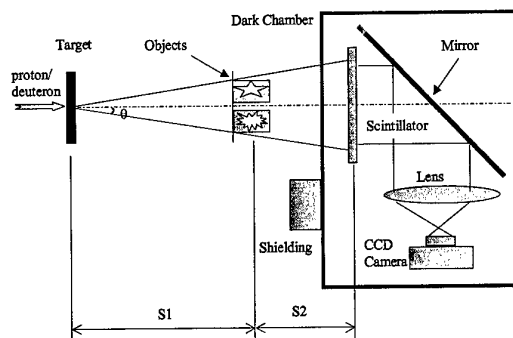


Figure 7. Scintillation camera used for imaging experiments

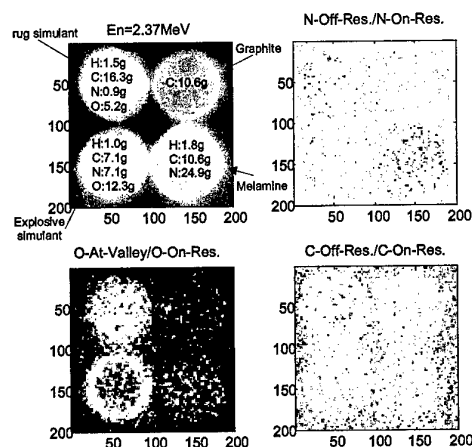


Figure 8. NRR with single peaks (a) image at 2.37 MeV, (b) nitrogen on and off resonance, (c) oxygen on and off resonance, (d) carbon on and off resonance.

The simple method employed here has several significant problems in practical applications. First, we note that single, distinct resonance peaks are usually found in the 0.5-2.5 MeV neutron energy region, where the total neutron cross section (especially that of hydrogen) is large and therefore neutron penetration is poor. Second, since the resonance peaks are typically 10-30 keV in width, a thin target is required to maintain a beam of essentially mono-energetic neutrons. Such thin targets, especially using lithium, have thermal problems, which generally limit the beam current and thus the neutron output. Third, a relatively small viewing angle ($\theta < 10^\circ$) is required so that the neutron energy fall-off across the image is significantly smaller than the difference between on and off resonance energy, restricting the geometry. Finally, different energy neutrons are obtained by changing the accelerator energy, an undesirable requirement in inspection applications where high throughput is required, since for large electrostatic accelerators, the terminal voltage cannot be changed in fractions of a second. For some applications, such as the minerals industry, where only a single element is being detected, the single peak approach is considerably more practical as it is possible to use a pair of radiofrequency quadrupole (RFQ) accelerators to move rapidly between two energies [6]. With this exception, the single peak implementation has practical limitations but does demonstrate the technique.

As previously discussed, detection of nitrogen alone does not determine the presence of explosives and contraband and thus extensions to permit multiple element detection are required. Unfortunately, it becomes difficult to find distinct resonance peaks for all elements of interest and, in addition, neutron resonance radiography with distinct resonance peaks suffers from the practical problems discussed previously. To improve the method, we have investigated the broad resonance structure at neutron energies of 2 to 6 MeV, and have developed an approach based on the use of the broad structure in this energy range rather than requiring a narrow energy spread beam. In effect, all elements will be imaged simultaneously without changing the accelerator energy.

Other groups have used similar principles, based on neutron time-of-flight (TOF) and also applied them to non-destructive inspection for the detection of explosives and other contraband in baggage and cargo [7]. Our method does not use TOF and thus does not require a pulsed ($\sim$ ns) neutron source with a relatively long ($\sim$ 3 m) flight path and thus can be made more compact than these systems. Since there is no need for a long flight path, there is sufficient room to place the detector far enough from the object so that it is possible to reduce scattering in the images as well and thus to improve contrast. (The optimum geometry is when the object is halfway between the source and the detector.) Further, since the detector is only a simple integrating imager, it is possible to obtain considerably better spatial resolution ($\sim$ 3 mm) as compared to detectors in which each pixel must be instrumented, limiting individual pixel resolution to 3 cm or more.

In our approach, we also generate all energies simultaneously but do so by using the kinematics of the DD reaction, where the neutron energy depends on the angle between the incident beam and the emitted neutron. This is illustrated in Figure 9 where the energy of the emitted neutron is shown as a function of neutron angle. Three curves are shown, which correspond to the spread of energy expected in a target 600 keV thick with a 2.3 MeV incident deuteron beam energy.

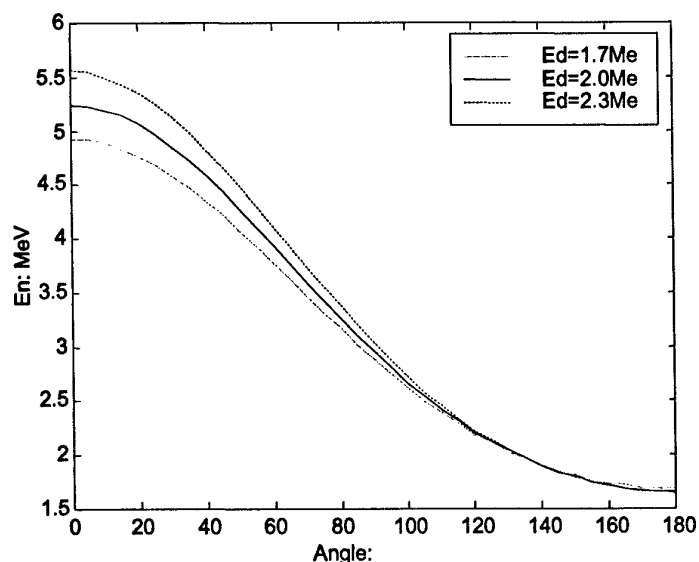


Figure 9. Energy of neutron resulting from the DD reaction at 1.7 to 2.3 MeV incident energy deuteron.

We now can scan through the energies of the resonances by moving the object under inspection around the target; as the angle changes the energy changes as in Figure 9. It should be noted that due to the thick target and the finite acceptance angle at the detector, a relatively wide range of energies is scanned at any angle. The method is analogous to spectral fitting methods for determining elemental composition through gamma spectroscopy where detectors with relatively

poor spectral resolution are used but the resulting spectrum is fitted to a series of low-resolution spectra from individual elements. In this technique, the entire absorption spectrum is utilized and therefore the use of the neutrons is very efficient as compared to monoenergetic single energy scanning. The problem is reduced to considering an equivalent transmission spectrum for each element and fitting the observed spectrum to a linear combination of these equivalent transmission spectra. The basic method is straightforward: a series of images is taken at multiple angles (energies) and the resulting data set is fitted on a pixel-by-pixel basis to a particular combination of elements. The details of various computational methods for accomplishing this have been published in several places [7,8,9]. For carbon, oxygen, nitrogen, and hydrogen, the appropriate spectra are shown in Figure 10.

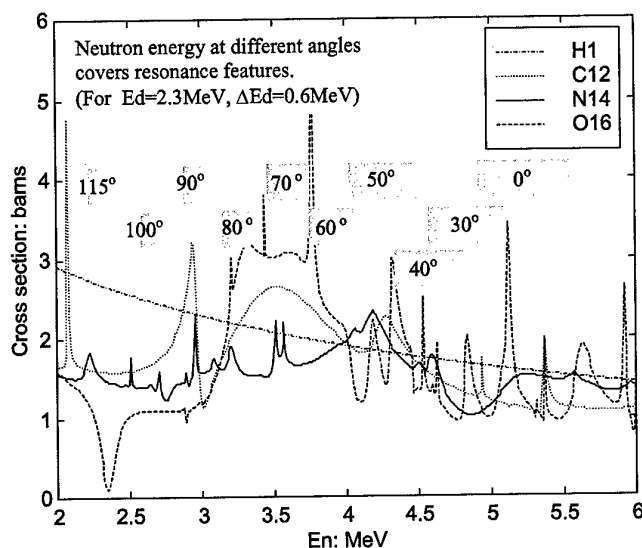


Figure 10. Spectrum of energies scanned. The shaded areas are the range of energies at a particular nominal neutron angle.

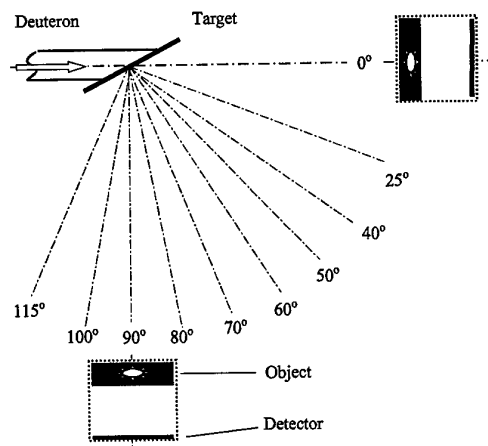


Figure 11. One possible approach to scanning baggage. The baggage is moved in a circular path centered on the deuterium target.

A practical way of implementing this is shown in Figure 11. The luggage is moved along a conveyor belt around the target. Bags are shown on one side, but a second path could also be added on the other side of the target to double throughput.

Typically the neutrons are generated by bombarding a deuteron target with energetic deuterons accelerated by a fixed energy commercially available Radio Frequency Quadrupole (RFQ) accelerator [10]. The major advantage of the RFQ in this application is that it is compact (~ 1 m long) and capable of high current operation ($\sim 140 \mu\text{A}$ average). The fixed energy inherent in the RFQ, is not a disadvantage in this application since we use the angular dependence of the neutron energy to vary energy. The target design depends on the final system parameters especially the beam diameter and current. In previous work we have reported on the design of a windowless gas target capable of operation at 3 to 6 atmospheres and capable of handling a beam diameter of ~ 2 mm. We estimate that systems capable of scanning baggage in the 6 s time scale would require beam currents of $\sim 10 \mu\text{A}$ with a nominal target of 6 atmosphere-cm of D_2 depending on the details of the detector efficiency and nominal pixel size.

4. SIMULATIONS

In order to study the process in more detail, a series of simulations were made using the LLNL simulation code COG. The object modeled in the simulations was devised by James Hall of LLNL and is a simulation of a "Terrorist's Overnight Bag" [11], a small overnight bag filled with various materials. The bag has a thin aluminum shell ($\sim 40 \times 30 \times 10 \text{ cm}^3$) with a wood handle, thick cloth covering and steel fittings. Among the "innocent items" there is a newspaper, a travel umbrella, a bag of sugar (~ 100 g), a paperback book, a pen and pencil set, a small camera, a flat paper notebook and a selection of cotton, wool and nylon clothing items. The less innocent items are a 4" switchblade knife, cocaine-HCl (~ 100 g), a 300 g block of plastic explosive (50/50 wt.% mix of RDX and PETN) and an automatic pistol with extra ammunition clip. The bag is heavily loaded with an average density of $\sim 0.5 \text{ g/cm}^3$. Figure 12 gives the simulated neutron image for neutrons produced at 0° (left) and a 140 keV X-ray image typical of x-ray baggage scanners (right).

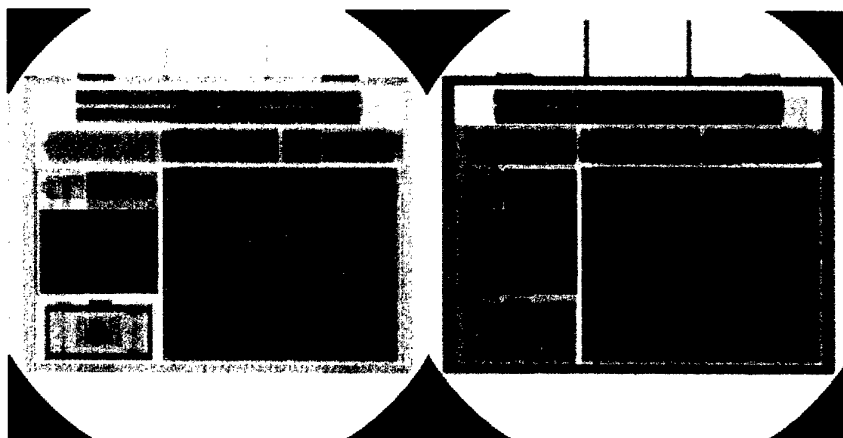


Figure 12. Fast neutron radiograph at 0° (left) and X-ray radiograph (right).

As might be expected neither method tells the book from the plastic explosive, or the sugar bag from the drug bag. We then simulated a spectrum characteristic of the angular dependence of the DD reaction. Ten angular ranges were generated and the data fitted to carbon, hydrogen, oxygen and nitrogen, with remaining materials being considered as "other". From this, both the elemental composition of items as well as their shapes can be determined which makes it possible to distinguish between organic materials of similar density and to separate the materials (Figure 13). Using the data in Figure 3, plastic explosive can be identified by its high nitrogen and oxygen content and low hydrogen and carbon content. The cocaine looks different from sugar in that the drug has about equal amounts of hydrogen and carbon

but very little oxygen. The bright bar overlapping the drug bag in the carbon image is the polystyrene handle of an umbrella. The pistol, knife blade and the battery are visible in the "other" picture. A glass lens in the camera is also very clear in the oxygen picture. Two aluminum buckles can be seen on the top in the hydrogen picture. As we have mentioned, the calculation splits aluminum content into hydrogen and "other" results.

5. CONCLUSIONS

Neutron resonance radiography can fill a specific need in the detection of contraband. Table 1 shows a comparison of some of the properties of NRR as compared to other techniques. Neutron resonance radiography provides a unique method for obtaining both elemental composition of dense objects under inspection as well as high resolution (~ mm) imaging. The spatial resolution is somewhat worse than x-ray systems but, unlike x-ray systems, elemental composition and density are measured. The limits on resolution are established mostly by the size of the beam and the resolution of the detector. The most important aspect of this technique, the determination of elemental composition provides an extremely powerful method for identification of threat materials, which more than compensates for spatial resolution. A cargo inspection system could relax the system spatial resolution requirements as well. As we have mentioned, the beam size is determined by limitations in the power handling of conventional windowed gas targets; the use of windowless targets, while somewhat more complex can be used to obtain mm resolution images. New developments in imaging detectors may enable spatial resolution comparable to x-rays and, in principle, the technique can be expanded to tomographic imaging as well. Another possible implementation method would be to use an NRR system in conjunction with an x-ray CT system, using NRR for clearing false alarms.

A critical problem inherent in this technique is the use of accelerator-based technology. To date, no accelerator-based systems have been deployed in airports whereas thousands of x-ray systems are in use. As a result, there has not been the same level of development in neutron or any other nuclear technique as in the CT systems now in use. Issues of shielding, public perception and the ability to integrate accelerators into the airport environment remain significant when compared to more conventional technologies. Table 1 lists some of the properties of various systems as compared to NRR.

Method	Element Identification	Spatial Resolution	COTS Sources	Trucks/Cargo Inspection
NRR	YES	3- 5 mm	YES	YES
PFNA	YES	5 cm	NO	YES
X-ray	NO	1 cm	YES	YES
Backscatter	Low Z only near surface	1 cm	YES	Near surface only
Tomography	NO	3 mm	YES	NO

Table 1. Some representative properties of existing technologies.

The issue of deployment depends on the ability to effectively shield the system in an environment typical of most airports. Simple shielding methods appear practical for the neutron intensities used in this system and dose rates are within current regulatory limits. The shielding requirements are directly related the efficient use of neutrons through a combination of geometric design and efficient imaging detectors. Improvements in detector efficiency directly reduces the shielding required for a given level of imaging performance. Details of these calculations can be found in [7] and [9].

ACKNOWLEDGEMENTS

This work was supported in part by the Office of National Drug Control Policy under contract number DAAD07-98-C-0117, by the Federal Aviation Administration through Grant 93-G-053 and contract B503612 with Lawrence Livermore National Laboratory. Many people have contributed to this work. Gongyin Chen was instrumental in all aspects of the experimental and theoretical work. Others include James Hall of Lawrence Livermore National Laboratory for his help in simulations and in the physics of fast neutron radiography, Richard Ambrosi and John Watterson of the University of the Witwatersrand and Jacek Guzek and Staffan Tapper of deBeers for many useful discussions and ideas. Dr. Wagih

Makky of the FAA and James Petrousky and Dr. Albert Brandenstein of the Office of National Drug Control Policy encouraged and supported this work.

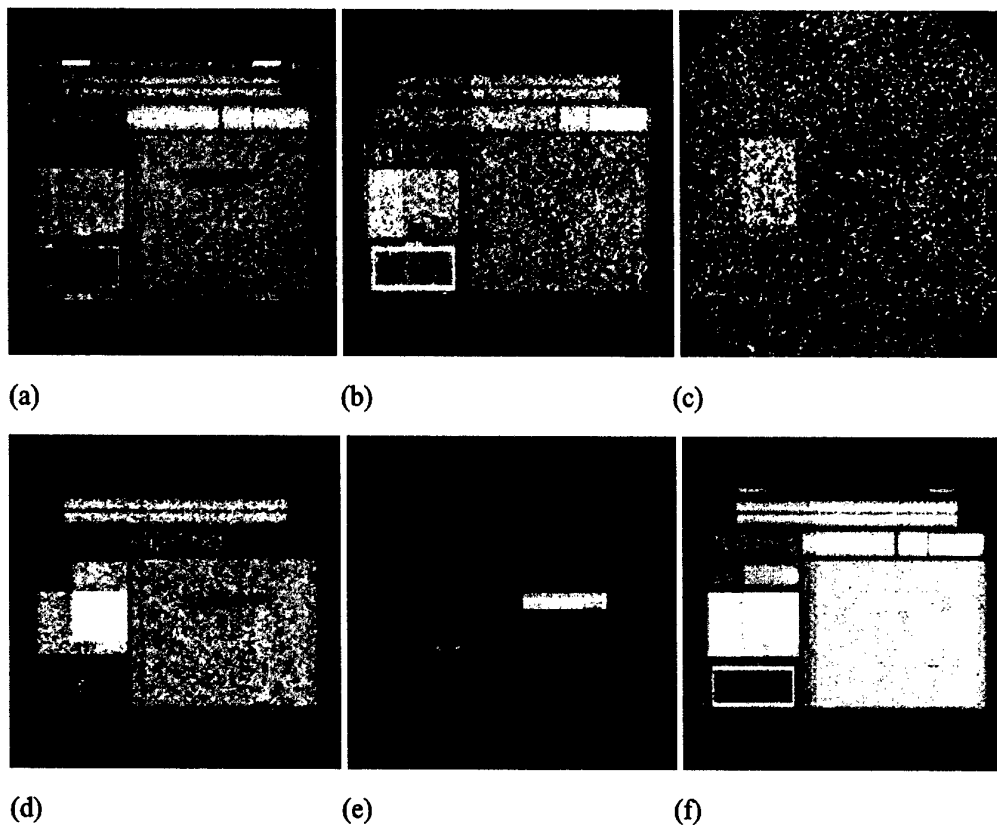


Figure 13. Calculated elemental images for different elements: (a) hydrogen; (b) carbon; (c) nitrogen; (d) oxygen; (e) other; (f) all elements.

REFERENCES

1. For an early review see Proceedings of the First International Symposium on Explosive Detection Technology. Atlantic City, November 1991 as well as the later Proceedings of [2].
2. R.A. Krauss, "Signatures of Explosives by Elemental Composition" in W. Makky, ed., Proceedings of the Second Explosives Detection Technology Symposium, pp. 18 -25, 1996
3. S. Tapper, private communication, 1996
4. R.C. Lanza, S. Shi, and E.W. McFarland, "A cooled CCD based Neutron Imaging System for Low Fluence Neutron Sources", *IEEE Trans. Nucl. Sci.*, v 43, no. 3, pt.2, pp. 1347 - 1351, 1996.
5. J Hall, F Dietrich, C Logan and G Schmid, " Development of High-Energy Neutron Imaging for Use in NDE Applications", UCRL-JC- 134562, 1999

6. J. Guzek, "Elemental Radiography Using Fast Neutron Beams", Doctor of Philosophy Thesis, University of the Witwatersrand, 1999.
7. "The Practicality of Pulsed Fast Neutron Transmission Spectroscopy for Aviation Security", Report NMAB-482-6, National Academy of Sciences Press, Washington 1999
8. G. Chen, "Fast Neutron Resonance Radiography for Elemental Imaging: Theory and Applications", PhD Thesis, Massachusetts Institute of Technology Department of Nuclear Engineering, April 2001.
9. G. Chen and R.C. Lanza "Fast Neutron Resonance Radiography for Elemental Imaging: Theory and Applications", accepted for publication in IEEE Trans. Nucl. Sci.. August 2002
10. AccSys Technologies, Pleasanton, CA
11. J. Hall, "Monte Carlo Modeling of Neutron and Gamma-Ray Imaging Systems", 5th International Conference on Applications of Nuclear Techniques, Crete, 1996.

Portable multi-sensor for detection and identification of explosives substances

Andrey KUTNETSOV, V.G. Klophin Radium Institute, Russia

ABSTRACT

A portable version of a combined sensor for detection of explosive substances is described. The sensor is based on continuous electromagnetic ultra-high frequency waves (microwaves) and timed neutron source. Combination of both methods allows one to quickly localize hidden objects within large area and to identify them. The sensor will be capable of detecting modern explosive substances weighting 100 grams with little or no metal content within several tens of seconds.

I. INTRODUCTION

Research at Radium Institute (ISTC Project #1050) is centered on development of two methods of detection of explosive substances (ES):

- application of electromagnetic UHF waves for localization and preliminary identification of hidden objects by their dielectric properties ("microwave technique");
- irradiation of the localized object with neutrons and subsequent determination of its elemental composition by characteristic γ -rays ("nuclear technique").

The microwave technique is based on irradiation of the inspected area with low-power continuous microwave radiation and measurement of interference of the probing radiation with that scattered from objects located in the area. The on-line analysis yields both position of reflecting surfaces within the irradiated volume and dielectric properties of substances comprising the volume. The method is very fast and allows continuous scanning of large areas. It is capable of localization of suspicious objects within the area and their preliminary identification by their dielectric properties.

The main idea of the nuclear technique is to irradiate of the localized unknown object with neutrons from isotopic sources or portable neutron generator and to simultaneously measuring secondary γ -radiation induced by neutrons in the object and charged particles that accompany neutron emission from the source. The latter allows one to use "marked" neutrons and to carry out detection of secondary γ -radiation in narrow (nanosecond) time intervals, thus considerably

¹ This work is supported by the International Science and Technology Center, ISTC Project #1050.

reducing the identification time. By using position-sensitive detector of accompanying alpha particles one can obtain a 3D elemental image of the inspected volume and identify explosives hidden inside large volumes of metallic, organic or other material.

II. MICROWAVE SENSOR

To determine dielectric properties of hidden substances an automated experimental installation was created. The range of frequencies of the microwave radiation in this installation (5 – 25 GHz) were chosen to satisfy two conditions: high spatial resolution (1,2 – 6 cm) and acceptable penetrating ability of radiation in damp media. Unlike pulsed radars, in our method the inspected area is continuously irradiated by a probing wave with changing frequency.

The main advantages of such systems compared to pulsed radars are:

- It is easy to provide a wide range of frequencies equivalent to pulse length $\Delta t \sim 0.1$ ns, hence spatial resolution $\Delta L \sim c\Delta t \sim 3$ cm.
- Possibility of off-line correction of amplitude and frequency characteristics of the emitter and the receiver.
- Well-defined frequency boundaries of the signal, outside which it has zero energy.
- Less strict requirements to the quality of emitter and receiver, and to their decoupling.

It was experimentally shown that metals and dielectrics, including explosives, can be efficiently localized with continuous ultra-high frequency radiation. This technique allows one to carry out pre-identification of the hidden object. Procedure was developed to identify dielectric objects, including explosives in non-metallic cases. This procedure was applied to cases of high attenuation and dispersion (wet sand). A more detailed description of the technique was given in [1].

The method will be further developed to achieve good results for media with higher humidity. This will be done by introducing a reference channel, increasing the sensitivity of the receiver, optimizing the antennae system, introducing 2-dimensional correlation and statistical analysis, and using a wider range of samples and ES imitators and more precise models.

At present a portable version of the microwave sensor is under construction (see Figure 1).

It will have the following characteristics:

- continuous microwaves in frequency range 2 – 8 GHz;
- number of frequency points per range – not less than 50;
- time of analysis of one scanning cycle – less than 0.1 second;
- the power of radiation – about 10 mW;
- sensitivity – 120 dB/W;

- dynamical sensitivity range – 40 dB with possibility of changing the range depending on the level of the reflected signal;
- spatial resolution: transversal – 4 cm, longitudinal – 3 cm;
- penetrating ability of radiation in medium with humidity 20% by weight – up to 10 cm; with humidity 5% by weight – up to 20 cm;
- time of continuous work without battery recharging – 8 hours.

The sensor can be easily operated by one operator, and is completely safe for people, film, etc.

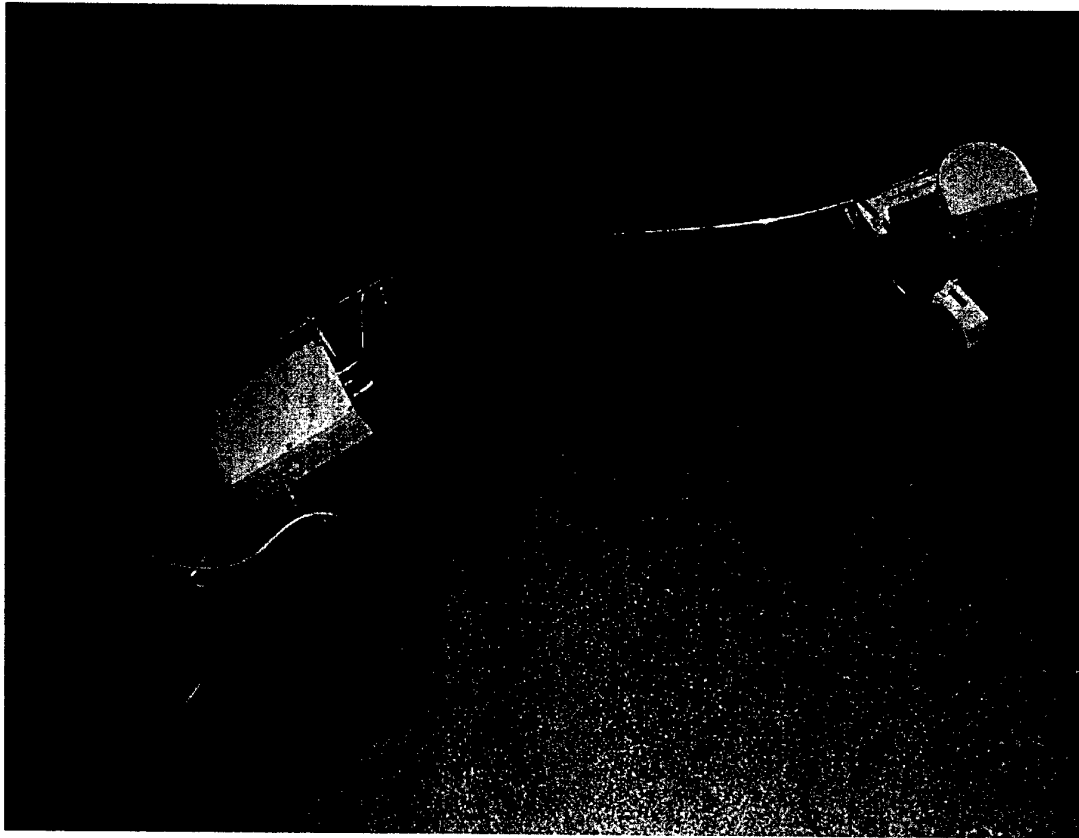


Figure 1. View of the portable microwave sensor, which can quickly localize hidden metallic and dielectric objects.

III. NUCLEAR SENSOR

A. Existing Device Based on Timed Isotopic Neutron Source

The existing prototype of nuclear sensor is based on timed isotopic neutron source (^{252}Cf , 4×10^6 neutrons per second) enclosed in a miniature ionization chamber [2-6]. Gamma rays induced in the inspected object by neutrons from the source are detected by NaI(Tl) detector in coincidence (10ns-wide time window) and anti-coincidence with fission fragments of ^{252}Cf (see photos at Figure 2). The coincidence spectrum contains γ -rays from inelastic scattering of fast neutrons on nuclei of the object, while the anti-coincidence spectrum corresponds to capture of thermal neutrons. In the coincidence mode the background is suppressed by more that an order of magnitude, since only a small fraction of the background γ -rays fit into the 10 ns-wide measurement window.

The measured spectra of secondary γ -radiation allow one to determine relative concentration of the main chemical elements (carbon, oxygen, nitrogen, hydrogen and others) in the inspected object. Explosives and other dangerous substances are characterized by specific ratio of concentrations of chemical elements, that allows identifying them in the presence of other substances and household goods.

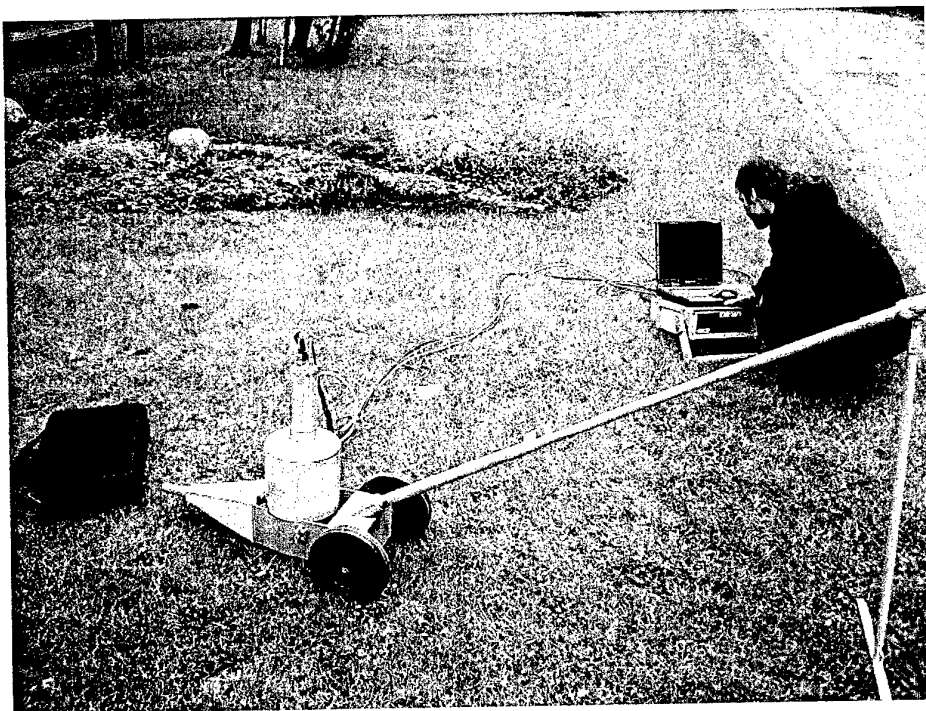


Figure 2. Existing prototype of the mobile device for detection of explosive substances during the field test at Radium Institute.

The prototype is serviced by a specialized block of electronics which contains battery power supplies, fast analogue electronics, ADCs and a programmable processor, which performs data collection, storage and transfer to the external PC for analysis.

The prototype has been tested in laboratory using phantoms of trinitrotoluene (TNT) and samples of common materials: iron, wood, water, etc. Samples were placed into media with different humidity (up to 20% by weight) at depths up to 5 cm.

It has been established that the current prototype can distinguish between TNT and non-explosive substances weighting not less than 400 grams in 5 minutes. At present tests are under way to try detection of various explosive substances hidden in soil, walls, hand luggage. However use of an isotopic neutron source limits application of the existing device.

B. Portable Sensor with Timed Neutron Generator

At present Radium Institute and All-Russia Research Institute of Automatics are working on the portable device, in which a portable neutron generator with built-in system of detection of accompanying particles is used as a source of neutrons [7]. The neutron generator is a small accelerator, which does not create any radiation when it is switched off. The sectioned detector of accompanying α -particles allows one to determine the location of the hidden object within the inspected area. The portable device consists of the neutron generator, γ -detector, detector shielding, block of electronics with battery power supply and is controlled from a pocket computer (see drawing on Figure 3).

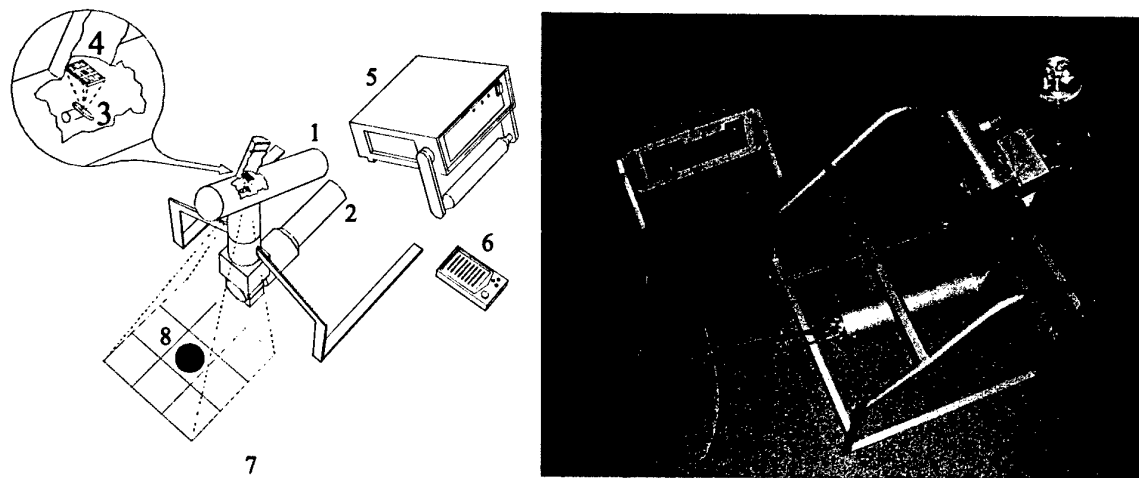


Figure 3. Left: portable device for detection of explosive substances. 1 - neutron generator with built-in sectioned detector of accompanying α -particles, 2 - γ -ray detector, 3 - target, 4 - segmented detector of the accompanying particles, 5 - specialized block of electronics, 6 - pocket computer (control panel), 7 - the inspected area, 8 - hidden object. Right: view of the existing prototype.

Its expected characteristic are:

1. Detection and identification of explosives weighting 100 grams in 10 seconds.
2. Simultaneously surveyed area 30 cm × 30 cm (12 in × 12 in) up to depth 20 cm with position resolution 10 cm × 10 cm × 10 cm.
3. Total weight – not more than 30 kg.
4. Ability to work in the range of temperatures -25° – +50°C, independent power supply (8 hours of continuous work without recharging or replacing of batteries).

REFERENCES

- [1] Averianov V.P., Vishneveski A.S., Vorobiov I.B., Zubkov M.D. and Kuznetsov A.V., "Explosives localization and pre-identification based on UHF electromagnetic waves," presented at the NATO ARW #977941 "Detection of explosives and land mines: methods and field experience", St.-Petersburg, Russia, 11 – 14 September 2001, to be published.
- [2] Kuznetsov A.V., "Development of a spontaneous portable neutron source with a built-in system for registration of accompanying particles for background reduction," in Proc. IAEA/PS/RC-799 of Research Coordination Meeting "Application of Nuclear Techniques to Anti-personnel Landmines Identification", Zagreb, Croatia, 23 – 26 November 1999.
- [3] Kuznetsov A.V., "A spontaneous portable neutron source with a built-in system for registration of accompanying particles for background reduction," presented at the Int. Conf. Explosives and Drug Detection Techniques, Crete, Greece, 18 – 24 June 2000.
- [4] Kuznetsov A.V., "A prototype of mobile device with isotopic timed neutron source," presented at the IAEA First Project Co-ordination Meeting on Regional Technical Co-operation Project RER/1/005 "Field Testing and Use of Pulsed Neutron Generator for Demining", Vienna, 12 – 14 February 2001.
- [5] Kuznetsov A.V., "Nuclear sensor for explosives detection based on timed radioactive source," presented at the Second Australian-American Joint Conference on the Technologies of Mine Countermeasures conference, Sydney, Australia, 27 – 29 March 2001, to be published.
- [6] Kuznetsov A.V., "A prototype of mobile device for explosives and landmines identification based on timed radioactive source," in Proc. the 7th International Conference on Applications of Nuclear Techniques "Nuclear and Atomic Industrial & Analytical Applications", Crete, Greece, 17 – 23 June 2001.
- [7] Kuznetsov A.V., "Concept of a combined mobile device for explosives and landmines identification based on timed neutron source and electromagnetic UHF waves," presented at the NATO ARW #977941 "Detection of explosives and land mines: methods and field experience", St.-Petersburg, Russia, 11 – 14 September 2001, to be published.

Practical aspects of using explosive detection techniques
Israel HIRSCH, Aphelion Ltd., Israel

Aphellon Ltd.

Practical Aspects Of Explosive Detection Techniques

By
Israel Hirsch, Ph.D.

Bled Lake – Slovenia, 2-4 June 2003

P.O.Box 6107, 12 Sokolov St.Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: ihirsch@netvision.net.il

Aphellon Ltd.

Presentation's Road Map

- ☐ Crystal Grating Technology
 - The wave meter
 - Spectrometer based on wave meter
- ☐ Crystal Grating Technique for Explosives Detection.
 - The "FRED" project
 - Other practical applications.
- ☐ Thoughts on Dual/Multi Energy X-Rays Backscatter Imaging.

P.O.Box 6107, 12 Sokolov St.Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: ihirsch@netvision.net.il

Aphellon Ltd.


Wavelength Measurement

- Prism
- Grating - lens
- Etalon/Fabry-Perot
- Michelson (Fourier Spectroscopy)
- Birefringent filter

P.O.Box 6107, 12 Sokolov St.Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: ihirsch@netvision.net.il

Aphellon Ltd.

Grating - lens

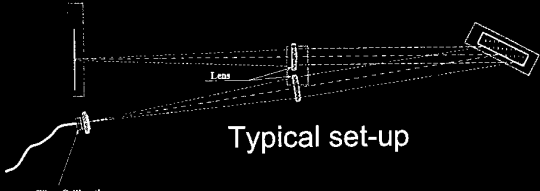

Typical set-up

Fiber Collimation

Step 1: Transformation of the optical wavelength to angular information
 Step 2: Transformation of angular information into optical position
 Step 3: Extraction of wavelength from the space dependant signal

P.O.Box 6107, 12 Sokolov St.Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: ihirsch@netvision.net.il

Aphellon Ltd.

Grating – Lens Equations

- ☐ Space dependant
- ☐ Grating equation

$$\sin \beta = m\lambda/d - \sin \alpha$$
- ☐ Space based detection

$$x = f (\beta - \beta_0)$$

P.O.Box 6107, 12 Sokolov St.Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: ihirsch@netvision.net.il

Aphellon Ltd.

Grating – Lens Fundamentals

☐ Diffraction limit and aberrations	Yes
☐ Detector pixel size limitation	Yes
☐ Use of non collimated light	No
☐ Grating resolution limit	Yes
☐ The read out is limited by the output rate of the sensor divided by the number of pixels	


P.O.Box 6107, 12 Sokolov St.Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: ihirsch@netvision.net.il

Wavelength Measurement

- Prism
- ✓ Grating – lens
- ➔ Grating Crystal – GC polarization modulation
- Etalon Fabry-Perot
- Michelson (Fourier Spectroscopy)
- Birefringent filter


P.O. Box 6107, 12 Sokolov St. Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9518606, Email: info@aphellon.com

Schematic Description

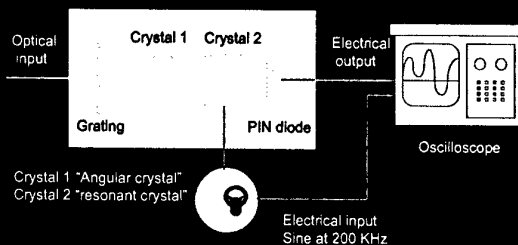

P.O. Box 6107, 12 Sokolov St. Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9518606, Email: info@aphellon.com

GC Optical Scheme

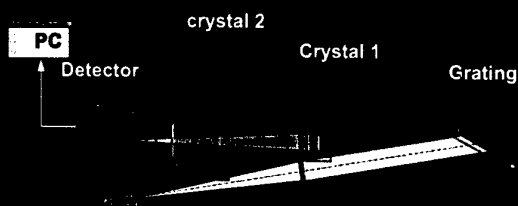

- Step 1: Transformation of the optical wavelength to angular information
 Step 2: Transformation of angular information into optical phase retardance
 Step 3: Transformation of birefringence optical phase into electrical phase information
 Step 4: Extraction of wavelength value from the time dependent signal

P.O. Box 6107, 12 Sokolov St. Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9518606, Email: info@aphellon.com

GC Fundamentals

- ⌋ Time dependant
- ⌋ Grating equation
 $\sin \beta = m\lambda/d - \sin \alpha$
- ⌋ Crystal equation (crystal1- angular crystal)
 $\Delta\varphi = 2\pi \Delta n L/\lambda \cdot [(\beta - \beta_0)/n]^2$ quadratic
 $\Delta\varphi = 4\pi \Delta n L/\lambda \cdot \beta_1 [(\beta - \beta_0)/n]$ linear
- ⌋ Polarization detection equation (crystal2- resonant crystal)
 $I(t) = \cos^2[\Delta\varphi + \varphi(t)]$
 $\varphi(t) = g \cos(\omega t)$ $g = \pi V_0/V_\pi$


P.O. Box 6107, 12 Sokolov St. Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9518606, Email: info@aphellon.com

Governing Equations

$$I(t) = DC + k_1 \cos(\omega t) + k_2 \cos(2\omega t) + k_3 \cos(3\omega t) + \dots$$


$$I(t) = 2I_0 J_1(g) \sin(\Delta\varphi) \cos(\omega t) + 2I_0 J_2(g) \cos(\Delta\varphi) \cos(2\omega t) + 2I_0 J_3(g) \sin(\Delta\varphi) \cos(3\omega t) + \dots$$

When, $\Delta\varphi = \arctan(k_1/c, k_2)$
 $c = J_1(g) / J_2$









P.O. Box 6107, 12 Sokolov St. Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9518606, Email: info@aphellon.com


Signal Description at a Single Wavelength

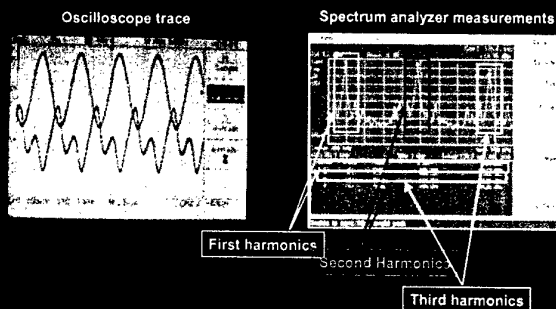

P.O. Box 6107, 12 Sokolov St. Herzliya, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9518606, Email: info@aphellon.com

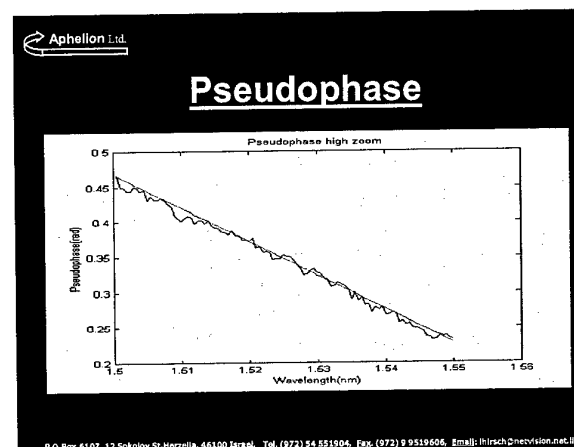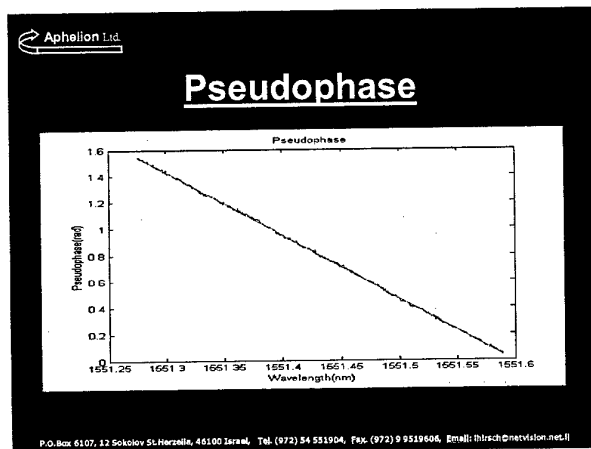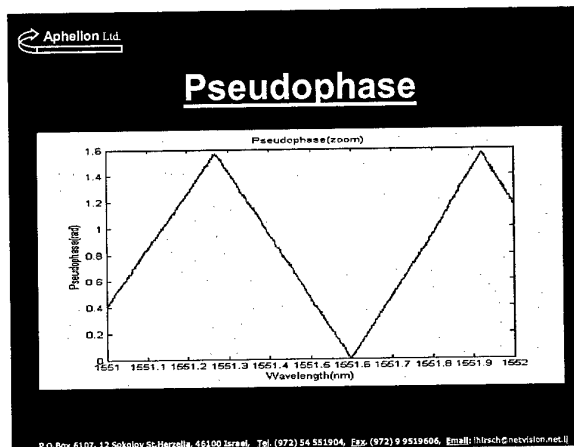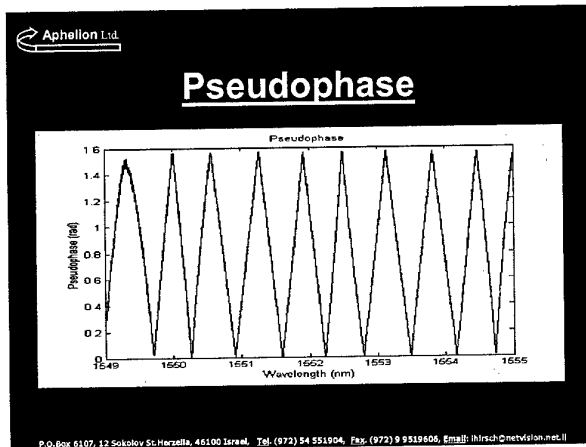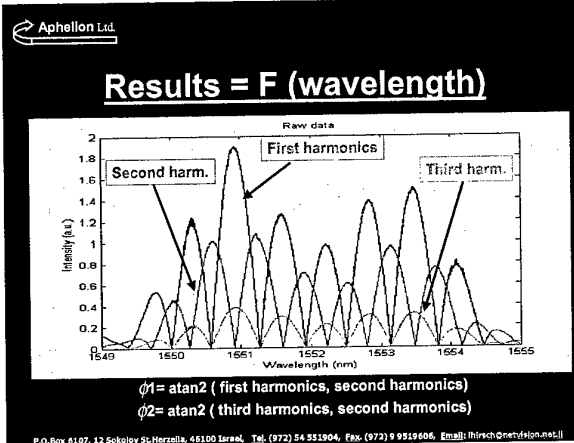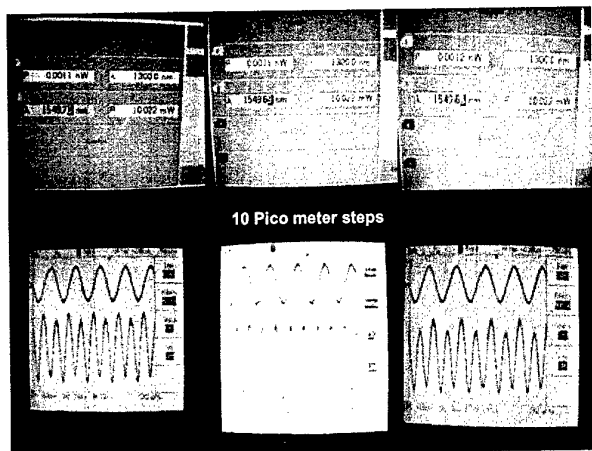


Pseudophase Difference

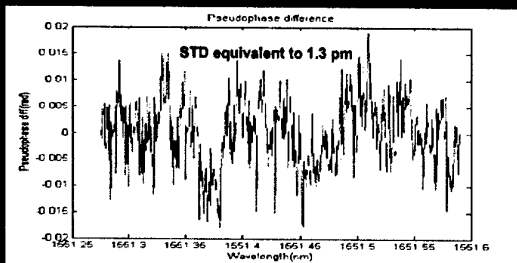

P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: info@aphelion.com


GC Fundamentals

- Diffraction limit and aberrations - No
- Detector pixel limit - No

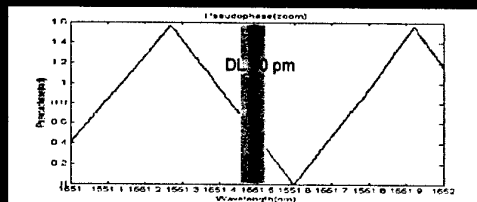


P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: info@aphelion.com

GC Fundamentals

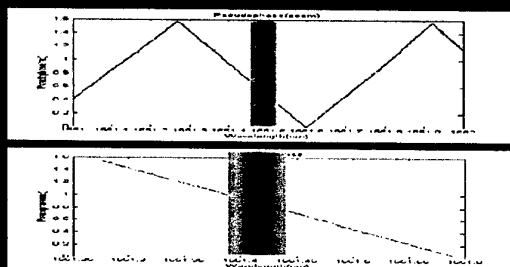


P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: info@aphelion.com

GC Components Layout

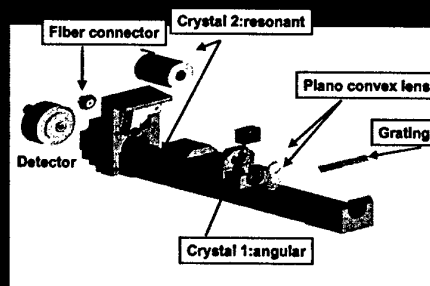


P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: info@aphelion.com


GC Optical Layout

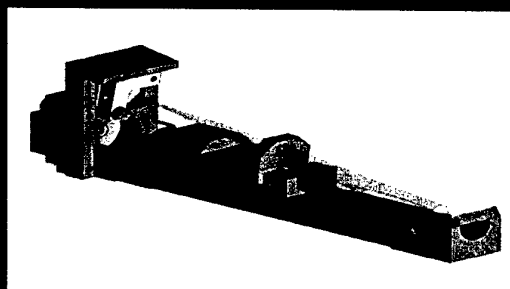


P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: info@aphelion.com

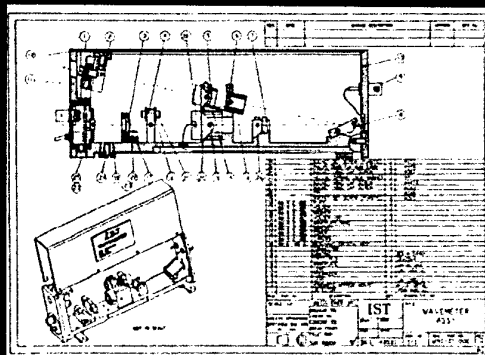

P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: info@aphelion.com

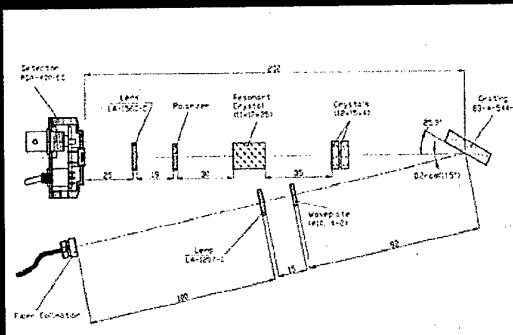

P.O.Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: thirsch@netvision.net.il

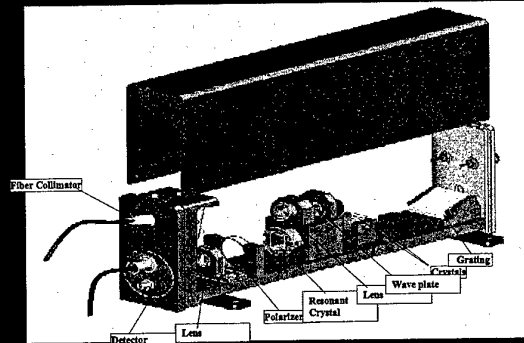

P.O.Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: thirsch@netvision.net.il

Grating - Crystal fundamentals

- Diffraction limit and aberrations No
- Detector pixel limit - No
- Parallel light - No
- Grating resolution limit - No
- Time response limited by the Signal to Noise ratio and PIN diode electrical bandwidth.

P.O.Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: thirsch@netvision.net.il

GC's - Technological Capacity

- Capability of measuring wavelength of light sources with high accuracy and high speed.
- Capability of resolving two adjacent wave-length with order of magnitude differences intensities.
- Capability of measuring low level light intensity.
- Capability of measuring and analyzing continuous spectra

P.O.Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: thirsch@netvision.net.il

GC's - Advantages

- ✓ High precision, pm to sub pm resolution
- ✓ Multiple spectral line using single detector.
- ✓ Response time in the usec. range: transient effect record
- ✓ Highly sensitive, High optical efficiency
- ✓ Measurements precision is independent of input beam collimation.
- ✓ No need for warm up time.
- ✓ Low cost and size

P.O.Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: thirsch@netvision.net.il

GC's Precision Limitations

- Error in measuring phase between two electrical signals.
- Engineering limitation in the accuracy of crystal dimensions.

P.O.Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: thirsch@netvision.net.il

GC's physical features

- Micro system available from UV to FIR.
- Off the shelves components.
- Low cost Bill Of Material (BOM).
- Loose mechanical tolerances.
- Small volume.
- Hand held.
- No moving parts.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: info@aphellon.com

Presentation's Road Map

- Crystal Grating Technology
 - ✓ The wave meter
 - Spectrometer based on the wave meter
- Crystal Grating Technique for Explosives Detection.
 - The "FRED" project
 - Other practical applications.
- Thoughts on Dual/Multi Energy X-Rays Backscatter Imaging.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: info@aphellon.com

Prof. Dan Neuhauser originated the idea of Filter Diagonalization Method (FDM)

High resolution method for spectral analysis of
multidimensional time signal

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: info@aphellon.com

Advantages of FDM

- Small Linear algebra problem: diagonalizing some data matrices, with dimension $\ll$ # of signal terms. For example, if there are 1000 different sin-terms contributing to the signal, still a 2×2 matrix can be used in each spectral range.
- Fast ($\sim$ FFT), efficient, stable, handles overlap.
- No assumptions about the number of peaks. (No need to even know how many peaks are there!)
- Local spectral analysis (each spectral range handled separately).

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: info@aphellon.com

Advantages of FDM (cont.)

- Direct fit of multidimensional signal.
- Extends FFT.
- Bridges FFT and other approaches.
- Bypasses $(\Delta\omega) T_{\max} \geq 1$

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: info@aphellon.com

Application of FDM to Crystal Grating

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, Email: info@aphellon.com

Crystal Grating Essence

- Wavelength $\rightarrow$ Grating Angle $\rightarrow$ Final polarization

$$I(t) = \cos^2[\Delta\phi + g \cos(\omega t)]$$

$$\text{where: } \Delta\phi = 4\pi \Delta n L / \lambda \quad \beta_1 [(\beta - \beta_0)/n]$$

$$M(\text{out}) = I(\text{in}) * (1 + \cos(x, \lambda))$$

M: output measurement

λ : Wavelength

x: parameter; depends on: Crystal length, Grating Angle

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: hirsch@netvision.net.il

Continuous spectrum: General Spectra

$$M(x) = \int I(\lambda) \cos(x\lambda) d\lambda$$

$I(\lambda)$: relative intensity

Key to extract $I(\lambda)$: Vary the parameter x

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: hirsch@netvision.net.il

Spectrum extraction:

$$I(x) \sim \int M(\lambda) \cos(x\lambda) dx$$

Vary x continuously; one or combination of:

- i) Wedge (varying crystal length).
- ii) (Alternate: Change angle)
- iii) Voltage on resonant crystal

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: hirsch@netvision.net.il

Wedge:



$$I(\lambda) \sim \int M(x) \cos(x\lambda) dx$$


P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: hirsch@netvision.net.il

Example: Two neighboring lines.

$$M(x) = \int I(\lambda) \cos(x\lambda) d\lambda$$



Need to invert relation.

Desired spectrum:




P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: hirsch@netvision.net.il

First effort- Long crystal

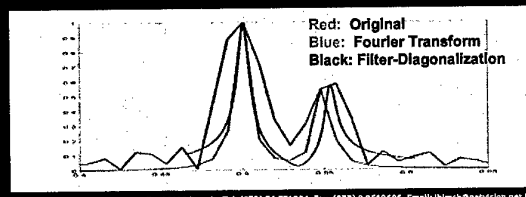


P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: hirsch@netvision.net.il

shorter crystal- more difficult



Measured signal with noise sigma=0.01

FOURIER FAILS

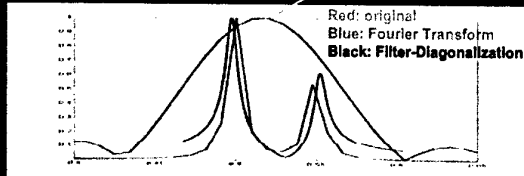


Red: original
Blue: Fourier Transform
Black: Filter-Diagonalization


P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel. Tel: (972) 54 551904. Fax: (972) 9 9519606. Email: info@aphellon.com

FDM WORKS ALSO WITH NOISY SIGNAL

(Sigma -0.1!)
short crystal



Noisy short time signal...



... But FDM extracts spectrum easily!

P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel. Tel: (972) 54 551904. Fax: (972) 9 9519606. Email: info@aphellon.com

Conclusions

Filter-Diagonalization:

- Handles large signals
- Applicable when long-times expensive/difficult
- General extension of Fourier-Transforms

P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel. Tel: (972) 54 551904. Fax: (972) 9 9519606. Email: info@aphellon.com

Presentation's Road Map

- ✓ Crystal Grating Technology
 - ✓ The wave meter
 - ✓ Spectrometer based on wave meter
- Crystal Grating Technique for Explosives Detection.
 - The "FRED" project
 - Other practical applications.
- Thoughts on Dual/Multi Energy X-Rays Backscatter Imaging.


P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel. Tel: (972) 54 551904. Fax: (972) 9 9519606. Email: info@aphellon.com

The Full-Range Explosives Detector Project

P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel. Tel: (972) 54 551904. Fax: (972) 9 9519606. Email: info@aphellon.com

ETK^{five} Explosives Testing Kit

A Portable micro-laboratory for rapid detection of explosives

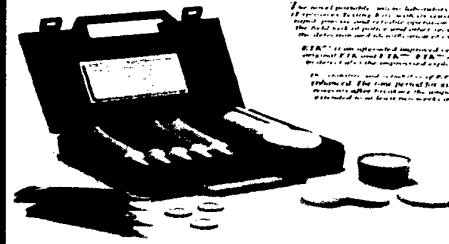

The most portable, sensitive laboratory ETK^{five} is a portable micro-laboratory for rapid detection of explosives. It is a portable micro-laboratory for rapid detection of explosives. It is a portable micro-laboratory for rapid detection of explosives.

P.O. Box 6107, 12 Sokolov St, Herzlia, 46100 Israel. Tel: (972) 54 551904. Fax: (972) 9 9519606. Email: info@aphellon.com

Aphellon Ltd.

1. Safety
The ETK is extremely safe for both operator and subject, as there is no direct contact with the explosive.

2. Employment
The ETK is extremely safe and has no effect on the explosive or on sampling procedures.

3. Range of Identification
The ETK is capable of identifying the full range of both known types of explosives and compounds, explosives and also of identifying explosives based on organic acids, alkyl and aromatic, etc.

4. Test Sensitivity
Group A: 100% (100% of the full range of explosives)
Group B: 100% (100% of the full range of explosives)
Group C: 100% (100% of the full range of explosives)
Group D: 100% (100% of the full range of explosives)

5. Specific Capabilities
No False Alarms
There are no false alarms with the ETK as it is based on a highly sensitive and specific method of detection.

6. Rapid Results
The ETK takes a few seconds from the time of sampling until the results are obtained, making it a very fast and efficient method of detection.

7. Unsurpassed Results
The ETK is capable of detecting explosives which are undetectable by other methods of detection.

Field Test Results
Group A: 100% (100% of the full range of explosives)
Group B: 100% (100% of the full range of explosives)
Group C: 100% (100% of the full range of explosives)
Group D: 100% (100% of the full range of explosives)

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: thirsch@netvision.net.il

Aphellon Ltd.

Block Diagram & Description

ETK's Technology
+
GC Spectrometer
+
Sampling Module

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: thirsch@netvision.net.il

Aphellon Ltd.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: thirsch@netvision.net.il

Aphellon Ltd.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: thirsch@netvision.net.il

Aphellon Ltd.

Operational Capabilities & Advantages

- Using of proved & reliable method for explosives detection.
- Identification of full range of explosives.
- Automatic process (sampling, detection & identification).
- Potential of being combined with/into other technologies.
- No need warm-up time, calibration or training.
- Small, light hand held instrument.
- Could be implemented also as a stand alone portal.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: thirsch@netvision.net.il

Aphellon Ltd.

Presentation's Road Map

- ✓ Crystal Grating Technology
 - ✓ The wave meter
 - ✓ Spectrometer based on wave meter
- ✓ Crystal Grating Technique for Explosives Detection.
 - ✓ The "FRED" project
 - Other practical applications.
- Thoughts on Dual/Multi Energy X-Rays Backscatter Imaging.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: thirsch@netvision.net.il

Other Practical Applications


P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, E-mail: info@aphellon.com

CG's Possible Applications

- └ Security Technologies
 - Explosives detection by using reagents reactions
 - Remote sensing of explosives using Raman Spectroscopy a/o scattering.
- └ Communication
 - Laser wavelength monitoring.
 - Stabilizing laser wavelength.
- └ Industrial and laboratories
 - Materials
 - Biology
 - Chemistry

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, E-mail: info@aphellon.com

Three main possible implementations in spectroscopy

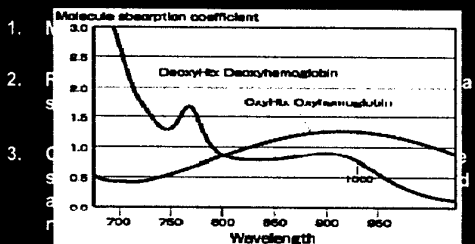

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, E-mail: info@aphellon.com

Presentation's Road Map

- ✓ Crystal Grating Technology
 - ✓ The wave meter
 - ✓ Spectrometer based on wave meter
- ✓ Crystal Grating Technique for Explosives Detection.
 - ✓ The "FRED" project
 - ✓ Other practical applications.
- Thoughts on Dual/Multi Energy X-Rays Backscatter Imaging.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, E-mail: info@aphellon.com

Thoughts on Dual/Multi-Energy X-rays Backscatter imaging for Detection of Buried Land Mines

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, E-mail: info@aphellon.com

X-Ray Backscatter Imaging

By

Bruce C. Towe and Alan M. Jacobs

As Published on
IEEE Transaction on Biomedical Engineering,
Vol. BME-28, No. 9, September 1981

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel, Tel. (972) 54 551904, Fax. (972) 9 9519606, E-mail: info@aphellon.com

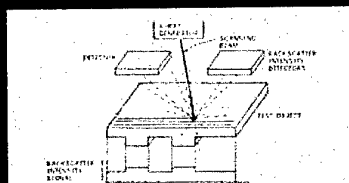


Fig. 1. Concept of backscatter radiography. This diagram shows the changes in scatter intensity detected at a narrow X-ray beam in steps over an object of changing thickness.

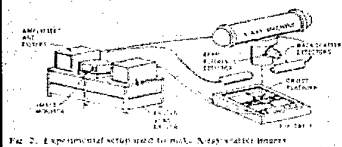


Fig. 2. Experimental setup used for backscatter radiography.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: ihirsch@netvision.net.il

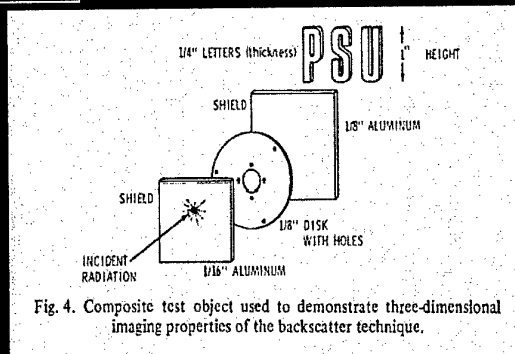


Fig. 4. Composite test object used to demonstrate three-dimensional imaging properties of the backscatter technique.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: ihirsch@netvision.net.il

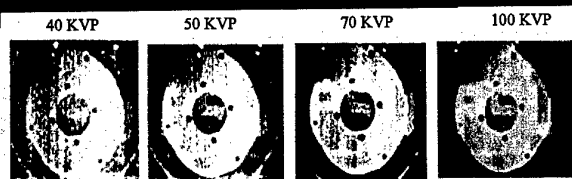


Fig. 3. Backscatter radiographs of the composite test object shown in Fig. 4 made at (a) 40 KVP, (b) 50 KVP, (c) 70 KVP, and (d) 100 KVP beam energy. These radiographs show how near surface features can appear progressively more transparent at higher X-ray energies.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: ihirsch@netvision.net.il

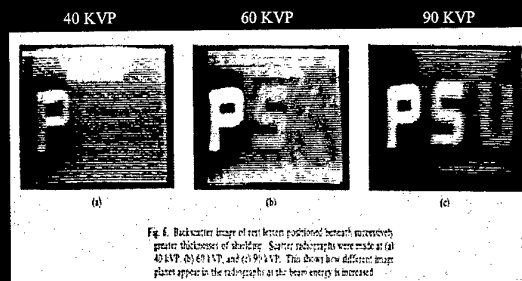


Fig. 6. Backscatter image of test object positioned beneath successively greater thicknesses of shielding. Backscatter radiographs were made at (a) 40 KVP, (b) 60 KVP, and (c) 90 KVP. This shows how different image planes appear in the radiographs as the beam energy is increased.

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: ihirsch@netvision.net.il

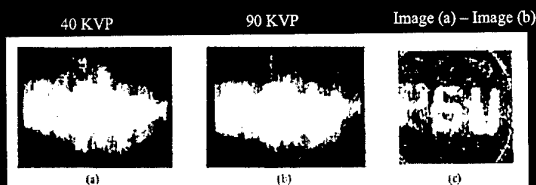


Fig. 9. Demonstration of X-ray backscatter tomography by subtraction of two images made at different energies. (a) is a backscatter image of the test object made at 40 KVP, (b) an image made at 90 KVP, and (c) shows the tomographic image plane containing the PSU letters generated by subtracting (a) and (b).

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: ihirsch@netvision.net.il

Detection of Buried Land Mines by Compton Backscatter Imaging

By

J.G. Campbell and Alan M. Jacobs

As Published on
Nuclear Science and Engineering,
Vol. 110, pp. 417-424, 1992

P.O. Box 6107, 12 Sokolov St. Herzlia, 46100 Israel. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: ihirsch@netvision.net.il

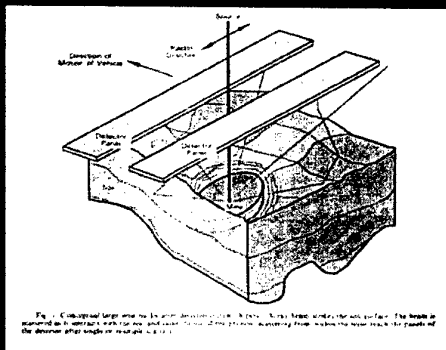


Fig. 3. Conceptual diagram of the backscatter detector. A 160-kVp X-ray beam is incident on a soil surface. The beam is scattered back to a detector. The detector is a NaI(Tl) crystal. The detector is mounted on a mobile platform. The detector is positioned at a distance of 10 cm from the soil surface. The detector is positioned at a distance of 10 cm from the soil surface.

P.O. Box 6107, 12 Sokolov St, Herat, 46100, Iran. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: aphellon@herat.net

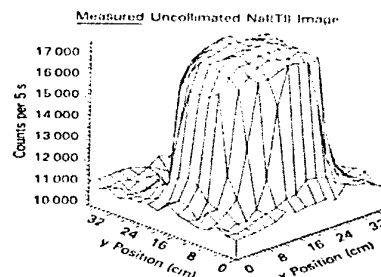


Fig. 4. Three-dimensional image of the measured uncollimated NaI(Tl) pulse mode detector response to a 100-kVp source beam filtered by 0.24 mm of lead for a 30-cm-diam mine buried flush with the soil surface. The response is sampled at a 2.54-cm increment.

P.O. Box 6107, 12 Sokolov St, Herat, 46100, Iran. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: aphellon@herat.net

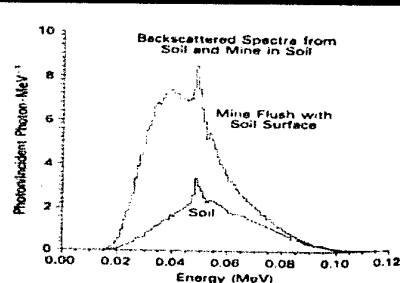


Fig. 5. Calculated photon spectra produced by backscatter of a 160-kVp X-ray beam (spectrum shown in Fig. 2) perpendicularly incident on soil and on soil containing a 30-cm-diam mine buried flush with the soil surface. One million photon histories are followed for each spectrum.

P.O. Box 6107, 12 Sokolov St, Herat, 46100, Iran. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: aphellon@herat.net

Review of one side approaches to radiographic imaging for detection of explosives and narcotics

By

Esam M.A. Hussein and Edward J. Waller

As Published on
Radiation Measurements,
Vol. 29, No. 6, pp. 581-591, 1998

P.O. Box 6107, 12 Sokolov St, Herat, 46100, Iran. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: aphellon@herat.net

CONCLUSIONS

The main conclusions that can be drawn from the above review of approaches to one-side imaging for explosive and contraband detection are:

- One-side imaging is possible with neutrons by a variety of interactions, however the pulsed fast neutron activation analysis technique is the most developed technique, and has good elemental discrimination ability. A fast intense neutron source can be used with the neutron-resonance scattering method, introducing advantages in shielding and mobility.
- Very high spatial resolution should not be expected with one-side imaging in general and with neutron techniques in particular.
- The photon Compton scatter imaging technique is suited for one-side imaging, but in its current form provides only density images. Further development is needed if atomic number information is to be obtained.
- Photon scattering provides better image spatial resolution than neutrons, due to the relative ease of collimating photons.
- In a mobile imaging device, the use of a system that is not very sensitive to positioning information becomes essential. Systems using time-of-flight measurements should therefore be avoided.

To summarize, if there is emphasis on obtaining good elemental-composition information, neutrons should be used. On the other hand, if one desires a good image, photon scatter imaging should be employed. The first approach is more costly and technically demanding than the latter.

P.O. Box 6107, 12 Sokolov St, Herat, 46100, Iran. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: aphellon@herat.net

Landmines Detection: The Problem and the Challenge

By

Esam M.A. Hussein and Edward J. Waller

As Published on
Applied Radiation and Isotopes,
Vol. 53, pp. 557-563, 2000

P.O. Box 6107, 12 Sokolov St, Herat, 46100, Iran. Tel: (972) 54 551904, Fax: (972) 9 9519606, Email: aphellon@herat.net

5.1 Photons

For photons (i.e. gamma rays) to be utilized in intrusive detectors, they must be used in the secondary or secondary nuclear reactions. Photons can be emitted as a result of nuclear activation, which is discussed in the following section. However, absorption of incident photons can lead to the generation of characteristic x-rays (photons) due to the replacement of electrons in the shells of the affected atom. These x-rays are usually considered within the context of gamma-ray detection as also being a secondary emission generated by the target element as a result of electron interactions. This process is mainly important in materials with high atomic number (a few of which are abundant in soil, and some of which are present in explosive materials). The first possible photon reaction that leads to secondary emission is the pair production process, in which the electron and positron pair is produced within a shell of a heavy nucleus (Z > 1.02 MeV). This reaction is only observed in high photon energies (greater than about 1.02 MeV) and for high atomic number materials. Disadvantages of this latter reaction are that it requires the presence of heavy elements which are not abundant in soil and in explosives, and high energy photons are required from expensive accelerators that are not easily mountable in field conditions and require special shielding and care to operate. In summary, no significant emissions can be expected from photon interactions with matter, and even when such emissions occur they are the result of interactions with high atomic number elements which are not found in explosive materials.

The second approach to employing photons in the intrusive detection process, involving photon transmission or photon scattering (Photo-spectroscopy) can occur either indirectly or directly with the detector. In the former, coherent (Rayleigh) scattering is a small angle scattering (i.e. forward) process and would therefore be transparent to the detector. Incoherent (Compton) scattering is a small angle scattering (i.e. forward) process and would therefore be transparent to the detector. Incoherent (Compton) scattering is a small angle scattering (i.e. forward) process and would therefore be transparent to the detector. Incoherent (Compton) scattering is a small angle scattering (i.e. forward) process and would therefore be transparent to the detector.

All the scattered photons travel back towards the detector they are removed by further scattering or absorption, with the photo-absorption probability being strongly dependent on the atomic number. This approach can provide atomic number (or more precisely effective atomic number) information that can be used for further characterizing a material as being an explosive material. The unique elemental composition of explosives gives them a unique range of effective atomic number. A combination of density and atomic number can be used to characterize the material of interest. This is similar to the approach used in conventional gamma-ray detection systems. The technique is used in some airport inspection and into some oil well logging systems (Hess 1984) and has been proposed for luggage inspection (Hess, 1984). Localization of the detector and into some oil well logging systems (Hess 1984) and has been proposed for luggage inspection (Hess, 1984). Localization of the detector and into some oil well logging systems (Hess 1984) and has been proposed for luggage inspection (Hess, 1984). Localization of the detector and into some oil well logging systems (Hess 1984) and has been proposed for luggage inspection (Hess, 1984).

While the above developments are being pursued, there are other approaches to the problem of detecting explosives. One approach is to use a dual energy photon source, where one energy is higher than the photoelectric effect is not dominant, while the other energy is lower than the photoelectric effect is not dominant. This may be sufficient for intrusive detection if used in examining an already identified anomaly (i.e. a suspicious object).

For more information on these possibilities, advantages and limitations of photon technology, the reader can consult the review paper by Hirsch and

"A dual energy photon source may be employed, where one energy is higher so that photoelectric effect is not dominant, while the other energy is lower to allow for some photo-absorption while permitting the photons to Compton scatter back into the detector."

Thank You

**An emerging analytical technology for military and homeland defense
applications
Russel HARMON, U.S. Army Research Office, USA**

LIBS: An Emerging Analytical Technology for Military and Homeland Defense Applications

Russell Harmon¹, Andrzej Miziolek², Frank DeLucia²,
Kevin McNesby², and Barrie Homan²

¹US Army Research Office
²US Army Research Laboratory

Army Research Office, Basic Research - Exploring the Imaginable

Outline

- Laser-Induced Breakdown Spectroscopy (LIBS)
- Military Applications of LIBS
- The Landmine Detection Problem
- LIBS Analysis of Explosives
- LIBS Analysis of Landmines
- LIBS Analysis of Chemical Warfare Agents
- The ARL Explosives/Landmine Detection Concept
- Summary

What is LIBS ?

- Laser Induced Breakdown Spectroscopy (LIBS) is basically a simple spark spectrochemical technique utilizing a laser source which has broad capability for both chemical and biological analysis
- In order to do LIBS one needs:
 - Short pulse (20 nsec or faster) laser with a minimum energy of 10 millijoules per pulse
 - Optics for laser light delivery/focusing
 - Optics for capturing the light emitted from the spark
 - A detector or spectrometer to separate the light signal produced by different chemical species (e.g. elements, ions, and molecular species) for identification and quantification
- Additional information at: <http://www.arl.army.mil/wmrd/LIBS>

Laser Induced Breakdown Spectroscopy


LIBS Fundamentals

- Plasma Formation
 - Multiphoton absorption leads to elemental ionization
 - Absorption of laser radiation by free electrons
 - Electron collisions leads to ionization, heating, and breakdown
 - Typical gas temperatures, ca. 20,000°K
- Spectrochemical analysis is based on collection of light emission (200 - 980 nm) from atomic, ionic, and molecular constituents, usually after the plasma continuum radiation decays (~ 1 µsec after laser pulse)
- All elements emit in the 200-980 nm region
- Analyte identification and abundance determination is based on measured wavelength (elemental emission lines) and intensity of captured light



Laser Induced Breakdown Spectroscopy

Components of a LIBS System

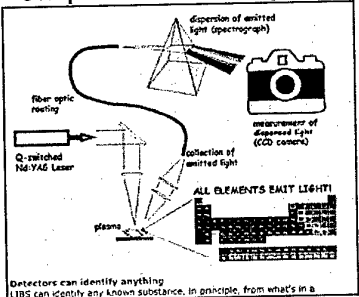


Recent LIBS Breakthrough

In March 2002 there was a breakthrough in LIBS component technology with the launching of the


LIBS 2000+ Broadband Spectrometer

by Ocean Optics, Inc. This commercial product was the result of a collaborative effort between ARL and OOI. This new spectrometer allows for real-time detection of all elements in any unknown target.

- 7 high resolution spectrometers
- Spectral range 200-980 nm, so all of plasma light is captured
- Expands the utility of LIBS to molecular detection
- Spectral resolution of 0.1 nm
- Full information content obtained at high resolution resolution, i.e. Full Spectrum Analysis
- Rugged and robust design
- Potential for field use (needs to be made lighter and smaller)



Current ARL Laboratory LIBS Experimental Setup Using the OOI LIBS 2000+ Broadband Spectrometer

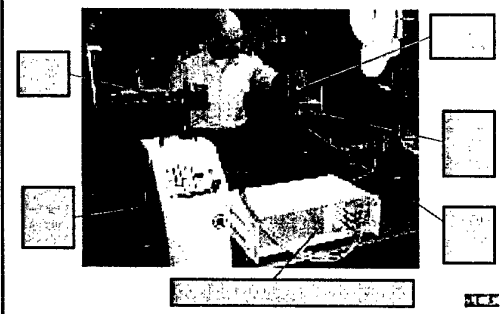

Potential Military Applications for FP LIBS

- Robotic sensor battlefield applications (e.g. standoff and point detection of chemical-biological warfare agents)
- Detection of hazardous vapors (e.g. halon replacements)
- Detection of Resource Conservation and Recovery Act (RCRA) toxic metals in soils and waters
- Detection and depth profiling of Pb in paint
- Detection of depleted uranium (DU) in aerosols/particulates
- Rapid field detection of unknown, possibly hazardous material
- Field detection of contaminated debris from test ranges and military building demolition
- Field detection of excessive engine wear and approach to material/alloy failure
- Exposure testing of new materials in extreme climates
- Detection of energetic explosive materials
- Detection of landmines/unexploded ordnance (UXOs) through identification of nature of buried solid objects (e.g. rock, glass, steel, plastic, etc.) and explosives particles
- Detection of chemical warfare agents

The Landmine Detection Problem

Mines of different kinds, sizes, shapes, & materials

→ Broad Threat

- Over 2,500 types of AP & AT mines in use around the world
- Booby traps & UXO add to complexity
- Plastic cases & new fuse technologies

Variety of soils and environments

Man-made objects similar to mines

Landmines consist of a casing and an explosive charge

Ideal detection would detect both components

Casing	Explosive
metal	TNT
plastic	RDX
wood	

Landmine Detection

A Difficult Problem

- A broad threat: i.e. a wide range of metal, low-metal, and non-metal anti-personnel and anti-tank mines
- There is no single technology or approach that will apply to all field situations

Sensor Issues:


- Variability in mine character (AP to AT mines & high-metal to non-metal character)
- High degree of natural and anthropogenic clutter resulting in high false alarm rates
- Variable, heterogeneous, and dynamic character of the soil environment
- Operator use, dwell time, & signal cognition
- EMI: metallic clutter
- GPR: ground bounce
- NQR: RFI susceptibility & very high power need
- Fusion of data information from different sensors
- Low vapor pressures of explosives for sniffing
- Vapor anomalies not over landmine

Is there a role for LIBS in Landmine detection? **NTT**


LIBS Analyses of Explosives

Some Common Explosive and Energetic Materials


- Black Powder
- Ammonium Nitrate
- TNT: $C_7H_5N_3O_6$
- RDX: $C_3H_5N_3O_6$
- HMX: $C_4H_8N_8O_8$
- Comp A: 81% RDX, 8% candlelite wax
- Comp A-5: 88.5% RDX, 1.8% stearic acid
- Comp B: 80% RDX, 39% TNT, 1% wax
- Comp CA: 81% RDX, 39% TNT, 1% wax
- Comp C: 81% RDX, 39% TNT, 1% wax
- JA-2: 80% nitrocellulose, 15.8% nitroglycerine, 25.2% plasticizer [diethylene glycol dinitrate], 8.74% Akadite II [N-methyl-N'-diphenyl urea] burning rate moderator and stabilizer, 0.03% magnesium oxide, 0.7% graphite
- M-43 - 17 part: 78% RDX, 4% nitrocellulose, 12% cellulose acetate/butyrate, 8% plasticizer, <1% additives
- XM59: 78% RDX, 4% nitrocellulose, 4% acetyl triethyl citrate, 12% cellulose butyrate, 0.4% ethyl centralite [N,N'-diethyl carbentide] propellant stabilizer
- PBX 9502: 98% TATB (triaminotrinitrobenzene), 8% Kel-F 800




LIBS Analyses of Explosives

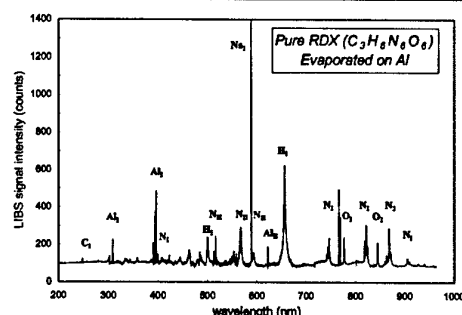


LIBS Analysis of Explosives

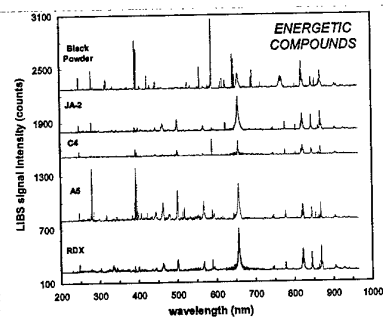


LIBS Analyses of Explosives

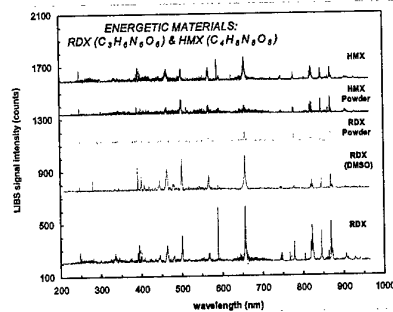


LIBS Analyses of Explosives

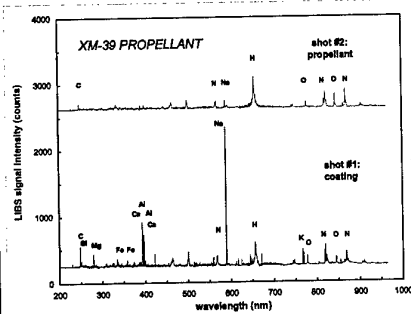

LIBS Analysis for Landmines

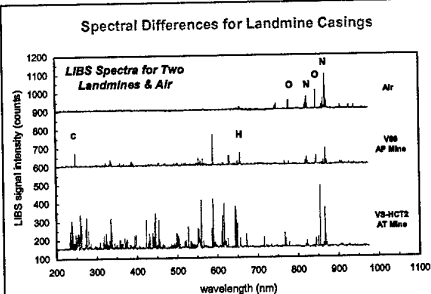


LIBS Analysis for Landmines

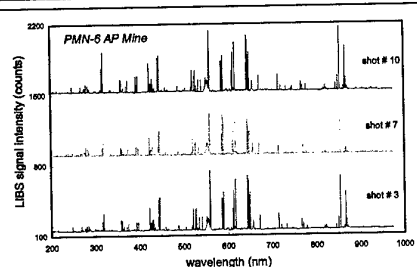


Full LIBS Spectra Are Very Reproducible


LIBS Analysis for Landmines

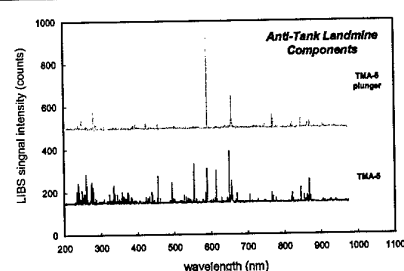

LIBS Analysis for Landmines

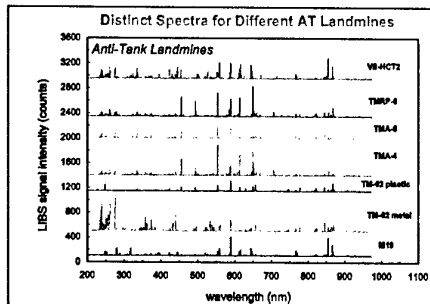

LIBS Analysis for Landmines

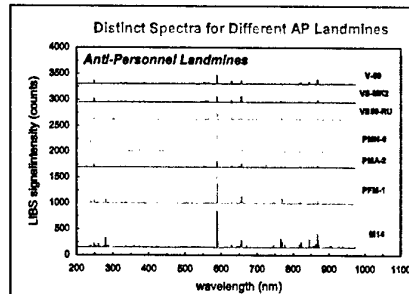

LIBS Analysis for Chemical Warfare Agents

Chemical Agent	Constituent Elements
GB (Barin)	P, F, O, C, H
VX	P, S, N, O, C, H
HD (Mustard)	S, Cl, C, H

Target Elements
(besides H, C, N, and O)

Element Emission λ

- Sulfur Containing Compounds
 - VX
 - Mustard Gas
- Phosphorus Containing Compounds
 - VX, GA, GB, GA
- Chlorine Containing Compounds
 - Mustard Gas
- Fluorine Containing Compounds
 - GB, GD


(λ : 921 nm)

(λ : 213, 253 nm)

(λ : 800-920 nm)

(λ : 670-720 nm)


LIBS Spectra for Chemical Agent Simulants

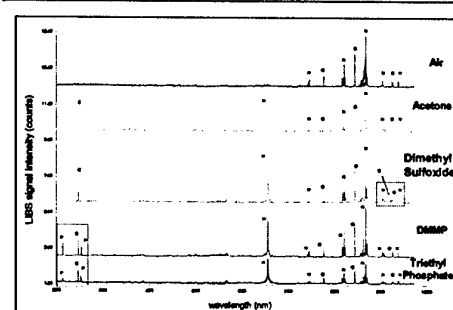

Future Directions for Field Portable LIBS

- We are optimistic for the development of a field-portable LIBS system for military and homeland defense applications
- However, specific improvements are needed:
 - Size - The current system should be reduced in size by at least 50% (i.e. shoebox size)
 - Weight - Lightweight materials should reduce the weight of the current system by a factor of 5 (i.e. to 10lb or less)
 - Laser - Nd:YAG laser and fiber-optic delivery system needs to be redesigned to fit into a handheld probe
 - LIBS Spectral Reference Library - A reference library of LIBS spectra for target materials needs to be greatly expanded
 - Chemometrics - A fast and robust software is needed for spectral matching and manipulation, element identification and stoichiometry calculation

Concept of LIBS Sensor for Landmine Detection

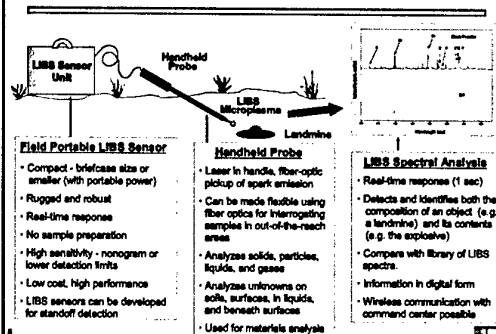

Defense Emergency Relief Fund LIBS Initiative

- FY03 Initiative at ARL for the development of a field-portable LIBS system for security and homeland defense applications
- 1st prototype available in late 2003



Design Goals:

- Size - medium size backpack
- Weight - 25 lbs or less
- Probe- hand-held (mini-laser in handle), interchangeable lengths
- Display- eyeglass mounted VGA resolution
- Spectrometer- broadband (200-980 nm), new design, small shoebox,
- Sample rate- laser shot every 3-4 seconds

Summary

LIBS Attributes for Military & Security Applications

Laser Induced Breakdown Spectroscopy (LIBS) is an emerging sensor technology for military applications with unprecedented performance characteristics:

- Real-time response
- No sample preparation
- Inherent high sensitivity (nanogram)
- Can be used as a point sensor or in a standoff detection mode
- Sensitive to all chemical elements (therefore, the only sensor that is capable of detecting and identifying different types of hazardous matter)
- Can be made small (shoebox size) and lightweight (10 lbs or less)
- Can be soldier portable, or mounted on a combat/robotics platform
- Can utilize a hand-held rigid probe, or use flexible optical fibers, to access and analyze targets in out-of-reach locations
- Standoff distances of 20-50 meters and beyond are possible (scales with laser size)
- LIBS detection of explosives (including black powder, C4, RDX), energetic materials, landmine casings, chemical agent simulants (DMMP, DIMP), biological agent surrogates (BC, BG, BT), and toxic metals has already been demonstrated

**Improvement of nitrogen NQR detection in explosives by proton
polarization
Tomaz APIH; Robert BLINC, Institute Jozef Stefan, Slovenia**

Detection of explosives by quadrupole resonance

T. Apih, R. Blinc


J. Stefan Institute, Ljubljana, Slovenia
 FMF, University of Ljubljana, Slovenia
 Institute for Mathematics, Physics and Mechanics in
 Ljubljana, Slovenia
 King's College London, U.K.
 International Trust Fund for Demining, Ig, Slovenia



Current mine detection technology

- Metal detectors:
 - high false alarm rate
 - have difficulties detecting low metal content antipersonnel mines
- Mechanical (manual) prodding:
 - slow
 - dangerous
- Alternative detection techniques: not mine specific - can be triggered by a similar object
- Need for a better detection technology -
 --> direct explosive detection

Explosives in landmines

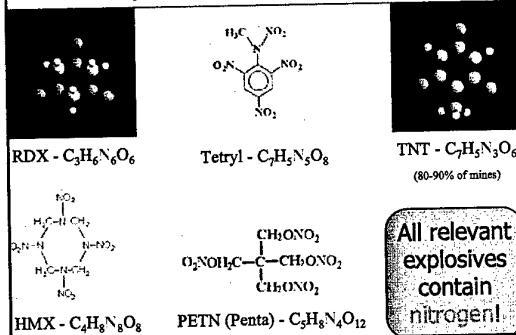

^{14}N ($I=1$) energy levels in zero field


$$H_Q = \frac{1}{3} K [3I_z^2 - I(I+1) + \frac{1}{2} \eta (I_+^2 + I_-^2)]$$

quadrupole coupling constant: $K = eQV_{zz}/h$

assymetry parameter: $\eta = (V_{xx} - V_{yy})/V_{zz}$

$v_0 = K/2$	$E_1 = \hbar K(1+\eta)/4$
	$E_2 = \hbar K(1-\eta)/4$
$v_- = K(3-\eta)/4$	$v_+ = K(3+\eta)/4$
	$E_2 = -\hbar K/2$


^{14}N NQR spectrum for each nitrogen atom in unit cell




NQR Detection Principle




Transmitter emits RF waves.



Transition between ^{14}N energy levels are induced.



^{14}N nuclei emit RF waves at substance specific frequencies.




Signal is received and analysed by PC. If explosive is detected, audio-visual signal is triggered.

Remote ^{14}N NQR Detection?

- Advantages:
 - molecular specific: $0.5 \text{ MHz} \leq (eQV_{zz}/4h) \leq 10 \text{ MHz}$
 - virtually zero false alarms
 - detects zero metal content landmines
 - no need for magnetic field
- Disadvantages:
 - need for high power RF amplifier
 - low sensitivity (signal accumulation)
 - RF interference (gradiometric coils)
 - does not detect liquid explosives or explosives contained in metal cases (but could be used in MD model)

^{14}N NQR of RDX

^{14}N NQR spectrum of $\text{N}(\text{NO}_2)_3 \cdot \text{CH}_3$ - RDX
5192 kHz line



- Relatively high frequencies
- good sensitivity
- T. shift: 50-500 Hz/K
- Short T_1 (~ 10 ms) -
fast repetition and
accumulation possible
- SSFP pulse sequence -
Steady State Free Precession
- Remote NQR detection
possible


TNT Problem (80-90% of mines!)

- 6 nonequivalent N-14 sites
 - monoclinic (yellow, stable) modification
 - orthorhombic (white, unstable) modification
 - ratio of monoclinic/orthorhombic ratio depends on
the processing technique
- low frq.: ν_+ (800-900) kHz, ν_- (700-800) kHz
- long T_1 (2s - 30s)
- S/N ratio too low for conventional detection in
the required time!
- How to increase ^{14}N NQR signal to make the
detection useful?

Ways to detect ^{14}N NQR

- **A: Indirect detection:**
quadrupole dips in proton relaxation
- **B: indirect detection by**
Nuclear Quadrupole Double Resonance
 - B1: ^1H - ^{14}N NQDR with field cycling
 - B2: NQDR with multiple frequency sweeps
- **C: direct detection by**
enhancement of ^{14}N -NQR signal
(lecture by Lužnik & Trontelj)

A: Quadrupole dips

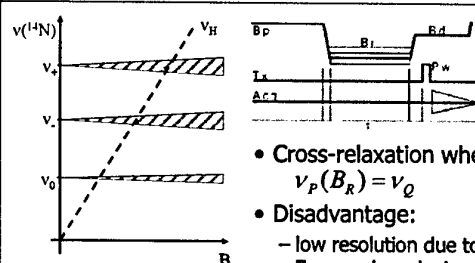

- Cross-relaxation when
 $\nu_P(B_R) = \nu_Q$
- Disadvantage:
- low resolution due to
Zeeman broadening of
 ^{14}N lines in powders

B1: ^{14}N - ^1H NQDR with field cycling

Slusher, Hahn Phys. Rev. 166 (1968) 156

- **Steps:**
 - H polarized in strong B_0
 - adiabatic demagnetization
 - "cold" (polarized) protons
 - rf irradiation: in resonance
 $\nu_H = \nu_Q$, energy flow from
"hot" (saturated) N to H
 - stepwise rf irradiation,
reduction of the proton
signal when
 $\nu_H = \nu_+$, ν_- or ν_0






Fig. 1 Low field field-cycling experiment. The effect of $\nu_H = \nu_+$ is usually shown as frequency modulation.

Multiple Level Crossing Cycle

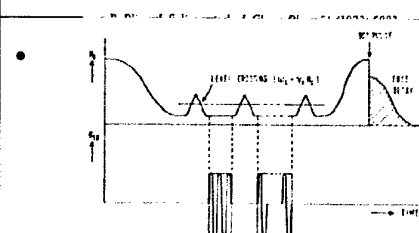

Increase of energy transfer between the proton and
the nitrogen system by multiple level crossing

^{14}N - ^1H NQDR with field cycling




- ^1H - ^{14}N nuclear quadrupole double resonance spectrum of TNT in zero external magnetic field (ν_+ NQR transition). (The proton signal vs. the frequency of the rf irradiation field.)
- Disadvantage:
 - broadening: "spin quenching" in zero field due to averaging of magnetic dipole coupling of quadrupole nuclei with $\eta \neq 0$

B2: NQDR with multiple frequency sweeps

Seliger, Žagar, Blinc, J. Magn. Res. 106, 214 (1994)

- Better resolution and higher sensitivity:
 - Adiabatic field cycling between B_p and small $B_0 > 0$ so that $\nu_L(^1\text{H}) \sim \nu_Q(^{14}\text{N})$
 - continuous sweep of rf frequency in a range, covering both ν_+ and ν_-
 - Result: as if NQR R_1 would be very large -> fast flow of thermal energy from ^{14}N NQR system to "cool" proton system. If only one NQR frequency is covered by sweep, negligible change in the proton signal -> allows for a rough ν_+ and ν_- determination


Simulation of Fast Nitrogen Relaxation at $\nu = \nu_+(W_+)$ and $\nu = \nu_-(W_-)$ by Multiple Frequency Sweeps

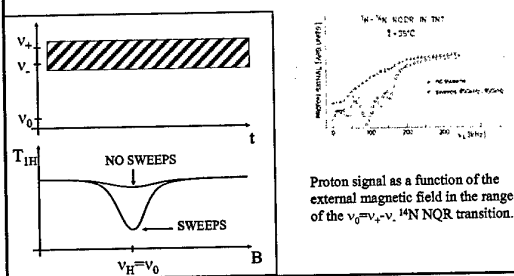

... even higher resolution ...

- Two frequency irradiation
 - first $\nu_1 \sim \nu_+$ is chosen and ν_2 is varied until $\nu_2 = \nu_-$
 - then $\nu_2 = \nu_-$ is kept fixed and ν_1 varied to $\nu_1 = \nu_+$
 - resonance $\nu_1 \sim \nu_+$, $\nu_2 = \nu_-$ and $\nu_L = \nu_0$ to 100 Hz
- very useful also in the case of complicated NMR spectra as it allows the assignment of ν_+ and ν_- lines to a given NMR nucleus


NQDR with Multiple Frequency Sweeps

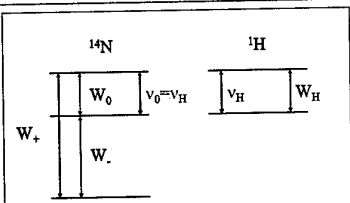

$$T_{1H}^{-1}(\nu_H = \nu_Q) = W_H + \frac{N_N}{N_N + N_H} \left[W_0 + \frac{W_+ W_-}{W_+ + W_-} \right]$$

Seliger, Žagar, Blinc, J. Magn. Res. 106, 214 (1994)

TNT at room temperature



$$\frac{N_N}{N_N + N_H} = \frac{5}{8}$$

- Frequency dispersion of proton T_1
 $W_N \sim 0.2-0.3 \text{ s}^{-1}$
- Double resonance between laboratory and rotating frame
 $\nu_Q = 810 \text{ kHz}$
 $\eta \approx 0$
- Double resonance with multiple frequency sweeps

¹⁴N NQR frequencies in military grade TNT

	ν [kHz]	ν [kHz]	e^2qQ/h [kHz]	η
1	872	712	1056	0.303
2	861.5	769	1087	0.170
3	853	742.5	1064	0.208
4	850	718	1045	0.253
5	847	755	1068	0.172
6	837	742	1052	0.179
7	-807	-807	1076	-0

NQR parameters have to be verified on a full range of TNT samples for the effects of crystallization, processing, aging, impurity content ...

Conclusions

- RDX:
 - remote detection by pure NQR is possible
- TNT
 - pure NQR probably does not have enough sensitivity for remote detection
 - NQDR: high resolution and high sensitivity, but homogeneous magnetic field is needed
 - PE NQR (see next talk) may be possible

Acknowledgements

R. Blinc, J. Seliger
J. Lužnik, Z. Trontelj
J.A.S. Smith

J. Cimperšek, G. Gačnik - ITF

- Financial support:
 - NATO Science for Peace Programme
 - Ministry of Education, Science and Sports of RS



Improvement of ^{14}N NQR detection in explosives by proton polarization

Janko LUZNIK, University of Ljubljana, Slovenia

INTRODUCTION

Nuclear quadrupole resonance – NQR is one of the promising methods for the detection and identification of illicit substances [1-3]. Almost all explosives, drugs etc. contain nitrogen. ^{14}N NQR spectra and their resonance frequencies depend on the molecular structure and are characteristic of each of these substances, providing a kind of their »fingerprint« and so enabling their detection and identification. The problem is that the ^{14}N NQR spectral lines often lie at low frequencies where the NQR signals are usually very weak and not easy to detect. A lot of work has been done so far and is still in progress to improve the sensitivity of NQR detection. More sophisticated and sensitive experimental equipment can be used with application of superconducting receiving coils and cooled preamplifiers or SQUID (Superconducting Quantum Interference Devices) sensors. Various different pulse sequence methods, proper data processing and averaging can also improve the sensitivity.

An additional method to improve the signal is polarization enhancement [4-6]: Initially protons are polarized in a strong magnetic field so that the proton NMR levels are split considerably more than the nitrogen NQR levels. Due to the Boltzman distribution factor the occupation difference between the high and low NMR levels of protons is much higher than the occupation difference between ^{14}N NQR levels. During the adiabatic demagnetization of the measured sample level crossing between proton NMR and ^{14}N NQR occurs, causing an energy flow from the »hot« nitrogen quadrupolar system to the »cold« proton NMR system which is manifested in the »cooling« of the nitrogen quadrupolar system. Applying standard pulse NQR detection techniques immediately after removing the magnetic field, the signal can be improved according to the ratio of the proton NMR to ^{14}N NQR frequency (f_p/f_Q) if the proton reservoir is abundant enough to cool down the nitrogen system to the proton spin temperature. If the abundances of the proton and nitrogen systems are comparable, the improvement factor is reduced proportionally to the ratio: $N_H/(N_H + N_N)$. When several nonequivalent nitrogens are present in the molecule, multiple level crossing must be correctly taken into account.

EXPERIMENTAL

To confirm the predicted improvement factor with the use of polarization enhancement three different samples: $\text{N}_3(\text{NO}_2)_3(\text{CH}_2)_3$ – RDX (explosive), $(\text{CH}_2)_6\text{N}_4$ – HMTA (hexamethylenetetramine) and $(\text{NO}_2)\text{C}_6\text{H}_4\text{COOH}$ – NBA (4 – nitrobenzoic acid) were tested. Approximately the same amounts of samples packed in plastic tubes of 16 mm diameter and 40 mm length were used. Proton polarization [7] was obtained by an NdFeB permanent magnet (Vacuumschmelze GmbH, VACODYM). The dimensions of the magnet were 70 mm x 70 mm x 65 mm. The very nonhomogeneous field at the site of the sample was estimated to be 200 ± 50 mT and the average proton NMR frequency was around 8.5 MHz. To avoid fast quadrupolar relaxation of ^{14}N the experiments were performed at 77 K. All the samples were polarized for at least 10 minutes to assure complete proton polarization even at very slow spin – lattice relaxation. After polarization the magnet was quickly (manually) removed and single shot ^{14}N NQR FID signals were recorded and compared to those without polarization.

RESULTS

The results of our measurements are collected in Tab. 1, where A_c and A_m represent the calculated and the measured enhancement factor of the ^{14}N NQR signal intensities. The agreement between the calculated A_c and observed enhancement A_m is very good. It

demonstrates that the use of proton polarization enhancement at a fixed polarization field is much more effective at lower frequencies where the ratio of the proton NMR to ^{14}N NQR frequencies is higher. As was expected, the polarizing magnetic field homogeneity is not critical and the improvement is proportional to the average field only.

sample	f_Q (kHz)	f_P/f_Q	$N_H/(N_H+N_N)$	A_c	A_m
RDX	5265	1.6	0.75	1.2	observable(1.3)
HMTA	3408	2.5	0.75	1.9	around 1.8
NBA	982	8.7	0.85	7.4	around 7

Table 1. Calculated and measured data for 3 different samples. All measurements were made at 77 K.

CONCLUSIONS

- The use of proton polarization enhancement of ^{14}N NQR signals at low frequencies can be effective.
- Because the improvement is proportional to the polarizing magnetic field, the method is useful only if strong enough magnetic field can be obtained on the place of the sample.
- Inhomogeneity of the field is not critical.
- ^{14}N NQR relaxation must be slow enough to allow the removal of the magnet or the sample.
- The ratio of protons to nitrogens in the sample must not be small (For most of explosives and drugs this condition is fulfilled).

REFERENCES

- [1] V.S. Grechishkin and N.J. Sinyavsky, Physics Uspekhi, 40, 393 (1997)
- [2] J.P. Yesinowski, M.L. Buess, A.N. Garroway, Anal. Chem., 67, 2256 (1995)
- [3] V.S. Grechishkin, Appl. Phys. A, 55, 505 (1992)
- [4] R.E. Slusher and E.L. Hahn, Phys. Rev., 166, 332 (1968)
- [5] J. Seliger, R. Blinc, G. Lahajnar, D. Arcon, P. Cevc, Patent Appl. No. 200000086 (1999)
- [6] R. Blinc, J. Seliger, D. Arcon, T. Aphi, P. Cevc, V. Zagar, Phys. Status Solidi A, 180, 541 (2000)
- [7] Z. Trontelj, J. Luznik, R. Blinc, G. Lahajnar, J. Seliger, Patent Appl. No. 200000141 (2000)

**Explosive Detection in Mine Clearance:
Chemical behavior of explosives and their vapours in the field.
Vernon JOYNT, CSIR, South Africa**

Introduction

During the recent SPIE Conference in Orlando I had the privilege to attend lectures on Chemical detection of explosives and mines. This covered the behavior of these explosives in the soil. There were related mine detection lectures based on vapor detection.

In Africa I attended the REST (Remote Explosive Sensing Techniques) workshop at Morogoro in Tanzania. This workshop was attended by top chemists from Nomadics (Dr Mark Fischer), Sandia National Laboratories (Dr Jim Phelan) and FOI (Lena Sarholm). The world REST fraternity was also well represented: The Geneva International Centre of Humanitarian Demining (GICHD) who was running the workshop under Håvard Bach, APOPO under Christophe Cox, Mechem with Kip Schulz, NOKSH and NPA with Rune Fjellanger. There was also an excellent summary of the workshop presentations issued by Dr Ian McLean of the GICHD.

I was fortunate to have been given copies of all the mentioned people's lectures apart from having attended the presentations.

In Europe I was asked to review 8 lectures proposed for the forthcoming EUDEM-Symposium in September. Obviously these must remain confidential till presented but they did help remind me of the advances made and also the mistakes that are holding Vapor Detection back in terms of becoming a valuable demining tool.

I will however use some of the points made and slides used constructively in this closed expert workshop.

Approach

I would like to separate the techniques

MINE DETECTING DOGS (MDD)

- At a large workshop here in Ljubljana some years ago the case for MDD was debated. No consensus was reached. There were just too many opinions, stresses and uncertainties.
- The work group at the GIHD started basically with the same problems but through the persistence of Håvard Bach and others the problems became less and the Dog People started co-operating.


A MDD AND HANDLER WORKING AT ROAD CLEARANCE



SOME MDD VARIATIONS

Not like the MDDog working in safe lanes and blocks on the right, these two TNT detecting Free roaming dogs are voice commanded from a MRV to work down the road or in the grass fields.

Mine Detecting Dogs MDD

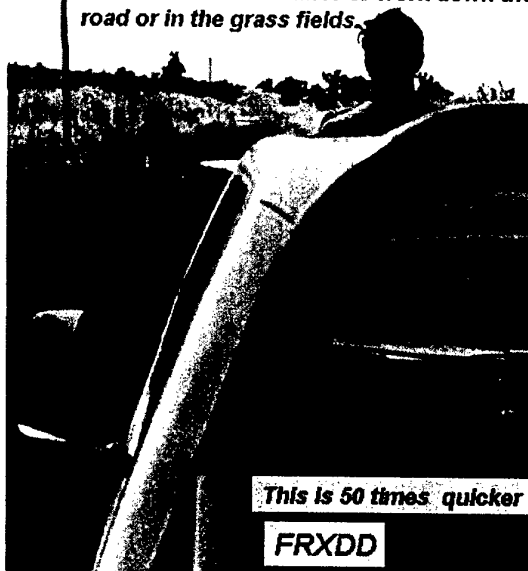

This is 50 times quicker

FRXDD



UN Iraq Contrac

Safe lanes for the dog handler takes time to make

REST (MEDDS)

- The old Mechem was part of that GICHD MDD effort and I pushed our Mechem Explosive and Drug Detection System (MEDDS) with a passion. It was only accepted once the South African Government offered the use of the system to all HD operations with no strings attached.
- The technology in this context was first transferred to NPA who named it Explosive Vapor Detection (EVD) and then later Håvard Bach renamed and broadened the concept to REST
- MEDDS was more scientifically controllable because the training and use of the dogs were separated from the field and sampling problems

- With MDD setting up controlled tests was extremely difficult when one is trying to do this in real operational demining conditions. With MEDDS this was easier and the results more acceptable.
- MEDDS resulted in us partaking in the DARPA Electronic nose project. This project deliver two significant products:
 - The Nomadics/MIT FIDO electronic nose
 - The Quantum Magnetics NQR explosive detector
- A NVESD Contract over the past two years with the new Mechem and Nomadics attempted to repeat more scientifically what the original development and demining contracts had taught us about the system. They had some success.
- MEDDS taught us many things about MDD and their problems but most important of all it taught us the problems of what happens to the explosives once they are out of the landmine and left to the environmental influences. A nightmare!
- MEDDS was often used to provide a dog-nose benchmark to a Vapor sensor development or evaluation.
- Many unresolved arguments resulted as to the sensitivity levels that a dog's nose can achieve. According to Jim Phelan and us, dogs in Mechem and Global (San Antonio) could do ppq (Quadrillion). This is detecting 10 to the power -15 grams of TNT or femtograms. A picogram is 10 to the power -12 grams so dogs are at least a 1000 times below classic chemistry which can normally do picograms.
- Nomadics have however now cast some doubt on the way this figure was measured. And so it goes on.


EXPLOSIVES IN SOIL

The explosives leak and leach out of buried mines and then spread out into and onto the surrounding soil. How does it spread? Where does it find itself after a time? What happens to it in different conditions? A million questions but the mere fact of MDD successes made it important to study this.

This has been a bug bear all along and in the early 1990's we tried to establish how the contours of detection around a buried mine or mines looked like. The shape we established, I described later could be as irregular as a camouflage pattern.

Compare this with the lines determined during one NVESD test in Croatia recently:

Area Reduction test site May/September 2002

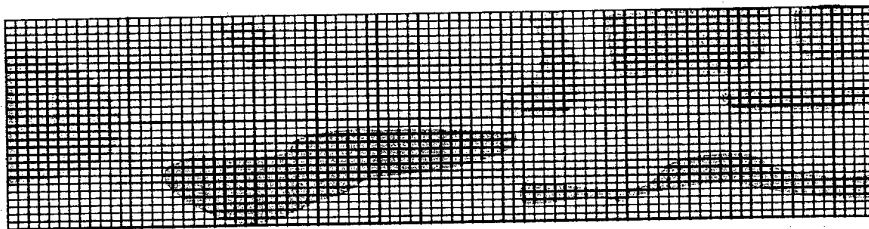

Coloured areas represent standing and flowing water up to 40 cm deep

Although this represented standing water, tests done showed the TNT to be strongest in the water. This is to be expected because TNT is about a million times more soluble in water than in air.

What is important is to note that when the water dried up the spread of TNT could have remained in that shape.

This would explain the so called 'camouflage' patterns we had determined ten years before.

The scientific tests and results obtained in the early 1990's by the old Mechem was never published and only recorded in broad detail. What was shared was the results and developed techniques.

Today as people realize the value of this tool they want more precise recorded results and sound conclusions. I have personally been part of some of these new tests. Only on occasion have 'new to us' results appeared. Some of these could explain problems we sometimes encountered in the clearance contracts.

So it is fair to say that the whole field of REST is improving and moving forward.


Showing some Morogoro slides can illustrate this; a FOI slide:

Why analysis of soil samples?

- Mapping of explosives migration in soil and air
- Verification of explosives/land mine detection systems
- Detection of landmines


And some 'new to us' results; from NOKSH:

Relationship between Humidity and proportion correct

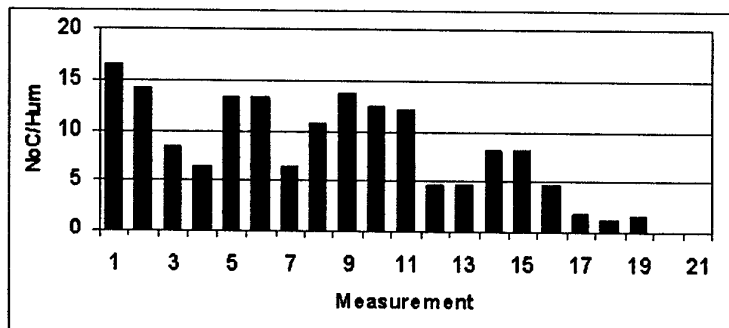

High correct=low humidity
Spearman's $r = 0.44$, $P=0.044$


Relationship between Temperature and proportion correct

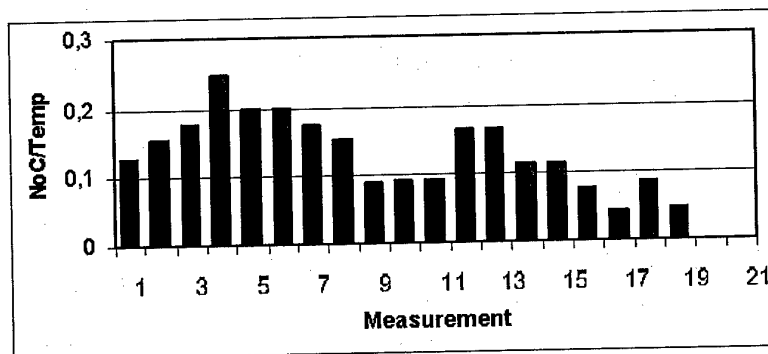

Little relationship between T and proportion correct
Spearman's $r = 0.19$, NS

We used to believe MEDDS worked better in humid conditions and avoided hot dry conditions. This came from our MDD experiences. Dogs smell better when the humidity is above 30% but REST is sampled with a pump and filter that then is presented to a dog in a humidified room.

Both Sandia and FOI analyzed the decomposition products of TNT in various soils and conditions. An example of a FOI result:

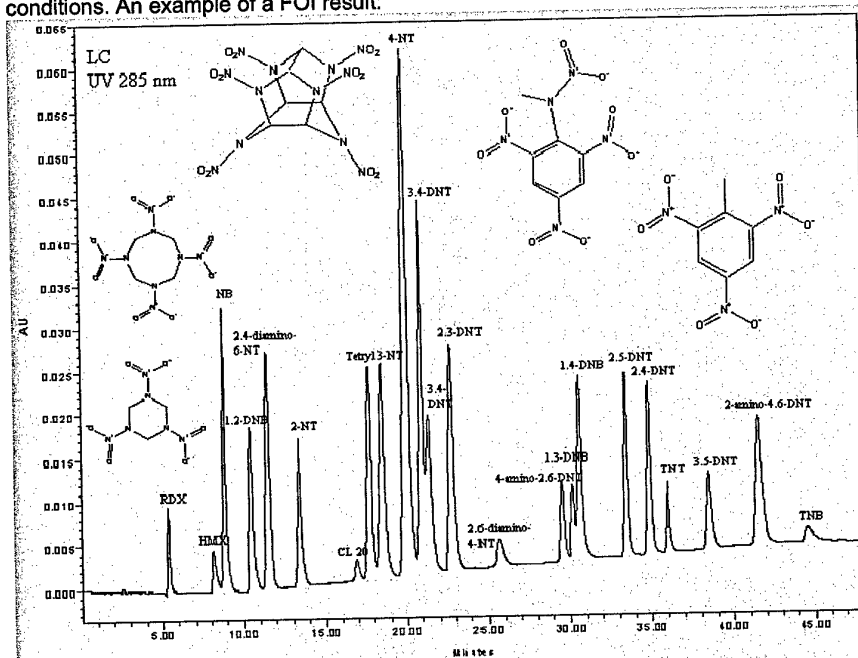


These are products extracted out of soil contaminated with TNT, RDX and TETRYL.

For TNT a decomposition product that had a longer half life in the soil was 4 Amino Dinitrotolueen so in doing area\reduction one should include this product.

CHEMICAL MACHINES

Nomadics FIDO: This uses a sensor polymer developed at MIT

Enhancing Polymer Selectivity

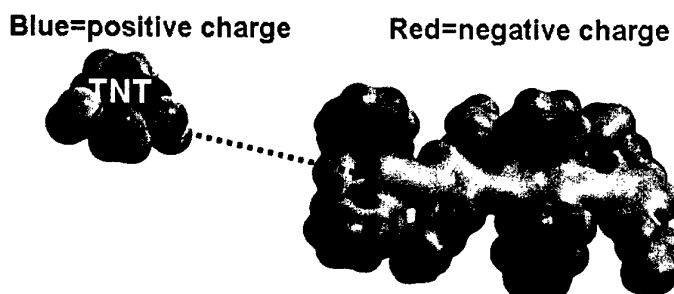


Polymer contains binding sites that are engineered to be electrostatic 'mirror images' of target analytes - this enhances selectivity toward target analytes.

Handheld Explosives Detector



Underwater Detection of TNT

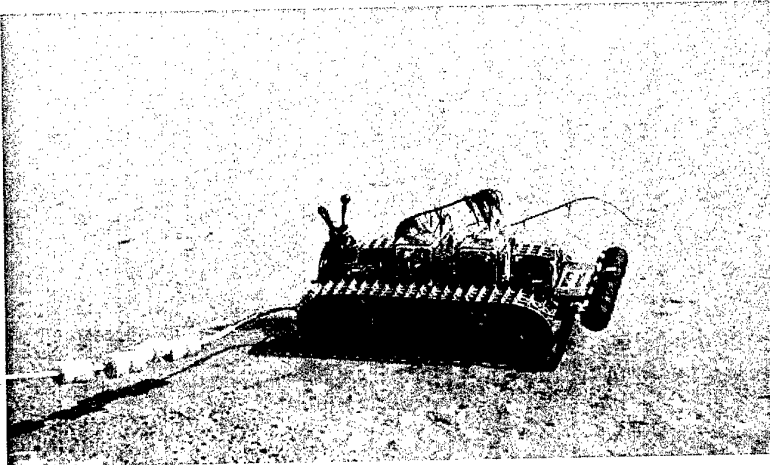

The company is now also into:



Other Work in Progress

- Environmental screening for explosives contamination on firing ranges
- Screening of scrap materials from firing ranges for detonable masses of HE
- Chemical warfare agent detection
- Biological warfare agent detection
- Gunshot residue detection
- Groundwater monitoring for explosives contamination
- Detection of other explosives

One needs also to show the APOPO rats and mention they are also using the rats to detect Tuberculosis. So biological detection is on the cards for REST.

General Methodology

Training and analysis

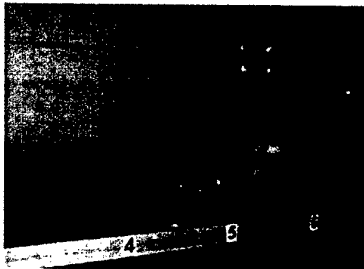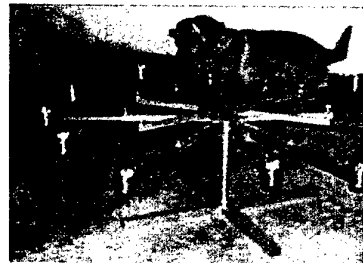


The CSIR, in collaboration with a US company, is detecting Cancer in humans by using dogs and the ScentPrint two stage filter system the CSIR has developed for multiple uses of REST. The US Company has already some trained dogs doing the Cancer work and the addition of a filter step has shown an improvement.

The CSIR is also involved with TB diagnosis but lacks an animal training Company as a partner.

ScentPrint: A Two Stage REST Filter System


Tube ready to use

- Removal of the lids allows one to pass an air sample through the vapor tube



The Inner Tube

- The inner tube is perforated to release the trapped vapor sample. The tube is also designed to house any vapor capturing material suited for the appropriate circumstance.



The inner tube is a holding reservoir with strong adsorption while the cotton wool-like wads have the correct surface adsorption properties. This is to hold enough transferred reservoir material ready on the surface of the wool for the hot moist animal breath to desorb the smell and get it into his nose.



An APOPO rat

Here one can see why one of the foremost dog trainers in the world for REST dogs asked me to set him up with a program to train Dachshund to operate like the APOPO rats; on a shelf around the walls of a room! He claims savings in man power and test time will make it worth it. Off course the dogs would not need a cage but a railing not to fall off would do. According to him. A hunting dog

like a Dachshund has a good nose and is trainable.

APOPO is also running a rat detection program to do TB diagnosis. For this they found a second stage adsorber that works better than the Mechchem filter, to be polyester wool.

The CSIR found that similar polyester wool coated with a silicone polymer was best for Cancer detection's second stage in the ScentPrint filter. On their TB program the CSIR has no animals to do their testing so a talk to APOPO seems appropriate.

Scientifically the filter problem is that a good absorber is a good reservoir for large quantities of the active chemical or bouquet vapors. This seldom is a good adsorbent for releasing the ingredient to the animal when it smells. Good adsorbents often hold to little sample for a series of animals to make passes and one then finds the second stage 'fading'. So the second stage can have more than one 'wool filter' to use in sequence of smelling.

Now you see why Jim Phelan has coined the word 'sorption' so one need not specify!

Chemical detectors can and are using filters in mine detection to do a similar function; to concentrate samples and also to separate the rough and tumble of field sampling from the analysis step. The various companies use different solutions but inevitably they have to have a holding stage followed by a quick release into the detector. Like the cold finger and flash heater of commercial chemical analyzers.

**Demands on chemical vapor detection of landmines and explosives for
counter-terrorism
Michael KRAUSA, ICT, Germany**

Demands on chemical detection of landmines and explosives for counter-terrorism

Demands on chemical vapor detection of landmines and explosives for counter-terrorism



Picture:
DARPA, Dr. Gary Settles,
Penn State University

Michael Krausa
Applied Electrochemist
Fraunhofer-Institut für Chemische Technologie

Fraunhofer
Institut
Chemische Technologie


Demands on chemical detection of landmines and explosives for counter-terrorism

Fraunhofer
ICT
Pfinztal



Fraunhofer
Institut
Chemische Technologie

Demands on chemical detection of landmines and explosives for counter-terrorism

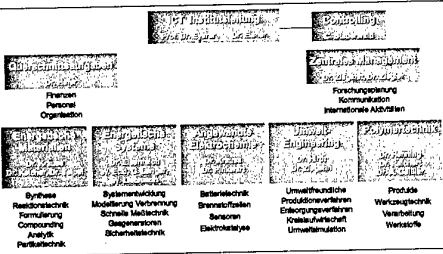

Fraunhofer
Institut
Chemische Technologie

Demands on chemical detection of landmines and explosives for counter-terrorism

Problem: Fast detection and location of explosives



airport hall mined garbage dump in Sarajevo

Fraunhofer
Institut
Chemische Technologie

Demands on chemical detection of landmines and explosives for counter-terrorism

Today: Fast detection (smelling) and localization by sniffer dogs



Source: <http://www.biorxiv.org/content/10.1101/2017.08.01.217748v1>

Photo by: German International Centre for Humanitarian Demining


Fraunhofer
Institut
Chemische Technologie

Demands on chemical detection of landmines and explosives for counter-terrorism

Basic demands on Sensors

<u>for mine detection</u>	<u>for counter-terrorism</u>
• easy to handle • handheld • robust • cheap • all climates • maintenance free • low-power consumption	• fast • trained staff • handheld

Fraunhofer
Institut
Chemische Technologie

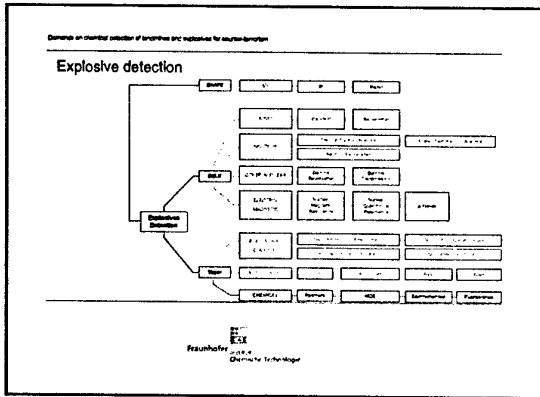

Demands on chemical detection of explosives and explosives for counter-terrorism

Explosives used	World Trade Center 1993 Nitrated urea
Most of the mines are filled with 2,4,6-TNT	Oklahoma City 1995 Ammonium nitrate fuel oil (ANFO)
	Moscow 1999 presumable cyclonite
	Suicide bombs made explosives
	Home

Fraunhofer ESK
Explosive Technology

Demands on chemical detection of explosives and explosives for counter-terrorism

Which explosives are used? (from K.G. Furton and L.J. Myers)

Commonly used explosives	Main components
C-2	RDX+TNT+DNT+NC+MNT
C-3	RDX+TNT+DNT+Tabyl+NC
C-4	RDX+Polyisobutylene+Fuel oil
Cyclitol	RDX+TNT
DBX	TNT+RDX+AN+AI
HTA-3	HMX+TNT+AI
Periclite	PETN+TNT
PTX-1	RDX+TNT+Tabyl
PTX-2	RDX+TNT+PETN
Tetrol	TNT+Tabyl
Dynamite 3	NG+NC+SN
Red Diamond	NG+EGDN+SN+AN+Chalk

Fraunhofer ESK
Explosive Technology

Demands on chemical detection of explosives and explosives for counter-terrorism

Vapor pressures of common explosives

Explosives	Vapor pressure (Torr) at 25°C
EGDN	2.8×10^{-2}
NG	4.4×10^{-4}
TNT	7.1×10^{-5}
PETN	1.4×10^{-5}
RDX	4.6×10^{-5}

The vapor concentration decreases with increasing distance from the source.


Fraunhofer ESK
Explosive Technology

Demands on chemical detection of explosives and explosives for counter-terrorism

Vapor pressures

Chemical	Vapor pressure (Torr) at 25°C
Ammonium nitrate	No information found
Nitrated urea	No information found
Potassium perchlorate	No information found
Cane sugar	No information found

Fraunhofer ESK
Explosive Technology

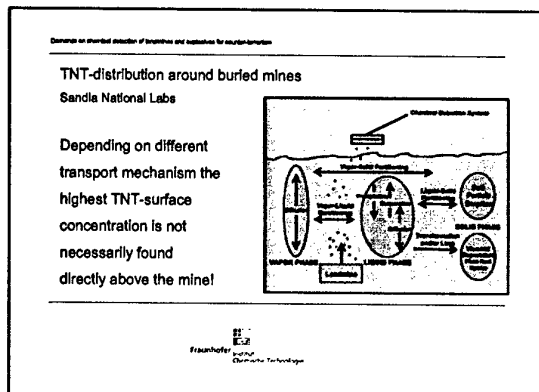

Demande on chemical detection of landmines and explosives for counter-terrorism

Vapor concentrations above buried TNT (US Corps of Engineers)

	Sand	Air dry	2.1% moisture	3.1% moisture
Sampling of the vapor above military grade TNT	1,3-DNB	29.3	561	285
	2,4-DNT	7.36	75.4	441
	2,4,6-TNT	0.267	20.8	13.7
•Time	Silt	Air dry	5.8% moisture	10% moisture
•Temperature	1,3-DNB	nd	59.4	51.4
•Moisture	2,4-DNT	0.145	49.7	51.3
•Different soils	2,4,6-TNT	0.652	1.59	1.83
	Clay	Air dry	15% moisture	30% moisture
	1,3-DNB	nd	2.34	2.29
	2,4-DNT	nd	nd	nd
	2,4,6-TNT	nd	nd	nd

Analyte (pg) collected in 1 minute after 6 days at 23 °C

Fraunhofer
Institut
Chemische Technologie

Demande on chemical detection of landmines and explosives for counter-terrorism

TNT-distribution around buried mines (Draper Laboratory)

Concentrations of different substances emanating from a buried TMA-5

Substance	surface	0-5 cm	5-10 cm	10-15 cm	under mine
2,4,6-TNT	<d	<d	9.9	7.5	873
2,4-DNT	52.3	6.3	17.0	150	5480
2-ADNT	48.8	13.6	27.5	207	3428
4-ADNT	40.8	14.2	28.8	163	2802
1,3-DNB	<d	<d	<d	<d	524


Fraunhofer
Institut
Chemische Technologie

Demande on chemical detection of landmines and explosives for counter-terrorism

Aerobic TNT-biotransformation (University of Minnesota)

Depends on

- Microclimate
- Temperature
- Microorganism
- Moisture



Fraunhofer
Institut
Chemische Technologie

Demande on chemical detection of landmines and explosives for counter-terrorism

Environmental transformation products (military grade TNT)
M.E. Walsh, US Army Cold Regions research and Engineering Laboratory Hanover

Biotransformation

- 2-amino-4,6-dinitrotoluene
- 4-amino-2,6-dinitrotoluene
- 2,4-diamino-6-nitrotoluene
- 4-hydroxylamino-2,6-dinitrotoluene

Photodegradation

- 3,5-dinitrophenol
- 3,5-dinitroaniline
- 1,3,5-trinitrobenzoic acid
- 1,3,5-trinitrobenzene

Fraunhofer
Institut
Chemische Technologie

Demande on chemical detection of landmines and explosives for counter-terrorism

Vapor phase TNT-concentrations above mines (FOA, Sweden)

Analysis of the vapor and solid phase above buried mines

- Cambodia
- Bosnia-Herzegovina

Results:

In the vapor phase


- 2,4-DNT
- 2,6-DNT
- amino-DNT (Cambodia only)

were found only TNT was detected in no vapor sample of mine affected areas

Fraunhofer
Institut
Chemische Technologie

Demande on chemical detection of landmines and explosives for counter-terrorism

How smells a mine?
Canine Olfactory Detection Laboratory,
Auburn University



Fraunhofer
Institut
Chemische Technologie

Demands on chemical detection of explosives and explosives for source-location

Adsorption of TNT

- TNT adsorbs strongly on various surfaces
- basis for several bomb detectors
- Problem: luggage



What does a dog smell?

Fraunhofer
ETZ
Electronics Technology

Demands on chemical detection of explosives and explosives for source-location

Set-up for defined TNT vapor concentrations

TNT vapor pressure approx.
7 ppb at 25 °C

TNT-concentrations above
mines are much smaller.

Adjustment of defined small
vapor concentrations.

Actually: 34 ppt



Fraunhofer
ETZ
Electronics Technology

Demands on chemical detection of explosives and explosives for source-location

Which explosives are used? (from R. L. Simmons, Naval Surface Warfare Center)

- 32% of the bombings used smokeless or black powder
- 29% used simple chemical mixtures (simple gas-producing chemicals confined in a container capable of withstanding some pressure before bursting)
- 16% commercial fireworks or pyrotechnic compositions similar to those used in fireworks
- 3% were high explosives or ammonium nitrate blasting agents
- 14% could not be identified

Fraunhofer
ETZ
Electronics Technology

Demands on chemical detection of explosives and explosives for source-location

Demands for the detection

- High sensitivity for the detection of common explosives
- Flexible for new applications

Problem

- Explosive concentration in the air decreases with increasing distance from the source
- Temperature influences the vapor concentration
- Moisture influences the vapor concentration
- Packages influences the vapor concentration
- Adsorptive behavior of explosives on different materials

Fraunhofer
ETZ
Electronics Technology

Demands on chemical detection of explosives and explosives for source-location

What does a dog smell?

Canine Olfactory Detection Laboratory, Auburn University

- under consideration
- combinations of different substances
- 10^{-12} – 10^{-13} g explosives

Photo:
Zim Johnson,
Auburn University



How smells
Nitro-glycerine
based smokeless powder?
Odour signature is composed of
acetone, toluene and limonene.

Fraunhofer
ETZ
Electronics Technology


Demands on chemical detection of explosives and explosives for source-location

What does a dog smell?

Canine Olfactory Detection Laboratory, Auburn University

- specificity unclear

- sensitivity very high




©Diagram: Canine Olfactory Detection
Laboratory,
Auburn University

Fraunhofer
ETZ
Electronics Technology

Simulation of smell sense


Combination of MOS and electrochemical sensors
Sensitivity approx.:
34 ppt (actual)



Fraunhofer
ECB
Chemische Technologie

Electrochemical pattern recognition

- normal electrochemical setup
- one working electrode
- first measurement in liquid phase
- pure substances



Fraunhofer
ECB
Chemische Technologie

Comparison

lower detection limits for TNT (all systems under development)

fluorescence:	1 pg/L	0.1 ppt
antibodies:	approx.: 1 pg (after sampling)	0.1 ppt
IMS:	approx.: 50-100 pg/L	5-10 ppt
SAW:	approx.: 100 pg/L	10 ppt
conducting polymers	200-400 pg/L	20-40 ppt
electrochemical:	<340 pg/L (without sampling)	<34 ppt
μ -Electron capture detector:	1 ng/L	100 ppt
Airport sniffers:	20 ng/L	2000 ppt

Fraunhofer
ECB
Chemische Technologie

Artificial Nose

- plastic model of a dog's nose based on computed tomography scans
- smell sensors placed in this set-up showed a better sensitivity



S.E. Stitzel et al.
J. Am. Chem. Soc. 125 (2003) 3684

Fraunhofer
ECB
Chemische Technologie

Basic demands on Sensors

for mine detection

- High sensitivity for TNT or better for DNT, DNB
- easy to handle
- handheld
- robust
- cheap
- all climates
- maintenance free
- low-power consumption

for counter-terrorism

- High sensitivity for various explosives
- High sensitivity for impurities
- pattern recognition
- should be flexible for new applications
- fast
- trained staff
- handheld

Fraunhofer
ECB
Chemische Technologie

Conclusions

Vapor phase detection of explosives would be a valuable tool in counter-terrorism and mine detection.

Information about chemical signature of mines and packaged explosives would stimulate the research and development of sensors.

Presumably different systems are necessary for the different applications in mine detection and counter-terrorism.

Information about the smell sense of sniffer dogs and rats will give an important input.

Sensors with high sensitivity for different aspects of explosives should be combined.

Fraunhofer
ECB
Chemische Technologie

Acknowledgements



Financial support by the
Bundesamt für Wehrtechnik und Beschaffung
(BWB)

and

the Wehrwissenschaftliches
Institut für Werk-, Explosiv- und Betriebsstoffe
(WIWEB)

is gratefully acknowledged.

Pfintzaler Applied- Electrochemistry- (ELCH-) Team

- Batteries
- Fuel Cells
- Sensors
- Electrocatalysis



**The IAEA coordinated research project on nuclear techniques for anti
personnel landmine identification
Ulf ROSENGÅRD, IAEA, Austria**

IAEA ACTIVITIES IN HUMANITARIAN DEMINING

Ulf Rosengård
IAEA/NAPC/Physics Section



13 August 2003

Blod

International Atomic Energy Agency (IAEA)

Founded 1957

In Vienna, Austria

134 Member States

7 Divisions

~2200 Staff

240 M\$ Regular Budget

60 M\$ Additional for Technical Cooperation


<http://www.iaea.org/>



13 August 2003

Blod

IAEA ORGANISATION

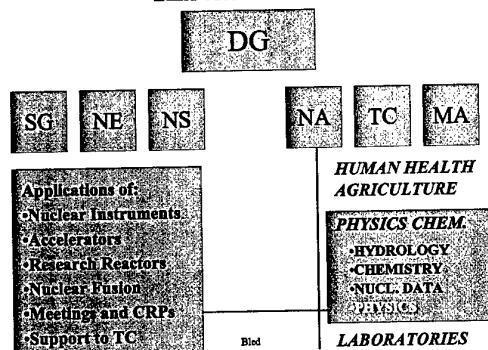

Blod

NUCLEAR TECHNIQUES

- All explosive agents contain Nitrogen, Oxygen, Carbon and Hydrogen in known ratios.
- Nuclear methods, based on neutron irradiation, offer a possibility to non intrusively detect/identify explosive agents by measuring the above mentioned ratios.
- A REAL MINE DETECTOR
- Backscattering of neutrons indicates Hydrogen density (plastic detector).

13 August 2003

Blod

Elements in Explosives and Soil

Explosives in Mines

Main

TNT Trinitrotoluene $C_7H_5N_3O_6$ 1.65g/cm³

Boosters

RDX 1,3,5, Trinitro-1,3,5-triazacyclohexane $C_3H_3N_6O_6$ 1.83g/cm³

Tetryl 2,4,6 N-Tetranitro-N-methylaniline $C_8H_5N_5O_8$ 1.96g/cm³

SOIL (wt%)

Oxygen Silicon Aluminium Iron Calcium Sodium Others

49.52 25.75 7.51 4.7 3.39 2.64 4.55

13 August 2003

Blod

IAEA INITIATIVES

- Advisory Group Meeting 9-12/12 1997
- Consultant's Meeting 8-10/12 1998
- Recommendation to initiate a Co-ordinated Research Project "Application of Nuclear Techniques to Anti-Personnel Landmines Identification"
- CRP started, 11 participants, first RCM in Zagreb 23-26/11 1999, St.Petersburg 11-14/9. 2001
- Regional TC-Project (TC/NA)

13 August 2003

Blod

IAEA COORDINATED RESEARCH PROJECTS

- Coordinate Research in IAEA Member States
- Defined research topic
- 5-20 Members from developed as well as developing countries
- Limited financial input (~5000 US\$/year to developing countries)

13 August 2003

Bled

CRP MEMBERS

- Australia (B. Sowerby, CSIRO, γ -ray camera)
- Canada (E. Hussein, Univ. of New Brunswick, neutrons)
- Croatia (Rudjer Boskovic Inst., neutrons)
- Egypt (R. Megahid, AEC, neutrons)
- Hungary (G. Csikai, Kossuth University, neutrons)
- Italy (G. Viesti, EXPLODET, neutrons)
- The Netherlands (C. Datema, Delft, NBS DUNBLAD)
- Russian Fed. (A. Kutznetsov, Khlopin Institute, neutrons)
- Slovak Republic (S. Hlavac, Slovak Acad. Of Sci., neut.)
- Slovenia (Josef Stefan Institute, neutrons)
- South Africa (F. Brooks, Cape Town, NBS)
- USA (G. Vourvopoulos, W. Kentucky Univ., neutrons)

The battery-powered, hand-held HYDAD-H landmine detector. (Univ. of Cape Town).




^3He proportional N counter with ^{252}Cf source.



13 August 2003

Bled

Hydrogen Density Anomaly Detector HYDAD (Univ. of Cape Town)

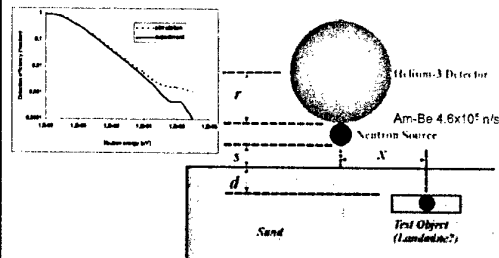

13 August 2003

Bled

Hydrogen Density Anomaly Detector (Improvements)

- Uses a hand-held computer (Palm m515).
- Includes x and y position readout.
- Produces and updates a display map of output as $f(x,y)$.

13 August 2003

Bled

Example of a simulated 2-stage HYDAD-H scan



Data from a simulated two-stage HYDAD-H scan, showing the distribution of "positives" obtained from: (a) the initial "fast" scan; and (b) the "follow-up" scan. Cyan and red show beep fractions of 30-70% and >70% respectively. The circles in (b) show the unknown locations of the simulated landmines, as revealed after completing the follow-up scan.

13 August 2003

Bled

The Delft University Neutron
Backscattering Landmine Detector (DUNBLAD)
C.P. Datema, V.R. Bom and C.W.E. van Eijk




Radiation dose at 1.5 meter: 0.5 μ Sv/h

13 August 2003

Blod

The detector head

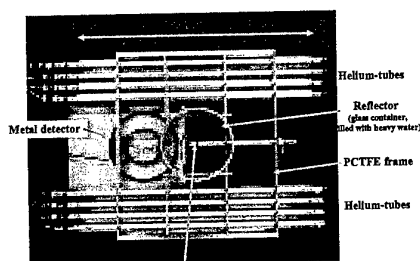


Source (1.1 MBq californium)

13 August 2003

Blod

Results with DUNBLAD



13 August 2003

Blod


NEUTRON BACKSCATTERING

- Neutron scattering is a promising technique for the detection of landmines
- There are limitations to the technique, depending on: mine size, depth, hydrogen content, etc. water content of the soil and organic materials in the soil
- The neutron backscattering detector and metal detector are complimentary systems
- Further improvements are needed

13 August 2003

Blod

Timed Neutron Source



**Khlopin Institute
St. Petersburg**

Timed
(nanosecond) ^{252}Cf
neutron source.


NaI(Tl) based
($\varnothing 15\text{cm} \times 10\text{cm}$)
gamma detector +
PMT.

Prototype of the mobile device with 2 μg ^{252}Cf source
with various investigated objects: TNT imitators,
metallic cylinder, wet root etc.

13 August 2003

Blod


Associated Particle Technique Advantages of a NG with multi-segment alpha-detector

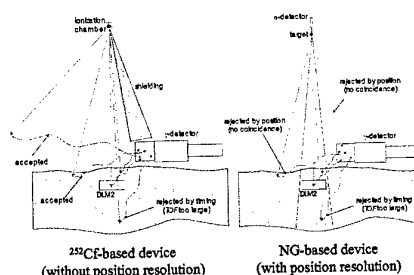

13 August 2003

Blod

Device for explosives' detection based on a portable sealed-tube DT neutron generator with built-in nine-segment detector of accompanying α -particles.



13 August 2003

Bled

IAEA TECHNICAL COOPERATION (TC)

- Through Technical Cooperation projects technology can be transferred to developing Member States.
- Includes equipment, fellowships, experts and training.

13 August 2003

Bled

EUROPE REGIONAL TC PROJECT

- To adapt an PFTNA instrument for the identification of landmines and to demonstrate its suitability for humanitarian demining (PELAN).
- Training courses (PELAN/WKU)
- Adaptation done by a laboratory/national demining organization
- Demonstration of suitability
- If successful other regions will be considered

13 August 2003

Bled

Demonstration of the PELAN device in Vienna

February 2002




13 August 2003

Bled

ELEMENTAL ANALYSIS BY NEUTRON IRRADIATION

- 14 MeV neutrons produced by d-t reaction
- Pulsing of NG enables timing of γ -rays

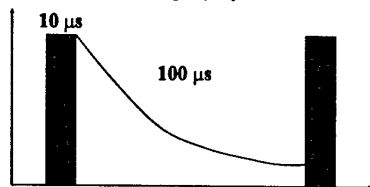

$n, n'\gamma$ $n, p\gamma$ Prompt from C, O, ...
 n, γ $n, \alpha\gamma$ Delayed from N, Fe, ...
 Si, P (by activation)

13 August 2003

Bled



IAEA training course at Western Kentucky Univ US May 2001


13 August 2003

Bled

1998-02 PELAN EVALUATIONS

- CW agents : Belgium, Aberdeen PG
- HE : Indian Head, MD, Dugway PG
- IED, RDD, SNM : Battelle, Columbus
- Land mines : Croatia
- Car bombs : Albuquerque

SAIC

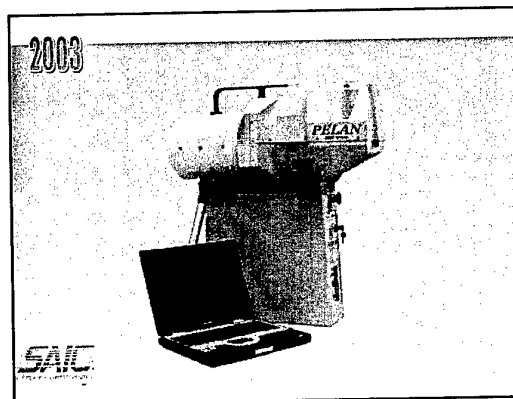

CONCLUSIONS

- Nuclear sensors complement conventional sensors
- Suitable as "confirmation sensors"
- Part of a multisensor device
- Handheld multisensors (Metal+GPR, Metal+NBS.....)

13 August 2003

Bled

Imaging techniques (optical and infrared) in landmine detection
Chris WEICKERT, CCMAT, Canada

DEFENCE **R&D** DÉFENSE

Canadian Research on Optical Imaging for Landmine Detection

Chris Welckert
Head/Military Engineering Section
Director/Canadian Center for Mine Action Technologies
Defence R&D Canada – Suffield

Defence R&D Canada • R & D pour la défense Canada

Canada

R&D Canadian Landmine Detection R&D

- Canadian landmine, UXO detection R&D since 1975
- DRDC – military mine detection (US\$0.70M per annum)
- CCMAT – humanitarian mine detection (US\$0.35M per annum)
- DRDC Suffield is lead laboratory
- Limited budget, many technologies → look for niche areas



Defence R&D Canada – Suffield • R & D pour la défense Canada – Suffield

R&D Canadian Landmine Detection R&D

- Research grouped by function
 - remote minefield detection
 - close-in scanning sensors
 - confirmation sensors
- Employ many technologies to solve problem
 - electro-optical imaging
 - electromagnetic induction
 - nuclear methods
 - thermal neutron activation
 - neutron moderation imaging
 - X-ray backscatter imaging
 - advanced prodders
 - teleoperation
 - data fusion

Defence R&D Canada – Suffield • R & D pour la défense Canada – Suffield


R&D Hyperspectral Imaging of Landmines



Defence R&D Canada – Suffield • R & D pour la défense Canada – Suffield

R&D Visible/Near IR Hyperspectral Imaging


- ITRES/DRDC partners since 1989
- ITRES *casl* 2 COTS systems
 - *casl* 2
 - *casl* 3
 - full software
 - geocorrection
 - detection algorithms
- VNIR problems
 - non real-time
 - slow for surface-laid
 - not reliable for buried



Defence R&D Canada – Suffield • R & D pour la défense Canada – Suffield

R&D Visible/Near IR Hyperspectral Imaging (*casl*)

- Key is high spatial resolution
- e.g., DRDC Suffield minefield : 10 - 20 cm




Defence R&D Canada – Suffield • R & D pour la défense Canada – Suffield



Real time VNIR HSI

- Demonstrated on slow land platform spring 2000
- Airborne by spring 2004
- Can apply to SWIR, TIR




Defence R&D Canada - Buffalo • R & D pour la défense Canada - Buffalo



Short Wave Infrared Hyperspectral Imaging

- Algorithms simpler for surface-laid mines
- Some capability for buried mines
- ITRES sas/ completed summer 2002
- Airborne images obtained
- Minefield tests summer 2003



Defence R&D Canada - Buffalo • R & D pour la défense Canada - Buffalo



Thermal Infrared Hyperspectral Imaging

- Buried mine capability
- Few systems suitable for mine detection
- U of Hawaii AHI exception
 - not dedicated to mine detection
 - cooled MCT focal plane array
- Investigating lower cost alternative (*tasl*)
 - microbolometer FPAs
 - novel energy dispersion method
- Traditional FPA materials (VO_x) should prove concept
- Exotic FPA materials (YBCO) for final system
- To date camera with narrow band filter set (*tabl*)
 - experiments summer 2003



Defence R&D Canada - Buffalo • R & D pour la défense Canada - Buffalo



International Airborne Imager Trials - MUST 2000

- Leveraged off TTCP (AUS/CA/UK/US) spring 2000 trials to evaluate state-of-art airborne sensors for surveillance
- Added surface/buried minefields
- Airborne sensors
 - HYMAP SWIR HSI (AUS)
 - AHI TIR HSI (US)
 - JP 129 SAR (AUS)
- Results of Canadian analysis to date:
 - have only looked for mines, not other indicators
 - HYMAP: no mines detected
 - AHI: no mines detected



HYMAP AHI

Defence R&D Canada - Buffalo • R & D pour la défense Canada - Buffalo



Optical Tripwire Imaging

Investigating since 1996

- Key to success - good spatial resolution
- Procam-1 CMOS sensor with dual P3 processors
 - pseudo real-time processing
- Future improvements
 - true real-time
 - better detection of broken, sagging, undulating wires
 - colour, polarization




Defence R&D Canada - Buffalo • R & D pour la défense Canada - Buffalo





Broad Band Thermal IR Imaging

- Variable performance
 - diurnal, seasonal, environmental, soil
- Performance prediction
- Long term imaging MWIR, TIR experiment
 - fully automated, complete environmental data
 - year long data base for demining community - 06/03
 - full environmental data
 - models for simple prediction



Defence R&D Canada - Buffalo • R & D pour la défense Canada - Buffalo

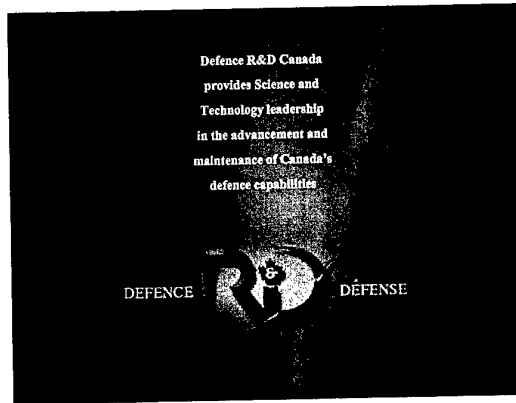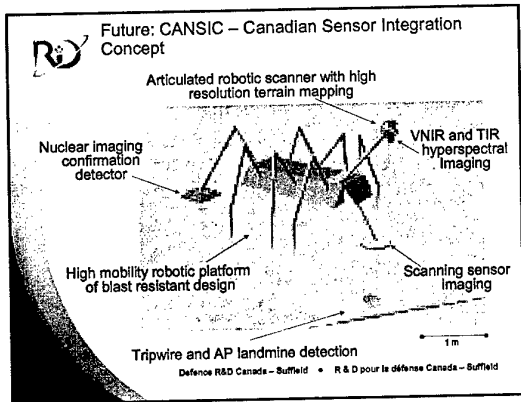

List of participants

ACHEROY Marc

Royal Military Academy
Avenue de la Renaissance 30
1000 Brussels
Belgium
Tel. +32 2 737 6470
Fax +32 2 737 6472
Marc.acheroy@mma.ac.be

BLINC Robert

Institute Jozef Stefan
Republic of Slovenia
Institute Jozef Stefan
Republic of Slovenia
Jamova 39
1000 Ljubljana
Slovenia
Tel. +386 1 4773620
Fax +386 1 4263269

CIMPERSEK Jernej

International Trust Fund for Demining and Mine Victims
Assistance
Ig 212, 1292 Ig
Slovenia
Tel. +386 1 4796580
Fax + 386 1 4796590
Ljubljana@itf-fund.si

DI GIOIA Elena

European Commission
Joint Research Centre – IPSC-HSU
Via E. Fermi, T.P. 723
21020 Ispra (VA)
Italy
Tel. +39 0332 785339
Fax +39 0332 785469
Elena.di-gioia@jrc.it

GILBERT John

DSTL Fort Halstead
Defence Science and Technology Lab.
Sevenoaks
United Kingdom
Tel. +44 1959 892271
Fax +44 1959 892506
jdgilbert@dstl.gov.uk

HIRSCH Israel

Aphelion Ltd
Po Box 6107, 12 Sokolov St.
Herzlia, 46100
Israel
Tel. +972 54 551904
Fax +972 9 9519606
ihirsch@netvision.net.il

APIH Tomaz

Institute Jozef Stefan
Republic of Slovenia
Jamova 39
1000 Ljubljana
Slovenia
Tel. +386 1 4773620
Fax +386 1 4263269
Tomaz.aplh@ijs.si

CARIN Lawrence

Duke University
3410 Middlebrook Dr.
Durham, North Carolina
USA
Tel. +1 919 403 2217
Fax +1 919 6605293
lcarin@ee.duke.edu

COX Christophe

APOPO
Po Box 3078
Morogoro
Tanzania
Tel. +255 741 740740
Fax +255 23 2600636
Apopo@ruca.ua.ac.be

GACNIK Goran

International Trust Fund for Demining and Mine Victims
Assistance
Ig 212, 1292 Ig
Slovenia
Tel. +386 1 4796580
Fax + 386 1 4796590
Ljubljana@itf-fund.si

HARMON Russell S.

US Army Research Office
4300 South Miami Blvd
Durham, NC 27703
USA
Tel. +1 919 549 4326
Fax +1 919 549 4310
harmon@aro.arl.army.mil

HORST Jonas

EPFL (EUDEM2)
Seestrasse 5-0
15711 Zeesen
Germany
Tel. +49 3375 209287
Fax +49 3375 951138
Hjonas4713@aol.com

JEFFREY David M.

TSWG
Po Box 15643
Arlington
USA
Davidj@tswg.gov

KRAUSA Michael

Fraunhofer Institute for Chemical Technology
Joseph-von-Fraunhofer Str. 7
76327 Pfinztal-Berghausen
Germany
Tel. +49 721 4640444
Fax +49 721 4640318
Michael.krausa@ict.fhg.de

LANZA Richard

Massachusetts Institute of Technology
77 Massachusetts Avenue Room NW13-221
Cambridge, MA 02139
USA
Tel. +1 617 2532399
Fax +1 617 2532343
lanza@mit.edu

LUZNIK Janko

IMFM
Jadranska 19
1000 Ljubljana
Slovenia
Tel. +386 1 4766579
Fax +386 1 2517281
Janko.luznik@imfm.uni-lj.si

ORPHAN Victor

SAIC
16701 West Bernardo Drive
San Diego, California 92127
USA
Tel. +1 858 8269102
Fax +1 858 826 9800
orphanv@saic.com

REINGRUBER John K.

John K. Reingruber & Associates LLC
2121 Jamieson Ave. Unit 1711
Alexandria, VA 22314-5715
USA
Tel. +1 571 703 692 1623
Mob. +1 571 218 7670
Fax +1 703 697 6166
reingro@comcast.net

JOYNT Vernon

CSIR Defence Technology
Po Box 395
0001 Pretoria
South Africa
Tel. +27 128 412496
Fax +27 128 414683
vjoynt@csir.co.za

KUTNETSOV Andrey V.

V.G. Khlopin Radium Institute
194021, 28, 2nd Murinsky pr.
St.-Petersburg
Russia
Tel. +7 812 2470173
Fax +7 812 2478095
lstc1050@atom.nw.ru

LEFEBVRE Michel

Royal Military Academy
Dept. of Chemistry
30, Avenue de la Renaissance
1000 Brussels
Belgium
Tel. +32 2 737 6630
Fax +32 2 737 6352
Michel.lefebvre@rma.ac

MOSTAK Petr

Jilemnického 2216
53002 Pardubice
Czech Republic
Tel. +420 466 303261
pmostak@volny.cz

PIRNAT

Institute Jozef Stefan
Republic of Slovenia
Jamova 39
1000 Ljubljana
Slovenia
Tel. +386 1 4773620
Fax +386 1 4263269

ROSENGARD Ulf

IAEA
Wagramerstr. 5
1400 Wien
Austria
Tel. +43 1 2600 21753
Fax +43 1 2600 721753
u.rosengard@iaea.org

SAMPATH Sam
European Research Office
Edison House, 223-231 Old Marylebone Rd.
London NW1 5TH
United Kingdom
Tel. +44 20 7514 4904
Fax +44 20 7724 1433
ssampath@usardsguk.army.mil

SHILSTONE Gert
DSTL Fort Halstead
Defence Science and Technology Lab.
Sevenoaks
United Kingdom
Tel. +44 1959 892460
Fax +44 1959 892506
gnshilstone@dstl.gov.uk

TRONTELJ Zvonko
Institute Jozef Stefan
Republic of Slovenia
Jamova 39
1000 Ljubljana
Slovenia
Tel. +386 1 4773620
Fax +386 1 4263269

WEICKERT Chris
CCMAT
Defence R&D Canada – Suffield
Po Box 4000, Station Main
Medicine Hat, Alberta, T1A 8K6
USA
Tel. +1 403 5445331
Fax +1 403 5444704
Chris.Weickert@drdc-rddc.gc.ca

SCHUBERT Hiltmar
PSE GmbH
Dahlenweg 6
75045 Walzbachtal
Germany
Tel. +49 721 4640112
Fax +49 721 4640111
schu@ict.fhg.de

SIEBER Alois J.
European Commission
Joint Research Centre – IPSC-HSU
Via E. Fermi, T.P. 723
21020 Ispra (VA)
Italy
Tel. +39 0332 789089
Fax +39 0332 785469
Alois.sieber@jrc.it

WASSERZUG Louis
TSWG
1111 Jefferson Davis Hwy 116
Arlington, VA 22202
USA
Tel. +1 703 6041684
Fax +1 703 6041731
wasserzugl@tswg.gov

VAN DER WEIDE Daniel W.
University of Wisconsin
Dept. of Electrical and Computer Engineering
1415 Engineering Dr.
Madison Wisconsin 53706
USA
Tel. +1 608 2656561
Fax +1 815 3713407
danvdw@engr.wisc.edu

Proceedings on the Expert Workshop on Explosive Detection Techniques for Use on Mine
Clearance and Security Related Requirments
2- 4 June 2003, Bled Lake, Slovenia

Prepared by JRC

Published by the ITF – Print: Studio PRINT