



Evaluation of an Infrared Camera for Use in a Gun-Launched Unmanned Aerial Vehicle

by Marshal A. Childers and John A. Condon

ARL-TR-3302

September 2004

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

DESTRUCTION NOTICE—Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5069

ARL-TR-3302**September 2004**

Evaluation of an Infrared Camera for Use in a Gun-Launched Unmanned Aerial Vehicle

Marshal A. Childers and John A. Condon
Weapons and Materials Research Directorate, ARL

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) September 2004		2. REPORT TYPE Final		3. DATES COVERED (From - To) February 2004 to July 2004	
4. TITLE AND SUBTITLE Evaluation of an Infrared Camera for Use in a Gun-Launched Unmanned Aerial Vehicle				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Marshal A. Childers and John A. Condon (both of ARL)				5d. PROJECT NUMBER 1L162618H80	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory Weapons and Materials Research Directorate Aberdeen Proving Ground, MD 21005-5069				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-3302	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT A commercially available infrared (IR) camera was evaluated for potential application on the silent operating aerial reconnaissance (SOAR) gun-launched unmanned aerial vehicle (GLUAV). The objective was to provide data to support an IR imaging camera capability for SOAR. Components of a candidate IR camera were subjected to high acceleration shock experiments to predict gun-launch survivability. The experimental results show that the camera in its off-the-shelf condition cannot survive the expected loads that are representative of a zone 4 120-mm mortar launch.					
15. SUBJECT TERMS infrared; reconnaissance; shock testing; SOAR; UAV					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES 20	19a. NAME OF RESPONSIBLE PERSON Marshal A. Childers
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED			19b. TELEPHONE NUMBER (Include area code) 410-306-0717

Contents

List of Figures	iv
Acknowledgments	v
1. Introduction	1
2. Lens Assembly Evaluation	3
3. Camera Evaluation	7
4. Conclusion	10
5. Recommendation	10
6. References	12
Distribution List	13

List of Figures

Figure 1. MTS Impac66 HVA shock test machine.....	2
Figure 2. Barrel.	3
Figure 3. Pre-shock x-ray image of lens assembly.	3
Figure 4. Lens assembly attached to shock test fixture.	4
Figure 5. Pulse from first shock test event.....	5
Figure 6. Post-shock x-ray image of lens assembly.....	5
Figure 7. Pre-shock lens.....	6
Figure 8. Lens fracture resulting from shock testing.	6
Figure 9. Indigo omega camera.	7
Figure 10. X-ray image of indigo omega camera.	8
Figure 11. Glass bead encapsulation of camera board assembly.....	8
Figure 12. Pre-encapsulation infrared video still image.	9
Figure 13. Post-encapsulation infrared video still image.....	9

Acknowledgments

The authors thank Mr. Melvin Ridgley (formerly of ARL) for his assistance in providing x-rays of the camera and lens assemblies. The authors thank Mr. Jamie King of Dynamic Sciences, Inc. (DSI) for his assistance with the application of glass beads to encapsulate the camera board assembly. Mr. Peter Kornik and Mr. Darin Murray of Janos Technology advised the authors about the component material properties and structural design of the lens assembly. The authors further thank Mr. Shawn Dirksen of Indigo Systems, Inc., for informing them about details of the camera design and for analyzing the mode of failure of the camera after experimentation (reference contract of support and procurement DAAD1703-03-P-0875).

INTENTIONALLY LEFT BLANK

1. Introduction

The gun-launched silent operating aerial reconnaissance (SOAR) vehicle is a small folding wing aerial vehicle that has potential to provide real-time reconnaissance, targeting, battle damage assessment, meteorological data, and a communication link (1). There is a need to extend the capabilities of SOAR to low light or night operational scenarios. Thermal imaging cameras are successfully used on larger unmanned aerial vehicles (UAV) such as Pointer (2). The objective of the work presented here was to determine the high-g survivability of a thermal imaging camera for use on SOAR. The U.S. Army's 120-mm M930/M983 illuminating mortar cartridge is the proposed delivery platform for the SOAR vehicle. In this delivery concept, the SOAR vehicle is contained within the mortar cartridge during mortar launch and is expelled from the cartridge during an in-flight expulsion event.

Omega¹ is a thermal imaging infrared (IR) camera that uses uncooled microbolometer² detectors and proprietary on-focal plane signal processing. Currently, Omega is the smallest commercially available IR camera. Further information about this camera is available on the manufacturer's web site³. The current size of the SOAR electronics cavity requires the use of an IR camera that is smaller and lighter than Omega and a custom external mirror design to provide an appropriate viewing angle.

To evaluate survivability of the camera, experiments were performed to simulate mortar launch of the SOAR vehicle. Given that the typical zone 4 launch acceleration for the selected mortar is approximately 10,000 g, a conservative launch acceleration of 15,000 g was chosen as the criterion for survivability of the camera. The approach used to determine the survivability of this camera in a gun launch environment was limited in that only one unit was evaluated because of its relatively high cost (approximately \$10,000 for a quantity of one to five) and long lead time. The lens assembly and the camera were tested separately, but the shutter assembly was not tested. It is assumed that the camera can be re-programmed to prevent in-flight recalibration so that the shutter assembly can be eliminated. The work in this report does not consider the effect of the mortar expulsion event on the camera which imparts approximately 3,000 g in the direction opposite the launch direction.

The apparatus used to simulate the mortar launch acceleration was the MTS⁴ IMPAC66 high velocity acceleration (HVA) shock test machine. The mechanism consists of a 33-lb high-

¹On June 8, 2004, the name was changed from Omega to ThermoVision Micron.

²A microbolometer is a type of technology for thermal imaging. Microbolometers are thermoelectric in nature, which means when the detector senses IR energy, it reacts by changing resistance. The change is then measured by the "read-out" electronics to create a thermal image for viewing.

³<http://www.indigosystems.com>

⁴Not an acronym; MTS Systems Corporation, 14000 Technology Dr., Eden Prairie, MN 55344-2290.

strength forged aluminum table that is accelerated with bungee cords onto a 450-lb steel reaction mass (see figure 1). In order to obtain a shock pulse of desired maximum deceleration and duration, it is necessary to place a mitigating material (programmer) between the shock table and reaction base. This material has energy absorption characteristics, and typical programmers used for high-g (>1000 -g) applications are constructed from felt or urethane materials. Detailed information about the use of this system for high-g and low-g applications was reported in references (3) and (4).

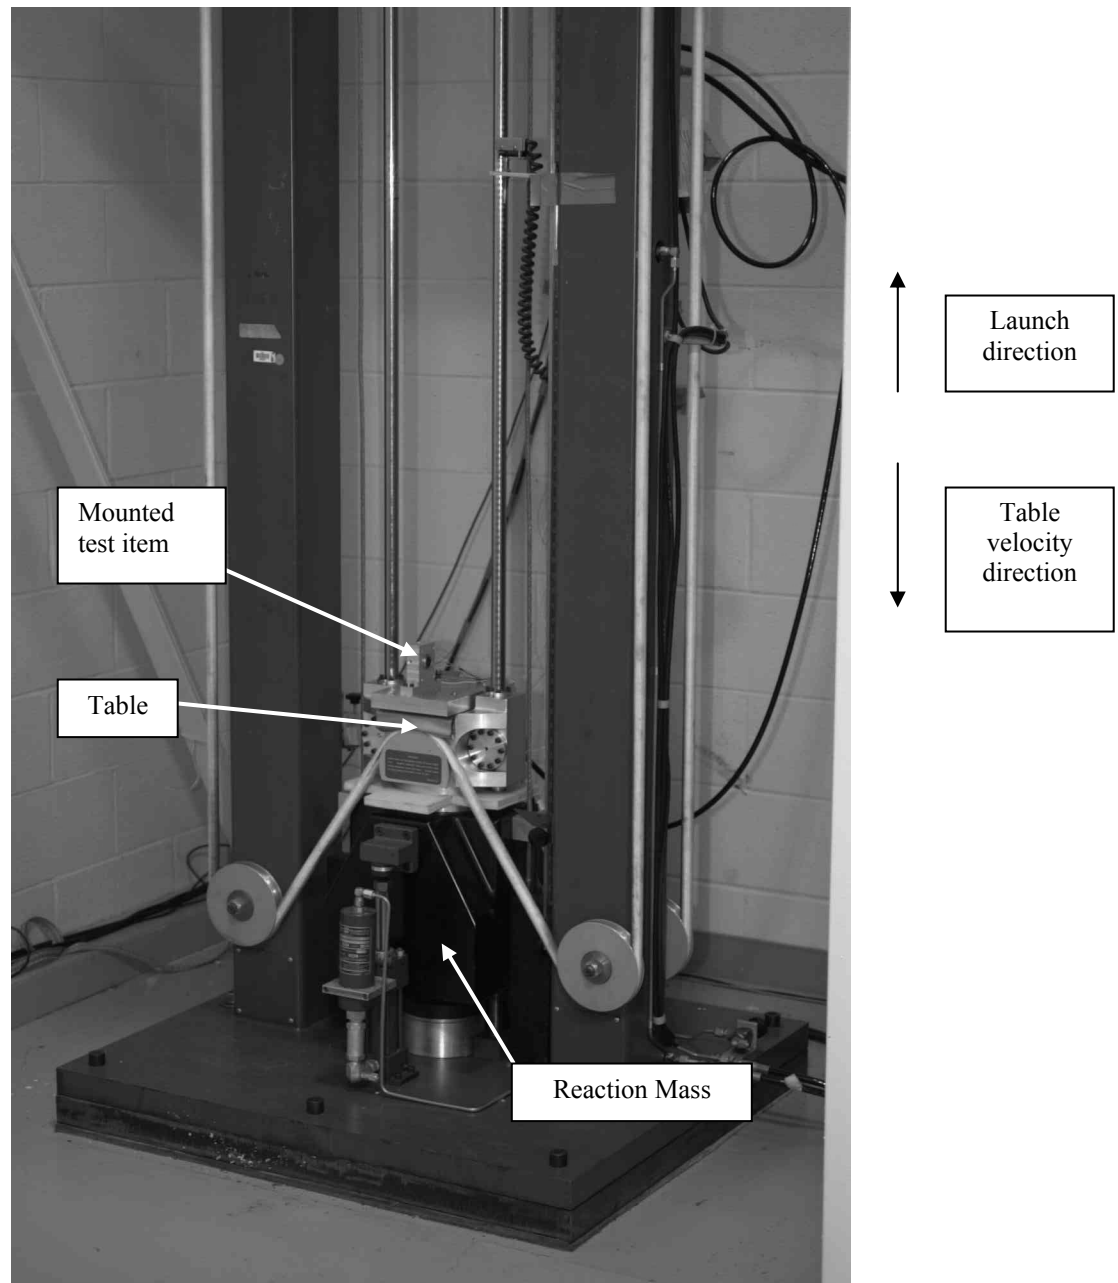


Figure 1. MTS IMPAC66 HVA shock test machine.

2. Lens Assembly Evaluation

The lens assembly consists of a barrel that contains the lens, barrel housing, and a mounting plate that connects the assembly to the camera body. The lens is machined from zinc selenide and is glued to the inside of the barrel. The barrel is held in the housing by friction, and a set screw enables manual focusing of the lens by means of a guide groove (see figure 2). An x-ray of the lens assembly is shown in figure 3.



Figure 2. Barrel.

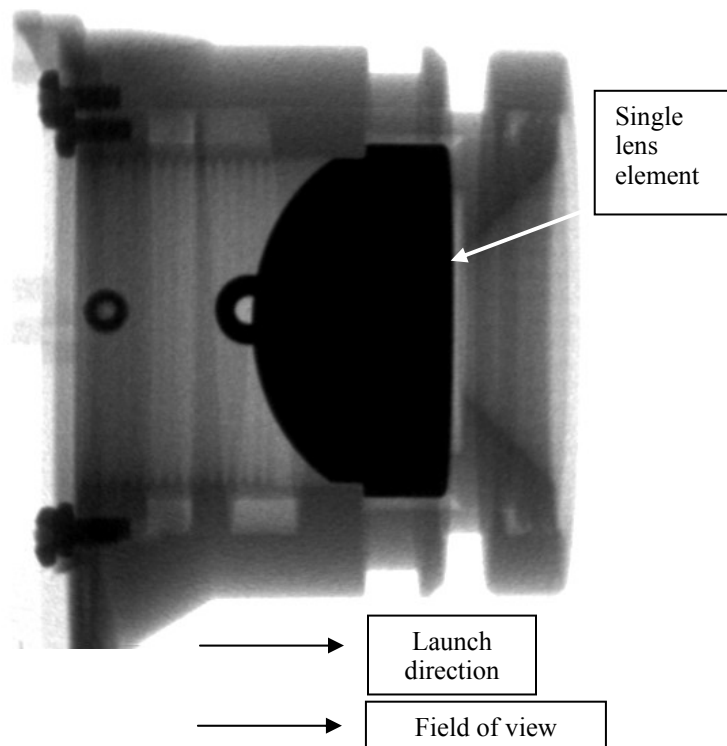


Figure 3. Pre-shock x-ray image of lens assembly.

The proposed camera orientation is such that the camera faces the forward direction along the SOAR vehicle thrust axis. The lens assembly was tested separately from the camera. To secure the lens assembly during the shock event, a fixture was designed to attach the lens assembly to the shock table by the four mounting holes in the lens assembly (see figure 4). The fixture was fabricated from 7075-T6 aluminum.

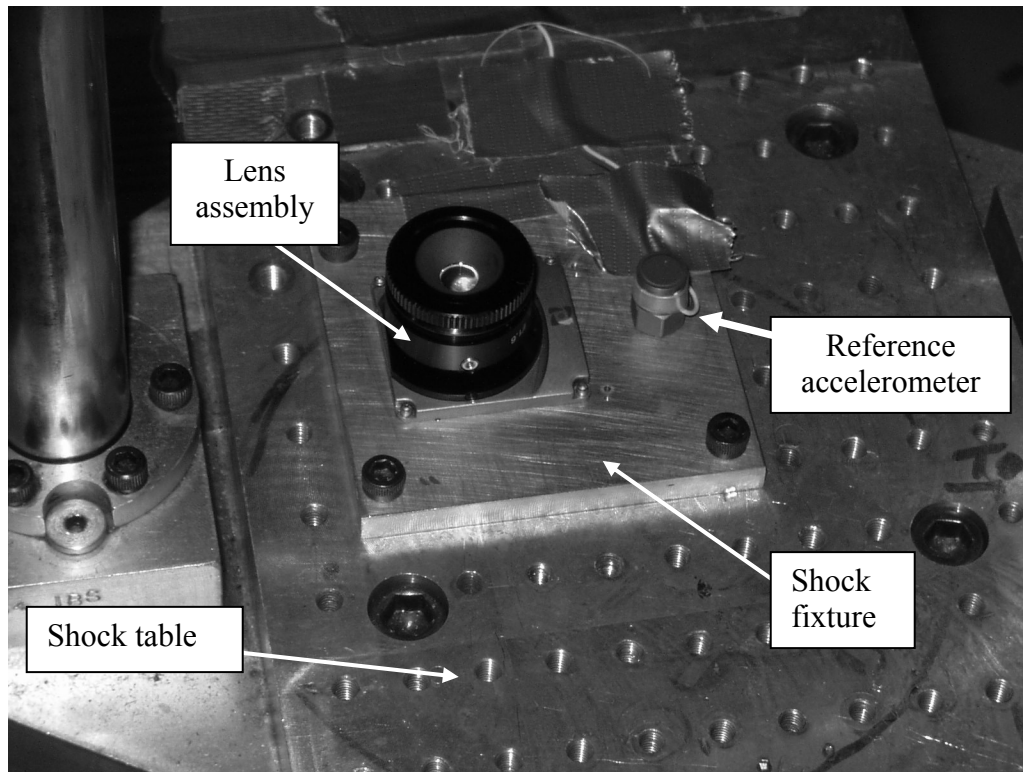


Figure 4. Lens assembly attached to shock test fixture.

Three shock events were incrementally applied to the same lens assembly with maximum shock levels of approximately 2000 g, 5000 g, and 11,000 g. A PCB⁵ Piezotronics⁶ model 350B02 reference accelerometer was attached to the shock fixture to measure the deceleration magnitude and duration of each shock event.

The shock pulse for the first shock is shown in figure 5. A 2300-g maximum deceleration of 60-microsecond (μ s) duration was applied to the lens assembly. No damage to the lens assembly was sustained during this shock event, as verified by visual inspection and post-shock imaging upon camera reassembly.

The second shock event achieved a maximum deceleration of 5600 g with a 55- μ s duration. No damage was sustained by the lens assembly during the second shock event.

⁵Not an acronym

⁶PCB Piezotronics, Inc., <http://www.pcb.com>

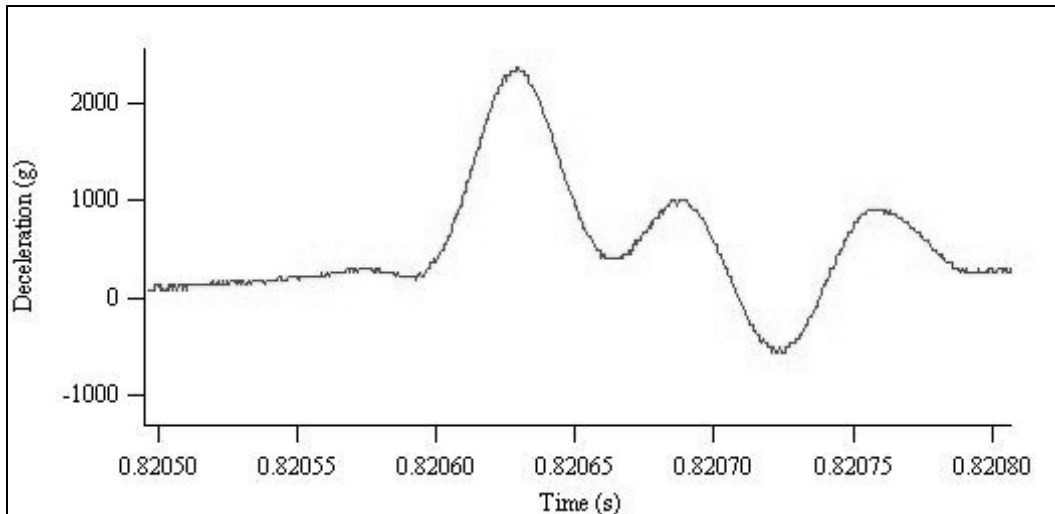


Figure 5. Pulse from first shock test event.

The third shock that was applied to the lens assembly achieved an 11,300-g maximum deceleration of 50- μ s duration. Significant damage was sustained by the lens during this shock event. The lens fractured so that the unsupported back half of the lens dislodged from the portion that was glued to the barrel. The x-ray in figure 6 shows that the fracture initiated at the shoulder edge where the lens was supported by the barrel. The lens was nonfunctional as a result of the third shock event (see figures 7 and 8).

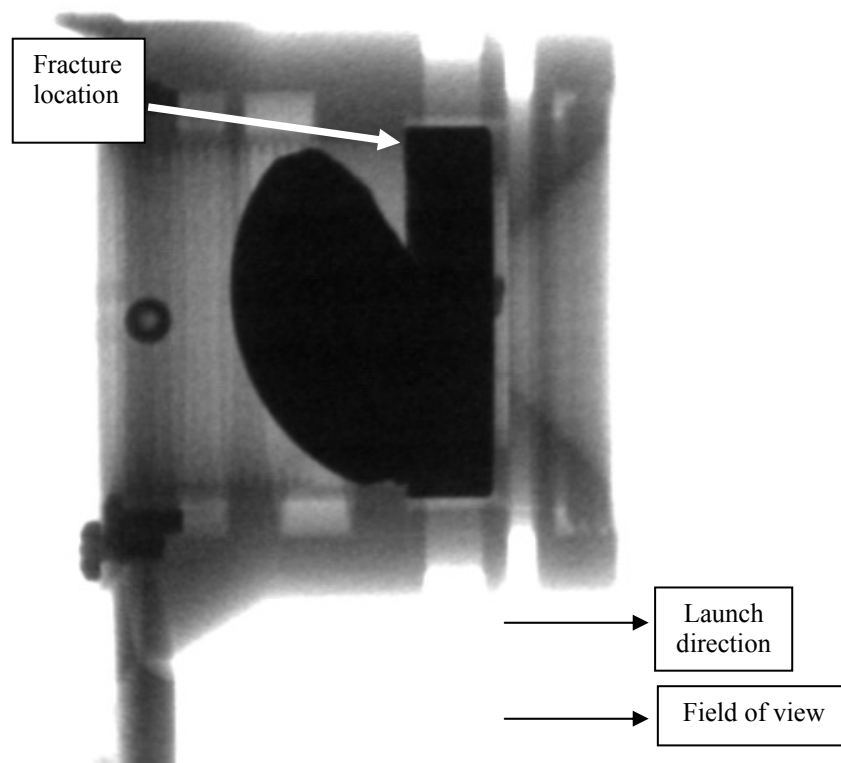


Figure 6. Post-shock x-ray image of lens assembly.



Figure 7. Pre-shock lens.



Figure 8. Lens fracture resulting from shock testing.

The cost of a replacement lens, as quoted by Indigo Systems Corporation, is \$900.00. The lens manufacturer⁷ claimed that by removing stress risers in the lens geometry and improving the method of supporting the lens, they could redesign the lens so that it could withstand a 15,000-g maximum acceleration shock event. The cost for a new lens design, as quoted by the lens manufacturer, was \$2,200.00 for non-recurring engineering costs and \$1,610.00 for five lenses (\$6,393.00 for one lens).

⁷Janos Technology, 1068 Grafton Road, Townshend, Vermont 05353-9605.

3. Camera Evaluation

The Indigo Omega camera (see figure 9) is a long wavelength IR (7.5 to 13.5 microns) system that obtains thermal images via an uncooled microbolometer. The approximate camera dimensions are 1.35 inches high by 1.45 inches wide by 1.9 inches long, and the weight of the unit (including lens) is 120 grams. Figure 10 shows an x-ray of the camera and shows that the circuit boards are supported only at the edges. The system consists of two circuit boards that interconnect via flexible ribbon cables to permit folding of the boards into the orientation shown in the x-ray. Visual inspection of the structure revealed that the circuit boards were attached to the camera case by two 0-80⁸ unified fine-thread series (UNF) screws and were supported on one side by a heat shield. To increase the shock survivability of the camera, glass spheres were used to support and encapsulate the electronics inside the camera body. Glass spheres were chosen to facilitate inspection after shock testing. (It is envisioned that a typical non-removable encapsulation material would be applied in a final production version.) The glass spheres, with a diameter of 270 microns, were vibrated into the camera case on a vibration table that is actuated by rotating imbalance. A clear acrylic box of the same dimensions as the camera case (see figure 11) was used to observe the glass bead encapsulation of the circuit boards. It was visually determined that the glass spheres thoroughly filled the spaces between the circuit boards and between the circuit components. The acrylic box was only used to qualify the encapsulation method; all testing was conducted with the actual camera case.



Figure 9. Indigo omega camera.

To verify that the glass spheres did not adversely affect the camera functionality, we performed video imaging before and after encapsulation. Figures 12 and 13 compare still photographs taken from the pre-encapsulation and post-encapsulation videos. The figure shows that there was no appreciable loss in the image quality as a result of glass sphere encapsulation.

⁸size 0, 80 turns per inch

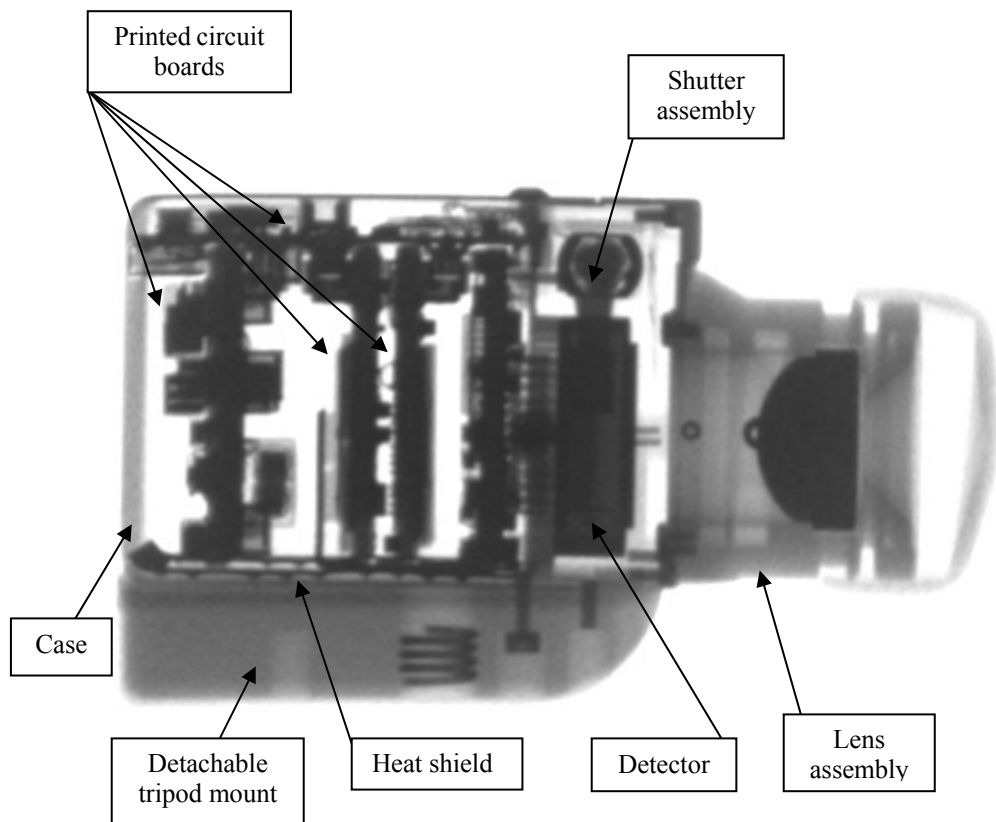


Figure 10. X-ray image of indigo omega camera.

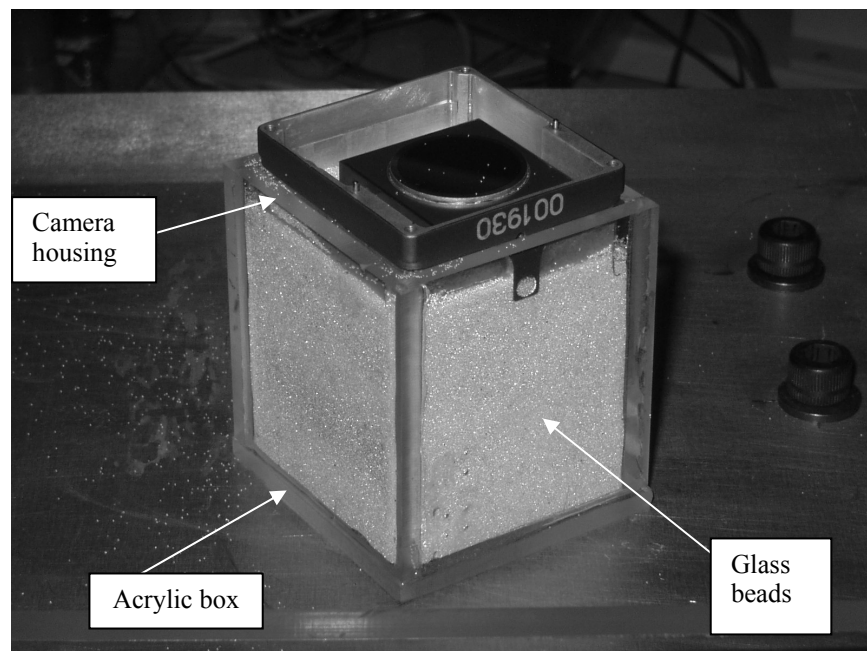


Figure 11. Glass bead encapsulation of camera board assembly.



Figure 12. Pre-encapsulation infrared video still image.



Figure 13. Post-encapsulation infrared video still image.

To secure the camera to the shock test system table, a fixture was designed and fabricated from 7075-T6 aluminum. The viewing axis of the camera was oriented parallel to the shock table deceleration axis with the lens facing the acceleration (launch) direction. Four 4-40 unified course-thread series (UNC) screws were used to attach the fixture to the shock table. A PCB Piezotronics model 350B02 reference accelerometer was attached directly to the shock table to measure the deceleration magnitude and duration of the shock event.

The objective of the shock experiments for the camera was to apply maximum deceleration values of 5000 g, 10,000 g, and 15,000 g incrementally in a series of three shock tests.

The first shock test performed on the camera achieved a 5000-g maximum deceleration of 72- μ s duration. As a result of the first shock test, the camera was nonfunctional in that the system did not start during the post-shock evaluation. A visual inspection of the camera components did not reveal any defects in the camera components.

As a result of post-shock test evaluation performed by the manufacturer, the printed circuit boards were verified to be intact and functional. The evaluation suggested that the failure was attributable to a “short” in the gold-plated substrate, caused by slumping of the detector wire bonds. The manufacturer recommended that removal of the gold plate substrate will enable the use of shorter wire bonds. According to a study performed at the U.S. Army Research Laboratory (5), shortening the wire bond lengths should increase shock survivability.

The cost to replace the detector and calibrate the system, as quoted by the manufacturer, was \$2,301.78.

4. Conclusion

The Omega camera, in commercial-off-the-shelf condition, is not capable of surviving in a typical gun launch environment. Changes in the sensor wire bond design are required to increase the potential for zone 4 mortar launch survivability. Shortening the wire bonds and encapsulating them in a shock-mitigating material should increase launch survivability. Some modification of either the camera or the SOAR vehicle may permit a soft launch (approximately 250 to 500 g) application of the Omega camera. If the SOAR vehicle electronics cavity were enlarged to accommodate the Omega camera or if the size of the Omega camera housing were reduced to fit the camera in the electronics cavity, the Omega camera would be a candidate for a soft launch, thermal imaging scenario.

5. Recommendation

To enable the use of a modified Omega camera in a zone 4 mortar launch scenario, it is recommended that the wire bonds in the sensor be “hardened” by the shortening of the bond length. Furthermore, the gold plate substrate should be removed to prevent “shorting” of the wires. To determine the shock survivability of a modified sensor, further shock experimentation is required. To determine the suitability of using the Omega camera in a soft launch environment, it is recommended to assess shock survivability of the camera by shock testing at

low levels (approximately 250 to 500 g) of acceleration. To mount the camera inside the SOAR vehicle, it is recommended that the size of the camera housing be decreased or the diameter of the SOAR vehicle electronics cavity be increased.

6. References

1. Aerovironment Incorporated Design Development Center, *FQM-151A (Pointer) Hand-launched Unmanned Aerial Vehicle System*, Simi Valley CA, October 2002.
2. Miralles, C. T. *Gun-launched Unmanned Aerial Vehicle Flight Demonstration and Concept Validation*; ARL-CR-0515; U.S. Army Research Laboratory: Aberdeen Proving Ground, MD, March 2003.
3. Childers, M. A. *Evaluation of the IMPAC66 Shock Test Machine, Serial Number 118*; ARL-TR-2840; U.S. Army Research Laboratory: Aberdeen Proving Ground, MD, October 2002.
4. Garner, J. M. *Shock Test Machine User's Guide*; ARL-TN-23; U.S. Army Research Laboratory: Aberdeen Proving Ground, MD, September 1993.
5. Katulka, G.; Ridgley, M. *Test Results of Munitions Interconnects During Shock and Spin Experiments*; ARL-TR-2792; U.S. Army Research Laboratory: Aberdeen Proving Ground, MD, August 2002.

NO. OF
COPIES ORGANIZATION

* ADMINISTRATOR
DEFENSE TECHNICAL INFO CTR
ATTN DTIC OCA
8725 JOHN J KINGMAN RD STE 0944
FT BELVOIR VA 22060-6218
*pdf file only

1 DIRECTOR
US ARMY RSCH LABORATORY
ATTN IMNE AD IM DR MAIL & REC MGMT
2800 POWDER MILL RD
ADELPHI MD 20783-1197

1 DIRECTOR
US ARMY RSCH LABORATORY
ATTN AMSRD ARL CI OK TECH LIB
2800 POWDER MILL RD
ADELPHI MD 20783-1197

4 DIRECTOR
US ARMY RSCH LABORATORY
ATTN AMSRD ARL SE RL M DUBEY
B PIEKARSKI
AMSRD ARL SE RM
AMSRD ARL SE SS LADAS
2800 POWDER MILL RD
ADELPHI MD 20783-1197

1 CDR US ARMY TACOM ARDEC
ATTN AMSTA AR FSP M HOLLIS
PICATINNY ARSENAL NJ 07806-5000

1 PROGRAM MGR ITTS
STRICOM
ATTN AMFTI EL D SCHNEIDER
12350 RESEARCH PKWY
ORLANDO FL 32826-3276

1 US ARMY CECOM RDEC
ATTN AMSEL RD NV AS UEA
G KLAUBER
10221 BURBECK ROAD
FORT BELVOIR VA 22060-5806

2 AEROVIRONMENT INC
ATTN C MIRALLES
4685-3H INDUSTRIAL ST
SIMI VALLEY CA 93063

ABERDEEN PROVING GROUND

1 DIRECTOR
US ARMY RSCH LABORATORY
ATTN AMSRD ARL CI OK (TECH LIB)
BLDG 4600

NO. OF
COPIES ORGANIZATION

2 CDR USA AMSAA
ATTN AMXSY EF
AMXSY EV
BLDG 392

1 US ARMY EVALUATION CMD
ATTN USA CSTE EAC AZ R MIRABELLE
BLDG 4120

2 CDR US ARMAMENT RD&E CTR
ATTN AMSTA AR FST T J MATTS
J WHITESIDE
BLDG 120

1 CDR USA DTC
ATTN CSTE DTC TTM J SCHNELL
RYAN BLDG

3 DIR USARL
ATTN AMSRD ARL WM J SMITH
T ROSENBERGER H WALLACE
BLDG 4600

1 DIR USARL
ATTN AMSRD ARL WM B W CIEPIELLA
BLDG 4600

23 DIR USARL
ATTN AMSRD ARL WM BA T BROWN (2 CYS)
F BRANDON T BROSSAU
M CHILDERS (5 CYS)
J CONDON (2 CYS) B DAVIS
T HARKINS D HEPNER
K HUBBARD G KATULKA
D LYON R MCGEE
P MULLER M NAIR
P PEREGINO A THOMPSON
M WILSON
BLDG 4600

2 DIR USARL
ATTN AMSRD ARL WM BC P PLOSTINS
J GARNER
BLDG 390

2 DIR USARL
ATTN AMSRD ARL WM BF H EDGE
T HAUG
BLDG 390

2 DIR USARL
ATTN AMSRD ARL WM RP J BORNSTEIN
C SHOEMAKER
BLDG 1121