

DETERMINATION OF LAMINAR FLAME SPEED OF DIESEL FUEL FOR USE IN A TURBULENT FLAME SPREAD PREMIXED COMBUSTION MODEL

Peter Schihl*, John Tasdemir, and Walter Bryzik
RDECOM-TARDEC
Warren, MI, 48397-5000

ABSTRACT

One of the key challenges facing diesel engine system modelers lies in adequately predicting the fuel burning rate profile given the direct relationship between energy release and key performance parameters such as fuel economy, torque, and exhaust emissions. Current state-of-the-art combustion sub-models employed in such system simulation codes rely heavily on empiricism and successful application of such sub-models for new engine designs is highly dependent on past experience with similar combustion systems. One common approach to address this issue is to expend great effort choosing associated empirical coefficients over a range of similar combustion system designs thus improving the potential predictive capability of a given empirical model. But, continual combustion system development and design changes limit the extrapolation and application of such generic combustion system dependent coefficients to new designs due to various reasons including advancements in fuel injection systems, engine control strategy encompassing multiple injections, and combustion chamber geometry.

In order to address these very difficult challenges, an extensive effort has been applied toward developing a physically based, simplified combustion model for military-relevant diesel engines known as the Large Scale Combustion Model (LSCM). Recent effort has been spent further refining the first stage of the LSCM two stage combustion model that is known as the premixed phase sub-model. This particular sub-model has been compared with high-speed cylinder pressure data acquired from two relevant direct injection diesel engines with much success based on a user defined parameter referred to as the laminar flame speed by the combustion community. It is a physically significant parameter that is highly dependent on local temperature, pressure, and oxygen concentration but little experimental effort has been spent determining its behavior for diesel fuel due to ignition constraints. This submission will discuss one approach of indirectly determining this key combustion parameter.

INTRODUCTION

Diesel combustion modeling is difficult from a fundamental perspective due to the lack of three-dimensional understanding thus making simplified (zero-

or quasi-dimensional) approaches even more difficult. The engine community has seen a tremendous advancement in understanding and predictive capability throughout the last fifty years and especially since the 1970's given the advent of supercomputers. One of the earliest attempts to model combustion in a diesel-like environment was based on a droplet evaporation control approach (Tanasawa, 1953) that utilized previous work focused on establishing droplet size distribution functions (Probert, 1946). Shortly afterward, this work was extended to include the effect of the injection rate on droplet evaporation (Austen and Lyn, 1961; Lyn, 1962) thus directly accounting for the role of the fuel injection event in the combustion process. This well known model is commonly referred to as the 'triangular burning rate law'. It was subsequently recognized by various researchers that inclusion of a semi-predictive combustion model would be very valuable within the context of an overall engine system model (Cook, 1963; McAulay et al., 1965; Cook, 1965; Nagao et al., 1967) and thus much effort has been spent by the engine community in developing more predictive heat release models. In the late 1960's one of first comprehensive models was developed that included coupled global evaporation, mixing, and kinetics effects (Shipinski et al., 1968, 1970).

At the onset of the 1970's emissions became an additional focus of such combustion model development efforts. The engine community subsequently developed chemically kinetic and mixing controlled combustion models (Whitehouse and Way, 1970, 1971), bulk mixing rate submodels (Grigg and Syed, 1970; Khan et al., 1971), and thermodynamic multi-zone models (Bastress et al., 1971; Shahed et al., 1973, 1975; Hodgetts and Shroff, 1975; Chiu et al., 1976; Hiroyasu and Kadota, 1976; Maguerdichian and Watson, 1978). These efforts were fundamental in establishing the basis for today's multi-zone and bulk mixing combustion models that have been fine tuned throughout the last twenty-five years through careful development of air-fuel mixing submodels (Dent and Mehta, 1981; Dent et al., 1982, Kono et al., 1985; Kyriakides et al., 1986; Schihl et al., 1996) and more comprehensive multi-zone models (Hiroyasu et al., 1983; Lipkea and DeJoode, 1987; Kouremenos et al., 1986, 1987, 1997; Bazari, 1992; Li and Assanis, 1993; Mehta et al. 1995; Jung and Assanis, 2001).

In parallel to these mixing approaches a number of strictly empirical models were developed and are

Report Documentation Page		Form Approved OMB No. 0704-0188
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.		
1. REPORT DATE 01 DEC 2004	2. REPORT TYPE	3. DATES COVERED -
4. TITLE AND SUBTITLE DETERMINATION OF LAMINAR FLAME SPEED OF DIESEL FUEL FOR USE IN A TURBULENT FLAME SPREAD PREMIXED COMBUSTION MODEL		5a. CONTRACT NUMBER
		5b. GRANT NUMBER
		5c. PROGRAM ELEMENT NUMBER
6. AUTHOR(S) PETER SCHIHL; JOHN TASDEMIR; WALTER BRYZIK		5d. PROJECT NUMBER
		5e. TASK NUMBER
		5f. WORK UNIT NUMBER
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) REDCOM-TACOM,6501 E 11 MILE,WARREN,MI,48397-5000		8. PERFORMING ORGANIZATION REPORT NUMBER 14162
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		10. SPONSOR/MONITOR'S ACRONYM(S)
		11. SPONSOR/MONITOR'S REPORT NUMBER(S)
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited		
13. SUPPLEMENTARY NOTES		
14. ABSTRACT One of the key challenges facing diesel engine system modelers lies in adequately predicting the fuel burning rate profile given the direct relationship between energy release and key performance parameters such as fuel economy, torque, and exhaust emissions. Current state-of-the-art combustion sub-models employed in such system simulation codes rely heavily on empiricism and successful application of such sub-models for new engine designs is highly dependent on past experience with similar combustion systems. One common approach to address this issue is to expend great effort choosing associated empirical coefficients over a range of similar combustion system designs thus improving the potential predictive capability of a given empirical model. But continual combustion system development and design changes limit the extrapolation and application of such generic combustion system dependent coefficients to new designs due to various reasons including advancements in fuel injection systems, engine control strategy encompassing multiple injections, and combustion chamber geometry. In order to address these very difficult challenges, an extensive effort has been applied toward developing a physically based, simplified combustion model for military-relevant diesel engines known as the Large Scale Combustion Model (LSCM). Recent effort has been spent further refining the first stage of the LSCM two stage combustion model that is known as the premixed phase sub-model. This particular sub-model has been compared with high-speed cylinder pressure data acquired from two relevant direct injection diesel engines with much success based on a user defined parameter referred to as the laminar flame speed by the combustion community. It is a physically significant parameter that is highly dependent on local temperature, pressure, and oxygen concentration but little experimental effort has been spent determining its behavior for diesel fuel due to ignition constraints. This submission will discuss one approach of indirectly determining this key combustion parameter.		
15. SUBJECT TERMS		

16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES 8	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

employed within various engine cycle simulation computer codes (Watson, 1977; Watson et al., 1980; Ghojel, 1982; Miyamota et al., 1985; Craddock and Hussain, 1986; Breuer, 1995; Reddy et al., 1996) such as Transeng, GT-Power and Wave. Such correlations include a number of constants (up to six) that are not always a direct function of the engine system, i.e. fuel injection event, piston design, thus making a priori optimized combustion system design nearly impossible. Nevertheless, such correlations are valuable for establishing an initial engine system configuration and thus save precious time throughout the development process. The engine community also saw development of three-dimensional models during this same time period that are currently employed for fine tuning combustion system geometry and targeting with codes such as KIVA (Amsden et al., 1985, 1989).

The LSCM is also a bulk mixing approach but includes relevant combustion chamber design parameters (spray impingement length, mean bowl wall curvature, bumper clearance, etc.) and the injection event (fuel velocity, number of nozzle holes and size, and angle) qualifiers on the heat release event through judicious selection of three constants – spray angle, laminar flame speed, and viscous dissipation (Schihl et al., 1999, 2002). The first constant is the most difficult to assess and usually is chosen based on measurements acquired by various researchers in engines and in combustion bombs; the second constant is actually a physicochemical property of the fuel; the last constant represents the turbulent dissipation rate and tends to be on the order of a tenth based on a number of engines modeled in the past. Overall, the elimination of laminar flame speed as a constant would reduce LSCM down to a single constant model assuming that the dissipation rate is on the same order for a given combustion chamber geometry (Schihl and Tasdemir, 2004).

Experimental determination of laminar flame speed for heavy hydrocarbon fuels is difficult. Most measurements reported to date range in fuel type from hydrogen to octane over a variety of temperatures, pressures, and air-fuel ratios (Andrews and Bradley, 1972; Metghalchi and Keck, 1982; Law, 1993; Zhou and Garner, 1996; Kobayashi et al., 1996; Egolfopoulos et al., 1998; Daly et al., 2001; Hirasawa et al., 2001). Two recent attempts to directly measure laminar flame speed for diesel fuel and jet fuel (JP-8) were unsuccessful due to the associated fast pre-ignition chemistry (personal communications with Southwest Research Institute and Northeastern University). Given the experimental limitations of obtaining this key combustion parameter, an indirect method was developed to assess diesel fuel laminar flame speed behavior as a function of ignition temperature and pressure based on heat release data acquired from two diesel engines. The underlying

assumption of this method is that the spray mixing layer fuel consumption rate can be determined if the turbulent intensity is known and the flame sheet is thin in comparison to the mean eddy length scale (Turns, 1996). Based on experience with various engines it should be possible to properly scale turbulence intensity given the good agreement between LSCM predictions and heat release data over various engine speed-load conditions (Schihl et al., 1999, Schihl et al., 2002). Additionally, utilization of a large database of engine operating conditions will also minimize any experimental and modeling errors associated with indirect determination of the associated heat release profiles.

1. EXPERIMENTAL SETUP

Two direct injection diesel engines were employed for this study as shown in table 1. The smaller bore engine was a single cylinder automotive-type (Schihl et al., 2002) while the larger bore engine was a two cylinder engine variant of the Bradley Fighting Vehicle V-8 power plant (Schihl et al., 2001). Each engine was operated over a variety of speed and load conditions, and included piezo-electric transducers for measuring combustion chamber pressure for heat release analysis. Additionally, the smaller bore engine was also operated at various exhaust recirculation (EGR) levels, fuel injection pressures, and injection timing schedules.

TABLE 1: ENGINE SPECIFICATIONS

Engine Parameter	Description	
Model Type	Cummins V903	Ford DIATA
Number of Cylinders	2	1
Injection system	PT	FEV CORA II
Injection pressure ¹ (bar)	600 – 1300	500 – 1200
Nozzle geometry (mm)	7 x 0.190	6 x 0.124
Bore x stroke (mm)	140 x 125	70 x 78
Compression ratio	12.5	19.5
Swirl number	0.8	2.4 ²
Displacement ³ (cc)	1850	300
Operating speeds (rpm)	1600 – 2600	1500 – 3000
IMEP range (bar)	5 – 14	3 – 18
Boost system	Shop air	

¹ Peak value.

² Flow bench demonstration at maximum valve lift.

³ Per cylinder.

Heat release analysis was performed using standard thermodynamic first law analysis and the perfect gas law. The specific heat ratio was calculated based on an ideal gas mixture of CO₂, H₂O, N₂, O₂ and gaseous diesel fuel when appropriate, i.e. after start of injection, and the bulk cylinder temperature was determined based on corrected real gas behavior (Kanimoto et al., 1997) and estimated in-cylinder charge mass – the corresponding equation of state is given by:

$$\nu = \frac{RT}{P} + 1.09059 \times 10^{-3} - \frac{8.50053 \times 10^{-3}}{(T/100)^{1.64}} + \frac{4.34248 \times 10^{-10}}{(T/100)^{2.49}} P - \frac{6.52579 \times 10^{-18}}{(T/100)^{2.92}} P^2 + \frac{2.95689 \times 10^{-26}}{(T/100)^{3.17}} P^3 \quad (1)$$

The initial specie mole fractions were chosen (CO_2 , H_2O , N_2 , O_2) after the intake valve closing event and a single step global paraffin chemistry model was utilized to determine any changes in the specie mole fractions upon initiation of the injection process. Since the apparent heat release rate does not differentiate between heat transfer and gross burning rate, and typical combustion efficiencies in diesel engines are 99%, a speed up factor was incorporated within the chemistry model to ensure a nearly complete burn and thus a more accurate calculation of the charge specific heat ratio. All experimental pressure traces were conditioned with a digital low pass filter that had a cutoff frequency of typically twice the engine speed preceding heat release analysis and n-hexadecane was chosen as a surrogate fuel for DF-2 based on a previous heat release fuel sensitivity study (Schihi et al., 2002).

1.1 Fuel Effects

A commercial DF-2 was employed throughout evaluation of the Ford DIATA engine while a military grade DF-2 was utilized throughout the V903 test schedule. Details of each fuel are given in table 2.

TABLE 2: TEST FUEL SPECIFICATIONS

Fuel Parameter	Engine Configuration	
	Cummins V903	Ford DIATA
Density (kg/m^3)	845	842
Cetane Number	47	53
Net Heating Value (MJ/kg)	42.6	42.8
Hydrogen (% wt.)	12.8	13.25
Sulfur (ppm)	1400	400

2. PREMIXED PHASE COMBUSTION MODEL

The combustion event maybe idealized as a sequence of three major events as described in the past by LSCM – ignition, consumption of the fuel-air mixing layer, and consumption of mixing controlled fuel-air packets (Schihi et al., 1999). During the ignition delay period, a mixing layer forms on the fuel spray periphery comprised of varying local fuel-air ratios and temperatures that is highly dependent of the fuel jet injection profile and in-cylinder thermodynamic state. At some point, a packet or packets of fuel-air charge reach an excited state that results in stabilization of a flame kernel and thus the onset of ignition once exothermic energy release exceeds the

local diffusion/convection transport rates. Afterward, the flame front(s) propagate in rapid fashion throughout the mixing layer consuming packets that reach flammable limits at a rate the order of the fuel injection velocity (Balles and Heywood, 1989). This consumption process is commonly referred to as the premixed phase of combustion (Heywood, 1988). After ignition, other fuel packets not originally included within the mixing layer either begin or continue to mix locally with oxidizer. Eventually these packets reach proper proportions and are eventually consumed by the established flame front initiated during the premixed phase of combustion. The mixing controlled phase of combustion initiates upon consumption of these packets and is assumed to occur at stoichiometry as is typical of a diffusion flame.

The LSCM addresses each of the three events based on simplified physics and inherently includes a premixed phase submodel that is based on the flamelet assumption (Turns, 1996) originally employed in homogeneous charge spark-ignition engines (Blizzard and Keck, 1974; Tabaczynski et al., 1977) and modified for diesel sprays (Schihi et al., 1999) as given below:

$$\begin{aligned} \frac{dm_{en}}{dt} &= FA \rho A_f (\tilde{u} + S_l + U_{jet}) \\ \frac{dm_{pb}}{dt} &= \frac{m_{en} - m_{pb}}{\tau} \\ \tau &= \frac{\delta_t}{S_l} \quad \frac{\delta_t}{l} \propto \text{Re}_l^{-0.5} \quad \text{Re}_l = \frac{\rho \tilde{u} l}{\mu} \end{aligned} \quad (2)$$

where m_{en} is the mixing layer charge mass entrainment rate, FA is the average mixing layer fuel-air ratio, ρ is the charge density, A_f is the flame front area, $\tilde{u}$ is the mean turbulence intensity, S_l is the laminar flame speed, U_{jet} is the local jet penetration rate, m_{pb} is the consumed premixed phase fuel mass, τ is the characteristic burning time, δ_t is the Taylor length scale, l is the representative mixing length scale and μ is the charge viscosity. Furthermore, the flame front area and mean turbulence intensity is given below:

$$\tilde{u} = l \omega \quad A_f = \pi \left[(R' + \delta_{pm})^2 - R'^2 \right] \quad (3)$$

and ω is the bulk mixing rate, R' is the radial distance from the spray centerline to the onset of the shear layer, and δ_{pm} is the premixed fuel-air shear layer thickness (Dimotakis, 1991). The representative eddy length scale is chosen as the following inverse relationship:

$$\frac{1}{l} = \frac{1}{B} + \frac{1}{z + d} \quad (4)$$

and B is the cylinder bore, d is a representative bowl depth, and z is the distance from the piston lip to the fire deck. The bulk mixing rate is determined based on

contributions from the injection event, squish flow, swirl, dissipation, and combustion chamber compression-expansion. Fundamentally it is derived from the angular momentum of a representative eddy (Spalding, 1970) as shown below:

$$\begin{aligned}
 \frac{d\Omega}{dt} &= \dot{P}_{inj} + \dot{P}_s + \dot{P}_{sw} - \dot{D}_s & \Omega &= \frac{1}{8} m_e \omega l^2 \\
 \frac{dm_e}{dt} &= \dot{m}_{inj} + \dot{m}_{sq} & \dot{P}_s &= ABS(\dot{m}_{sq} U_{sq} l_{sq}) \\
 \dot{D}_s &= a\omega\Omega \exp(-a\omega\delta t) & \dot{P}_{inj} &= \frac{\dot{m}_{inj} U_{inj} S}{4} \\
 \dot{P}_{sw} &= \rho \left(\frac{S+L_b}{2} \right)^3 \omega_s^2 \left\{ \tan\left(\frac{\theta}{2}\right) \right\}^2 \frac{S^2 - L_b^2}{2}
 \end{aligned} \quad (5)$$

where $\dot{P}_{inj}$ is the injection production term, $\dot{P}_s$ is the squish production term, $\dot{D}_s$ is the dissipation term, m_e is the eddy mass, $\dot{P}_{sw}$ is the swirl production term, $\dot{m}_{inj}$ is the injection rate, $\dot{m}_{sq}$ is the squish mass flow rate, U_{sq} is the average squish velocity, l_{sq} is the squish length scale, a is the dissipation constant, U_{inj} is the injection velocity, δt is the calculation time step, L_b is the break-up length, θ is the spray cone angle, ω_s is the swirl rate, and S is the spray tip penetration distance. The squish mass flow rate is determined based on piston speed, squish area, and bulk density (Heywood, 1998) and the squish length is defined as $-(z/2 + l/4)$.

Last, the spray formation process is a two zone model (Hiroyasu and Arai, 1980) that is applicable both to the liquid dominated and gaseous regimes. For completeness, this model is given below:

$$\begin{aligned}
 t < t_b & \quad S(t) = B U_{inj} t & t_b &= \frac{\alpha \rho_l d_o}{(2c_1 \rho \Delta P)^{0.5}} \\
 t > t_b & \quad S(t) = \frac{2.95}{B^*} \left(\frac{\Delta P}{\rho} \right)^{0.25} (d_o t)^{0.5}
 \end{aligned} \quad (6)$$

where B and B^* are constants, t_b is the break-up time, d_o is the orifice diameter, α and c_1 are break-up constants, ΔP is the orifice pressure drop, and ρ_l is the injected fuel density.

The three major parameters controlling the premixed phase burn rate are the laminar flame speed, spray angle, i.e. flame front area, and the turbulence intensity. The former is a function of the fuel and thermodynamic state of the mixture and fundamentally is described below:

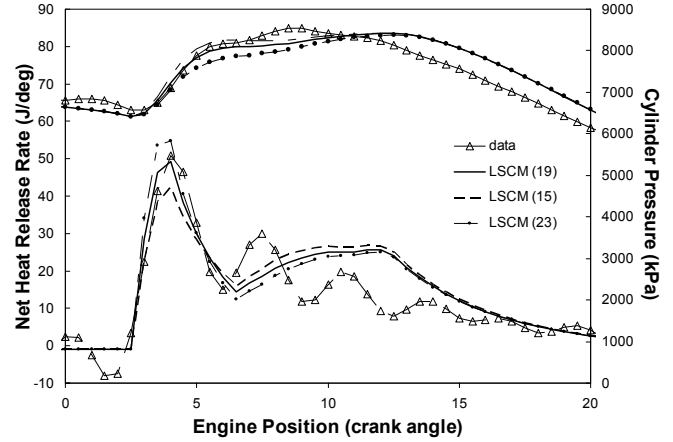


Figure 1: LSCM Laminar Flame Speed Calibration at Light Load for DIATA Engine.

$$S_l = S_{l,o} \left(\frac{T}{T_o} \right)^2 \left(\frac{P}{P_o} \right)^a \left(\frac{O_2}{O_{2,o}} \right)^b \quad (7)$$

where o-subscripted parameters represent reference conditions, T is the mean cylinder temperature at ignition, P is the cylinder pressure at ignition, O_2 is the oxygen concentration, and a and b are fuel dependent constants. These latter constants are ideally determined through a best fit of experimental data but that option is currently not available for DF-2 as discussed within the introduction.

Last, the LSCM mixing controlled phase is a characteristic time model that has been extensively discussed in the past (Schihi et al., 1999; Schihi et al., 2002). Essentially, the mixing time is the conjugation of four time scales – the bulk mixing time, the wall effect, an EGR based oxygen displacement, and an air utilization correction that collectively dictate both the mixing and fuel consumption rates. As noted earlier, the consumption rate is controlled by the turbulence intensity.

3. RESULTS

LSCM was optimized to match experimental in-cylinder pressure traces and corresponding heat release profiles through selection of the optimal laminar flame speed over various engine operating conditions. One key assumption made throughout this process involved the judicious selection of the jet formation angle. The methodology for this study entailed referencing various published spray angle data literature and scaling such measurements based on charge density and nozzle geometry to match each engine and associated operating condition (Su et al., 1995; Hiroyasu and Arai, 1990; Ruiz and Chigier, 1991; Montgomery et al., 1996; von Kuensberg Sarre et al., 1999; Han et al., 2000; Bae and Kang, 2000).

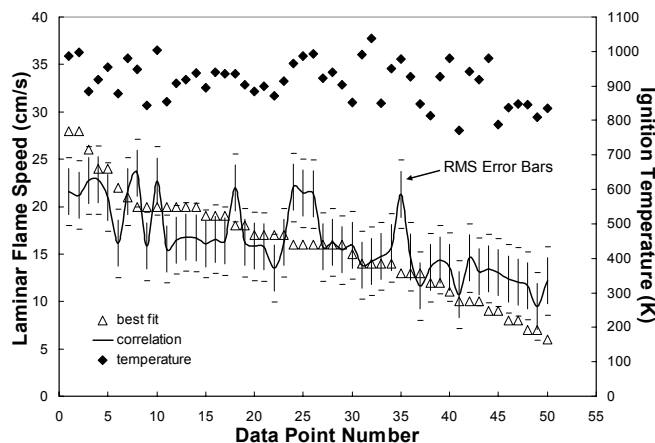


Figure 2: Comparison of Laminar Flame Speed Correlation with LSCM Best Fit Values.

An example of this optimization process is demonstrated by figure 1. The choice of the larger laminar flame speed value (23 cm/s) resulted in an over prediction of the peak premixed phase burning rate while choice of the lower laminar flame speed (15 cm/s) has the converse effect. For this particular case, the choice of the optimal laminar flame speed (19 cm/s) matched both the heat release and cylinder pressure profiles in an acceptable manner that implies LSCM did properly capture the mixing time scales. A total of seventy-seven operating points were subjected to this optimization method, but only fifty were accepted and included in this study since twenty-seven of the points did not exhibit a precise enough agreement with the experimental profiles.

Furthermore, the laminar flame speed correlation is a function of charge pressure, temperature, and equivalence ratio. These latter two parameters vary with time during the post-ignition flame spread event since the mixing layer is stratified in both composition and reactant temperature. In order to simplify this complex event, the bulk temperature and pressure, and oxygen concentration at the spray tip at ignition were chosen as representative values throughout the premixed phase of combustion. Additionally, the spray tip oxygen concentration at ignition was determined based on penetration distance at ignition (Schihi et al., 2002).

The two test fuels employed in this study had similar bulk properties as shown in table 2 but had varying cetane number and sulfur concentration levels. This study made the assumption that the reference laminar flame speed did not vary drastically between the two fuel samples and that bulk composition was similar enough to ensure each fuel demonstrated approximately the same trend versus cylinder temperature, pressure, and spray tip mean air-fuel ratio (Schihi et al., 2004).

The overall behavior of the optimal (best-fit) laminar flame speed and the associated correlation is given in

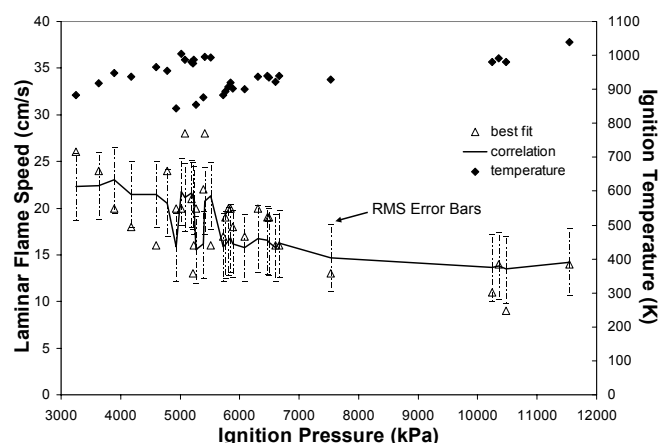


Figure 3: Comparison of the Laminar Flame Speed Correlation with the LSCM Best Fit Values for Non-EGR Operating Conditions.

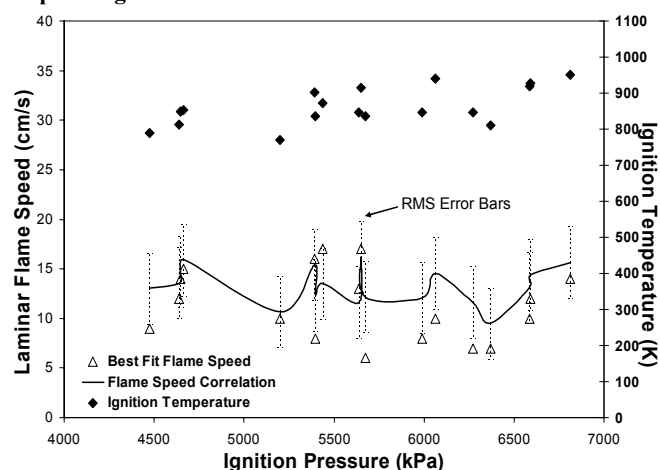


Figure 4: Comparison of the Laminar Flame Speed Correlation with the LSCM Best Fit Values for EGR Operating Conditions.

figure 2. Data is presented in a monotonically decreasing order versus measured cylinder ignition pressure in order to study thermodynamic trends in laminar flame speed since the overall behavior is complex. Inherent in this data set are eighteen EGR points that were acquired from the Ford DIATA. Note that the best-fit laminar flame speed varied between 6 cm/s and 30 cm/s with an associated bulk ignition temperature ranging from 800 K to 1040 K as dependent on the speed-load operating point. Additionally, the spray tip oxygen mass fraction was much less at the lower range of the best-fit flame speed spectrum in part due to EGR that varied between 10% to 45% and the associated lower ignition temperatures versus non-EGR cases. This later observation is apparent by studying the non-EGR and EGR cases as given in figures 3 and 4. Last, cool flame operating conditions were excluded from this study since LSCM does not address low temperature chemistry heat release (Schihi et al., 1999).

The resulting laminar flame speed correlation exhibited a root-mean-square (RMS) error of ± 3.6 cm/s in comparison to the best-fit values. Overall only a small portion (six) of the best-fit values fell well outside the RMS error but this shortcoming is not that significant considering a zero-dimensional combustion model was employed in this study. The implication is that LSCM generally captured the bulk mixing profile to sufficiently predict the net heat release profiles in two distinctly different direct-injection diesel engines over a variety of operating conditions. The resulting correlation is given below:

$$S_l = 21 \left(\frac{T}{300} \right)^2 P^{-0.6} \left(\frac{Y_{O_2}}{0.21} \right)^{0.3} \quad (8)$$

where S_l has units of cm/s, P and T have units of bar and Kelvin, and Y_{O_2} is the spray tip oxygen mass fraction.

CONCLUSION

A method to indirectly determine the laminar flame speed was developed for direct injection diesels based on using a zero-dimensional two-phase combustion model to match experimental pressure and heat release profiles. Data acquired for both light-duty and heavy-duty engines was employed in this study and revealed a laminar flame speed correlation that had realistic trends and magnitude in comparison to lighter hydrocarbon fuels. The correlation is limited to non-cool flame operating conditions since the zero-dimensional combustion model employed in this study did not include low temperature chemistry capability. This correlation maybe employed in three-dimensional flame models used for diesel applications and thus could be used for future military high output engine development efforts.

ACKNOWLEDGEMENTS

The authors wish to thank Ford Motor Company and FEV Engine Technology for supplying high-speed pressure data for the automotive diesel and Mr. Thomas Schiele for his endless effort spent acquiring combustion data for the Cummins V903 engine.

REFERENCES

- Amsden, A.A., Butler, T.D., O'Rourke, P.J. and Ramshaw, J.D., 1985, "KIVA - A Comprehensive Model for 2-D and 3-D Engine Simulations", SAE Paper 850554.
- Amsden, A.A., O'Rourke, P.J., and Butler, T.D., 1989, "KIVA-II: A Computer Program for Chemically Reactive Flows with Sprays", U.S. Department of Commerce Report, Los Alamos National Laboratory.
- Andrews, G.E. and Bradley, D., 1972, "The Burning Velocity of Methane-Air Mixtures", *Combustion and Flame*, **19**, 275 - 288.
- Austen, A.E.W. and Lyn, W.T., 1960-61, "Relation Between Fuel Injection and Heat Release in a Direct Injection Engine and the Nature of the Combustion Processes", Institution of Mechanical Engineers, Automotive Division, **1**, 47-62.
- Bae, C. and Kang, J., 2000, "Diesel Spray Development of VCO Nozzles for High Pressure Direct-Injection", SAE Paper 2000-01-1254.
- Balles, E.N. and Heywood, J.B., 1989, "Spray and Flame Structure in Diesel Combustion", ASME, *Journal of Engineering for Gas Turbines and Power*, **111**, 451 - 457.
- Bastress, E.K., Chng, K.M., and Dix, D.M., 1971, "Models of Combustion and Nitrogen Oxide Formation in DI and IDI Compression Ignition Engine", SAE Paper 719053.
- Bazari, Z., 1992, "A DI Diesel Combustion and Emission Capability for Use in a Cycle Simulation", SAE Paper 920462.
- Blizzard, N.C. and Keck, J.C., 1974, "Experimental and Theoretical Investigation of Turbulent Burning Model for Internal Combustion Engines", SAE Paper 740191.
- Breuer, C., 1995, "The Influence of Fuel Properties on the Heat Release in DI - Diesel Engines", *Fuel*, **74**, 1767 - 1771.
- Chiu, W.S., Shahed, S.M., and Lyn, W.T., 1976, "A Transient Spray Mixing Model for Diesel Combustion", SAE Paper 760128.
- Cook, H.A., 1963, "Appraisal of Effects of Operating Conditions and Engine Design on Combustion in Reciprocating Engines by Engine Cycle Calculations", SAE Paper 630083.
- Cook, H.A., 1965, "Diesel Engine Cycle Analysis of Relationships of Fuel Injection to Fuel Compression-Ignition Characteristics and Best Fuel Utilization", SAE Paper 650449.
- Craddock, J.P. and Hussain, M., 1986, "A Rate of Heat Release for Highly Charged Diesel Engines", SAE Paper 860083.
- Daly, C.A., Simmie, J.M., Wurmel, J., Djebaïli, N. and Paillard, C., 2001, "Burning Velocities of DiMethyl Ether and Air", *Combustion and Flame*, **125**, 1329 - 1340.
- Dent, J.C. and Mehta, P.S., 1981, "Phenomenological Combustion Model for a Quiescent Chamber Diesel Engine", SAE Paper 811235.
- Dent, J.C., Mehta, P.S. and Swan, J., 1982, "A Predictive Model for Automotive DI Diesel Engine Performance and Smoke Emissions", Institution of Mechanical Engineers, Paper C126/82, 237 - 245.
- Dimotakis, P.E., 1991, "Turbulent Free Shear Layer Mixing and Combustion", **High Speed Flight**

- Propulsion Systems**, *Progress in Astronautics and Aeronautics*, **137**, 265 – 340.
- Egolfopoulos, F.N., Zhu, D.L., and Law, C.K., 1990, "Experimental and Numerical Determination of Laminar Flame Speeds: Mixtures of C₂ - Hydrocarbons with Oxygen and Nitrogen", *Twenty-Third Symposium on Combustion*, The Combustion Institute, 417 - 478.
- Ghojel, J.I., 1982, "A Study of Combustion Chamber Arrangements and Heat Release in D.I. Diesel Engines", SAE Paper 821034.
- Grigg, H.C. and Syed, M.H., 1969-70, "The Problem of Predicting Rate of Heat Release in Diesel Engines", *Symposium on Diesel Engine Combustion*, Institution of Mechanical Engineers, **184**, 192-202.
- Han, J.-S., Wang, T.C., Xie, X.B., Lai, M.-C., Henein, N.A., Harrington, D.L., Pinson, J., and Miles, P., 2000, "Dynamics of Multiple-Injection Fuel Sprays in a Small-bore HSDI Diesel Engine", SAE Paper 2000-01-1256.
- Heywood, J., 1988, **Internal Combustion Engine Fundamentals**, McGraw-Hill Inc.
- Hirasawa, T., Sung, C.J., Yang, Z., Wang, H., and Law, C.K., 2001, "Determination of Laminar Flame Speeds of Ethylene/n-Butane/Air Flames Using Digital Particle Image Velocimetry", 2nd Joint Meeting of U.S. Sections of the Combustion Institute, Paper No. 138.
- Hiroyasu, H. and Kadota, T., 1976, "Models for Combustion and Formation of Nitric Oxide and Soot in Direct Injection Diesel Engines", SAE Paper 760129.
- Hiroyasu, H. and Arai, M., 1980, "Fuel Spray Penetration and Spray Angle in Diesel Engines", *Trans. SAE of Japan*, **21**, 5-11.
- Hiroyasu, H., Kadota, T., and Arai, M., 1983, "Development and Use of a Spray Combustion Modeling to Predict Diesel Engine Efficiency and Pollutant Emissions", *Bulletin of JSME*, **26**, 569 - 576.
- Hiroyasu, H. and Arai, M., 1990, "Structures of Fuel Sprays in Diesel Engines", SAE Paper 900475.
- Hodgetts, D. and Shroff, H.D., 1975, "More on the Formation of Nitric Oxide in a Diesel Engine", *Combustion in Engines*, Institution of Mechanical Engineers, Paper C95/75, 129-138.
- Jung, D. and Assanis, D., 2001, "Quasi-Dimensional, Multi-Zone Turbocharged DI Diesel Engine Simulation for Performance and Emissions Studies", SAE Paper 2001-01-1246.
- Kanimoto, T., Minagawa, T., and Kobori, S., 1997, "A Two-Zone Model Analysis of Heat Release Rate in Diesel Engines", SAE Paper 972959.
- Khan, I.M., Greeves, G. and Probert, D.M., 1971, "Prediction of Soot and Nitric Oxide Concentrations in Diesel Engine Exhaust", *Air Pollution in Transport Engines*, Institution of Mechanical Engineers, Paper 142/71, 205 - 217.
- Kobayashi, H., Tamura, T., Maruta, K., Niioka, T., and Williams, F.A., 1996, "Burning Velocity of Turbulent Premixed Flames in a High-Pressure Environment", *Twenty-Sixth Symposium on Combustion*, The Combustion Institute, 389 - 396.
- Kono, S., Nagao, A., and Motooka, H., 1985, "Prediction of In-Cylinder Flow and Spray Formation Effects on Combustion in Direct Injection Diesel Engines", SAE Paper 850108.
- Kouremenos, D.A., Rakopoulos, C.D. and Hountalas, D., 1986, "Modeling of Spray Mixing in a Quiescent Chamber Diesel Allowing for Jet Wall Impingement", *Proc. Intern. American Society of Mechanical Engineers - France Conf.*, Naples, **3.3**, 199 - 206.
- Kouremenos, D.A., Rakopoulos, C.D., and Karvounis, E., 1987, "Thermodynamic Analysis of Direct Injection Diesel Engines by Multi-zone Modeling", ASME Winter Annual Meeting, **3.3**, 67 - 77.
- Kouremenos, D.A., Rakopoulos, C.D. and Hountalas, D.T., 1997, "Multi-Zone Modelling for the Prediction of Pollutants Emissions and Performance of DI Diesel Engines", SAE Paper 970635.
- Kyriakides, S.C., Dent, J.C. and Mehta, P.S., 1986, "Phenomenological Diesel Combustion Model Including Smoke and NO Emissions", SAE Paper 860330.
- Law, C.K., 1993, "A Compilation of Experimental Data on Laminar Burning Velocities", **Reduced Kinetic Mechanisms for Applications in Combustion Systems**, Springer - Verlag, 15 – 26.
- Li, Q. and Assanis, D.N., 1993, "Quasi-Dimensional Combustion Model for Diesel Engine Simulation", 15th Annual Fall Technical Conference of American Society of Mechanical Engineers, Internal Combustion Engines, **20**, 109-118.
- Lipkea, W.H. and DeJoode, A.D., 1987, "A Model of a Direct Injection Diesel Combustion System for Use in a Cycle Simulation and Optimization Studies", SAE Paper 870573.
- Lyn, W.T., 1962, "Study of the Burning rate and Nature of Combustion in Diesel Engines", *Ninth International Symposium on Combustion*, The Combustion Institute, 1069 - 1082.
- Maguerdichian, M. and Watson, N., 1978, "Prediction of Mixture Formation and Heat Release in Diesel Engines", SAE Paper 780225.
- McAulay, K., Wu, T., Chen, S., Borman, G., Myers, P., and Uyehara, O., 1965, "Development and Evaluation of the Simulation of the CI Engine", SAE Paper 650451.
- Mehta, P.S., Singal, S.K., and Pundir, B.P., 1995, "Comprehensive Simulation Model for Mixing and Combustion Characteristics of Small Direct Injection

- Diesel Engines", Institution of Mechanical Engineers, *Journal of Automobile*, **209**, 117 - 126.
- Metghalchi, M. and Keck, J.C., 1982, "Burning Velocities of Mixtures of Air with Methanol, Isooctane, and Indolene at High Pressures and Temperatures", *Combustion and Flame*, **48**, 191 - 210.
- Miyamoto, N., Chikahisa, T., Murayama, T. and Sawyer, R., 1985, "Description and Analysis of Diesel Engine Rate of Combustion and Performance Using Wiebe's Functions", SAE Paper 850107.
- Montgomery, D.T., Chan, M., Chang, C.T., Farrell, P.V., and Reitz, R.D., 1996, "Effect of Injector Nozzle Hole Size and Number of Spray Characteristics and the Performance of a Heavy Duty D.I. Diesel Engine", SAE Paper 962002.
- Nagao, F., Ikegami, M. and Oshima, K., 1967, "An Analysis of Combustion Knock in a Diesel Engine", *Bulletin JSME*, **10**, 532 - 542.
- Ogawa, H., Matsui, Y., Kimura, S., and Kawashima, J., 1996, "Three-Dimensional Computation of the Effects of the Swirl Ratio in Direct-Injection Diesel Engines on NOx and Soot Emissions", SAE Paper 961125.
- Probert, R.P., 1946, "The Influence of Spray Particle Size and Distribution in the Combustion of Oil Droplet", *Philosophical Magazine*, **37**, 94 - 105.
- Reddy, P.R., Krishna, D.M., Mallan, K.R.G. and Ganesan, V., 1996, "Modeling of Direct-Injection Diesel-Engine Combustion and Emissions - an Easy and Reliable Method", *Indian Journal of Engineering and Material Science*, **3**, 1 - 8.
- Ruiz, F. and Chigier, N., 1991, "Parametric Experiments on Liquid Jet Atomization Spray Angle", *Atomization and Sprays*, **1**, 23 - 45.
- Schihl, P., Atreya, A., and Bryzik, W., 1996, "A Large Scale Mixing Model for a Quiescent Chamber Direct Injection Diesel", SAE Paper No. 961040.
- Schihl, P.J., Atreya, A., Bryzik, W., and Schwarz, E., 1999, "Simulation of Combustion in Direct-Injection Low Swirl Heavy-Duty Type Diesel Engines", SAE Paper 1999-01-0228.
- Schihl, P., Atreya, A., and Bryzik, W., 2000, "Development of a Shear Layer Ignition Model for Application to Direct-Injection Diesel Engines", *Combustion and Flame*, **121**, 453-470.
- Schihl, P., Schwarz, E., and Bryzik, W., 2001, "Performance Characteristics of a Low Heat Rejection Direct-Injection Military Diesel Engine Retrofitted with Thermal Barrier Coated Pistons", ASME, *Journal for Engineering Gas Turbines and Power*, **123**, 644 - 651.
- Schihl, P., Tasdemir, J., Schwarz, E., and Bryzik, W., 2002, "Development of a Zero-Dimensional Heat Release Model for Application to Small Bore Diesel Engines", SAE Paper 2002-01-0073.
- Schihl, P.J. and Tasdemir, J., 2004, "A Methodology for Indirect Determination of Diesel Fuel Laminar Flame Speed", SAE Paper 2004-01-0930.
- Shahed, S.M., Chiu, W.S., and Yumlu, V.S., 1973, "A Preliminary Model for the Formation of Nitric Oxide in DI Diesel Engines and its Application in Parametric Studies", SAE Paper 730083.
- Shahed, S.M., Chiu, W.S., and Lyn, W.T., 1975, "A Mathematical Model of Diesel Combustion", Institution of Mechanical Engineers, Paper C94/75, 119 - 128.
- Shipinski, J., Uyehara, O.A., and Myers, P.S., 1968, "Experimental Correlation Between Rate-of-Injection and Rate-of-Heat Release in a Diesel Engine", ASME Paper 68-DGP-11.
- Shipinski, J., Meyers, P.S. and Uyehara, O.A., 1969-70, "A Spray Droplet Model for Diesel Combustion", *Symposium on Diesel Engine Combustion*, Institution of Mechanical Engineers, **184**, 28 - 35.
- Spalding, D.B., "Mixing and Chemical Reaction in Steady, Confined Turbulent Flames", 1970, *Thirteenth International Symposium on Combustion*, The Combustion Institute, 643 - 657.
- Su, T.F., Farrell, P.V., and Nagarajan, R.T., 1995, "Nozzle Effect on High Pressure Diesel Injection", SAE Paper 950083.
- Tabaczynski, R., Ferguson, C., and Radhakrishnan, K., 1977, "A Turbulent Entrainment Model for Spark-Ignition Engine Combustion", SAE Paper 770647.
- Tanasawa, P.H., 1953, "On the Combustion Rate of a Group of Fuel Particles", Technical Report Tohoku University, **18**, 61 - 74.
- Turns, S., 1996, **An Introduction to Combustion: Concepts and Applications**, McGraw-Hill Inc.
- von Kuensberg Sarre, C., Kong, S.-C., and Reitz, R.D., 1999, "Modeling the Effects of Injector Nozzle Geometry on Diesel Sprays", SAE Paper 1999-01-0912.
- Watson, N., 1977, "A Non-Linear Digital Simulation of Turbocharged Diesel Engines Under Transient Conditions", SAE Paper 770123.
- Watson, N., Pilley, A.D., and Marzouk, M., 1980, "A Combustion Correlation for Diesel Engine Simulation", SAE Paper 800029.
- Whitehouse, N.D. and Way, R., 1969-70, "Rate of Heat Release in Diesel Engine and its Correlation With Fuel Injection Data", *Symposium on Diesel Engine Combustion*, Institution of Mechanical Engineers, **184**, 17 - 27.
- Whitehouse, N.D. and Way, R., 1971, "A Simple Method for the Calculation of Heat Release Rates in Diesel Engines Based on the Fuel Injection Rate", SAE Paper 710134.
- Zhou, M. and Garner, C.P., 1996, "Direct Measurements of Burning Velocity of Propane-Air Using Particle Image Velocimetry", *Combustion and Flame*, **106**, 363 - 367.