

Adaptive Channel Equalization in the Time-Varying Underwater Acoustic Channel: Performance Characterization and Robust Equalizers

James Preisig

Woods Hole Oceanographic Institute

phone: 508-289-2736

email: jpreisig@whoi.edu

Abstract Channel-estimate-based equalizers are adaptive coherent equalizers for which observations of the received signal are used to estimate channel parameters, and these estimates are used to calculate the equalizer filter weights. Traditional channel-estimate-based equalizers calculate filter weights assuming that the estimates of the channel parameters are perfect. This work presents a common framework for evaluating both the performance of channel-estimate-based equalizers when the channel estimates are perfect (i.e., the minimal achievable error of the equalizer) and the degradation in performance of these equalizers due to errors in the channel estimates (i.e., the excess error).

For the three type of equalizers considered, (DFE, Linear MMSE, and Passive Time Reversal) the expressions for minimal achievable error take the form of the results from classical estimation theory for estimation error achieved by MMSE and matched filter estimators. These expressions are interpreted to give insights into the characteristics of "good" and "bad" channels. For the case when the channel estimates are MMSE estimates of the channel-impulse response, the excess error is shown to be proportional to the 2-norm of the calculated feedforward filter weight vector of the equalizer. This result is analogous to the "white noise gain" result characterizing the sensitivity of adaptive array processors to mismatch. This result is used to evaluate the relative sensitivity of all three types of equalizers to environmental mismatch. The analytic predictions of equalizer performance are compared with observed performance using data from several field experiments in different underwater acoustic environments.

The expressions for minimal achievable error and excess error give insights into potential methods of improving the robustness to channel mismatch of adaptive equalizers such as the DFE. Several of these methods are implemented and evaluated.


Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 20 DEC 2004		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Adaptive Channel Equalization in the Time-Varying Underwater Acoustic Channel: Performance Characterization and Robust Equalizers				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Woods Hole Oceanographic Institute				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also, ADM001741 Proceedings of the Twelfth Annual Adaptive Sensor Array Processing Workshop, 16-18 March 2004 (ASAP-12, Volume 1)., The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 22	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Adaptive Channel Equalization in the Time-Varying Underwater Acoustic Channel: Performance Characterization and Robust Equalizers


James Preisig
Woods Hole Oceanographic Institution

- Equalizers, Array Processing, and Performance Prediction
- SPACE02 Data: P-TR and DFE performance comparison.
- DFE Performance Analysis
- Robust Decision Feedback Equalization
- Conclusions

Intersymbol Interference and Channel Replica Vectors

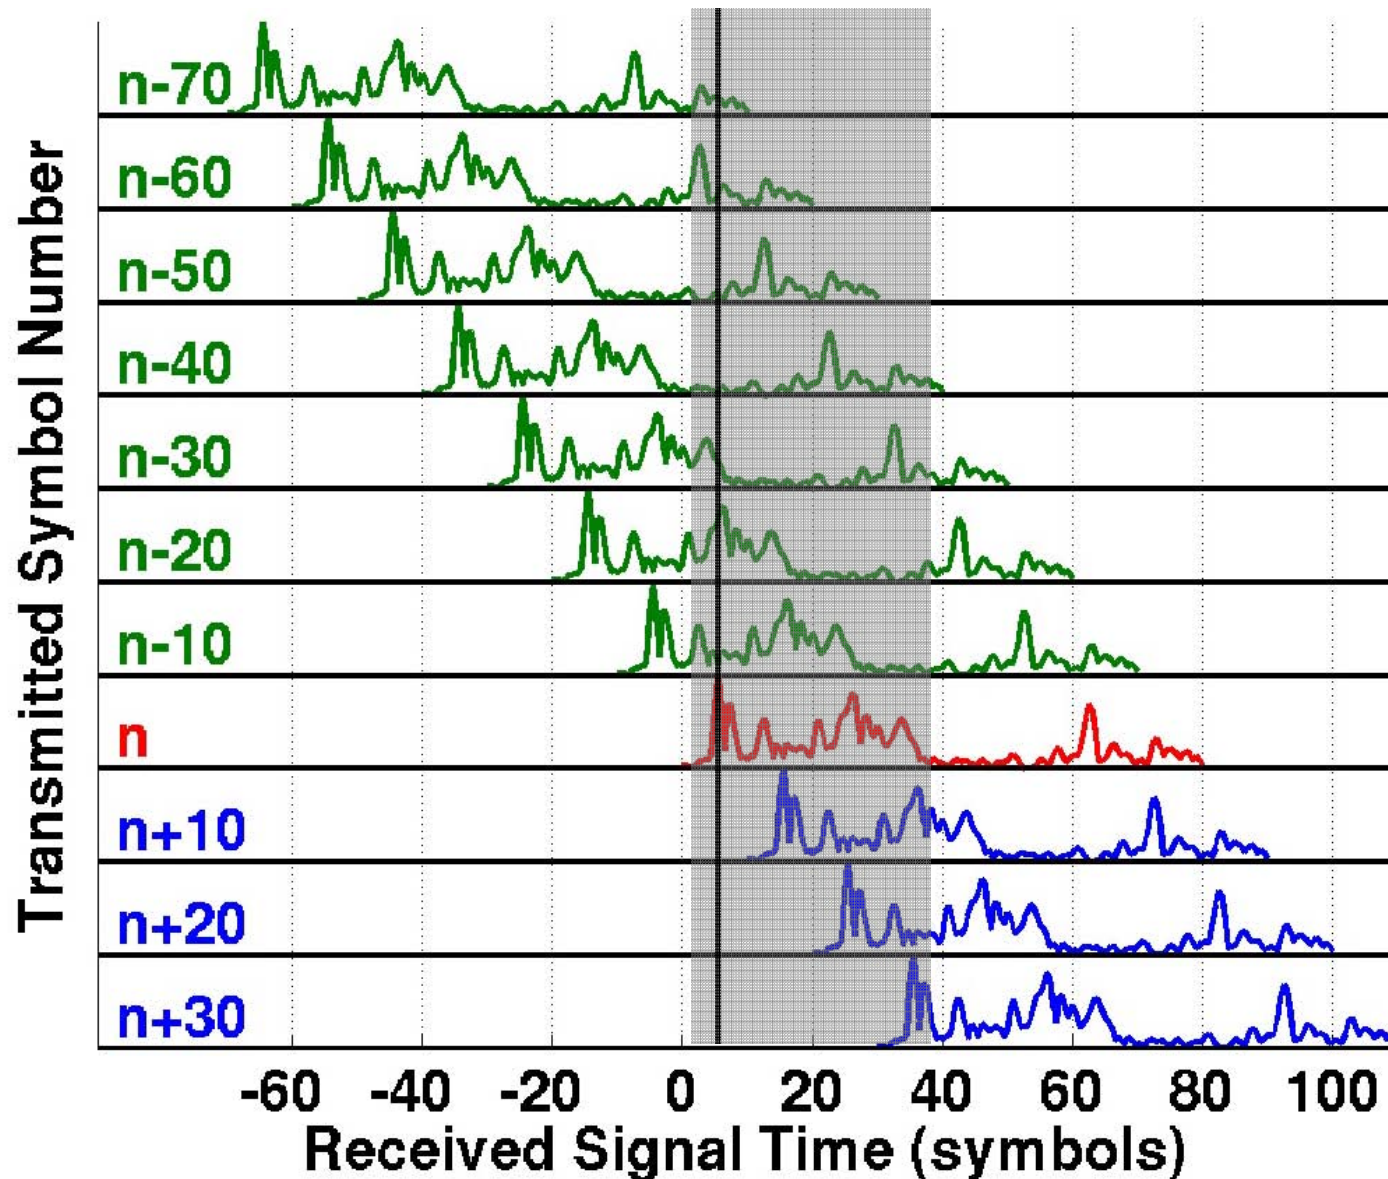

Channel Estimate Based Equalizer Structures

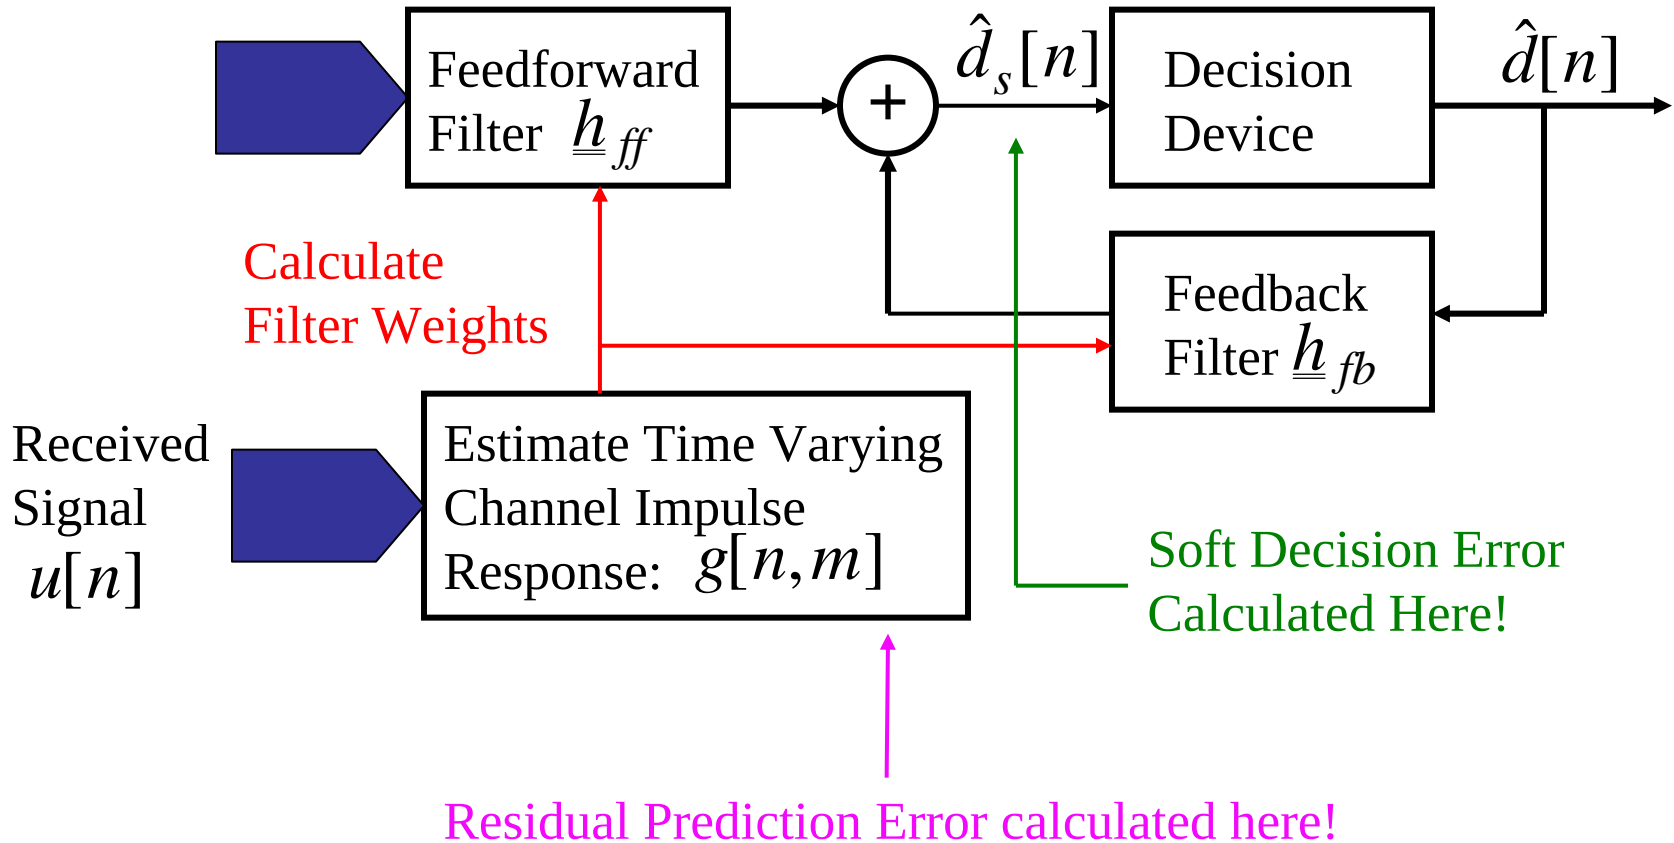

Input to Feedforward Filter is a Time Series of Rec. Sig.

$$\bullet \quad \underline{u}[n] = \begin{bmatrix} u[n - L_c] \\ \vdots \\ u[n] \\ \vdots \\ u[n + L_a] \end{bmatrix} \quad \underline{d}[n] = \begin{bmatrix} d[n - L_c - N_c] \\ \vdots \\ d[n] \\ \vdots \\ d[n + L_a + N_a] \end{bmatrix} \quad \underline{v}[n] = \begin{bmatrix} v[n - L_c] \\ \vdots \\ v[n] \\ \vdots \\ v[n + L_a] \end{bmatrix}$$

$$\bullet \quad \underline{u}[n] = G^h[n] \underline{d}[n] + \underline{v}[n]$$

$$\bullet \quad G^h[n] = \begin{bmatrix} \underline{r}_{(L_c+N_c)} & \cdots & \underline{r}_1 & \underline{r}_0 & \underline{r}_{-1} & \cdots & \underline{r}_{-(L_a+N_a)} \end{bmatrix}$$

(columns are replica vectors of the transmitted data signals as they appear in the feedforward filter input signal)

Partitioning the Time Varying Channel Impulse Response

received signal
due to desired
data signal

received signal
due to data signals
spanned by the
feedback filter

received signal
due to other
data signals,
“pre-cursor” replicas

$$\bullet \quad \underline{u}[n] = \underline{r}_0[n]d[n] + G_{fb}^h[n]\underline{d}_{fb}[n] + G_o^h[n]\underline{d}_o[n] + \underline{v}[n]$$

↑
replica vector
of desired signal

interference that
can be subtracted
from the received
signal using the
feedback filter


effective observation
noise

- assume: zero mean, “white” data signal with energy $= \sigma_d^2 = 1$
observation noise and data uncorrelated

- Normalized Effective Noise Correlation:

$$Q = R_v + \hat{G}_o^h \hat{G}_o$$

Intersymbol Interference and Channel Replica Vectors

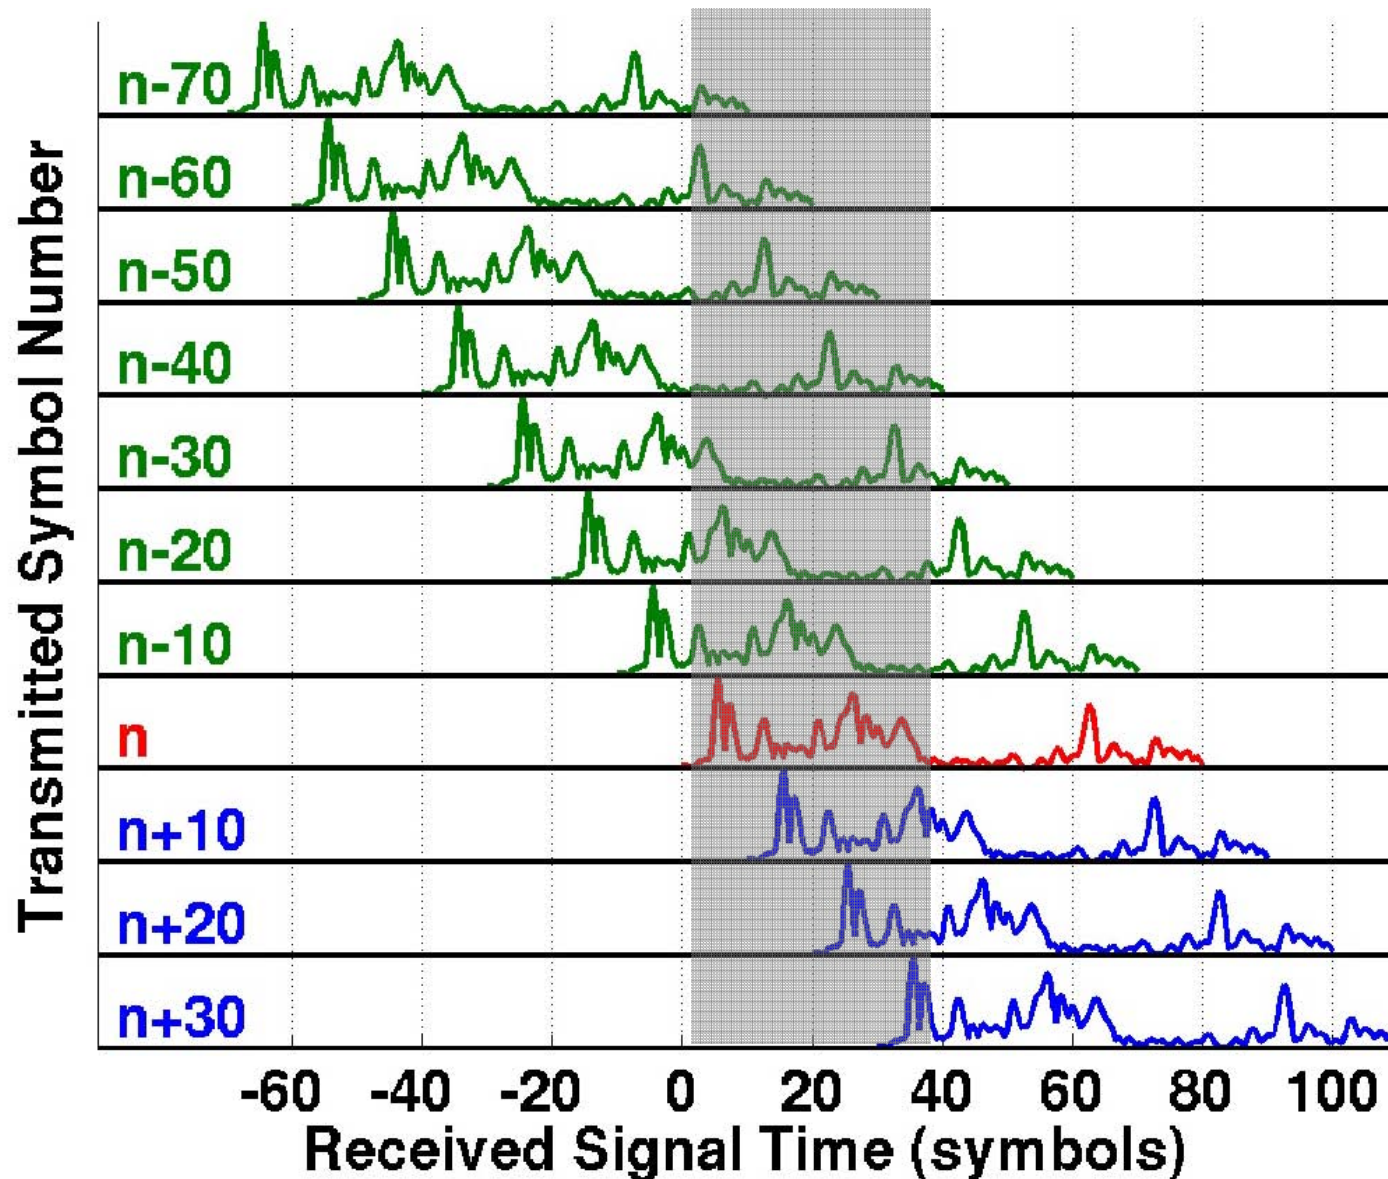

Coherent Equalizer Filter Weights

- Linear and DFE filter calculation formulated as a MMSE filtering problem:

$$\underline{h}_{\text{opt}} = \arg \min \overline{|d - \hat{d}_s|^2}$$

where $\overline{(\cdots)}$ denotes expectation conditioned on the channel estimate

- Approach assumes that channel estimate has no error

- MMSE DFE:

$$\underline{h}_{ff} = \frac{Q^{-1} \hat{r}_0}{1 + \hat{r}_0^h Q^{-1} \hat{r}_0}$$

$$\underline{h}_{fb} = -\hat{G}_{fb} \hat{h}_{ff}$$

- MMSE Linear:

$$\underline{h}_{lin} = \frac{(Q + \hat{G}_{fb}^h \hat{G}_{fb})^{-1} \hat{r}_0}{1 + \hat{r}_0^h (Q + \hat{G}_{fb}^h \hat{G}_{fb})^{-1} \hat{r}_0}$$

- Time Reversal:

$$\underline{h}_{tr} = \frac{\hat{r}_0}{\hat{r}_0^h \hat{r}_0}$$

Equalizer Performance with Perfect Channel Information

- Decompose Soft Decision Error into two components:

$$\sigma_s^2 = \overline{|d - \hat{d}_s|^2} = \sigma_o^2 + \sigma_\varepsilon^2$$


- $$\sigma_{o_{dfe}}^2 = \frac{1}{1 + \hat{\underline{r}}_0^h Q^{-1} \hat{\underline{r}}_0} < \frac{\hat{\underline{r}}_0^h Q \hat{\underline{r}}_0}{\left(\hat{\underline{r}}_0^h \hat{\underline{r}}_0\right)^2} < \frac{\hat{\underline{r}}_0^h (Q + \hat{G}_{fb}^h \hat{G}_{fb}) \hat{\underline{r}}_0}{\left(\hat{\underline{r}}_0^h \hat{\underline{r}}_0\right)^2} = \sigma_{o_{tr}}^2$$

- $$Q = \frac{R_v}{\sigma_d^2} + \hat{G}_o^h \hat{G}_o$$

Equalizer Performance Degradation with Channel Estimation Errors

- $G = \hat{G} + E_G$
- Assume $\hat{G}$ is a MMSE estimate $\Rightarrow \bar{\varepsilon}_0, \bar{E}_{fb}, \bar{E}_o = 0$
- $\sigma_{\varepsilon_{dfe}}^2 = \underline{h}_{ff}^h \left(\overline{E_G^h E_G} \right) \underline{h}_{ff}$
- $\sigma_{\varepsilon_{tr}}^2 = \underline{h}_{tr}^h \left(\overline{E_G^h E_G} \right) \underline{h}_{tr}$
- $\left(\overline{E_G^h E_G} \right)$ denotes the expectation conditioned on the estimate of the channel impulse response.
- Magnitude Squared of FEEDFORWARD filter weight vector is an important determinant of sensitivity to channel estimation errors.
(White noise gain result)

MMSE DFE and Passive Time Reversal Sensitivity Comparison

Large Adaptive Processing Gain  $\hat{\underline{r}}_0^h Q^{-1} \hat{\underline{r}}_0 \gg 1$

$$\|\underline{h}_{ff}\|^2 \approx \left\| \frac{Q^{-1} \hat{\underline{r}}_0}{\hat{\underline{r}}_0^h Q^{-1} \hat{\underline{r}}_0} \right\|^2 \geq \left\| \frac{\hat{\underline{r}}_0}{\left(\hat{\underline{r}}_0^h \hat{\underline{r}}_0 \right)} \right\|^2 = \|\underline{h}_{tr}\|^2$$

Prediction of Excess Error

- $\sigma_{\varepsilon}^2 = \underline{\underline{h}}_{ff}^h \left(\overline{\underline{\underline{E}}_G^h \underline{\underline{E}}_G} \right) \underline{\underline{h}}_{ff}$
- $\underline{\underline{E}}_G = G - \hat{G}$
- **Input signal to FF filter:** $\underline{\underline{u}}[n] = G^h[n] \underline{\underline{d}}[n] + \underline{\underline{v}}[n]$
- **Predicted Input signal to FF filter:** $\hat{\underline{\underline{u}}}[n] = \hat{G}^h[n] \underline{\underline{d}}[n]$
- **Residual Prediction Error:** $\underline{\underline{\varepsilon}}[n] = \underline{\underline{u}}[n] - \hat{\underline{\underline{u}}}[n] = E_G^h[n] \underline{\underline{d}}[n] + \underline{\underline{v}}[n]$
- $\sigma_{\varepsilon}^2 \approx \underline{\underline{h}}_{ff}^h \left(\overline{\underline{\underline{\varepsilon}} \underline{\underline{\varepsilon}}^h} \right) \underline{\underline{h}}_{ff}$


SPACE02 Experiment

- Multi-institution experiment (myself, Grant Deane (SIO), David Farmer (URI), Svein Vagle (IOS)). Fall 2002, 5 km off South coast of Martha's Vineyard, 15 meter water depth, benign topography.
- Data from portions of two days. Julian Date 331 when significant wave height was 0.3 meters, wind speed = 3 m/s. Julian Date 334 when significant wave height was 3.0 meters, wind speed building from 8.1 to 9.7 m/s.
- Data from one transmitter/receiver pair: Transmitter 6 meters above the bottom. 185 dB source level, 8 to 20 kHz bandwidth. 8 element vertical hydrophone array, 2 meter aperture, non-uniform spacing, bottom element 2 meters above the bottom. Horizontal range from source of 250 meters. (Fixed-fixed config.)
- 14 kHz carrier frequency. Binary phase shift keyed (bpsk) signals with symbol rate of 11161 symbols per second..


Estimates of Channel Impulse Response

Least Squares Estimates using psk data (35.8 mSec rectangular averaging window)

Day 331, Sig Wave Height = 0.3 meters

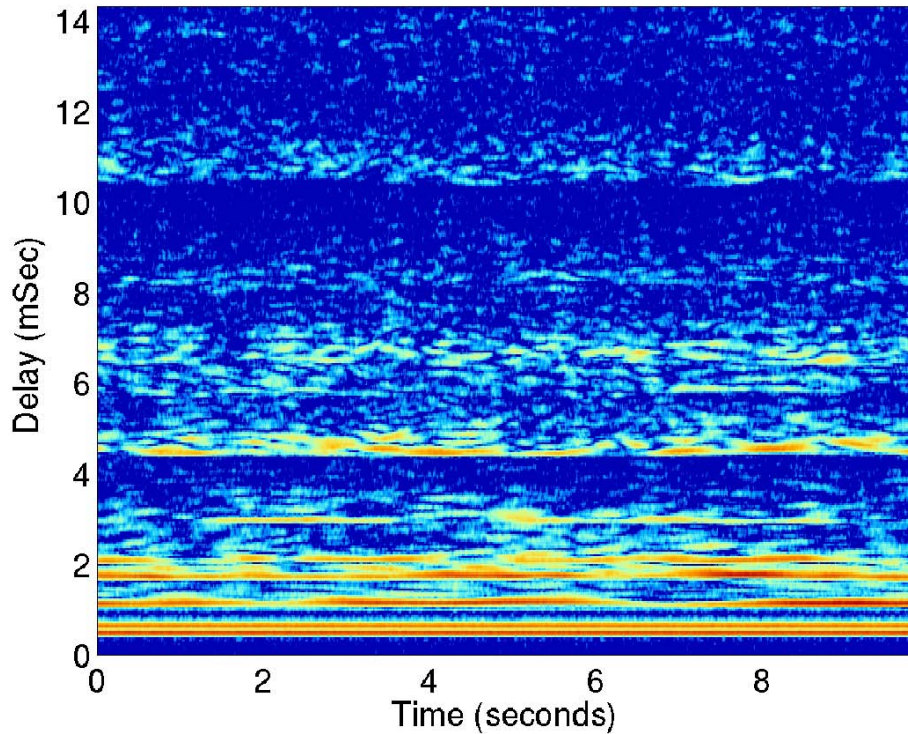

Day 334, Sig Wave Height = 3.0 meters

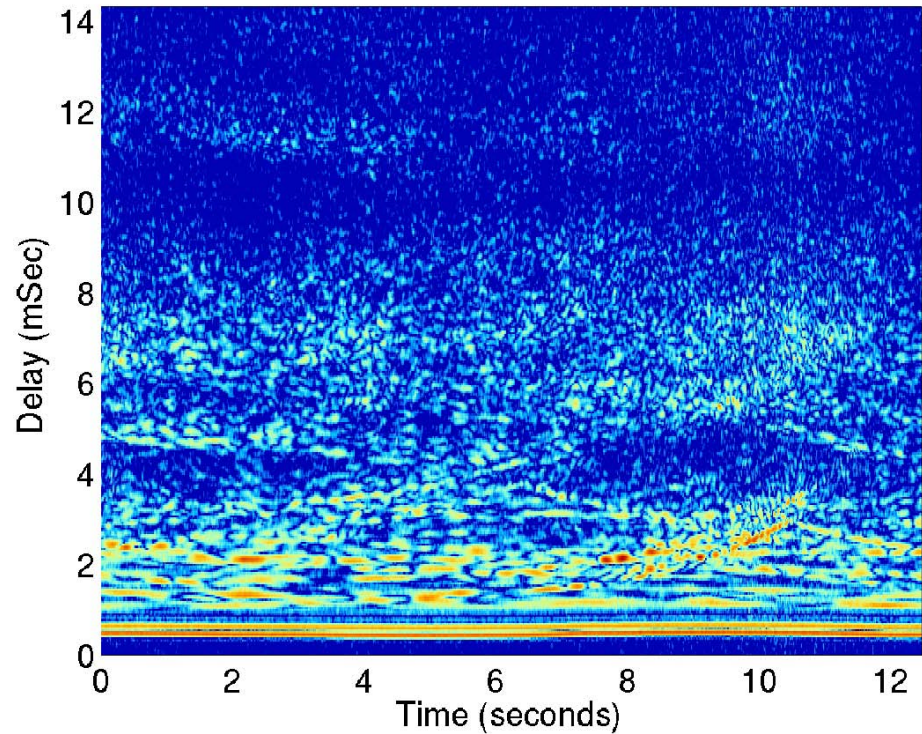

-65

-60

-55

-50

-45


Magnitude (dB)

- By most standards, these impulse responses would be considered to have a complex static structure.


Eight Channel DFE and P-TR Equalizer Performance

Soft Decision Errors

Day 331, Sig Wave Height = 0.3 m

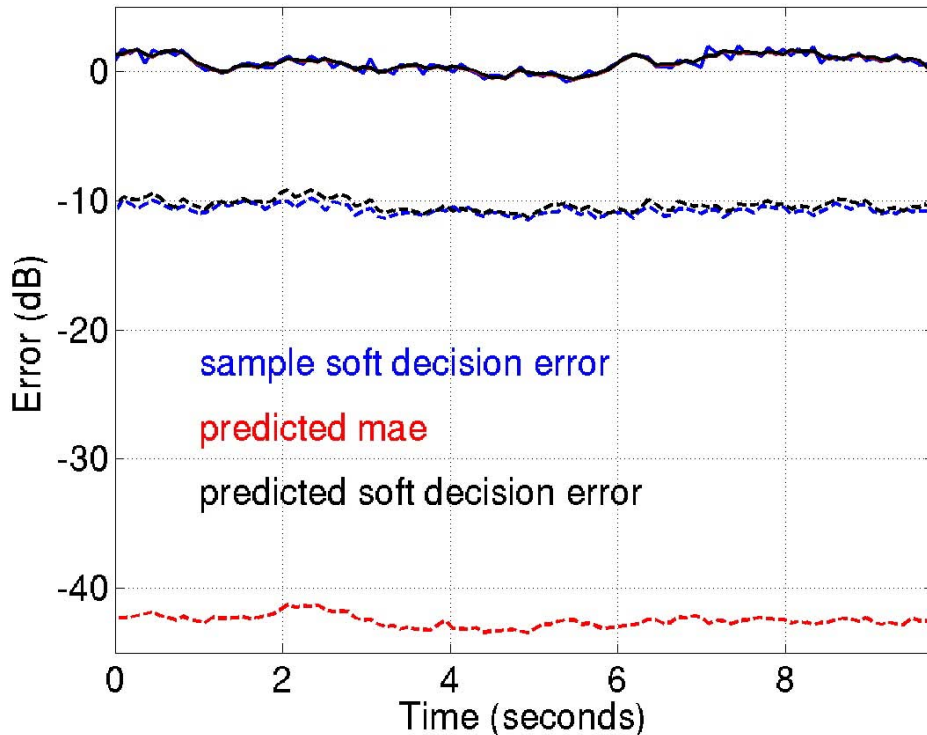


Day 334, Sig Wave Height = 3.0 m

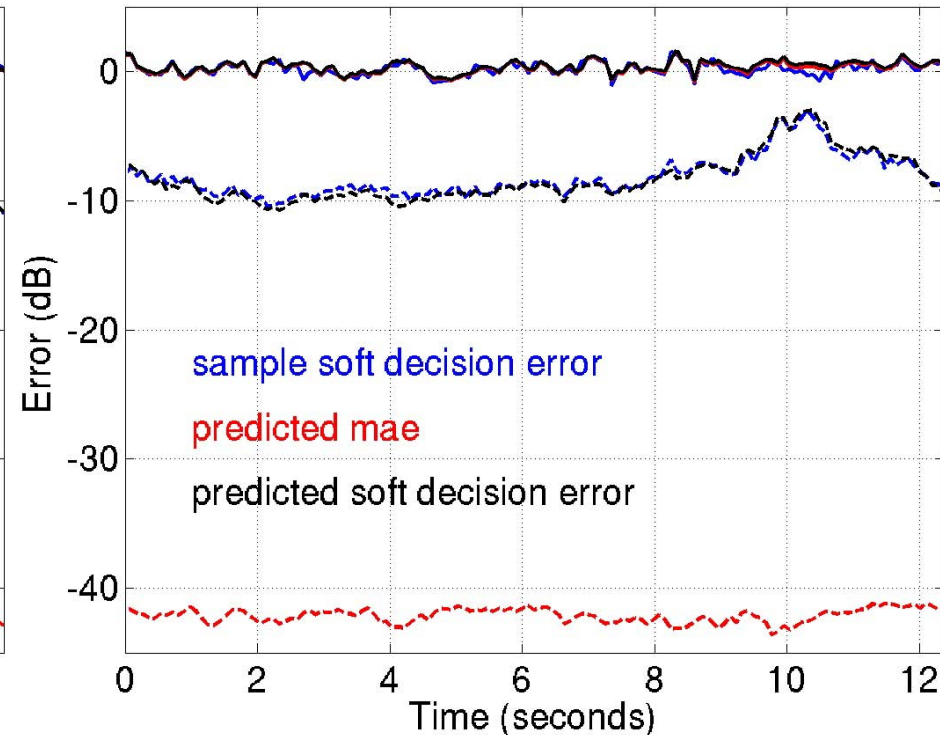


- For these complex channels, P-TR performance is limited by MAE (channel static structure) and is not significantly impacted by channel dynamics.
- For these complex channels, DFE performance is limited by the excess error caused by the dynamics and delay spread of the channel.

Single and Eight Channel DFE Performance Comparison

Day 334, Sig Wave Height = 3.0 meters

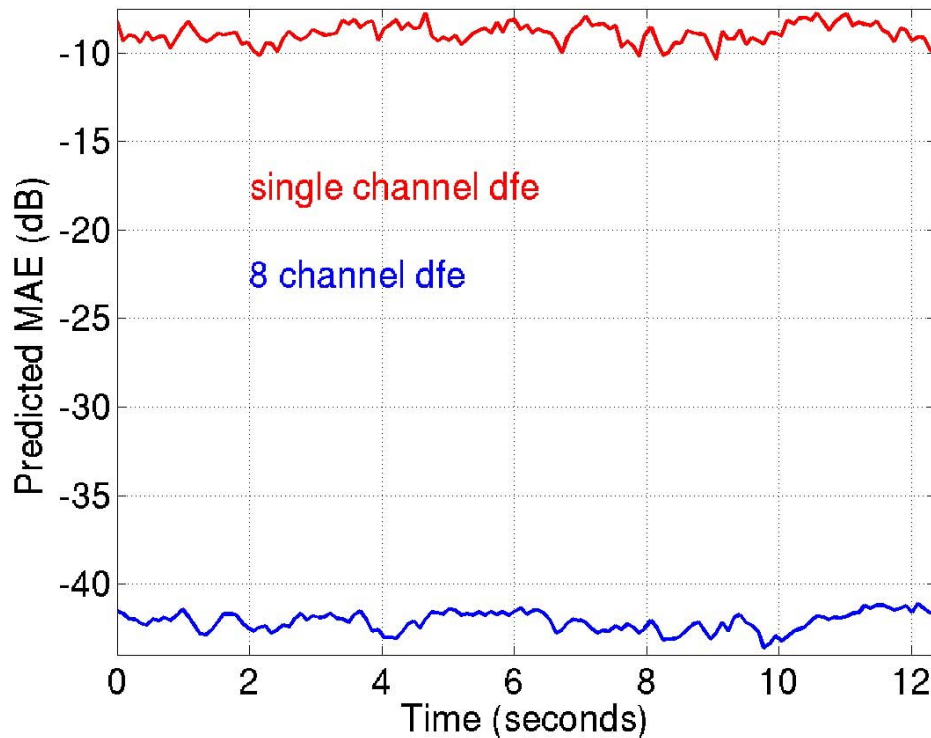

Day 334, Sig Wave Height = 3.0 meters

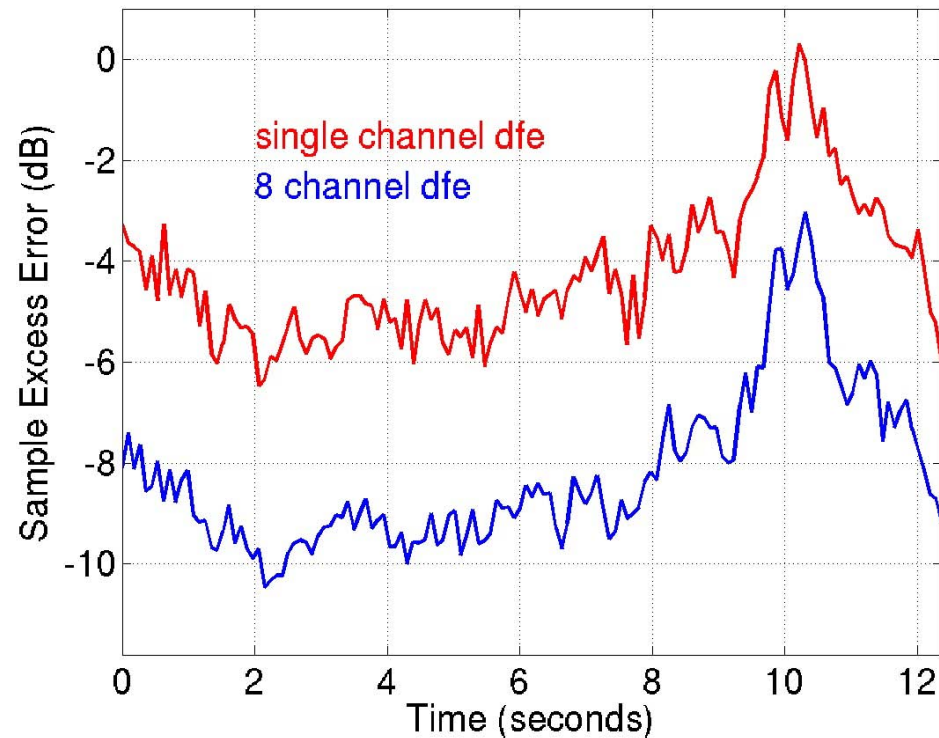

- Significant increase in single channel MAE.
- Single channel DFE error still dominated by excess error.
- Single channel DFE excess error greater than eight channel DFE excess error.

DFE Performance in Ocean Channels

- Even in channels with complex static structure, DFEs appear to be limited more by ability to track the channel than the ability to equalize the channel. (Excess error is limiting factor)




- Motivates development of equalizers that are robust with respect to channel estimation errors and improved techniques for tracking the time-varying channel impulse response.

Notes on Propagation Physics in Ocean Channels

- The taps that will contribute most to the channel tracking error are those that have high amplitudes and which fluctuate rapidly.
- Surface scattering is a primary source of high amplitude and rapidly fluctuating arrivals in channels with long delay spreads relative to the channel coherence time. (e.g., surface wave focused arrivals, Preisig and Deane, submitted to JASA)

The Development of Robust DFEs

- $\underline{u}[n] = \hat{G}^h[n]\underline{d}[n] + \underline{E}_G^h[n]\underline{d}[n] + \underline{v}[n]$



Increase in the apparent
observation noise level


- (Stojanovic, et. al., IEEE Trans. Comm., 1995) proposed increasing the assumed level of the observation noise by diagonal loading the assumed noise correlation matrix, R_v
- Approach does not fully exploit the statistical structure of the apparent observation noise.

The Residual Prediction Error DFE

- $\underline{u}[n] = \hat{G}^h[n]\underline{d}[n] + \underline{\varepsilon}[n]$
- $Q = R_{\varepsilon} + \hat{G}_o^h \hat{G}_o$
- Strict derivation of the “optimal” equalizer coefficients using the model in the first line above results in a Q matrix with other cross correlation matrices. However, these matrices cannot be estimated with sufficient accuracy to improve system performance.
- Empirical evidence suggests that the use of the additional terms results in a poorer system performance or equalizer failure.


DFE Performance Comparisons (SDE) for Day 334

3 and 8 channel equalizers

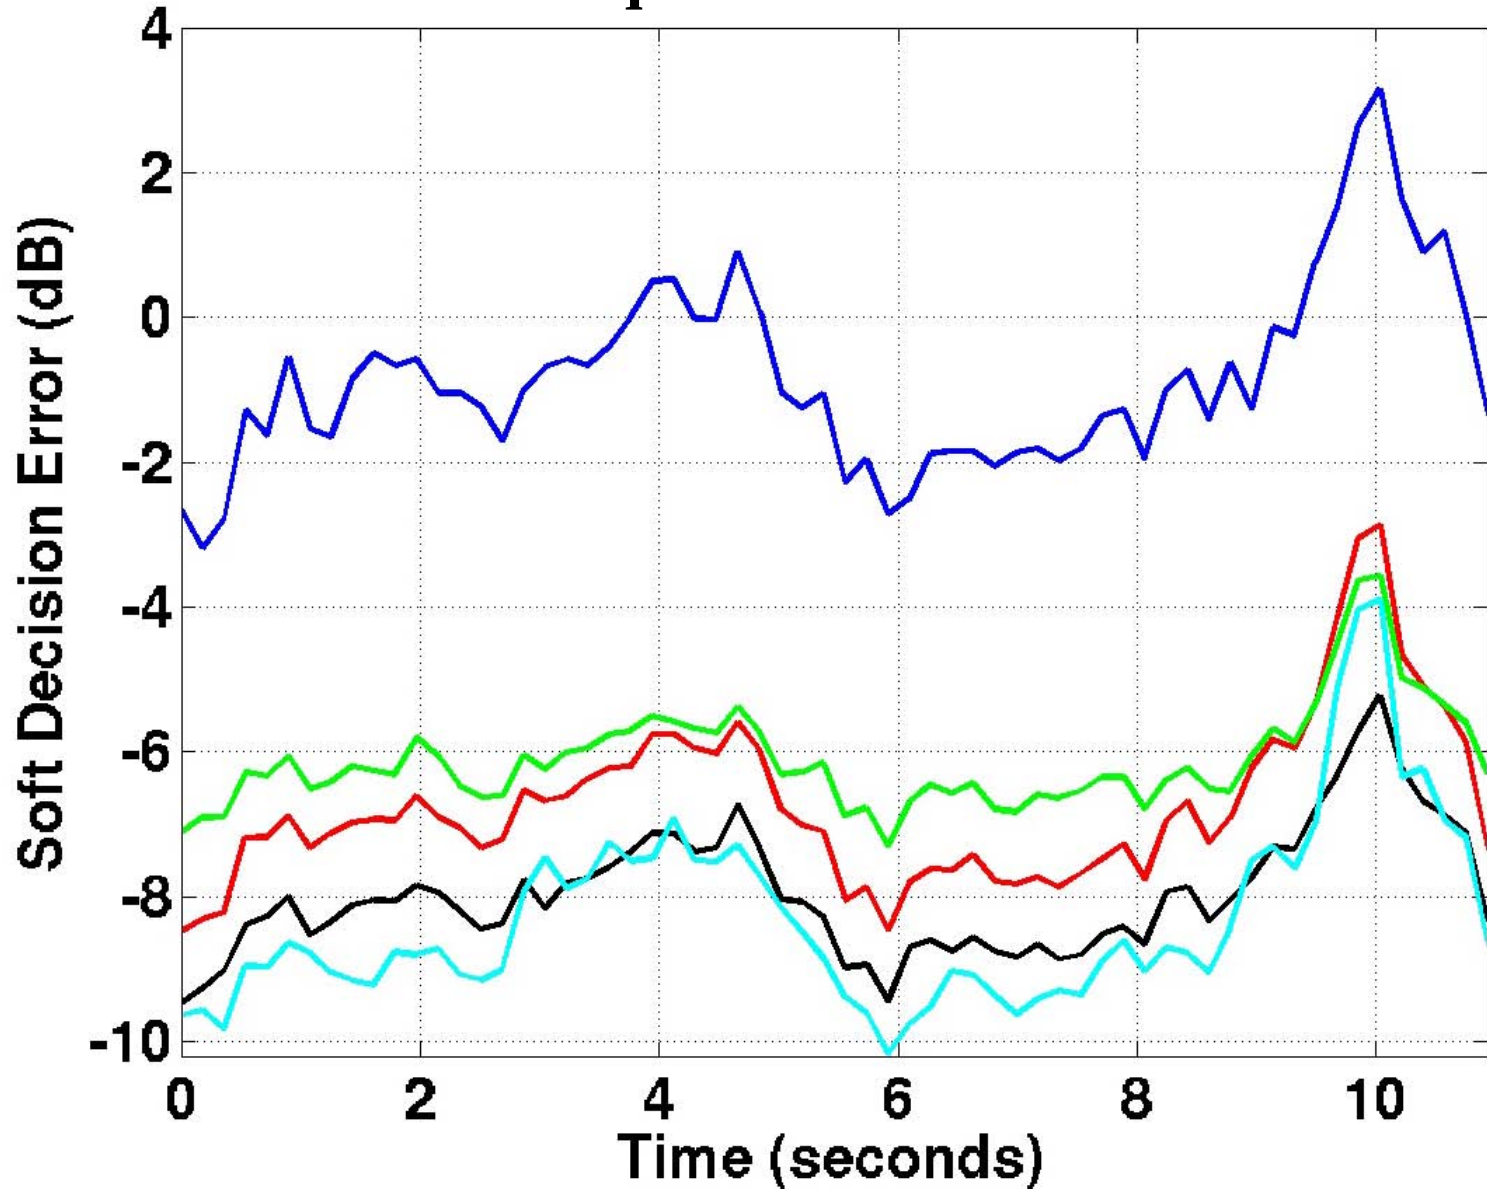

DFE Performance Comparisons (BER) for Day 334

3 and 8 channel equalizers

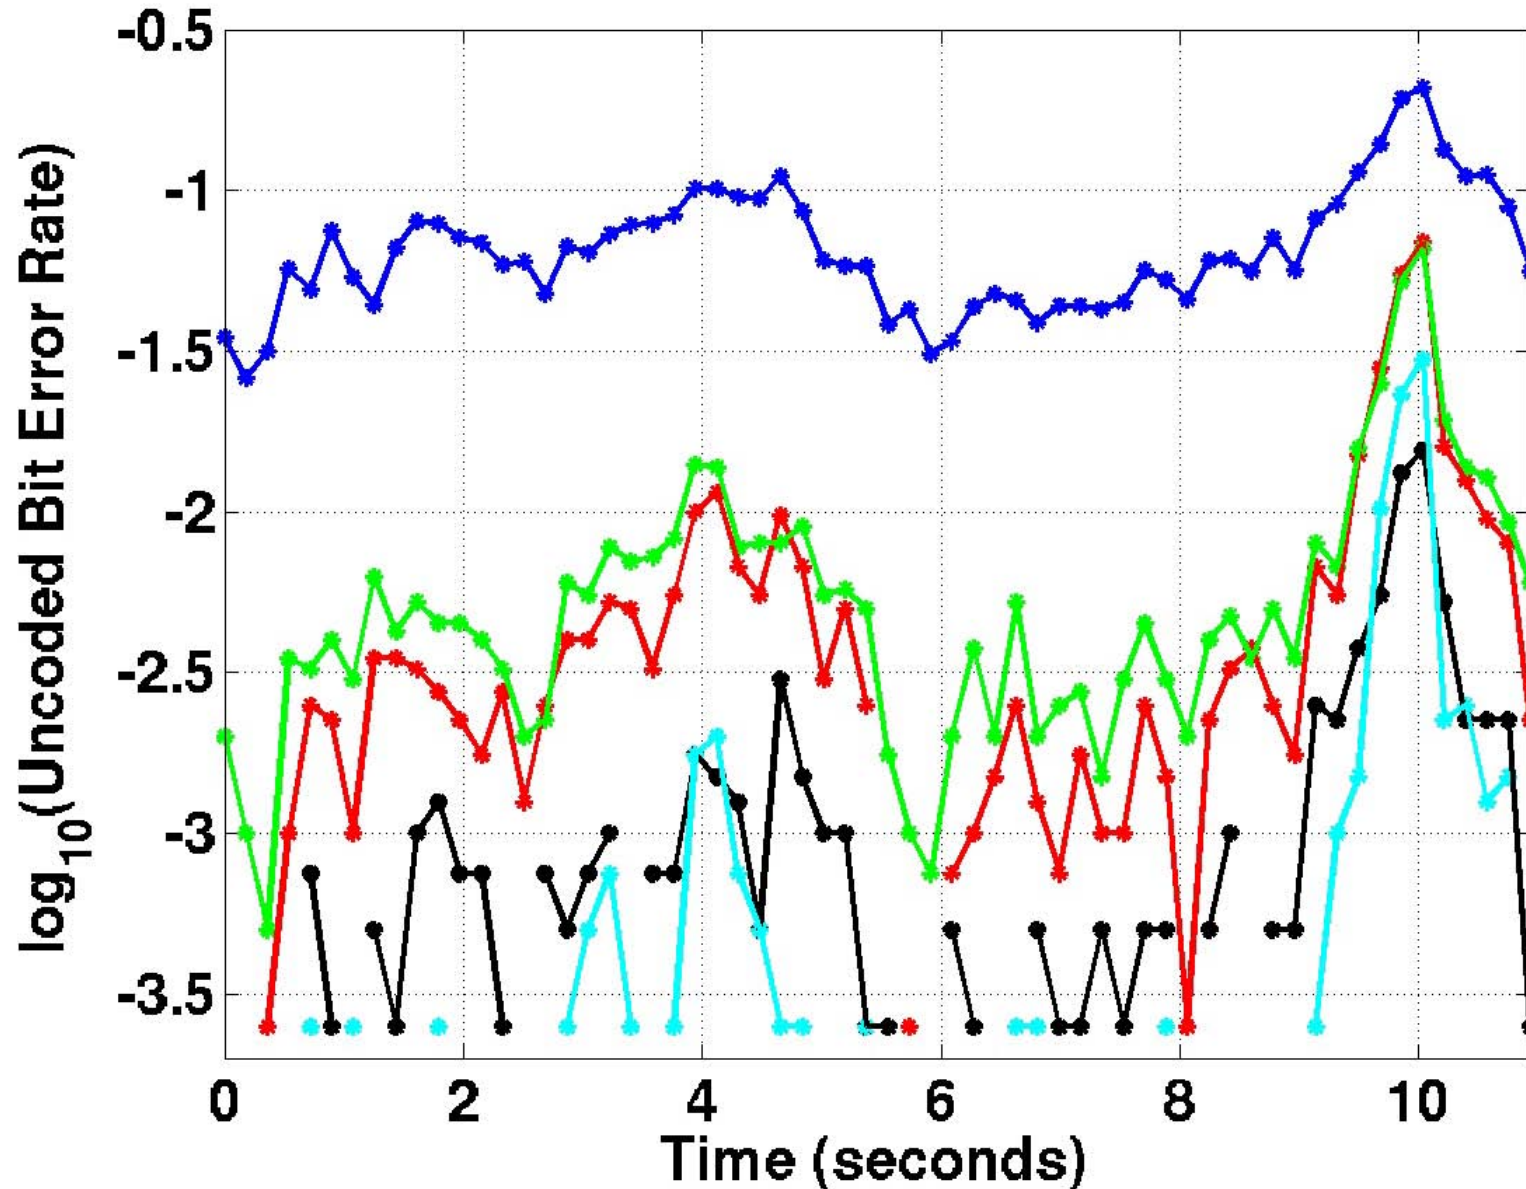

Summary of Equalizer Performance Analysis

- MMSE and passive time-reversal equalization can be put in a common framework and analytic expressions derived for their performance with and without channel estimation errors.
- The performance of these equalizers can be completely characterized by norm of the desired signal “replica vector” with respect to the “effective” noise correlation matrix.
- Sensitivity of processors to channel estimation errors depends on the magnitude squared of the feedforward or linear filter weight vector.
- MMSE DFE limited primarily by the ability to track channel fluctuations. The P-TR equalizer is limited primarily by the ability to equalize the channel.
- The modeling of the impact of channel estimation errors on the equalizer input signal as an increase in the observation noise level leads to the development of robust equalizers.
- The use of the residual prediction error of the equalizer input signal to calculate the statistics of the effective observation noise yields significant performance improvements.