

FUNDAMENTAL COMMUNICATION RANGE LIMITATION OF ULTRA WIDEBAND COMMUNICATIONS FOR MILITARY APPLICATION

Larry J. Levitt

Aviation and Missile Research, Development, and Engineering Center
Redstone Arsenal, AL 35898-5000

ABSTRACT

An analysis of ultra wideband (UWB) channel capacity as a function of communications range is provided in this paper. Potential military application of UWB communications are indicated based on this analysis, with particular emphasis on unmanned systems. The relevance of UWB communications for ground-to-ground or air-to-ground applications includes low probability of interception or detection (covert), relative immunity to multipath effects, large spatial capacity compared to other wireless systems, simultaneous precision ranging and communicating, and extremely low transmit power which reduces the possibility of interfering with other radio systems. Implementation challenges for advanced UWB applications are briefly noted.

1. INTRODUCTION

1.1 UWB Communications and Unmanned Systems

The application of UWB communications to achieve unmanned ground vehicle (UGV) / unmanned aerial vehicle (UAV) collaboration was explored during a recently completed Phase 2 Small Business Innovation Research (SBIR). The goal of this effort was the design of a UWB transceiver to enable video transmission from a UGV to an operator control unit using a UAV as a communications relay. The culmination of the SBIR was a demonstration at Redstone Arsenal, AL of a UWB video transmission from a UAV down to a ground station at a range of approximately 0.5 km. In addition, three UWB radios were configured for a 1.5 km ground-to-ground communications relay link. Time Domain Corporation (Huntsville, AL) received the SBIR 2004 Quality Award for this effort.

1.2 Outdoor UWB Wireless Network Capacity

The practical capacity of outdoor UWB wireless networks at tactical ranges has received scant attention in the engineering community (Zhao and Haimovich, 2001). The methodology to determine the UWB channel capacity as a function of range is based primarily on Shannon's information theorem (Shannon, 1948) and Federal Communication Commission (FCC) constraints (FCC, 2002). Simplifying assumptions concerning atmospheric losses and antenna characteristics are used to postulate hypothetical communication link budgets. This

methodology is directly relevant for specifying realistic applications of UWB communications for unmanned system initiatives, which are an integral part of the Future Combat System. An assessment is made for specific areas such as UGV/UAV interoperability, UAV to UAV communications, and collision avoidance for small UAVs. The analysis presented in this paper has been applied for determination of technology transition to evolving war fighting systems.

2. METHODOLOGY

The Shannon information theorem

$$C = B \log_2 (1 + S/N) \quad (1)$$

where C is maximum channel capacity (bits/sec), B is channel bandwidth (Hz), S and N are signal and noise power, respectively (watts). The Shannon equation refers to inputs or transmissions as a function of time, so that its use to determine UWB data rate as a function of communication range represents an approximation of a discrete process. Equation (1) is equated with the ratio of the energy per bit (E_b) to single-sided power spectral density of white noise (N_0) for a perfect communications channel with FCC limits. This results in an estimate of the fundamental limitation of data rate as a function of range:

$$M = B \log_2(1 + (1.687 * 10^{12}/B*R^2)) \quad (2)$$

where R is communications range (m) and M is data rate (bits/sec). The units for E_b are Joules or watts-sec, and the units for N_0 are watts/Hz/sec. The E_b/N_0 term is the ratio of pulse energy to thermal noise per Hz. A detailed derivation of Equation (2) may be found in a technical report (Levitt, 2004).

3. UWB CHANNEL CAPACITY AND COMMUNICATIONS RANGE

The simplifying assumptions are ideal modulation, no system losses, FCC emission limits, and the FCC main frequency band. The basic characteristic of UWB communications is revealed in Figure 1, namely very high data rates at relatively short ranges, with low data rates at longer ranges. The region to the right of the curve is considered to be unavailable, while the possible operating region is to the left.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 00 DEC 2004		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Fundamental Communication Range Limitation Of Ultra Wideband Communications For Military Application				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Aviation and Missile Research, Development, and Engineering Center Redstone Arsenal, AL 35898-5000				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM001736, Proceedings for the Army Science Conference (24th) Held on 29 November - 2 December 2005 in Orlando, Florida. , The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 2	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

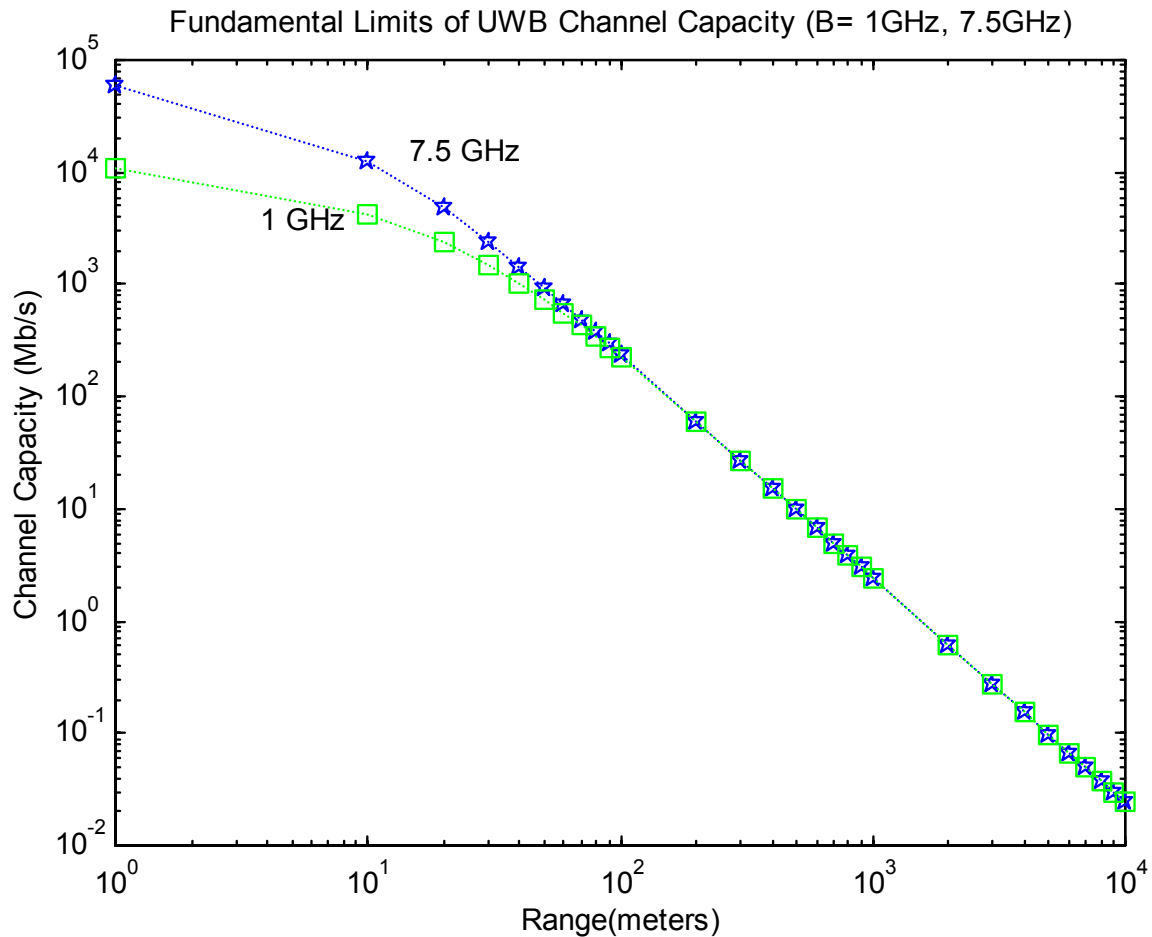


Fig 1. Fundamental limits to UWB channel capacity.

4. DISCUSSION

Based on Fig. 1, data rates of roughly kilobits/sec at a few km (assuming perfect communication channels), especially with the possibility of simultaneous ranging and communicating, could be a viable approach for collision avoidance and data exchange among small UAVs. The use of large antennas and receivers to achieve longer ranges (approximately 10 km) is not practical with current UAV payload limitations, and compromises secure communications since power levels would have to be substantially increased.

Concern about interference from other narrowband systems is still a contentious issue. However, UWB centrally controlled networks with multiple short range links, advanced digital filters (notch filters), and more adaptive receivers and antennas could lead to changes in FCC restrictions. Increases in data rate as a function of communications range could be realized by pulse compression, advances in broadband non-resonant antennas, the use of multiple antennas, improved spectral

efficiency (such as higher order modulation techniques), and the use of multiple input/multiple output techniques.

ACKNOWLEDGEMENTS

The author thanks Dr. George Emmons and of Booz-Allen_Hamilton, Inc for providing the analysis.

REFERENCES

- Levitt, L., 2004: Assessment of Ultra Wideband Communications for Unmanned System Initiatives. Technical Report AMR-AS-04-01, U.S. Army Aviation and Missile Research, Development, and Engineering Center.
- Shannon, C.E., 1948: A Mathematical Theory of Communication, *Bell System Technical Journal*, **27**, 379-423, 623-656.
- Zhao, L. and Haimovich, A.M., 2001: Capacity of M-ary PPM UWB Communications over AWGN Channels, 2001 IEEE Vehicular Technology Conference, 2, 1191-1195.