



Processing and Ballistic Performance of $\text{Al}_2\text{O}_3/\text{TiB}_2$ Composites

by Gary A. Gilde and Jane W. Adams

ARL-TR-3658

September 2005

NOTICES

Disclaimers

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of manufacturer's or trade names does not constitute an official endorsement or approval of the use thereof.

Destroy this report when it is no longer needed. Do not return it to the originator.

Army Research Laboratory

Aberdeen Proving Ground, MD 21005-5069

ARL-TR-3658**September 2005**

Processing and Ballistic Performance of $\text{Al}_2\text{O}_3/\text{TiB}_2$ Composites

Gary A. Gilde and Jane W. Adams
Weapons and Materials Research Directorate, ARL

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) September 2005		2. REPORT TYPE Final		3. DATES COVERED (From - To) October 2000–February 2003	
4. TITLE AND SUBTITLE Processing and Ballistic Performance of Al ₂ O ₃ /TiB ₂ Composites				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Gary A. Gilde and Jane W. Adams				5d. PROJECT NUMBER 665857.031	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Research Laboratory ATTN: AMSRD-ARL-WM-MD Aberdeen Proving Ground, MD 21005-5069				8. PERFORMING ORGANIZATION REPORT NUMBER ARL-TR-3658	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Early research on Al ₂ O ₃ /TiB ₂ composites focused on exploiting their potential as a low-cost armor ceramic. Limited ballistic data indicated that the microstructure had a dramatic effect on ballistic performance. In some cases, the penetration resistance of Al ₂ O ₃ /TiB ₂ approached that of monolithic TiB ₂ ceramics. However, challenges were encountered both in quantifying the microstructural details and fabricating the desired microstructure. The large spread in depth of penetration results for these ceramics, coupled with an insufficient number of samples tested, led to some confusion in accessing the effect microstructure had on the ballistic performance. Our research focused on microstructure control during fabrication and a more thorough ballistic evaluation to correlate microstructure with penetration resistance. Composites were made from mixed Al ₂ O ₃ and TiB ₂ powders. The composites, prepared with dramatically different microstructures, had similar ballistic performance. Results show that the penetration resistance of Al ₂ O ₃ /TiB ₂ composites is not as good as a hot-pressed silicon carbide.					
15. SUBJECT TERMS ceramic composite, microstructure, armor					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UL	18. NUMBER OF PAGES 20	19a. NAME OF RESPONSIBLE PERSON Gary Gilde
a. REPORT UNCLASSIFIED	b. ABSTRACT UNCLASSIFIED	c. THIS PAGE UNCLASSIFIED			19b. TELEPHONE NUMBER (Include area code) 410-306-0923

Contents

List of Figures	iv
1. Introduction	1
2. Experimental	2
2.1 Processing.....	2
2.2 Characterization.....	3
3. Results and Discussion	4
4. Summary	7
5. References	9
Distribution List	10

List of Figures

Figure 1. Early DOP ballistic test data for L/D = 13 rod at 1550 ms ⁻¹ against alumina titanium diboride ceramics.....	1
Figure 2. DOP test configuration.	3
Figure 3. Microstructure of ESD composite on left and MM composite on right.....	5
Figure 4. Summary of DOP experiments as described in experimental procedure: penetration into RHA backing vs. ceramic areal density against the L/D = 10 rod at 1500 ms ⁻¹ (4).....	5
Figure 5. Microstructure of Al ₂ O ₃ /TiB ₂ composite made from SHS-derived powder.	6

1. Introduction

Composites of $\text{Al}_2\text{O}_3/\text{TiB}_2$ were produced by K .V. Logan at the Georgia Institute of Technology (1), and the University of Dayton Research Institute (UDRI) performed the initial depth-of-penetration (DOP) ballistic evaluations on them (2). Logan concluded that there could be a possible correlation between microstructure and ballistic performance. It was theorized that the composite structure that had TiB_2 distributed along the grain boundaries of the Al_2O_3 , which formed a continuous distribution of TiB_2 , exhibited better ballistic performance than when the TiB_2 was dispersed in the Al_2O_3 matrix. Those results led the U.S. Army to continue looking at the composite material and the role of microstructure. In some tests, the ballistic performance was greater than predicted from the rule of mixtures, as shown in figure 1, and was high enough to generate interest in these materials as potential armor ceramic (3). However, there was ambiguity as to whether the observed differences were due to random ballistic variation or to an actual difference in microstructure (4). The purpose of this work was to fabricate $\text{Al}_2\text{O}_3/\text{TiB}_2$ composites with two distinctly different microstructures, to correlate microstructural differences with ballistic performance, and to determine how well the composite material worked relative to other armor-grade ceramics.

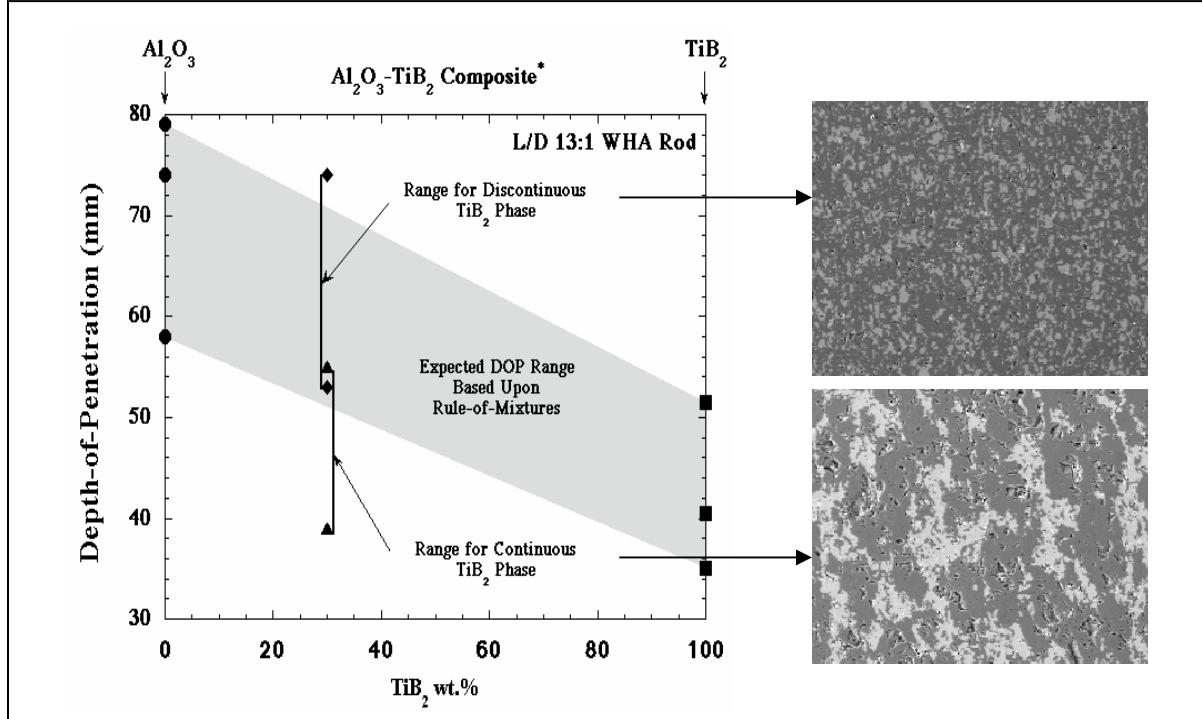


Figure 1. Early DOP ballistic test data for $L/D = 13$ rod at 1550 ms^{-1} against alumina titanium diboride ceramics.

2. Experimental

2.1 Processing

Al₂O₃/TiB₂ composites were fabricated with two different microstructures and then ballistically tested to determine the effect of the two different microstructures. The results from these ballistic tests were compared to earlier tests on similar materials made at the Georgia Tech Research Institute (GTRI). The materials from GTRI were the same thickness and tested under the same conditions by UDRI (2).

Two different powder-processing routes were used to produce composites with the same composition but very different microstructures. The composition was 77.4 without Al₂O₃^{*} and 22.6 without TiB₂.[†] Traditional ball-milling was used to make a composite structure in which the TiB₂ was evenly dispersed within the Al₂O₃ matrix. This microstructure will be referred to as manually mixed (MM). The Al₂O₃ and TiB₂ powders were ball-milled in ethanol for 16 hr using alumina milling media in a polyethylene jar. The slurry was then dried and the powder sieved through a polyester USA Series 60 mesh sieve.

Electrostatic dispersion was used to make a composite structure in which the TiB₂ particles surrounded Al₂O₃ agglomerates. TiB₂ was added to the Al₂O₃ powder in a polyethylene jar and dry mixed for 30 min using a Turbula mixer.[‡] In electrostatic dispersion, the TiB₂ coats agglomerates of Al₂O₃ because of the positive charge (on TiB₂) and negative charge (on Al₂O₃) that build up on the particles during the dry mixing. The powder was then sieved through a USA Series 60 polyester mesh sieve. The composite microstructure that results, whereby the TiB₂ surrounded areas of Al₂O₃, was designated as electrostatically dispersed (ESD).

Powders from the two different mixing methods were then hot-pressed under the same conditions. The composites were hot-pressed in graphite dies in an argon atmosphere. The temperature was raised from 20 °C to 850 °C at 10 °C/min, and then from 850 °C to 1650 °C at 4 °C/min. The temperature was held at 1650 °C for 4 hr and then cooled down at 10 °C/min to 20 °C. A pressure of 35 MPa was applied to the powder compact at the beginning of the heating cycle and maintained through the final hold at 1650 °C, then released prior to cool down.

^{*}A16SG, Alcoa, Pittsburgh, PA.

[†]Grade D, H. C. Starck, Newtown, MA.

[‡]Turbula Mixer, Glen Mills, Inc., Clifton, NJ.

2.2 Characterization

The elastic modulus was measured using the procedures described in ASTM C 1259 (5) and densities of the compacts were measured using the Archimedes water immersion technique. Samples were sectioned and polished for microstructural analysis. Microscopy was performed on a scanning electron microscope (SEM) using the backscatter mode.

DOP ballistic testing was conducted using a 65-g, $L/D = 10$ tungsten rods striking the sample at 1500 m/s. The rod was 7.8 mm in diameter, 78.7 mm long, and made from a tungsten heavy alloy (WHA) which was 93% W/ 4.9% Ni/ 2.1% Fe. The samples tested were 100 mm in diameter and 25 mm thick. These targets were mounted on rolled homogeneous armor (RHA) steel, semi-infinite witness blocks, with a thin layer of two-part epoxy. The target configuration is shown in figure 2. The velocity of the projectile and the pitch and yaw were determined using flash x-rays in all DOP tests. The maximum acceptable pitch-yaw angle was 1.5° .

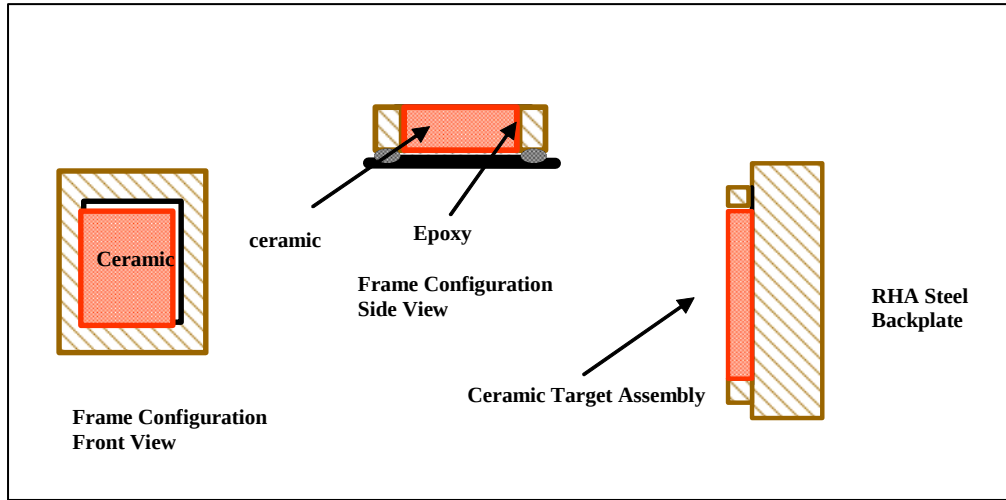


Figure 2. DOP test configuration.

From the DOP test data, mass efficiency, (e_m), space efficiency (e_s), and quality factor (q^2) can be defined by the following equations (6):

$$e_s = \frac{P_{WITN} - P_R}{T_{CER}} , \quad (1)$$

$$e_m = \frac{(P_{WITN} - P_R) \times \rho_{WITN}}{T_{CER} \times \rho_{CER}} = e_s \times \frac{\rho_{WITN}}{\rho_{CER}} , \quad (2)$$

and

$$q^2 = e_m \times e_s , \quad (3)$$

where P_{WITN} is the DOP of the projectile into the semi-infinite witness plate without the ceramic facing; P_{R} is the penetration of the projectile into the semi-infinite witness plate with the ceramic mounted to the front face; T_{CER} is the thickness of the ceramic applied to the face of the witness plate; and ρ refers to the density of the respective materials. It can be seen that e_{m} and e_{s} are dimensionless factors that compare the ballistic performance to RHA steel. The e_{m} and e_{s} of the reference witness plate are 1; thus, a higher number denotes better ballistic performance as compared to the reference backing material. Because both the weight of the armor and the space it takes up are critical factors in designing armors, the armor quality factor, q^2 , is important to armor designers because it relates both the mass and space efficiencies.

Pieces of the ceramic were recovered after the ballistic test. The pieces were sectioned, mounted, and polished. Microstructural characterization was performed using an SEM in the backscatter mode.

3. Results and Discussion

This study used the same $\text{Al}_2\text{O}_3/\text{TiB}_2$ composition to produce two different microstructures and to investigate the effect of microstructure on the ballistic performance. Results show that the only significant difference in the two composites is the microstructure. The density and the elastic modulus of the different composites were measured. The density of the microstructures were equivalent: both the MM composites and the ESD composites had a density of 4.0 g/cm^3 . The theoretical density for the composite, as determined by the rule of mixtures, was 4.1 g/cm^3 . In addition to having a similar density, the elastic moduli were similar.

Figure 3 shows that the microstructure for the ESD composite is very different from the MM composite. In the MM composite, the TiB_2 is dispersed uniformly within the Al_2O_3 matrix. In the case of the ESD composite, the TiB_2 surrounds large agglomerates of Al_2O_3 , forming a continuous TiB_2 phase around islands of Al_2O_3 . This structure is developed in the electrostatic dispersion due to the static electricity that builds up on the particles during the dry Turbula mixing; charge differences fix the TiB_2 to the Al_2O_3 agglomerates. When this powder is hot-pressed, the TiB_2 coating on the Al_2O_3 agglomerates is maintained.

Ballistic properties of $\text{Al}_2\text{O}_3/\text{TiB}_2$ composites impacted with the $L/D = 10$ tungsten alloy rod at 1500 m/s are presented in figure 4. It can be seen that there is no significant difference in the ballistic performance of the two composites. The average penetration for the MM composite is 32 mm with a standard deviation of 8 mm vs. 34 mm with a standard deviation of 4 mm for the ESD composite. The spread in the data is the same for the hot-pressed silicon carbide tested, which had an average penetration of 29 mm and a standard deviation of 8 . This hot-pressed silicon carbide is a mature, commercially available, armor ceramic. This variation is typical of ceramic materials tested in a DOP test.

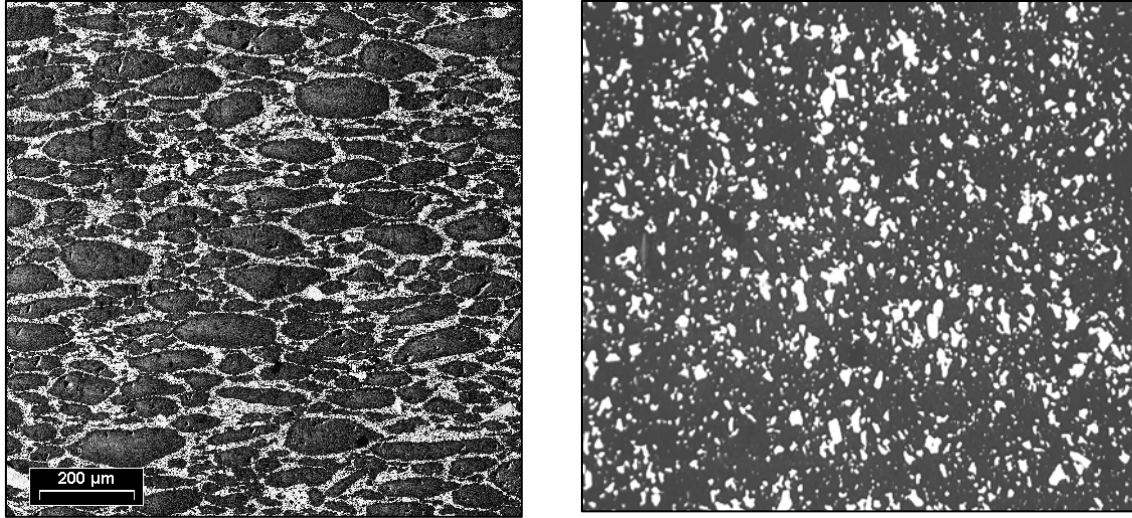


Figure 3. Microstructure of ESD composite on left and MM composite on right.

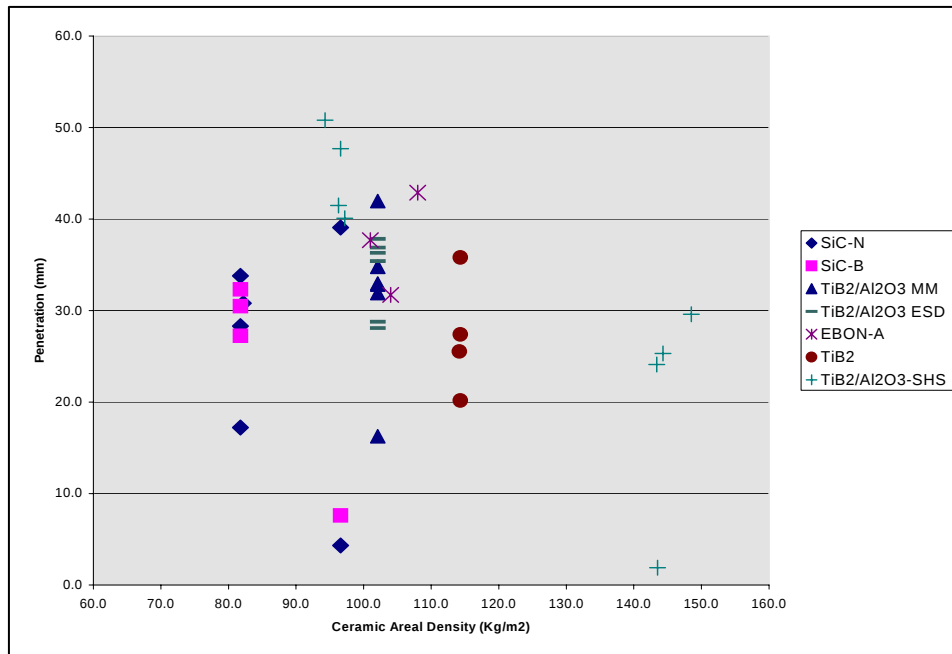


Figure 4. Summary of DOP experiments as described in experimental procedure: penetration into RHA backing vs. ceramic areal density against the $L/D = 10$ rod at 1500 ms^{-1} (4).

Palicka and Rubin reported the average DOP of hot-pressed Al_2O_3 as 37.4 mm for an areal density around 108 kg/m^2 tested under similar conditions (7). The average DOP of a hot-pressed Al_2O_3 is greater as compared to the average DOP for $\text{Al}_2\text{O}_3/\text{TiB}_2$, however, all alumina DOP results fall within the range of DOP results for the composites. It is not certain that the addition of TiB_2 increases the ballistic performance, although it appears likely that it has some positive effect. The large spread in DOP data for ceramics makes it difficult to draw conclusions based on a small number of tests; comparisons based on a couple of ballistic tests are very suspect. Unfortunately, due to the costs and complexity of the ballistic testing, this is often done.

Determining the effect of the TiB_2 on the Al_2O_3 matrix was outside the scope of this investigation.

In this study there was no significant difference in ballistic performance of the composites tested despite very different microstructures that were produced. When these results are compared to the earlier testing conducted by UDRI on materials furnished by GTRI, the results are similar (2). Those tests were done on tiles of the same thickness using the same 65-g WHA test rod striking the target at 1500 m/s. The target configurations were similar; thus, a direct comparison of the ballistic results is possible. The composites furnished by GTRI were made using a composite powder formed using a self-propagating high-temperature synthesis (SHS) reaction (1). The average e_m for the SHS $\text{Al}_2\text{O}_3/\text{TiB}_2$ composites tested by UDRI was 3.0 and the highest e_m was 4.1. Logan (1) concluded that the microstructure of the tile that gave the e_m of 4.1 was different from the others tested because it had a greater amount of TiB_2 surrounding the Al_2O_3 . She postulated that the superior ballistic performance was due to the greater amount of TiB_2 distributed around the Al_2O_3 . The average e_m of the $\text{Al}_2\text{O}_3/\text{TiB}_2$ composites tested in the current study was 3.0 and the highest e_m was 4.3. However, the e_m of 4.3 was given by a composite where the TiB_2 is dispersed in the Al_2O_3 . As can be seen in figure 5, the microstructure of the composite formed using the SHS-derived powder is different from the two microstructures tested in our study. The premise that the difference in ballistic performance is due to the difference in microstructure has not been supported by this study. In fact, the observed difference falls within the expected spread of DOP results for ceramics.

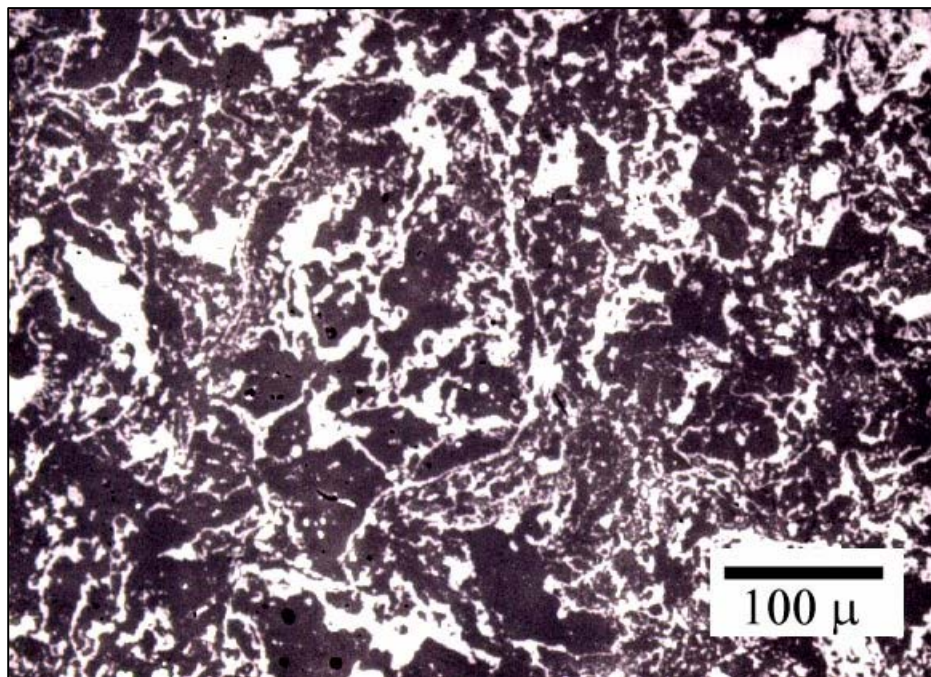


Figure 5. Microstructure of $\text{Al}_2\text{O}_3/\text{TiB}_2$ composite made from SHS-derived powder.

In previous work performed in our laboratory, composites prepared by GTRI were tested using a larger WHA $L/D = 13$ projectile that is 30% longer and twice the mass of the $L/D = 10$ projectile. The ceramic targets were 40 mm thick vs. 25 mm used in this study. The results are shown in figure 1. Composite targets were made using both mixed Al_2O_3/TiB_2 powders and composite powders formed via an SHS reaction. The best e_m obtained with the larger projectile, $e_m = 4.4$, is very close to the best e_m (4.3) in the current study, despite the differences in the testing. The average e_m in that study was 3.3, compared to an average e_m of 3.0 in this study. Although it is not possible to make direct comparisons when there are differences in the projectile and target thickness, in this case it is safe to conclude that the differences observed in the ballistic performance were due to the usual random variation in ceramic DOP results and not due to differences in microstructure. In this study, our highest e_m was given by the microstructure that had TiB_2 dispersed within the Al_2O_3 (MM) as opposed to the previous study where the best e_m was given by the composites made with mixed Al_2O_3/TiB_2 powders where the TiB_2 was surrounding the Al_2O_3 . This indicates that the observed differences in ballistic performance are due to the inherent variability in ceramic DOP tests. Because of the large spread in the DOP results for ceramics, extreme care must be taken when analyzing the data, and the sample size must be large enough to get a good indication of the standard deviation.

When the ballistic performance of the Al_2O_3/TiB_2 composite is compared to a hot-pressed silicon carbide, the silicon carbide is clearly superior. From figure 4 it can be determined that silicon carbide has an average e_m of 4.5, e_s of 1.8, and a q^2 of 8.3, while the Al_2O_3/TiB_2 composite has an average e_m of 3.0, e_s of 1.5, and a q^2 of 4.6.

Although none of the Al_2O_3/TiB_2 composites microstructures tested in this study had an effect on the ballistic performance, more work is needed to understand the effect of microstructure on ballistic performance. It would be a mistake to conclude that because the different microstructures tested in this study had no effect, microstructure will not have an effect on ballistic performance.

4. Summary

Our investigation to assess the effect of microstructure on Al_2O_3/TiB_2 composite ballistic performance demonstrated that distinctive microstructures could be developed and controlled by a variety of processing methods. A systematic ballistic evaluation was completed using 65-g $L/D = 10$ projectiles at a velocity of 1500 m/s. None of the microstructures tested had an effect on the ballistic properties of the composites. The process of mixing dry powders to electrostatically disperse the TiB_2 around the Al_2O_3 grains resulted in composite structures that were as effective as those that had the TiB_2 dispersed in the Al_2O_3 , and both proved similar to composites made for powders derived for SHS reactions. The addition of TiB_2 to the Al_2O_3 matrix had no deleterious effect on the ballistic performance and may have enhanced the ballistic

performance of the Al_2O_3 matrix. $\text{Al}_2\text{O}_3/\text{TiB}_2$ composites do not result in e_m , e_s , and q^2 values as high as a state-of-the-art hot-pressed silicon carbide and it may be concluded that $\text{Al}_2\text{O}_3/\text{TiB}_2$ composite structures will not be as effective as hot-pressed silicon carbide as an armor ceramic.

5. References

1. Logan, K. V. Elastic-plastic Behavior of Hot-pressed Composite $\text{TiB}_2/\text{Al}_2\text{O}_3$ Powders Produced Using Self-propagating High-temperature Synthesis. Ph.D. Thesis, Georgia Institute of Technology, Atlanta, GA, 1992.
2. Abfalter, G.; Brar, N. S; Jurick, D. *Determination of the Dynamic Unload/Reload Characteristics of Ceramics*; Contract No. DAAL03-88-K-0203; University of Dayton Research Institute: Dayton, OH, June 1992.
3. Gilde, G. A.; Adams, J. W.; Burkins, M.; Motyka, M.; Patel, P. J.; Chin, E.; Prokurat Franks, L.; Sutaria M. P.; Rigali, M. Processing of $\text{Al}_2\text{O}_3/\text{TiB}_2$ Composites for Penetration Resistance. *Cer. Eng. Sci. Proc.* **2001**, 22, 331–342.
4. Adams, J. W.; Gilde, G. A.; Burkins, M. Microstructure Development of $\text{Al}_2\text{O}_3/\text{TiB}_2$ Composites for Penetration Resistance. In *Ceramic Armor Materials by Design*; McCauley, J. W., Crowson, A., Gooch, W. A., Jr., Rajendran, A. M., Bless, S. J., Logan, K. V., Normandia, M., Wax, S., Eds.; *Ceramic Transactions, Vol. 134*; American Chemical Society: Washington, DC, 2002.
5. ASTM C 1259. Standard Test Method for Dynamic Young's Modulus, Shear Modulus, and Poisson's Ratio for Advanced Ceramics by Impulse Excitation. *Annu. Book ASTM Stand.* **1998**, Vol. 15.01.
6. Woolsey, P.; Kokidko, D.; Mariano, S. *An Alternative Test Methodology for Ballistic Performance Ranking of Armor Ceramics*; MTL TR 89-43; U.S. Army Materials Technology Laboratory: Watertown, MA, 1989.
7. Palicka, R. J.; Rubin, J. A. *Development, Fabrication and Ballistic Testing of New, Novel Low-Cost High Performance Ballistic Materials*; Final Report Contract No. DAAL03-88-C-0032; CERCOM, Inc.: Vista, CA, July 1991.

NO. OF
COPIES ORGANIZATION

1 DEFENSE TECHNICAL
(PDF INFORMATION CTR
ONLY) DTIC OCA
8725 JOHN J KINGMAN RD
STE 0944
FORT BELVOIR VA 22060-6218

1 US ARMY RSRCH DEV &
ENGRG CMD
SYSTEMS OF SYSTEMS
INTEGRATION
AMSRD SS T
6000 6TH ST STE 100
FORT BELVOIR VA 22060-5608

1 INST FOR ADVNCD TCHNLGY
THE UNIV OF TEXAS
AT AUSTIN
3925 W BRAKER LN
AUSTIN TX 78759-5316

1 DIRECTOR
US ARMY RESEARCH LAB
IMNE ALC IMS
2800 POWDER MILL RD
ADELPHI MD 20783-1197

3 DIRECTOR
US ARMY RESEARCH LAB
AMSRD ARL CI OK TL
2800 POWDER MILL RD
ADELPHI MD 20783-1197

3 DIRECTOR
US ARMY RESEARCH LAB
AMSRD ARL CS IS T
2800 POWDER MILL RD
ADELPHI MD 20783-1197

ABERDEEN PROVING GROUND

1 DIR USARL
AMSRD ARL CI OK TP (BLDG 4600)

NO. OF
COPIES ORGANIZATION

3 NASA LANGLEY RSCH CTR
AMSRD ARL VT
F BARTLETT JR MS 266
W ELBER MS 266
G FARLEY MS 266
HAMPTON VA 23681-0001

2 US ARMY RSCH OFC
J CHANG
D STEPP
PO BOX 12211
RSCH TRIANGLE PARK NC
27709-2211

1 DARPA
SPECIAL PROJ OFC
A ALVING
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

1 DARPA
TACTICAL TECH OFF
W JOHNSON
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

2 DARPA
DEFENSE SCIENCE OFC
L CHRISTODOULOU
S WAX
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

1 DARPA
ADV TECH OFC
D HONEY
3701 N FAIRFAX DR
ARLINGTON VA 22203-1714

1 DIRECTOR DTRA
MSC 6201
8725 JOHN J KINGMAN RD
FT BELVOIR VA 22060-6201

1 DIRECTOR DIA
TA-5
K CRELLING
WASHINGTON DC 20310

NO. OF
COPIES ORGANIZATION

1 CDR US ARMY TACOM
PM COMBAT SYSTEMS
SFAE GCS CS
6501 ELEVEN MILE RD
WARREN MI 48397-5000

1 CDR US ARMY TACOM
AMSTA SF
WARREN MI 48397-5000

1 CDR US ARMY TACOM
PM SURV SYS
SFAE ASM SS
6501 ELEVEN MILE RD
WARREN MI 48397-5000

1 CDR US ARMY TACOM
PEO CS & CSS
PM LIGHT TACTICAL VHCLS
SFAE CSS LE (M114 MGR)
6502 ELEVEN MILE RD
WARREN MI 48397-5000

2 CDR US ARMY TACOM
AMSTA TR R
J BENNETT
D HANSEN
WARREN MI 48397-5000

2 CDR US ARMY TACOM
AMSTA TR D
S HODGES
D OSTBERG
WARREN MI 48397-5000

6 CDR US ARMY TACOM
AMSTA JSK
J CARIE
S GOODMAN
K IYER
A SCHUMACHER
R SIERS
D TEMPLETON
WARREN MI 48397-5000

2 CDR US ARMY TACOM
AMSTA CS SF
H HUTCHINSON
F SCHWARZ
WARREN MI 48397-5000

NO. OF
COPIES ORGANIZATION

1 DIR TNG DOC & CBT DEV
ATZK TDD ORSA
A POMEY
FT KNOX KY 40121-5000

2 CDR US ARMY AMCOM
AVIATION APPLIED TECH DIR
J SCHUCK
FT EUSTIS VA 23604-5577

6 DIR US ARMY NGIC
J GASTON
M HOLTUS
D LEITER
S MINGLEDORF
R WARNER
M WOLFE
230 SEVENTH ST NE
CHARLOTTESVILLE VA 22091

2 OFC OF NAVAL RSCH
J KELLY
D SIEGEL CODE 315
800 N QUINCY ST
ARLINGTON VA 22217-5560

2 NAVAL SURFACE WARFARE CTR
U SORATHIA
C WILLIAMS CS 6551
9500 MACARTHUR BLVD
WEST BETHESDA MD 20817

3 NAVAL SURFACE WARFARE CTR
CARDEROCK DIVISION
T BURTON CODE 667
R CRANE CODE 6553
R PETERSON COD 2020
9500 MACARTHUR BLVE
WEST BETHESDA MD 20817

1 MARINE CORPS
INTELLIGENCE ACTIVITY
D KOSITZKE
3300 RUSSELL RD STE 250
QUANTICO VA 22134-5011

1 MARINE CORPS SYSTEM CMD
J BURNS
2200 LESTER ST
QUANTICO VA 22134

NO. OF
COPIES ORGANIZATION

1 CENTRAL INTELLIGENCE AGENCY
WINPAC/CWTG/GWET
M DAN
RM 4P07 NHB
WASHINGTON DC 20505

3 DIR LLNL
S DETERESA
M FINGERS MS 313
S GROVES
PO BOX 808
LIVERMORE CA 94550

1 DIR LANL
F ADDESSIO MS B216
PO BOX 1633
LOS ALAMOS NM 87545

3 THE BOEING CO
MS 84 69
S AVILA
J CHILDRESS
N GERKEN
PO BOX 3707
SEATTLE WA 98124

2 UNITED DEFENSE LP
D SCHADE
G THOMAS
PO BOX 359
SANTA CLARA CA 95052-0359

2 UNITED DEFENSE LP
W BALLATA
R BRYNSVOLD
PO BOX 21099
MINNEAPOLIS MN 55421

2 GENL DYNAMICS LAND SYSTEMS
SECURITY
PO BOX 1900
WARREN MI 48090

1 CONCURRENT TECH CORP
G NICODEMUS
PO BOX 5180
JOHNSTOWN PA 15904

1 RAYTHEON
E FACCINI
DOCUMENT CONTROL
50 APPLE HILL DR
TEWKSBURY MA 01876-0901

NO. OF
COPIES ORGANIZATION

- 1 JOHN J MCMULLEN ASSOCIATES
SECURITY OFFICER
R WALLER
4300 KING ST SUITE 400
PO BOX 3009
ALEXANDRIA VA 22302
- 2 SOUTHWEST RSCH INST
SECURITY OFC
C ANDERSON
J WALKER
PO BOX 28255
SAN ANTONIO TX 78228-0255

ABERDEEN PROVING GROUND

- 41 DIR USARL
AMSRD ARL WM
J SMITH
AMSRD ARL WM M
J BEATTY
AMSRD ARL WM MA
S MCKNIGHT
R JENSEN
AMSRD ARL WM MB
T BOGETTI
L BURTON
A FRYDMAN
AMSRD ARL WM MC
M MAHER
AMSRD ARL WM MD
J CAMPBELL
B CHEESEMAN
E CHIN
P DEHMER
K DOHERTY
R DOOLEY
S GHIORSE
G GILDE
C HOPPEL
M KLUSEWITZ
J LASALVIA
J MONTGOMERY
P PATEL
W ROY
J SANDS
B SCOTT
S WALSH
S WOLF
C YEN

NO. OF
COPIES ORGANIZATION

AMSRD ARL WM RP
C SHOEMAKER
AMSRD ARL WM T
B BURNS
AMSRD ARL WM TA
M BURKINS
W GOOCH
T HAVEL
E HORWATH
J RUNYEON
M ZOLTOSKI
AMSRD ARL WM TB
P BAKER
AMSRD ARL WM TC
R COATES
AMSRD ARL WM TD
S SCHOENFELD
AMSRD ARL WM TE
A NILER
AMSRD ARL CS AP EG
M ADAMSON
AMSRD ARL SL
P TANENBAUM
AMSRD ARL SL BB
D BELY

INTENTIONALLY LEFT BLANK.