

AFRL-MN-EG-TP-2006-7410

ADAPTABLE MINIATURE INITIATION SYSTEM TECHNOLOGY (AMIST)

Kenneth Bradley
Chris Martin
Ed Wild
Air Force Research Laboratory
Munitions Directorate
AFRL/MNMF
Eglin AFB, FL 32542-6810



Roger Platteborze
Air Armament Center
AAC/XR
Eglin AFB, FL 32542-6810

SEPTEMBER 2006

JOURNAL ARTICLE (POST PRINT)

This work was published in AFRL Tech Horizons, August 2006. All authors are U.S. Government employees working within the scope of their position. Therefore, this material is declared a work of the U.S. Government and is not subject to copyright protection in the United States. The Government has the right to copy, distribute, and use the work.

This work has been submitted for publication in interest of the scientific and technical exchange. Publication of this report does not constitute approval or disapproval of the ideas or findings.

DISTRIBUTION A: Approved for public release; distribution unlimited. AAC/PA Public Release Approval Confirmation # 12-01-05-447
--

AIR FORCE RESEARCH LABORATORY, MUNITIONS DIRECTORATE

■ Air Force Material Command ■ United States Air Force ■ Eglin Air Force Base

REPORT DOCUMENTATION PAGE				Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) XX-09-2006		2. REPORT TYPE Journal Article (POSTPRINT)		3. DATES COVERED (From - To) 10/01/01 - 09/01/06	
4. TITLE AND SUBTITLE ADAPTABLE MINIATURE INITIATION SYSTEMS TECHNOLOGY (AMIST)				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER 62602F	
6. AUTHOR(S) KENNETH C. BRADLEY, CHRIS MARTIN, ED WILD, ROGER PLATTEBORZE				5d. PROJECT NUMBER 2502	
				5e. TASK NUMBER 11	
				5f. WORK UNIT NUMBER 21	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Air Force Research Lab 2. Air Armament Center Munitions Directorate, AAC/XR AFRL/MNMF Eglin AFB, FL 32542 Eglin AFB, FL 32542-6810				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING / MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Force Research Laboratory Munitions Directorate AFRL/MNMF Eglin AFB, FL 32542-6810				10. SPONSOR/MONITOR'S ACRONYM(S) AFRL-MN-EG	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) AFRL-MN-EG-TP-2006-7410	
12. DISTRIBUTION / AVAILABILITY STATEMENT DISTRIBUTION A: Approved for public release; distribution unlimited. Approval Confirmation #AAC/PA 12-01-05-447					
13. SUPPLEMENTARY NOTES This work was published in AFRL Tech Horizons, August 2006. All authors are U.S. Government employees working within the scope of their position. Therefore, this material is declared a work of the U.S. Government and is not subject to copyright protection in the United States. The Government has the right to copy, distribute, and use the work.					
14. ABSTRACT Researchers develop multipoint initiation technology to tailor weapons effects.					
15. SUBJECT TERMS Fire Point, Distributed Initiation, Initiation Systems, Detonator System					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON
a. REPORT	b. ABSTRACT	c. THIS PAGE			19b. TELEPHONE NUMBER (include area code)
UNCLASSIFIED	UNCLASSIFIED	UNCLASSIFIED	SAR	5	Kenneth C. Bradley

Adaptable Miniature Initiation System Technology

Researchers develop multipoint initiation technology to tailor weapon effects.

The ever-changing nature of warfare presents constant challenges to weapon system designers, who must carefully consider various perspectives of mutual importance. Specifically, designers must address constraints associated with newly developed aircraft, such as the F-22 and F-35, which carry their stores internally and thus have size limitations on their payloads. Weapons designers must also recognize the weight of political pressures that fuel concerns about a given weapon's potential to cause collateral damage to civilian populations. At the same time, they must respond adequately to warfighter demand for the flexibility to employ the most effective weapon against a given target. These distinct—but inter-related—challenges emphasize the need for smaller, more efficient, and highly accurate weapons with controlled damage effects. Moreover, the availability of highly adaptable munitions that serve multiple functions will provide more options in meeting emergent threats and targets of opportunity on the battlefield. For example, if a small, dual-role warhead could dynamically focus a greater percentage of its total explosive energy

towards a target, it would provide acceptable probability-of-kill values while also reducing the potential for collateral damage to the surrounding environment. The dual functionality of this warhead would also provide the warfighter with the real-time flexibility to engage in both counter air and interdiction operations with a single weapon. Development of focused warhead weapons, such as the dual-role munition, requires an interdisciplinary technical solution

incorporating aerodynamic, energetic, warhead, target detection, and initiation system technologies. AFRL is collaborating with the US Department of Energy's Kansas City Plant (Missouri) to provide ordnance designers with the tools to address the initiation system element of these requirements. One tool undergoing development is the Adaptable Miniature Initiation System Technology (AMIST)—a multipoint system designed for initiating explosive warheads. A key goal of the AMIST program effort is to ensure the developed system incorporates highly accurate and precise timing between fire points. Precision multipoint initiation allows the warhead designer to develop a weapon for which the detonation front is directly controllable via the initiation sequence

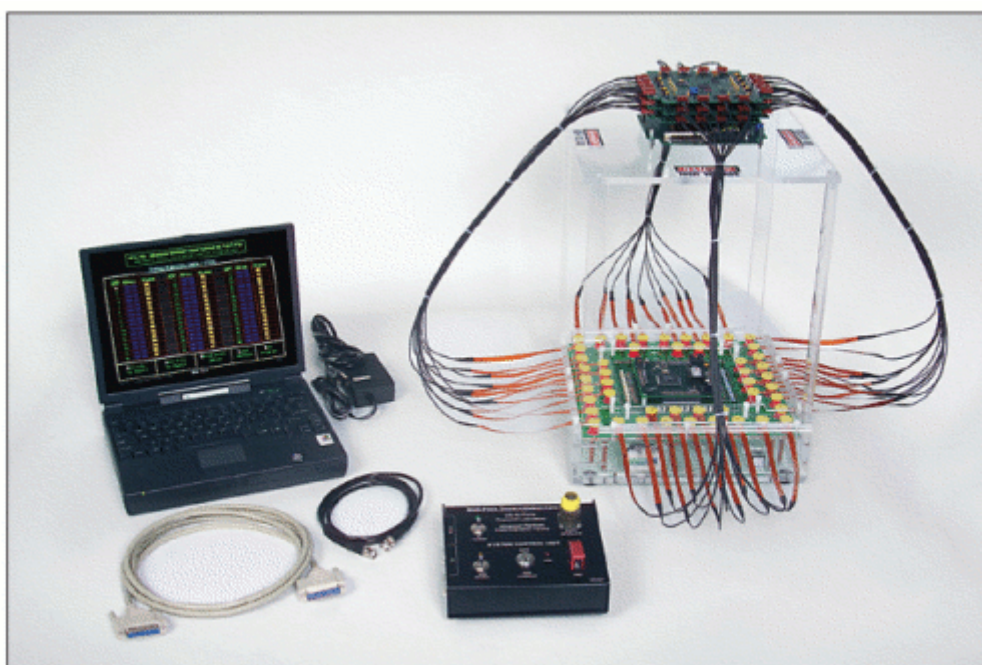


Figure 1. AMIST Configuration I with centrally controlled fire points

of fire points within the explosive fill. The resulting warhead can bias the directional path of its fragments and thus increase the energy focused towards the selected target. Not only does AMIST have enormous potential to meet the demands for future dual-role munitions, it is also a very reliable and safe initiation system. Each fire point utilizes an exploding foil initiator (EFI) to detonate an insensitive secondary explosive. The in-line (no moving parts) nature of EFIs increases their reliability over out-of-line initiation systems.

Likewise, EFI fire points increase the safety factor for two main reasons: (1) firing an EFI requires a very high-voltage pulse with a specific shape, and (2) detonating the secondary explosive requires a very high-pressure shock. Consequently, inadvertent detonation is extremely unlikely. In July 2004, AFRL researchers conducted AMIST Configuration I (see Figure 1 on previous page) proof-of-concept tests at the Advanced Warhead Experimentation Facility (AWEF), (Eglin Air Force Base, Florida) to prove that a multipoint initiation system comprising relatively inexpensive initiators could successfully operate in an explosive fill with precision timing. The test article consisted of a planar array of AMIST-controlled fire points located on the backside of a high-explosive disc. Researchers performed the tests using both simultaneous fire point detonation and individual, temporally distributed fire point detonations. Using streak and high-speed cameras, they recorded the detonation breakout on the front surface of the disc to verify the two distinct initiation sequences. Approximately a year later, the team used AMIST Configuration I to support Fuel Air Explosive (FAE) testing at the AWEF. The goal of these tests was to determine the feasibility of directing an explosive blast within an FAE cloud via strategic placement and detonation of multiple initiators. The test setup consisted of an enclosed configuration of FAEs with several fire points arranged on the outer surface of the enclosure. Researchers recorded the test events with high-speed video cameras and pressure sensors. The tests proved the viability of detonating an FAE cloud using a multipoint initiation system.

The current system architecture, AMIST Configuration II, facilitates the programming of multiple fire points capable of operating autonomously upon disconnecting from the controller. The programming can direct the fire points either to fire simultaneously or to fire individually, delayed with negligible timing errors. AMIST Configuration II (see Figure 2) is the first multipoint initiation system to combine high timing precision with fire point

autonomy. Each fire point consists of a logic board with processing and memory capabilities, a firing capacitor, and a high-voltage switch. A centralized controller uses a data bus to communicate with the fire points to update the firing modes at rapid intervals. Warhead designers pre-program a set of firing modes into the multipoint system, and each mode produces a different warhead effect. Based on the location of a given target relative to the warhead, the centralized controller selects the firing mode that will generate optimal lethality. Upon receiving the fire command, each firepoint can disconnect from the data bus without affecting its operational performance. At the point of disconnect, the fire point no longer receives firing mode updates from the controller.



Figure 2. AMIST Configuration II with autonomous fire point control following fire command and controller disconnect

Instead, it operates autonomously, using its own internal processor and memory to detonate at the time corresponding to the designated firing mode. Testing has confirmed AMIST as a precise and reliable means of achieving multipoint initiation for future weapon systems. Although researchers developed the technology for potential transition to a dual-role weapon system, it has also proven useful as a range asset for other types of tests requiring controlled detonation of multiple firepoints. AMIST has thus established itself as ideal for integration with any weapon system requiring a high level of lethality and a decreased probability of extensive collateral damage.

Capt Kenneth C. Bradley, Mr. Ed Wild, and Lt Chris Martin, of the Air Force Research Laboratory's Munitions Directorate, and Lt Roger Platteborze, of the Air Armament Center, wrote this article. For more information, contact TECH CONNECT at (800) 203-6451 or place a request at http://www.afrl.af.mil/techconn_index.asp. Reference document MN-H-06-03.