

AFRL-VA-WP-TP-2007-314

**AUTOMATED AERIAL REFUELING
PRESENTATION TO 2007 ARSAG
CONFERENCE (PREPRINT)**

Jacob Hinchman and Daniel Schreiter



APRIL 2007

Approved for public release; distribution unlimited.

STINFO COPY

This is a work of the U.S. Government and is not subject to copyright protection in the United States.

**AIR VEHICLES DIRECTORATE
AIR FORCE MATERIEL COMMAND
AIR FORCE RESEARCH LABORATORY
WRIGHT-PATTERSON AIR FORCE BASE, OH 45433-7542**

NOTICE AND SIGNATURE PAGE

Using Government drawings, specifications, or other data included in this document for any purpose other than Government procurement does not in any way obligate the U.S. Government. The fact that the Government formulated or supplied the drawings, specifications, or other data does not license the holder or any other person or corporation; or convey any rights or permission to manufacture, use, or sell any patented invention that may relate to them.

This report was cleared for public release by the Air Force Research Laboratory Wright Site (AFRL/WS) Public Affairs Office and is available to the general public, including foreign nationals. Copies may be obtained from the Defense Technical Information Center (DTIC) (<http://www.dtic.mil>).

AFRL-VA-WP-TP-2007-314 HAS BEEN REVIEWED AND IS APPROVED FOR PUBLICATION IN ACCORDANCE WITH ASSIGNED DISTRIBUTION STATEMENT.

//Signature//

DANIEL J. SCHREITER
Deputy Program Manager
Automated Aerial Refueling

//Signature//

MICHAEL P. CAMDEN
Chief, Control Systems Development and
Application Branch
Control Sciences Division

//Signature//

JEFFREY C. TROMP
Senior Technical Advisor
Control Sciences Division
Air Vehicles Directorate

This report is published in the interest of scientific and technical information exchange, and its publication does not constitute the Government's approval or disapproval of its ideas or findings.

*Disseminated copies will show “//Signature//” stamped or typed above the signature blocks.

REPORT DOCUMENTATION PAGE					Form Approved OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.						
1. REPORT DATE (DD-MM-YY) April 2007		2. REPORT TYPE Conference Paper Preprint		3. DATES COVERED (From - To) 10/01/2002 – 04/01/2007		
4. TITLE AND SUBTITLE AUTOMATED AERIAL REFUELING PRESENTATION TO 2007 ARSAG CONFERENCE (PREPRINT)				5a. CONTRACT NUMBER In-house		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER 0603400		
6. AUTHOR(S) Jacob Hinchman and Daniel Schreiter				5d. PROJECT NUMBER A00T		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER 0B		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Control Systems Development and Application Branch (AFRL/VACC) Control Sciences Division Air Vehicles Directorate Air Force Research Laboratory, Air Force Materiel Command Wright-Patterson Air Force Base, OH 45433-7542				8. PERFORMING ORGANIZATION REPORT NUMBER AFRL-VA-WP-TP-2007-314		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Air Vehicles Directorate Air Force Research Laboratory Air Force Materiel Command Wright-Patterson Air Force Base, OH 45433-7542				10. SPONSORING/MONITORING AGENCY ACRONYM(S) AFRL-VA-WP		
				11. SPONSORING/MONITORING AGENCY REPORT NUMBER(S) AFRL-VA-WP-TP-2007-314		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited.						
13. SUPPLEMENTARY NOTES Conference paper submitted to the Proceedings of the 2007 ARSAG Conference. This is a work of the U.S. Government and is not subject to copyright protection in the United States. PAO Case Number: AFRL/WS 07-0674, 26 Mar 2007. Paper contains color content.						
14. ABSTRACT This presentation was prepared for the 2007 Aerial Refueling Systems Advisory Group (ARSAG) conference to update the status of the Automated Aerial Refueling program at the Air Force Research Laboratory.						
15. SUBJECT TERMS automated aerial refueling, UAV refueling, precision global positioning system, boom-receptacle refueling, station keeping flight test						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT: SAR	18. NUMBER OF PAGES 24	19a. NAME OF RESPONSIBLE PERSON (Monitor) Daniel J. Schreiter 19b. TELEPHONE NUMBER (Include Area Code) N/A	
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified				



NAVY AIR



NORTHROP GRUMMAN

Calspan

Rockwell
Collins

Automated Aerial Refueling

ARSAG Presentation
April 2007

Jacob Hinchman
Program Manager

Automated Aerial Refueling
Air Force Research Laboratory
Jacob.Hinchman@wpafb.af.mil

Approved for public release; distribution is unlimited.

AFRL-WS 07-0674



Significance to Air Force



- **Unmanned Aerial Vehicles**

- Extends Range
- Shortens Response for Time-Critical Targets
- Maintains In-Theater Presence Using Fewer Assets
- Allows Deployment with Manned Fighters and Attack Without the Need of Forward Staging Areas



"How does it (J-UCAS) air refuel? ... which is persistence and endurance, things men can't do in airplanes "

**-Gen. John Jumper, USAF,
February 2005**



- **Manned Aircraft**

- Provides Adverse Weather Operations
- Improves Fueling Efficiency
- Improves Pilot Workload

**AAR Assists UCAVs in Reaching Its Full Potential,
and Greatly Enhances Manned Refueling**

Approved for public release; distribution is unlimited.

2

The AAR technology suite has application to both manned and unmanned vehicles. For unmanned vehicles, AAR allows eliminates the tyranny of fuel, allowing unmanned vehicles to be based, deployed, and employed like manned systems.

Furthermore as manned mission durations increase, aerial refueling becomes more and more strenuous on the pilot. AAR seeks to reduce the workload in cockpit and provide a in-weather refueling capability. Also, this technology allows manned or unmanned platforms to fly formation in IFR conditions.



The AAR program was created by the War Fighters to address their needs. Since day one, AAR's goal has been to meet this need through operationally relevant technology development and integration. The AAR team was formed with ACC, AMC, AFRL, ASC, NAVAIR, and contractors with the goal of "Same Tracks, Same Tankers, Same Time for manned and unmanned refueling"



Operational Requirements



- Perform All 3 Rendezvous types
 - Point Parallel, Fighter Turn-On, and En-Route/Tactical
- Refuel in up to 4 Ship Packages
- Integrate into Mixed Fleet Operations
 - Minimize Changes to Tanker and Tanker Operations
- Operate in an EMCON-3 (Data Encrypted) Environment





Key Technology Challenges



See Near

- Determine Relative Position with Tanker
 - Using Position/Velocities to Close Control Loop
 - High Confidence in Position Accuracy
 - Avoid Aircraft in AAR Area

Collision Avoidance


- AAR Brings Many Aircraft into Same Airspace

Command and Control

- Assure UCAS Accurately Responds Boomer Break-Away Commands



UCAV Must Continuously Determine Range and Heading to Tanker and Tanker Velocities from ~20 Miles to Station Keeping Position



Note: UCAVs are Flying "Formation Lead"




Aircraft Integration

- Minimize impacts to tanker fleet
- Fit within constrained volume of UCAS
- Precision control of UCAS
- Flight critical integration

Real World Considerations


- Fitting Solutions into a Low Probability of Detect/Intercept Environment
 - Latency, Drop-Outs, Re-Encryption, and Limit Power Settings

Approved for public release; distribution is unlimited.

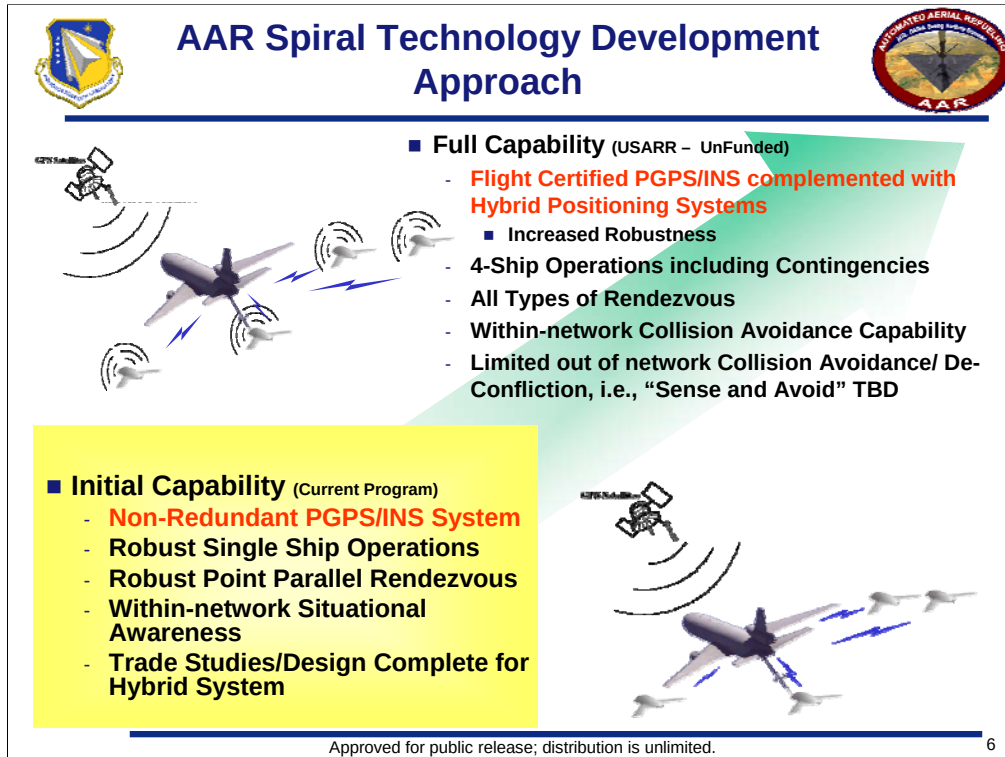


The currently funded AAR program seeks to develop a robust single ship AAR capability based on Precision GPS (PGPS). In order to make sure good design decisions are made, AAR also addresses 4-ship operations, rendezvous, and sensor trade studies/design for hybrid system. While these areas are seriously being addressed, they are not as mature as the PGPS single-ship operations.

The AAR program has a vision of combining the PGPS system with Sense and Avoid sensor to produce a dissimilar robust positioning capability. This is labeled as the Full Capability (Hybrid Design) on the above chart. Along with the advances in positioning capability, 4-ship operations will be expanded to include contingencies. Along with this, flight demonstration of multi-ship operations and rendezvous would be conducted.

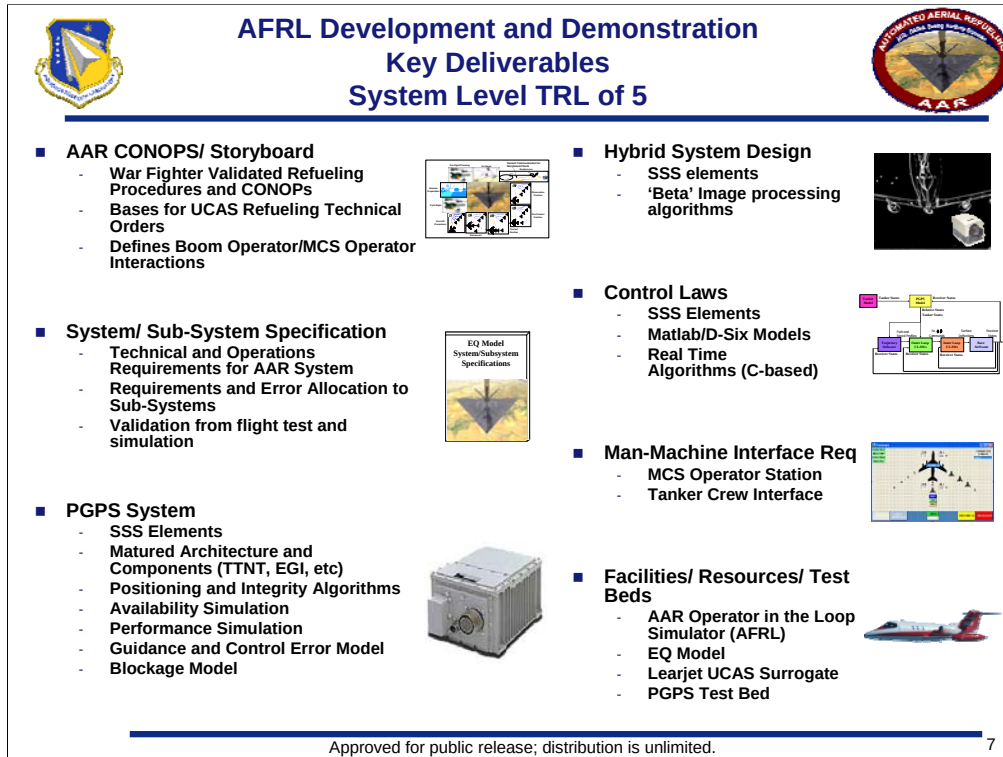

AAR seeks to develop seven key products: AAR Storyboards, System/Sub-System Specification and Design Document (SSS/SSDD), PGPS Prototype Positioning System, Hybrid system Preliminary Design, Formation Flight Control Algorithms, Man-Machine Interface Requirements, and a host of Test Resources. The AAR Storyboards are war-fighter validated CONOPS for AAR Rendezvous through Departure from the tanker. They are tested with AMC and ACC operators in the AFRL high fidelity man-in-the-loop simulation (MILS). The SSS/SSDD is an encapsulation of over 2500 requirements and design decisions into a design spec for future weapon system integration. The PGPS prototype positioning system provides the precise relative position between the tanker and surrogate receiver. This prototype equipment is a key aspect of the AAR flight test program. The control laws are flight tested close formation flight algorithms tuned for the Equivalent model. These control laws allow for rendezvous, station keeping with the tanker, maneuvering from refueling position to position, and departure from the tanker. The man-machine interface (MMI/HSI) Requirement Study is a detailed study into the interface requirements for the ground station and tanker in order to maintain operator situational awareness. HSI preliminary design concepts will be tested in MILS.

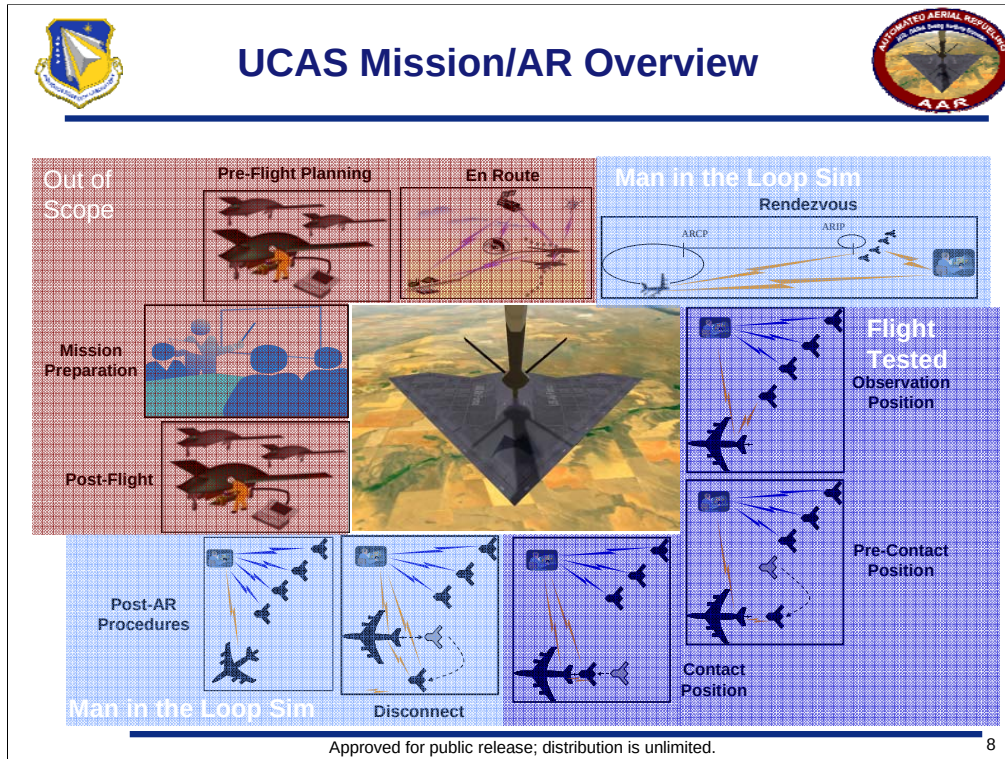


The AAR program addresses only the Air Refueling (AR) operations elements of the overall UCAS mission. Mission preparation, pre-flight planning, en route flying, and post-flight operations are not addressed.

In the AAR man-in-the-loop simulation, air refueling operations are simulated from rendezvous through post-AR procedures.

During the AAR flight tests, the program will demonstrate a subset of AR operations sequencing the UCAS surrogate vehicle through the observation, pre-contact, and contact positions. The flight tests not only validate the simulation, but also demonstrate the AAR components in a relevant environment.



EQ Model Facilitates Precision Navigation System Development

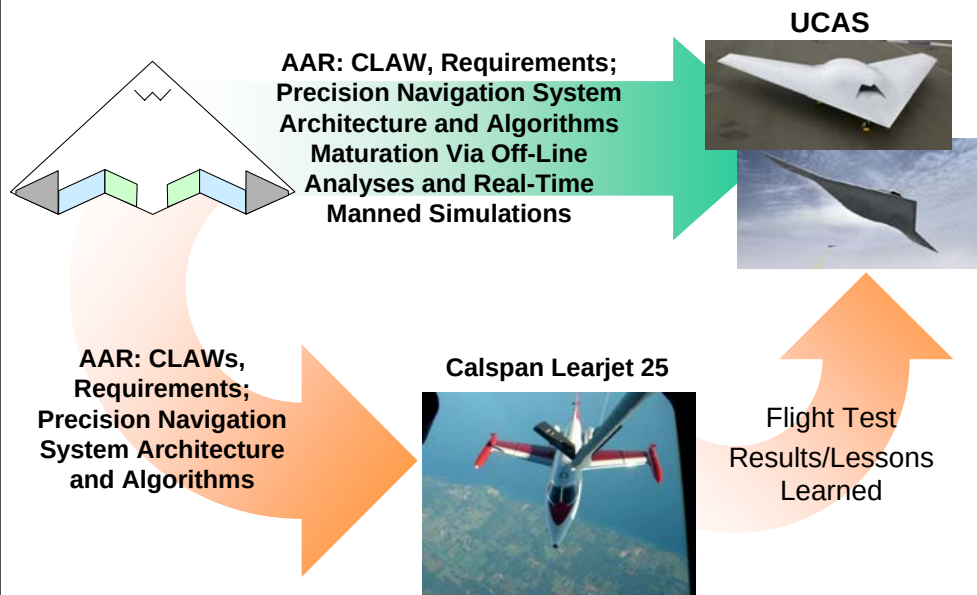

Approved for public release; distribution is unlimited.



Calspan Learjet 2 AAR UAS Surrogate



- **UAS Manned Surrogate**
 - Autonomous Capability with Safety Pilot Override
 - Variable Stability Flight Controls

- **Represented EQ Model Performance Parameters**
 - Frequency and Damping



Approved for public release; distribution is unlimited.


10



AAR Test Plan



- **Fall 04 Phase I Flight Test**
 - Collect GPS blockage/EO data
 - Significance: validate predicted results
- **Fall 05 TTNT Flight Test**
 - Collect data to characterize TTNT
 - Significance: validate TTNT use in AAR
- **Fall 06 Station Keeping Flight**
 - Hold contact position in race track
 - Significance: AAR's first hand's off formation flight
- **Fall 07 Surrogate Flight Test**
 - Formation maneuvering around tanker in race track
 - Significance: AAR algorithms and PGPS system
- **Winter 07 Full CONOPS Simulation**
 - Demonstrate full 4-ship CONOPS
 - Significance: full CONOPS and human interaction

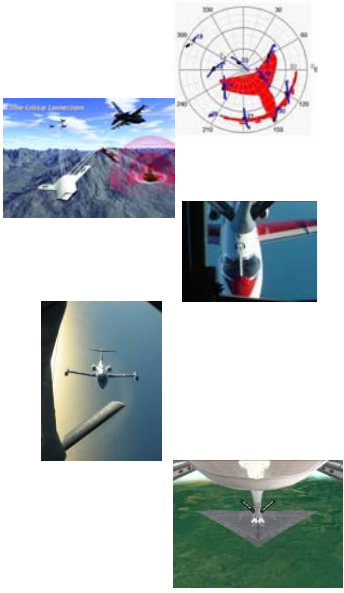

Approved for public release; distribution is unlimited.

11

AAR has four major flight tests:

Phase I Flight Test:

The objective of this test was to collect GPS blockage data and EO Sensor data around the tanker in order to verify the predict performance with actual flight test data. This flight test was key in determining PGPS feasibility. Out of this flight test, it was determine that the AAR system can track GPS satellites through the KC-135 tanker tail.

Tactical Targeting Network Technology (TTNT) Flight Test:


The objective of this test was to transmit PGPS data over a loaded TTNT network. The goal was to determine how network loading effects signal delay. This also was the first test that integrated PGPS with TTNT. The test was conducted in conjunction with the DARPA TTNT China Lake test. It was determine that TTNT needed slight modifications which have been incorporated.

Station Keeping Flight Test:

The objective of this test is to demonstrate hands-off formation flight of the Calspan Learjet with a KC-135. The pilot will hand fly the Learjet into the Observation, Pre-Contact, and Contact position and engage the auto-hold system. The Learjet will autonomously hold that position with the KC-135 flying around a refueling racetrack. The will be the first integration test of the PGPS and flight controls system.

Graduation Flight Test:

The objective of this test is to demonstrate the AAR Tanker Maneuvering and Formation Flight System. In this test, the pilot will hand fly the Learjet into the Observation position and engage the system. Then, the flight test engineer will be able to command the software to maneuver the Learjet to the other refueling positions including break-away. The tanker crew will also be able to give the Learjet the breakaway and move back to pre-contact commands to be autonomously executed. Also as part of this test, the PGPS integrity monitoring system will be tested.

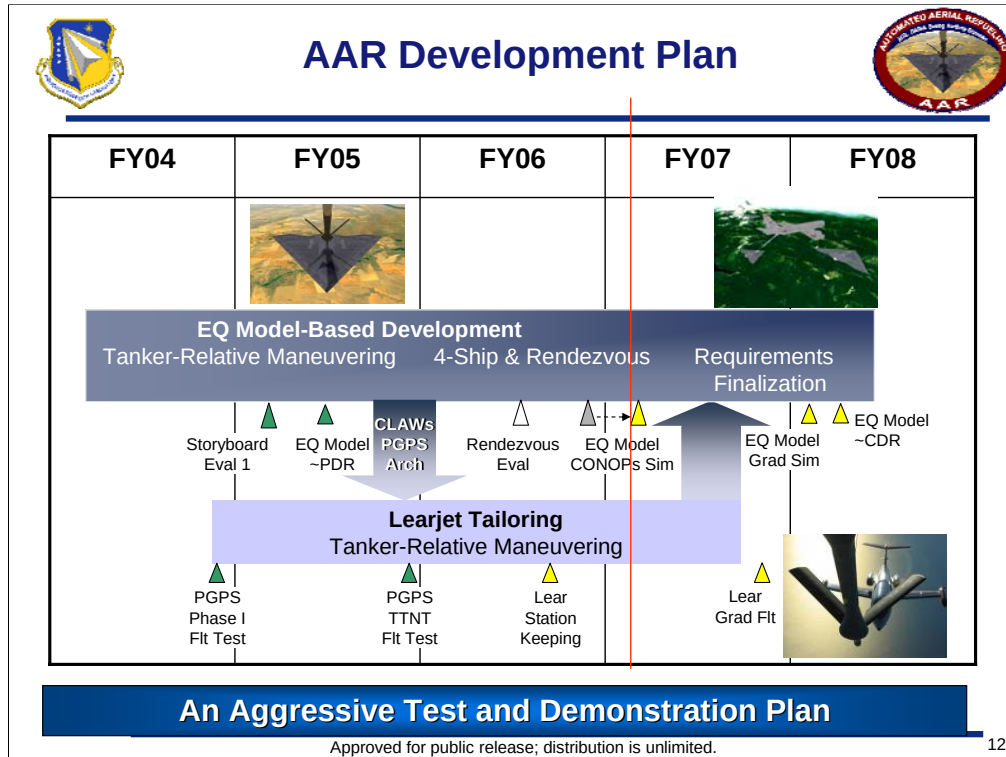

The AAR Development and Demonstration Plan consists of two paths. All of the design and development work is conducted on the EQ Model. The EQ Model is a non-proprietary blending of X-45 and X-47 models. The EQ model is the basis for all of the AAR simulation work. The program has 4 major simulation events designed to test the storyboards, HSI, and algorithms. The final simulation, called the graduation simulation, is the full testing of the AAR 4-Ship algorithms from Rendezvous to Departure using high fidelity flight validated models.

The second path consists of tailoring the algorithm developed for the EQ model to the Calspan Variable Stability Learjet and combine the software with the positioning hardware. This enables flight demonstration the close-formation flight capability of the AAR system. There are 4 major flight tests. The first two test are data gathering tests aiding AAR in developing the high fidelity models for the system. The second two flight tests (Station Keeping and Graduation) are autonomous (Hands-Off) flight tests. In the graduation flight test, the pilot will fly into the observation position and engage the system. The system will then, upon command, autonomously fly the Learjet from observation->pre-contact->contact->breakaway->observation while the tanker maintains its normal racetrack pattern.




Precision GPS Closed-Loop Station Keeping Flt Test Aug 06



■ Objectives:

- Evaluation of Updated Precision GPS Performance
- Test Autonomous Formation Flt Algorithms in Contact Position
- Evaluate EO/IR Camera as AAR Sensor



■ Details:

- Aircraft: Calspan Learjet, NY ANG KC-135
- Simplex (Non-Redundant) AAR System and Safety Pilot



**"The System Held Contact Position
Better than I Could",
Calspan Test Pilot**

Approved for public release; distribution is unlimited.

13

The Precision GPS Closed-Loop Flight test is the largest technical risk reduction activity on the AAR ATD. This flight tests' first flight was 26 Jul 06; and, the flight test is scheduled to last through 31 Aug 06. So far, the team has successfully tested the precision GPS position system, the EO/IR camera, and the automated flight control system. The primary objective of this flight test is to demonstrate automated formation flight in the contact position around a refueling race track. The AAR system will also be tested in the (left/right in-board/out-board) observations positions, pre-contact, and contact position in straight and level flight, as well as in turns.



Station-Keeping Flight Test Example Contact Position Performance



Approved for public release; distribution is unlimited.

14



AAR Station-Keeping Flight Test Example Contact Position Performance



Approved for public release; distribution is unlimited.

15



PGPS Conclusions



- All Station-Keeping Flight Test Objects Met
- FTE Met Required Navigation Performance Requirements For All Positions During All FCS Flights
 - More Precise Than Piloted Station-Keeping
 - “A Lot Lower Workload” for Pilot
- Matlab AAR Simulation:
 - Some Station-Keeping Performance Differences With Flight Test Results
 - Adequate to Support Future CLAW Development and Analysis
- Control Law Updates Being Investigated for Inclusion in 2007 Graduation Flight Test

Approved for public release; distribution is unlimited.



Automated Aerial Refueling (AAR) Next Steps



- **Demonstration AAR in a relevant environment through wet hookup**
- **Focus areas for further maturation**
 - Redundancy/contingency management
 - Multi-ship operations
 - Hybrid (GPS+EO/IR Sensor) positioning system
 - Sense and Avoid
 - Robust AAR System/CONOPS Simulation
 - Full AR CONOPS flight test with hookup



Approved for public release; distribution is unlimited.

17

The AAR ATD has made great strides in maturing automated formation flight technology. This programs has pushed the envelope on precision positioning systems and close formation flight. The next step in AAR is to move from technology maturation into capability development. One of the key items that needs to be developed is precision GPS redundancy and contingency management along with dissimilar positioning technologies.




Overview Summary



- Developing technologies that enable aerial refueling of UAS and Manned Systems
- Current Program Provides Excellent Technology Maturation
- Future Work Needs to Move from Technology Development into AAR Capability







The AFRL led AAR team is poised to meet the AF UAS refueling challenge



Approved for public release; distribution is unlimited.

18

The current AAR program is developing the technology to make UAS refueling a reality. Without this focusing of core technology to the refueling challenge, automated aerial refueling would not be possible. Further work still needs to be completed to truly make AAR and SAA an “off-the-shelf (TRL 6)” capability. Most of this would address the safe and -ility aspects of AAR and SAA.