

Using Roughness Textures in Target Modelling - Impact on ISAR Images Calculations of the ZSU 23-4

H.J. MAMETSA¹, A. BERGES¹, J. LATGER²

1: ONERA-CERT/DEMR

2, av. E. Belin, BP 4025 31055 Toulouse Cedex France
Phone: 33 5 62 25 27 07 email: mametsa@onera.fr

2: Société OKTAL SE

2, rue Boudeville 31100 Toulouse France
Phone: 33 5 62 11 50 25 email: jlatger@oktal.fr

1. ABSTRACT

Tools for electromagnetic simulation, such as SPECRAY EM / FERMAT, make RCS and ISAR image computations down to millimetre wavelength possible from the CAD of targets. The higher the frequency is, the greater the influence of the precision and the realism of the CAD models on results are. In millimetre wavelength, whatever the precision of the CAD, the roughness of surface and the flatness of sheets of construction of terrestrial military vehicles cannot be reproduced by the geometry. Nevertheless, a realistic prediction of RCS can be carried out by taking into account the statistical surface qualities, which are superposed, on the deterministic effects of the geometry of the CAD. The calculations carried out on the CAD 600 and 80 kfacs of the ZSU 23-4 illustrate these effects, without degrading the efficiency of computations.

2. THE ELECTROMAGNETIC COMPUTER CODE FERMAT

The SPECRAY EM software includes several tools for the generation, management of physically textured databases, the edition of scenarios relating to a given sensor, the post-processing and visualisation of the output data and an EM core, FERMAT. FERMAT deals with the electromagnetic calculations of the interactions between EM wave and the observed scene.

The FERMAT software has been developed by the Electromagnetism and Radar Department of ONERA within the framework of a project dedicated to electromagnetic (EM) modelling. This computer code capitalises the results of research activities in high frequency scattering methods. A unique tool is currently available for studies dealing with radar analysis, antennas radiation, EM inter-system compatibility and propagation applications. This numerical simulation tool has the ambition to calculate scattered EM fields at high frequencies (i.e. the size of objects is supposed large compared to the wavelength), in a virtual 3 D, geometrical and physical complex environment including natural and man made objects. EM fields calculations either on a surface or in a volume could be carried out according to specific applications.

FERMAT associates various techniques and tools.

Virtual 3D, geometrical data bases, composed of a great number of elements, landscapes and objects such as vehicles, buildings, ..., are modelled by thousands of plane geometrical faces and associated management tools. Specific features and textures relative to electromagnetic scattering are provided for each face.

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 01 MAY 2005		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Using Roughness Textures in Target Modelling - Impact on ISAR Images Calculations of the ZSU 23-4				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) ONERA-CERT/DEMR 2, av. E. Belin, BP 4025 31055 Toulouse Cedex France				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES See also ADM202152., The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 52	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Using Roughness Textures in Target Modelling – Impact on ISAR Images Calculations of the ZSU 23-4

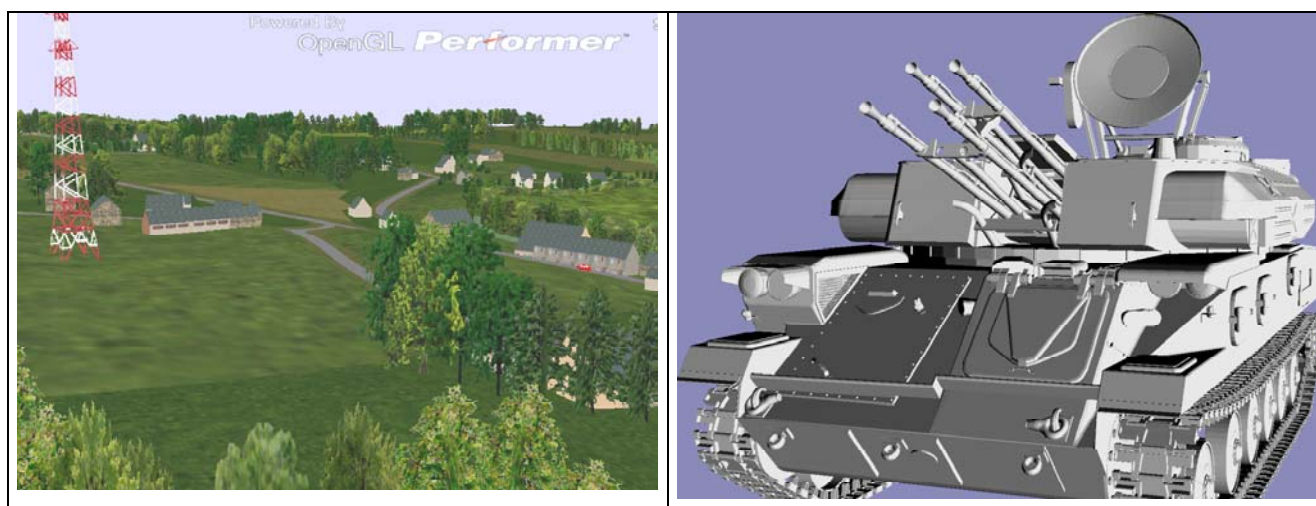


Figure 1: Examples of natural and man made databases

A geometrical Shooting and Bouncing Rays (SBR) technique has been optimised in order to calculate the intersections between rays from the transmitter towards the database and back to a receiving point. EM models of propagation, reflection, diffraction and an operating strategy (thanks to SBR) which allows unified calculation for the near or far EM scattered fields from the scenes. These models are the formulations of Geometrical Optics (GO), Physical Optics (PO), Uniform Theory of Diffraction (UTD) and Equivalent Current Method (ECM). Again, these models, judiciously coupled with the SBR technique make the computation time slightly dependent on the complexity of the treated virtual scene.

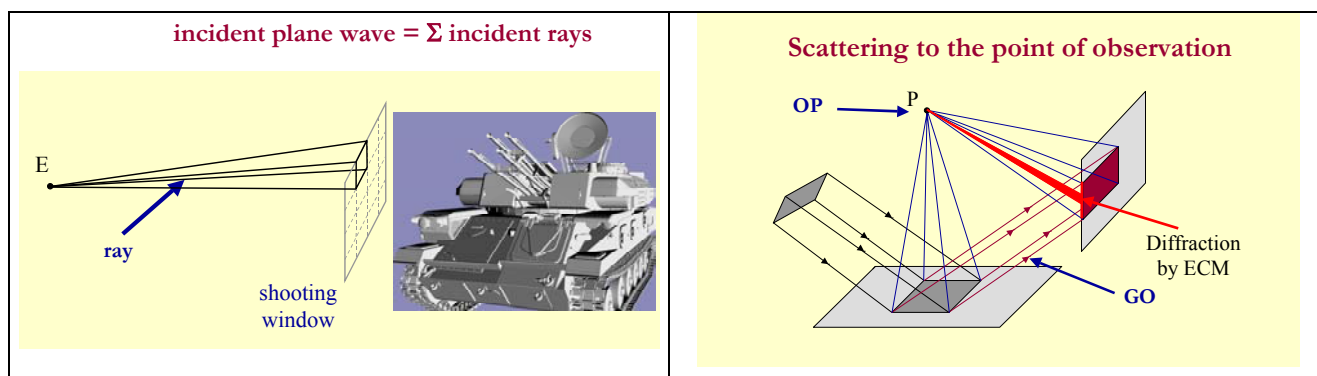


Figure 2: Coupling of SBR technique and EM asymptotic methods

Generation and management scenarios tools has been developed to simultaneously simulate, for example, motions of a radar sensor and displacements of mobiles in the landscape according to the type of field calculations. Outputs and visualisation tools have been adapted to investigated applications.

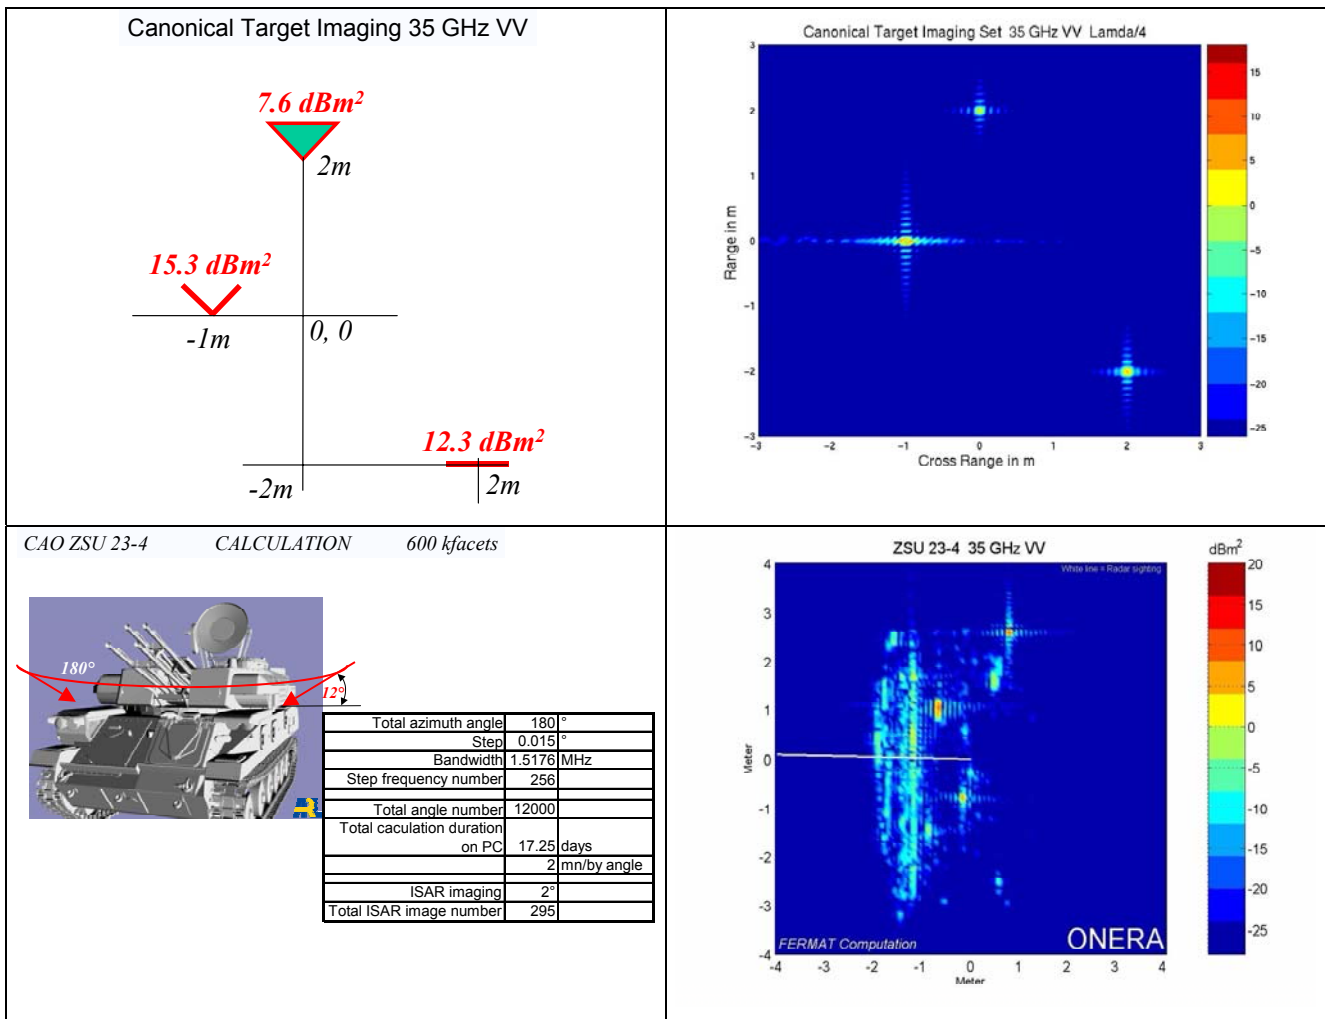


Figure 3: Examples of ISAR images from the canonical target set and the ZSU 23-4

The strength of FERMAT is that it is developed, under an agreement of partnership between ONERA and OKTAL SE. This company brings its competencies in the management and exploitation of databases, and the control of the SBR technique.

The validation mainly consisted in comparison with the EM models calculated either with other reference methods or with measurements on simple object known as canonical and allowing evaluating the various EM interactions. These comparisons took place during specialised national and international "workshops".

3. ROUGHNESS CHARACTERISTICS

3.1. Introduction

In previous investigation related to millimetre wavelength modelling, under-meshing of objects had led to peaks of scattering in the specular direction (very high values RCS that do not correspond to predicted or known values from real targets). A disturbance of height on the object facets was introduced to correct this effect, by attenuating it. The technique consisted in plating a texture (space height function) of random height on the smooth facets of the under-meshed target. We expected that the technique also made possible to take into account the presence of real roughness and non-flatness of real surfaces giving results superimposing random effects on the coherent scattering.

ONERA, OKTAL SE and CELAR completed a work of expertise, in millimetre wavelength, to validate those first ideas in a context representative of the requirements. Measurements on a VAB vehicle (made on CELAR STRADI set up in Rennes, France) and computation (by FERMAT) on a CAD file of this same

Using Roughness Textures in Target Modelling – Impact on ISAR Images Calculations of the ZSU 23-4

vehicle equipped with a texture of roughness have been compared. The principal conclusions were a better agreement between the predictions and the importance of the presence roughness texture on the surface of the object. Through this expertise, ONERA proved that the method is well adapted to simulation of radar behaviour radar in millimetre wavelength.

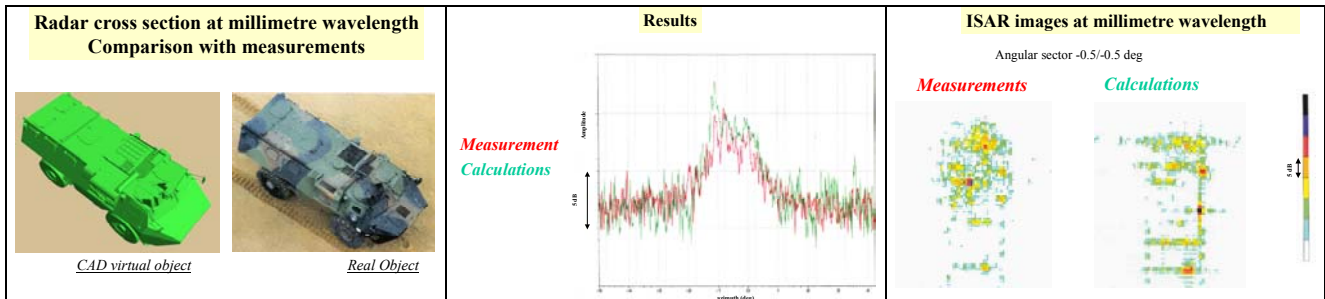


Figure 4: Previous results in using roughness texture on a recovery vehicle

3.2. Profile parameters

Generally, a surface roughness is characterised by the root mean square σ of its height distribution relating to wavelength and by the space correlation length L_c of an extracted profile from this surface. The interaction of EM waves and the surface presents a coherent part in the specular direction and a scattering part in the other directions. According to appropriate bibliography, the calculation of the specular component does not require the knowledge of correlation length. However, this one is necessary an evaluation of the scattering component.

A surface is known as smooth when the product $k\sigma < 0.2$ or $\frac{\sigma}{\lambda} < 0.03$.

A surface is known as rough when the product $k\sigma > 1$ or $\frac{\sigma}{\lambda} > 0.16$ with $k = \frac{2\pi}{\lambda}$

According to Rayleigh [Ulaby and Al 82], the coherent component is present for $\frac{\sigma}{\lambda} < 0.25$.

Other characterisation criteria using the correlation length will be specified thereafter. Kirchhoff approximation [Ulaby and Al 82] led to an expression of the attenuation of the coherent scattering (specular reflection) in the form known as the modified Fresnel reflection coefficient:

$$R = R_{th} \cdot \exp(-2k^2 \sigma^2 \cos^2(\theta_i))$$

Note: Thereafter, we will use the term of "bump" to indicate the texture of height disturbance. The texture of bump represents a random profile variation of height according to a given statistical distribution.

An example of profile of 512 x 256 points is presented on figure 4:

- height values could take 256 values,
- height RMS is 38.

The ratio of 15% (38/256) will remain constant for this texture. The peak-to-peak value and the length of the motif (of 512 points) would be the two parameters that have to be tuned according to a given wavelength

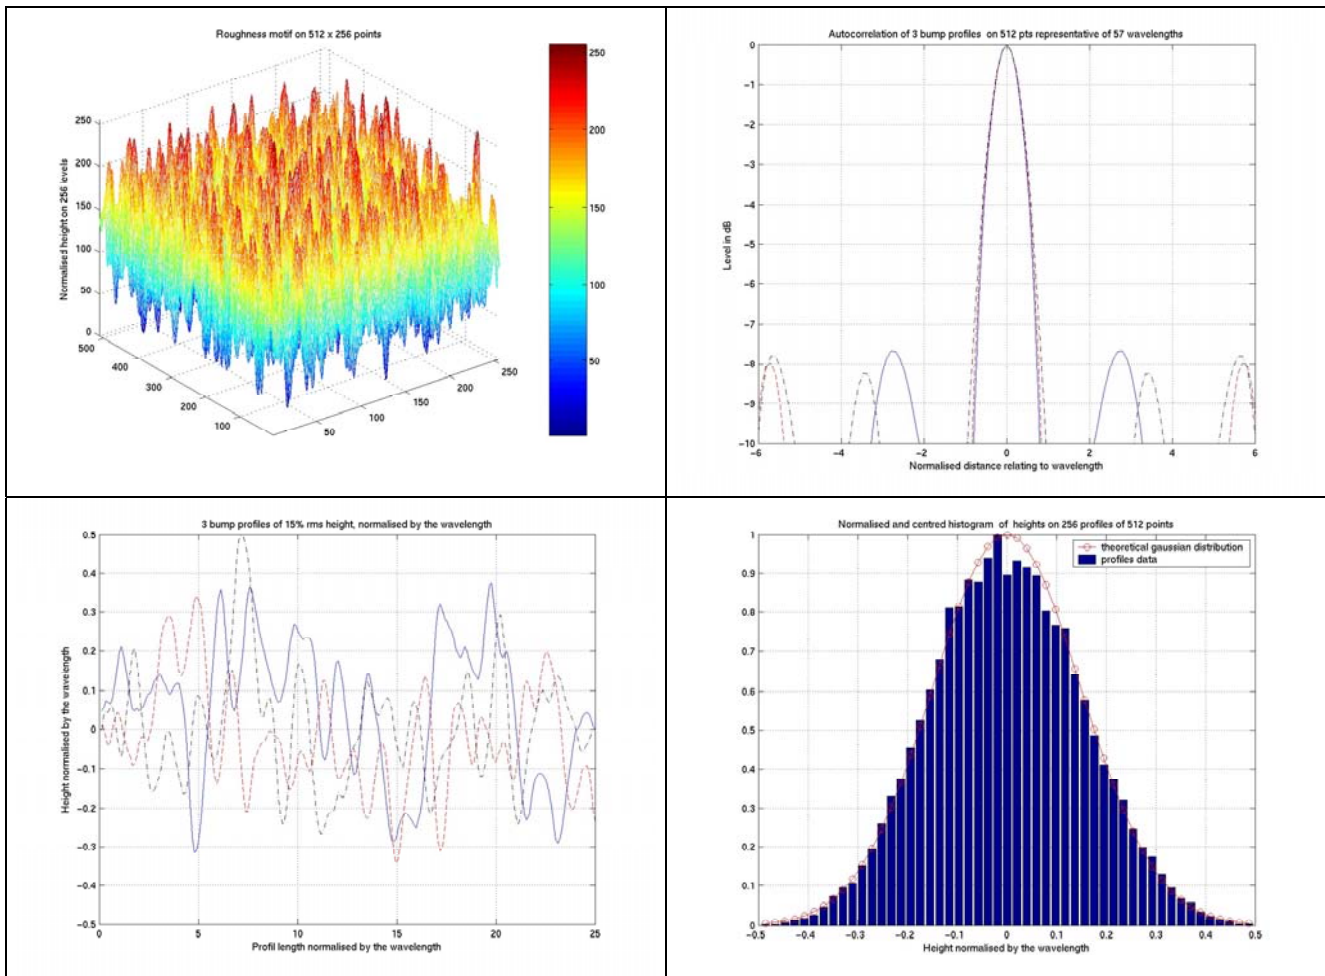


Figure 5: Statistical profile parameters

The density of the irregularities of a surface is described by the autocorrelation function that evaluates the degree of covering between a profile and its shifted image of a distance R .

It is defined by $\rho(R) = \sigma^2 C(R)$ where $C(R)$ is the function standardised autocorrelation function or coefficient of correlation and σ is the RMS height of roughness.

Most of profile modelling generally admits that

- $C(R) = \exp(-(R/L_c)^2)$ for a Gaussian function and
- $C(R) = \exp(-(R/L_c))$ for an exponential function where L_c is the correlation length, defined as the distance for which the coefficient of correlation is equal to $1/e$ or -4.3 dB.

L_c gives an estimate of the size of the irregularities of surface. Correlation length of several profiles was calculated and is presented on previous figure. It is important to remind that this length of correlation does not depend on the direction chosen on the profile.

A standardised and centred histogram on 256 profiles of 512 points extracted from this texture of bump is presented on the figure according to. It shows the Gaussian and isotropic behaviour of the distribution heights on this texture.

3.3. Roughness effects on canonical objects

The roughness previously described is used to measure its impact on the RCS of simple canonical objects such as plate planes, dihedral, trihedral and canonical scene (from SET 069). The length of the motif (of 512 points) is 1 m and calculations have been carried out at 34 GHz. Typical results according to the height of the texture of roughness are presented on the figure 6.

Using Roughness Textures in Target Modelling – Impact on ISAR Images Calculations of the ZSU 23-4

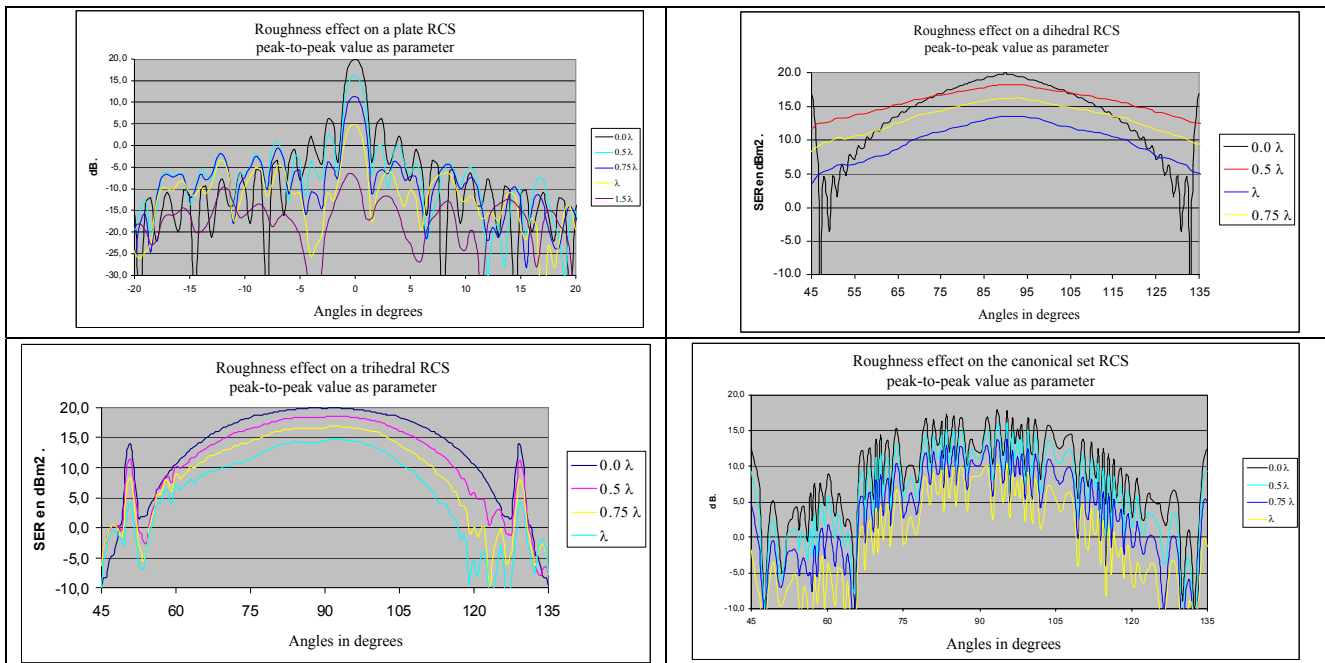


Figure 6: Roughness effect on RCS of canonical targets


On this figure, attenuation on the maximum RCS is observed. As an example, for a peak-to-peak roughness value of one wavelength λ , following values could be noted:

- -15 dB for the plate,
- -8 dB for the dihedral,
- -5 dB for the trihedral.

Less attenuation is observed in the backscattering direction for the dihedral and the trihedral even though multiple interactions are involved. In fact, the increase of the angle of incidence on the constitutive plates of each object decreases the effect of the roughness in agreement with the modified Fresnel coefficient reminded above. It is important to note that at the same time, the sidelobes level is globally increasing.

Bump texture effect and modified Fresnel formulations

$$R = R_{th} \cdot \exp(-2k^2 \sigma^2 \cos^2(\theta_i))$$

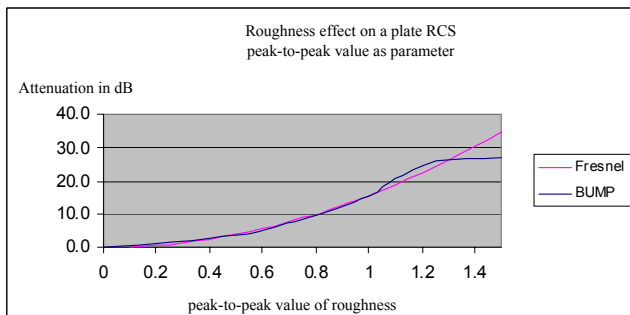

3.4. Results on the ZSU 23-4 60 kfacets

On figure 8, from left to right we respectively have a photo and 2 pictures from the 600 kfacets and 60 kfacets CAD files. It is important to note that in terms of EM interactions at Ka band, the 2 pictures do not really represent the same object, particularly concerning the caterpillar tracks.

Using Roughness Textures in Target Modelling – Impact on ISAR Images Calculations of the ZSU 23-4

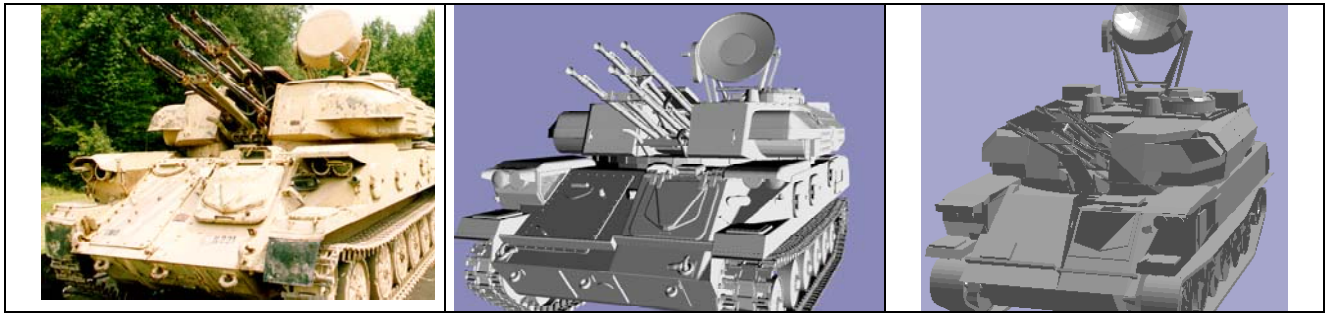


Figure 8: Representation of the ZSU 23-4

After analysis and adjustment of the effects on the canonical objects, it was decided to apply previous texture to the 60 kfacets CAD file of the ZSU 23-4. First results are presented below on figures 9 and 10.

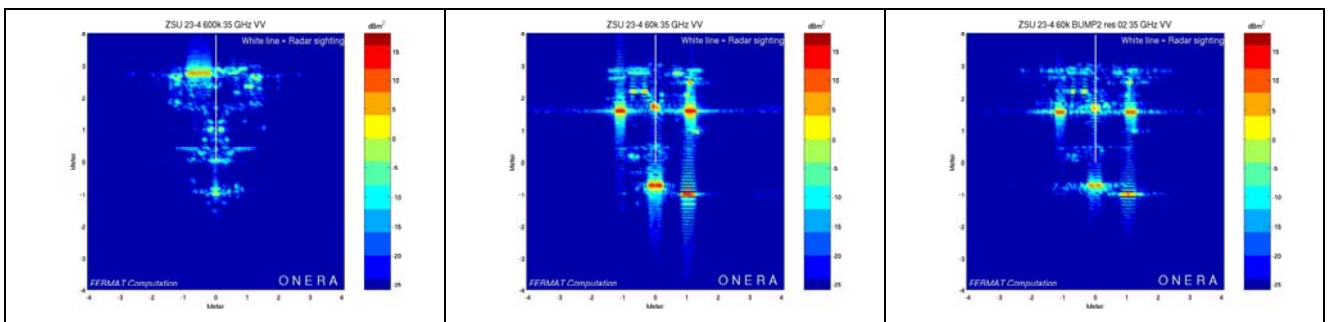


Figure 8: ISAR images with and without roughness texture

Concerning the ISAR images, high returns from specular effects are present on the central image and the distribution of scatterers is different. RCS investigation has been carried out from these images.

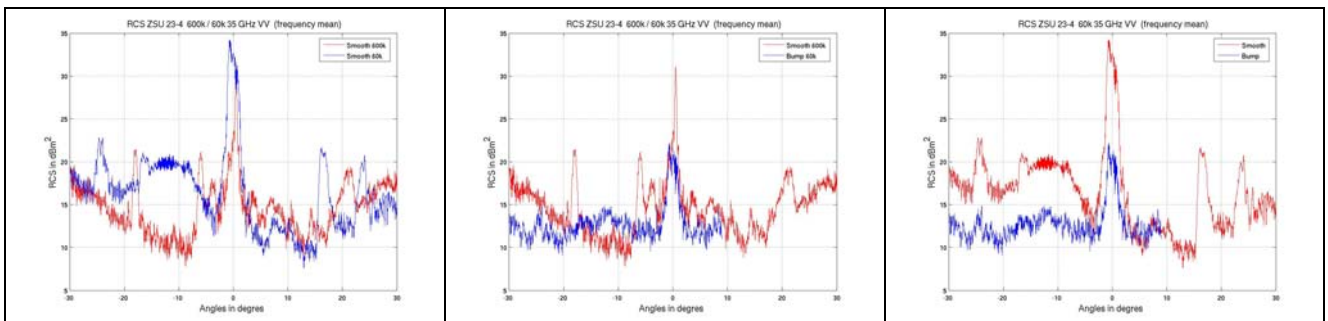


Figure 9: RCS of smooth or with roughness texture

Figure 9 presents the RCS behaviour from each target. Smooth configurations of 600 kfacets and 60 kfacets models are really different. Comparison between results from smooth and rough 60 kfacets CAD file shows reduction of principal peaks. CAD files. It is more difficult to compare results from rough 60 kfacets and smooth 600 kfacets.

4. ONGOING WORK - CONCLUSION

The principal shortcoming of a RCS calculation in MMW is the too significant value of "specular" backscattering due to unsatisfactory available CAD files compared to the real targets. FERMAT has the potential to take into account roughness texture thanks to the adaptive antialiasing. From these first experiments of roughness modelling, it appeared the results are satisfying compared to available measurements.

Comparison on global RCS (frequency averaged) and ISAR images on measurement references from SET 069 data pool and other available measurements from DCE/CELAR will be carried on. Statistical analyses on

Using Roughness Textures in Target Modelling – Impact on ISAR Images Calculations of the ZSU 23-4

ISAR images evaluated in terms of peak values, mean values, quadratic mean will be assessed and could allow an adjustment, on a given class of vehicle, of the random part of the scattering process.

5. REFERENCES

P. Pitot

"The Voxar Project"

IEEE Comp. Graph. Appl., January 1993, pp.27-33

H.J. Mametsa, S. Laybros, A. Bergès,

"Asymptotic Formulations and Shooting Ray Coupling for Fast 3D Scattering Field Evaluation from Complex Objects and Environment–Applications",

ICEAA, Turin (Italy), September 2003

F.T. Ulaby, M.C. Dobson

"Handbook of Radar Scattering Statistics for Terrain"

Artech House 1989

H. Ling, R.C. Chou, S.W. Lee

"Shooting and Bouncing Rays: Calculating the RCS of an Arbitrarily Shaped Cavity"

IEEE Trans. Ant. Prop., Vol. 37, N°2, Feb. 1989, pp. 194-205.

Using roughness textures in target modelling. Impact on ISAR images calculations of the ZSU 23-4

H. J. Mametsa¹


A. Bergès¹

J. Latger²


(1) ONERA/DEMR
2, Avenue E. BELIN
31055 TOULOUSE CEDEX

(2) OKTAL SE
2, rue de BOUDEVILLE
31100 TOULOUSE

Modelling Outline

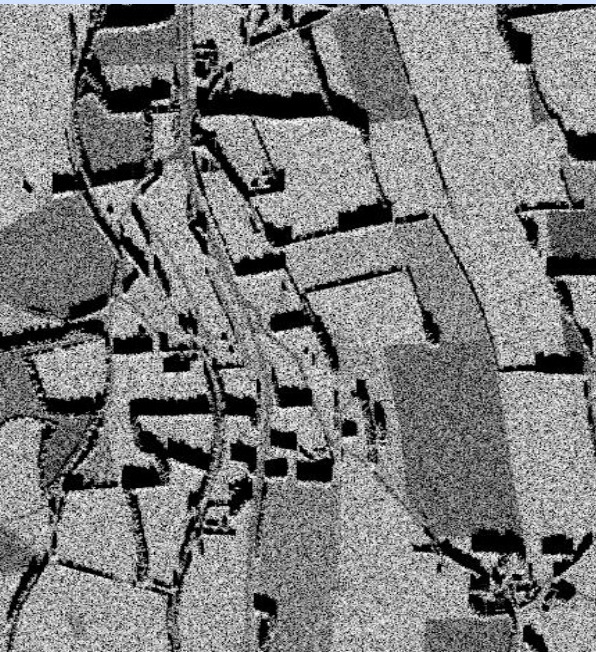

*Scenario
+
Radar Sensor Model*

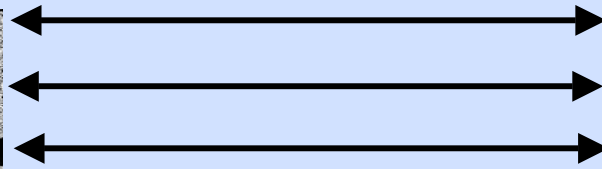

*Shooting and bouncing
rays technique
+
electromagnetism
formulations
+
atmospheric propagation*




*Virtual environment
and targets geometrical
3D data base
completed by specific
scattering coefficients*

Scientific ambition

- **Near field or far field** high frequency scattering from **metallic or dielectric materials** including reflection, transmission or diffraction of electromagnetic wave interaction.
- Taking into account the **statistical surface roughness (natural or artificial)**
- **Asymptotic formulations of Maxwell's equations and shooting and bouncing rays technique coupling.**

FERMAT: physical approach of EM Modelling

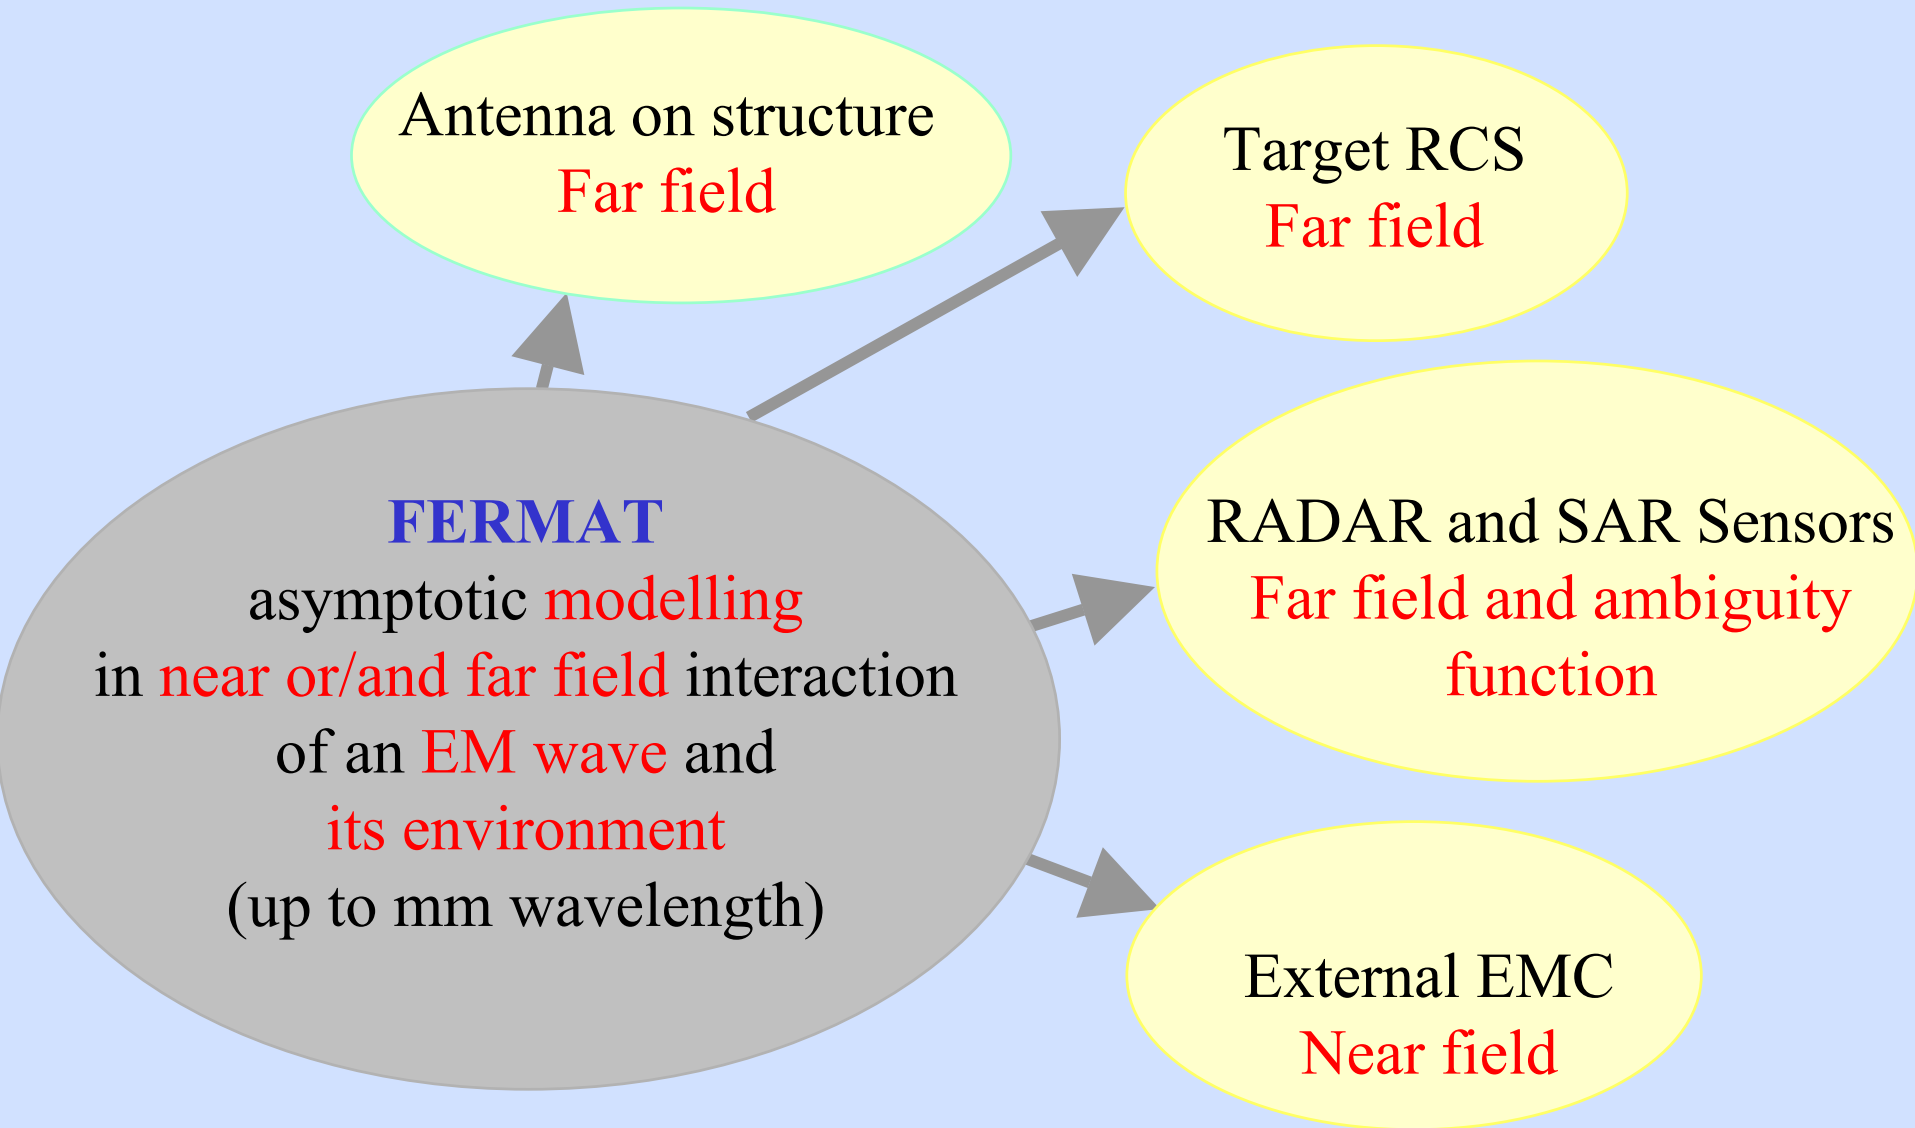

ONERA-OKTAL SE Partnership

- **ONERA/DEMR**

- Electromagnetic models
- Material databases.
- EM expertise especially for RADAR.

- **OKTAL SE**

- Geometrical 3D databases
- Ray tracing technique
- Software development



Materials and surfaces classification in the database

- **Dielectric materials** (characterised by: ϵ , ϵ' , σ , thickness)
- **Metallic materials** (characterised by infinite conductivity)
- **Natural surfaces** classification in 30 sub-classes
(characterised by backscattering coefficient average depending on incidence angle and related statistical fluctuations through a density of probability)
- **Surface roughness** by RMS height and correlation length characterisation

Shooting and Bouncing Rays

General Principle

- **SBR : Optimised technique** to explore geometrical data base, validated in optical domain
- **Set of rays** representing an incident plane wave

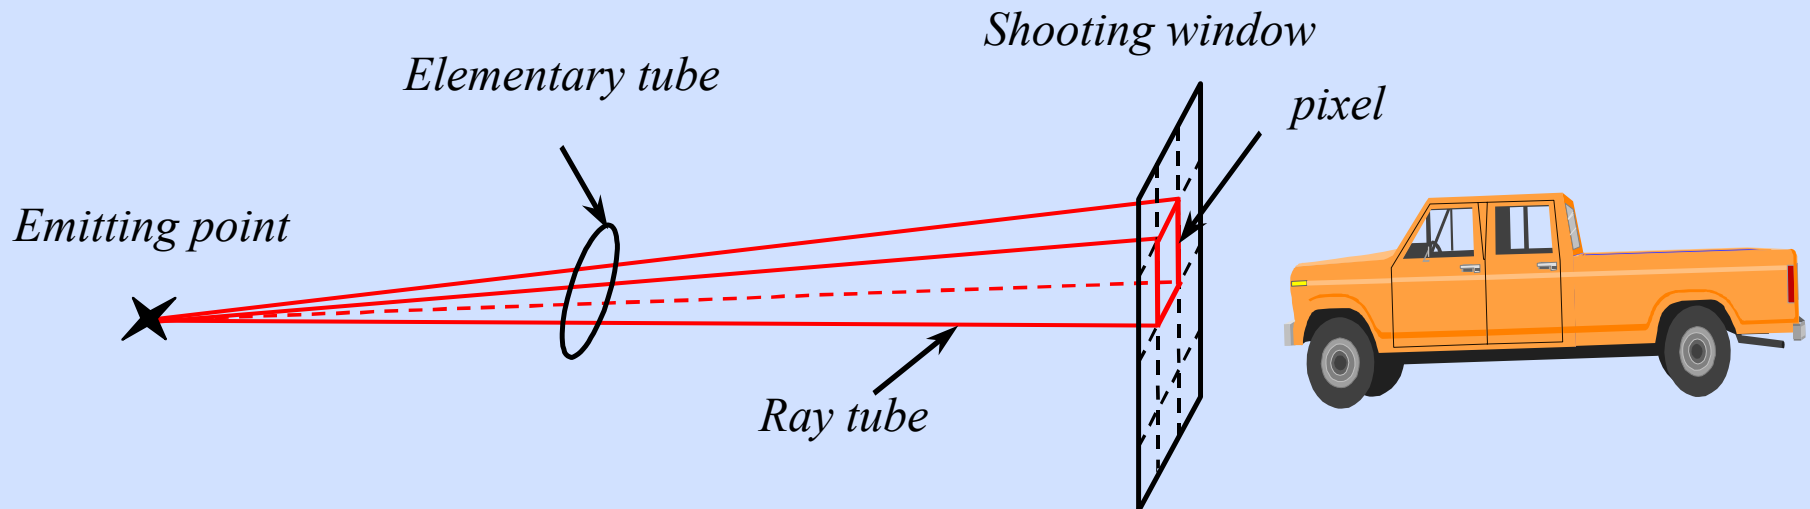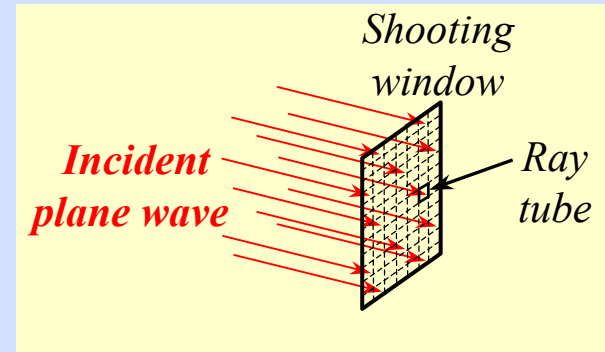

Electromagnetic Models : asymptotic methods of rays and current on dielectric or metallic surfaces

- **Geometrical Optics GO:** coupling, and forward scattering (multiple interactions) , very near field
- **Physical Optics PO:** scattering to observation (mono or bistatic configuration)
- **Uniform Theory of Diffraction UTD:** (near field edge diffraction)
- **Equivalent Currents Method ECM:** (edge diffraction to observation)



Examples and Results on Various Data Base

Radar Signature Prediction




- Tilted Trihedral Corner (dimensions ~ 140 cm x 60 cm x 20 cm)
- Polished aluminum full-scale canonical target
- 10 GHz RCS data published
- Workshop on 19 February 2003 in ONERA Salon de Provence at 9, 34, 94 GHz

Tilted trihedron W-Band RCS at 10° depression: Interaction decomposition

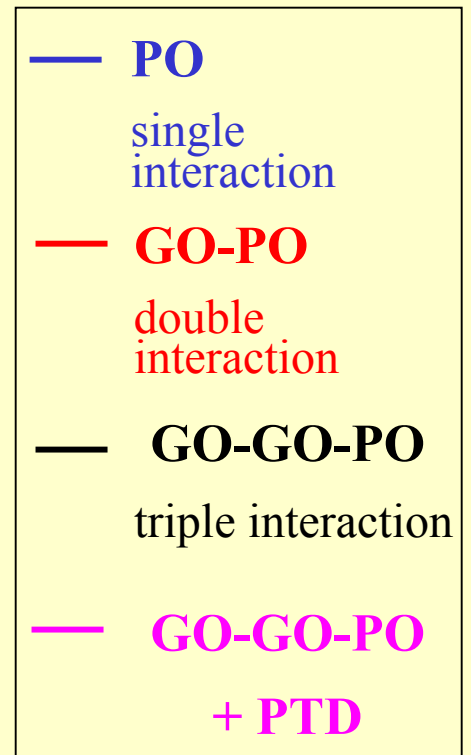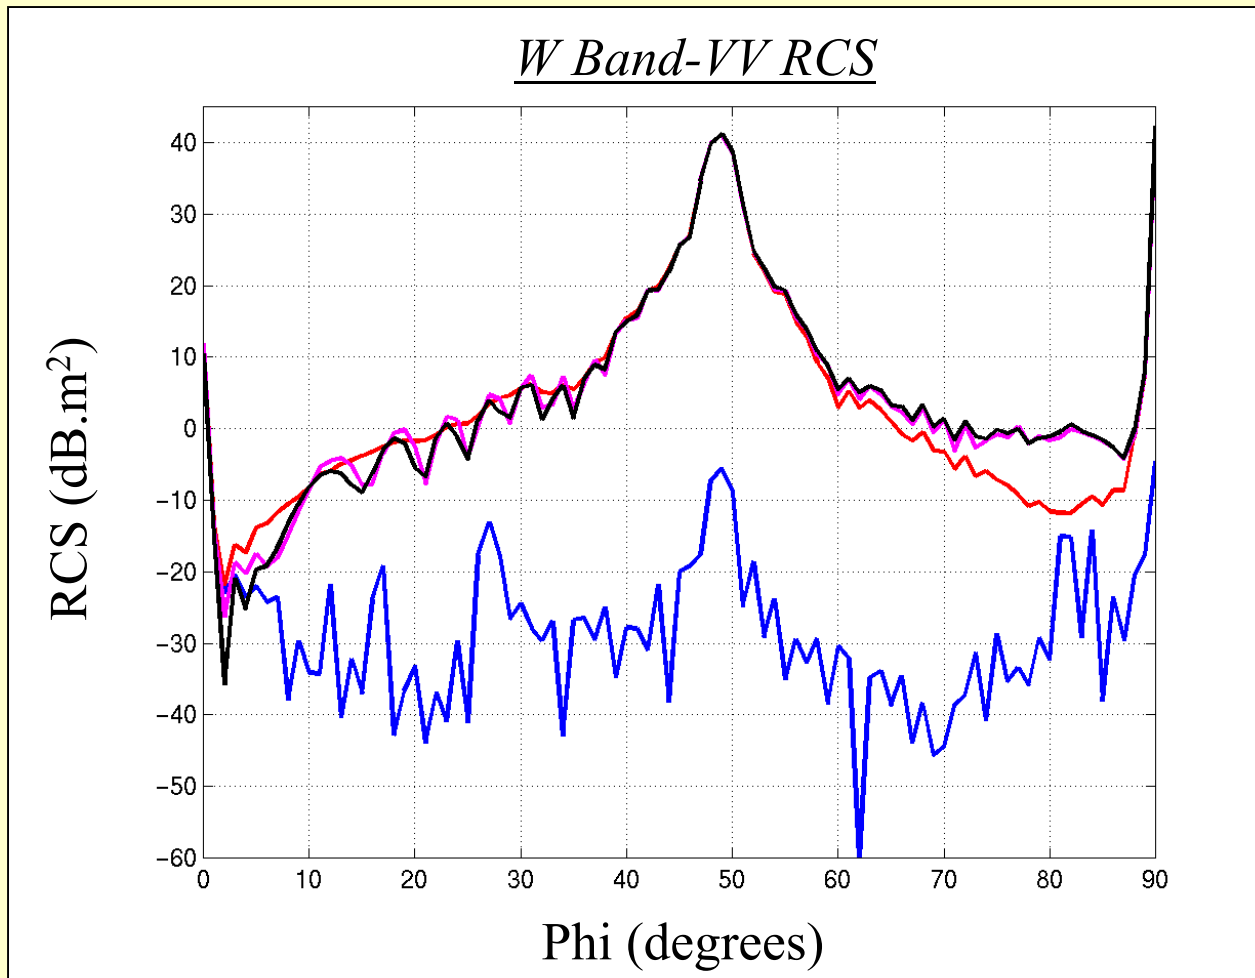

Tilted trihedron W-Band RCS at 10° depression: Validation

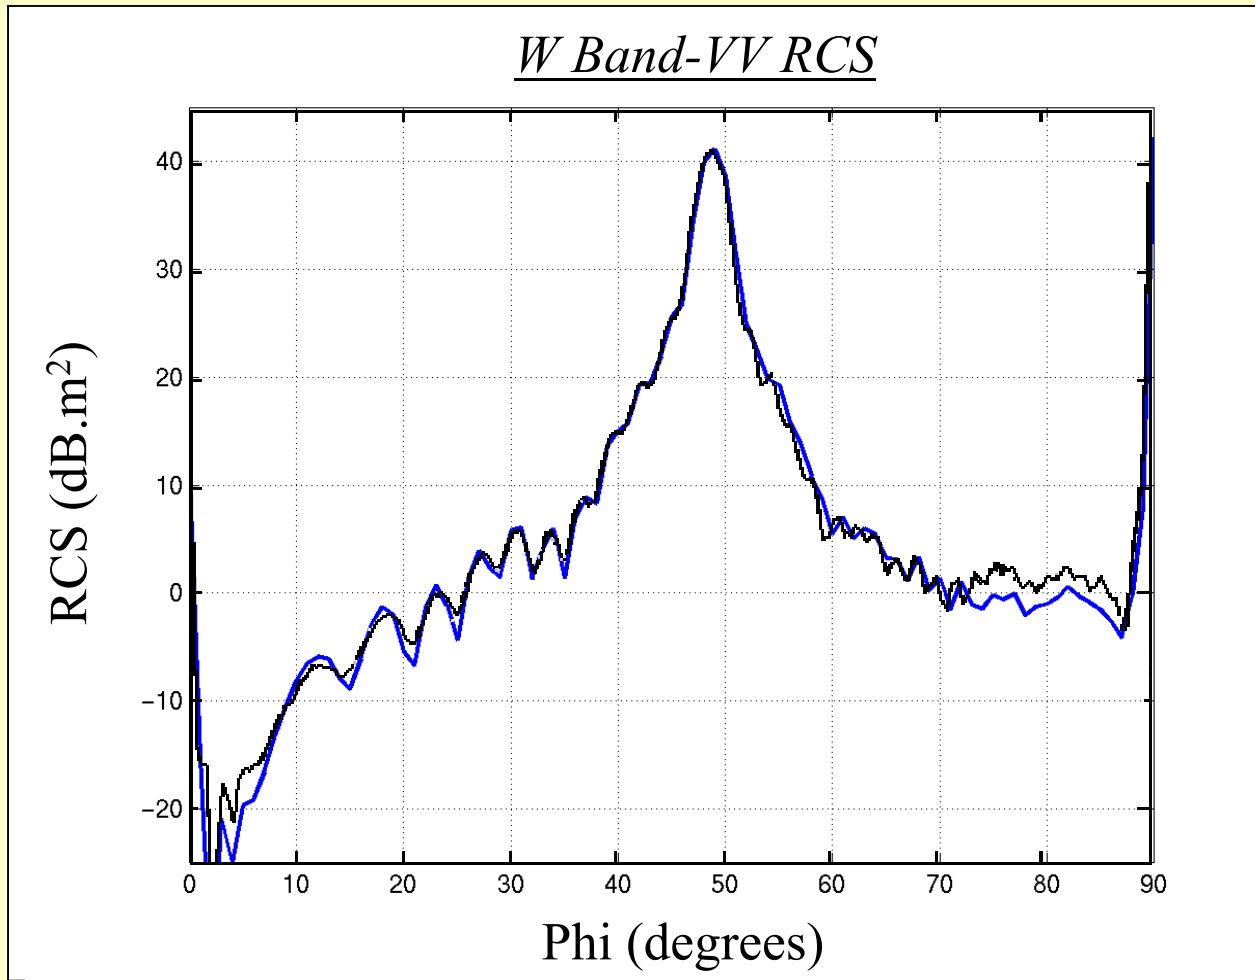


— FERMAT
— XPATCH

Radar Cross Section Results on VAB (Véhicule de l'Avant Blindé) Repair and Recovery Vehicle

Radar cross section at millimetre wavelength

Comparison with measurements

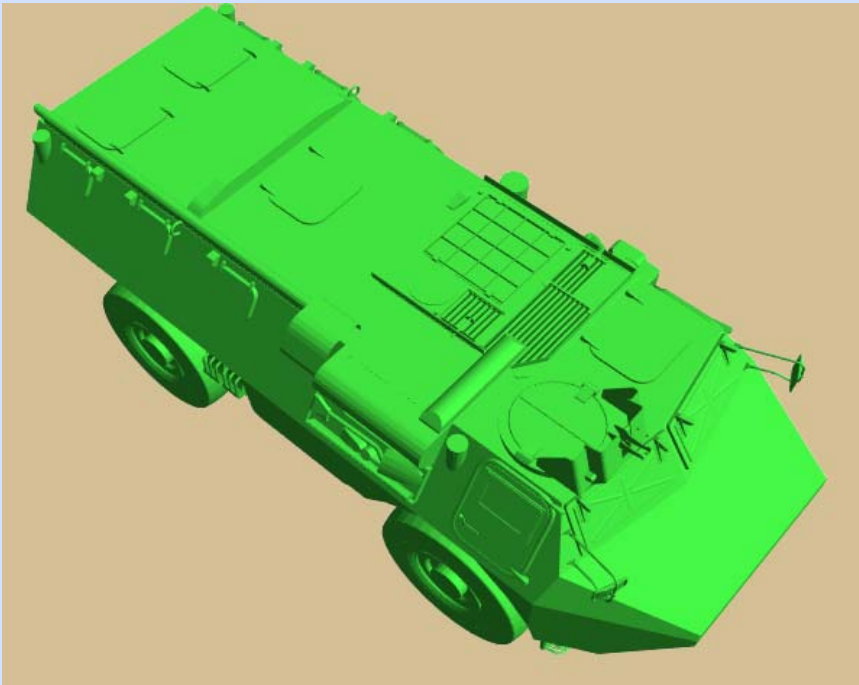


CAD virtual object



Real Object

Results


Measurement
Calculations

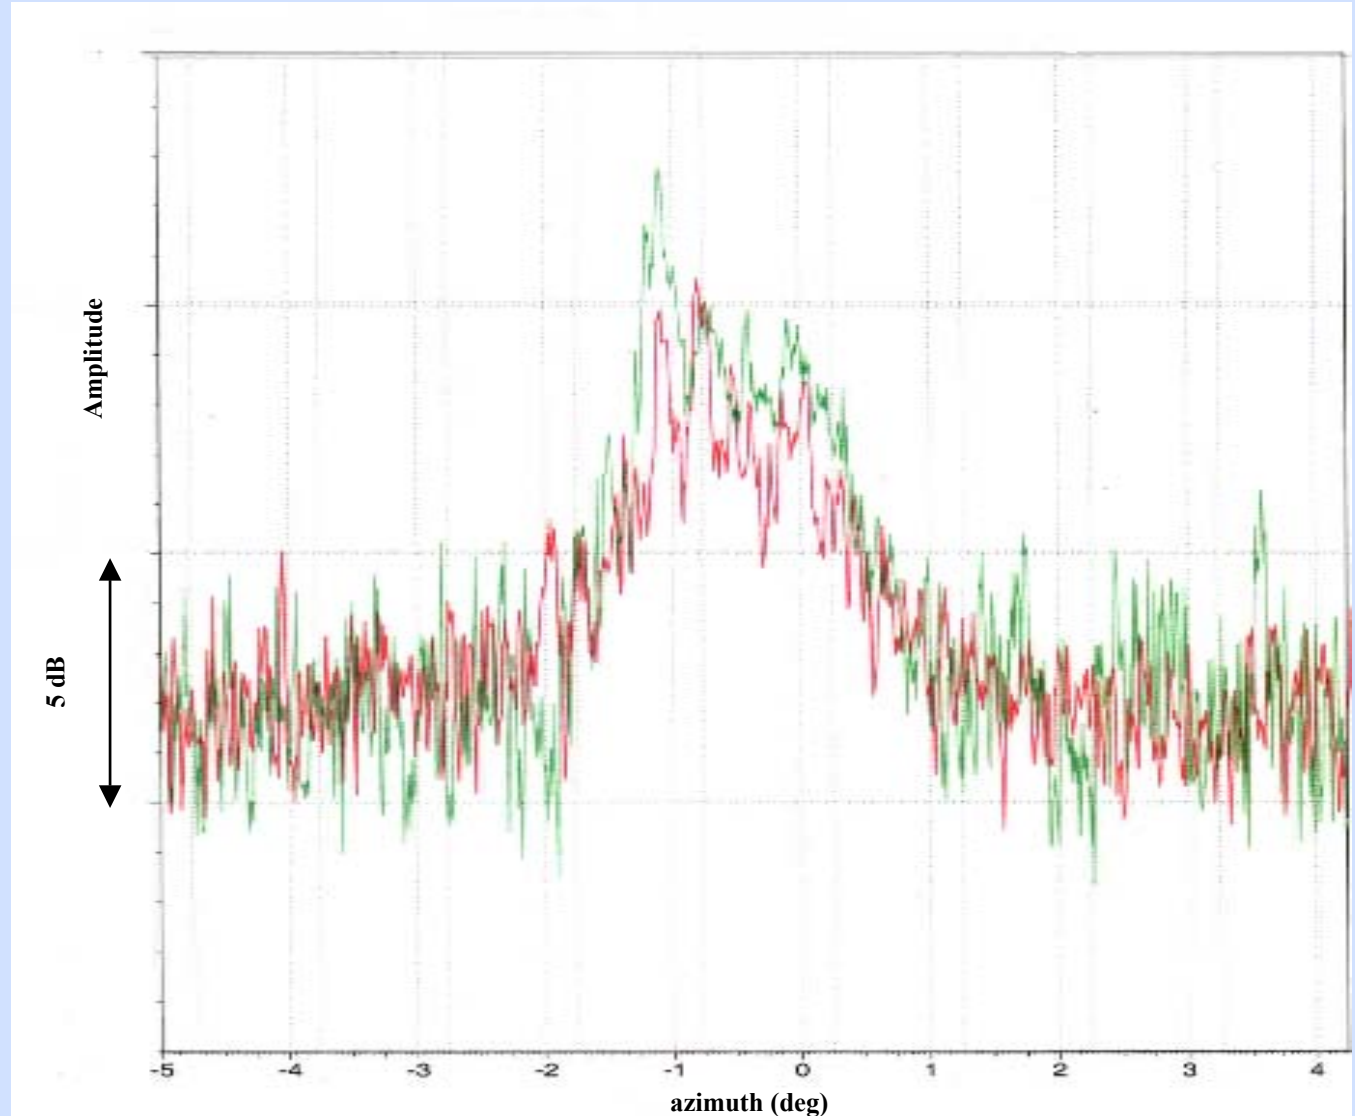


ISAR images at millimetre wavelength

Angular sector $-0.5/-0.5$ deg

Measurements

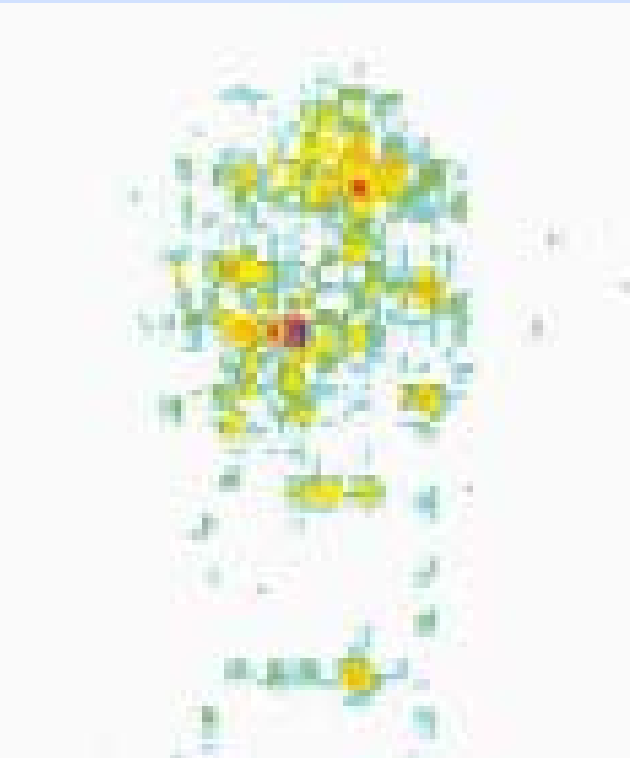

Calculations



Profile Statistical Parameters


Gaussian distribution of the heights, characterised by:


- 256 levels (8 bits)
- An extended area of 1 m²


Adjustment of:


- rms height
- correlation length
- antialiasing parameters

Roughness motif on 512 x 256 points

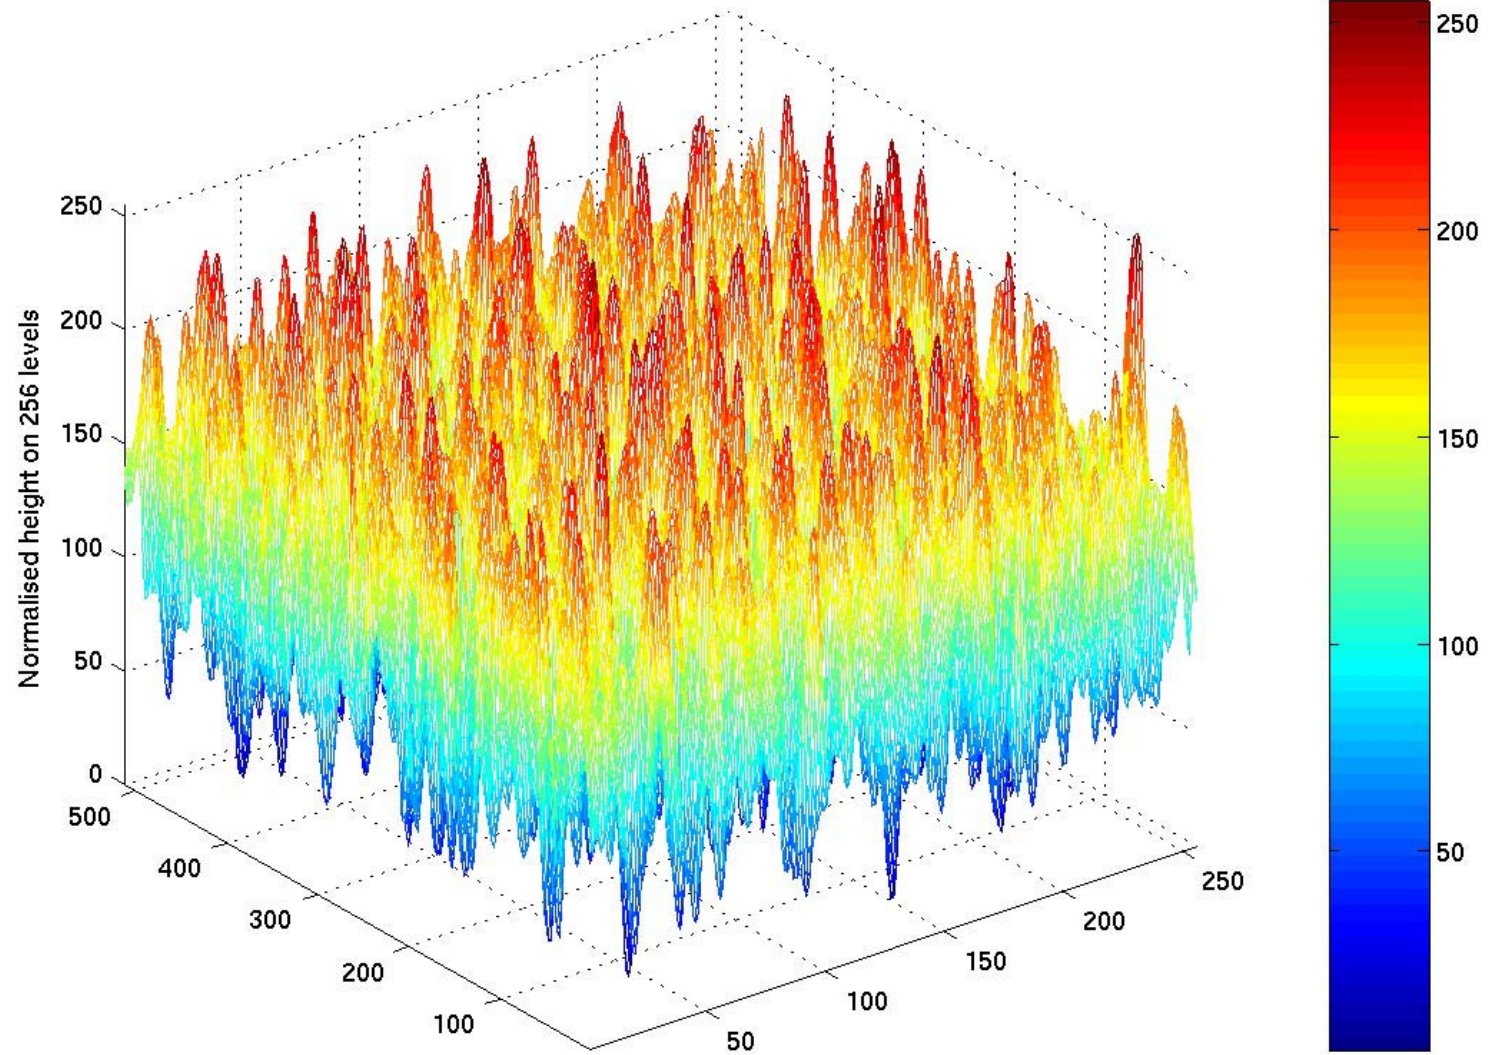

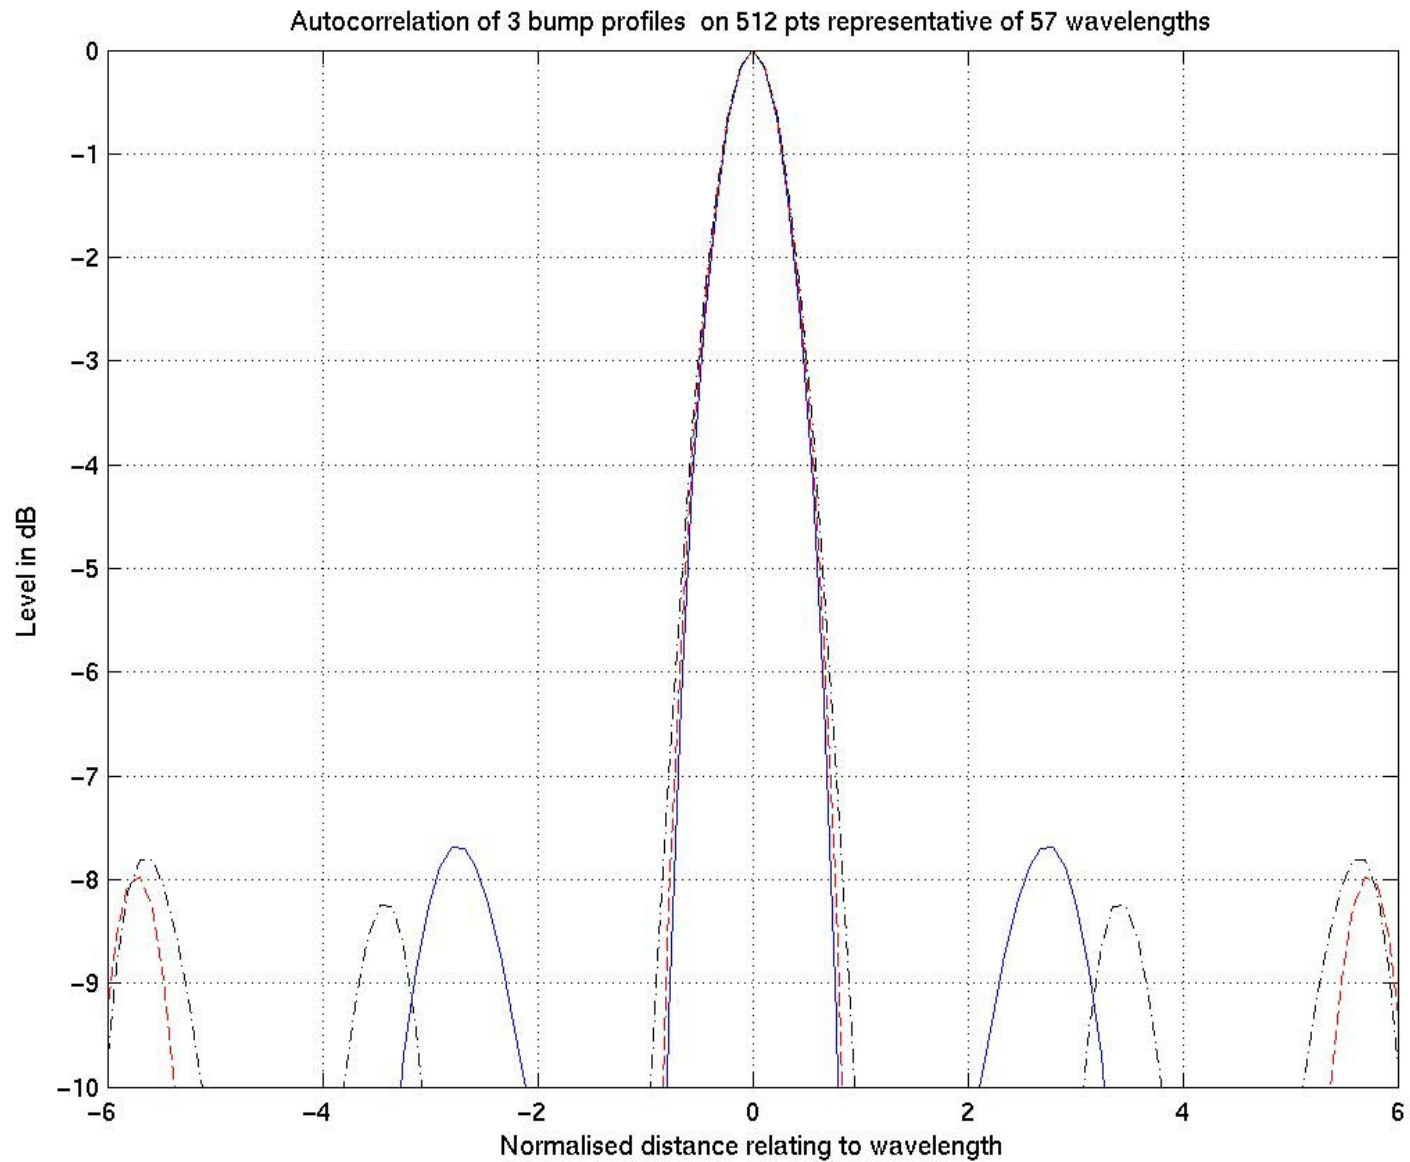

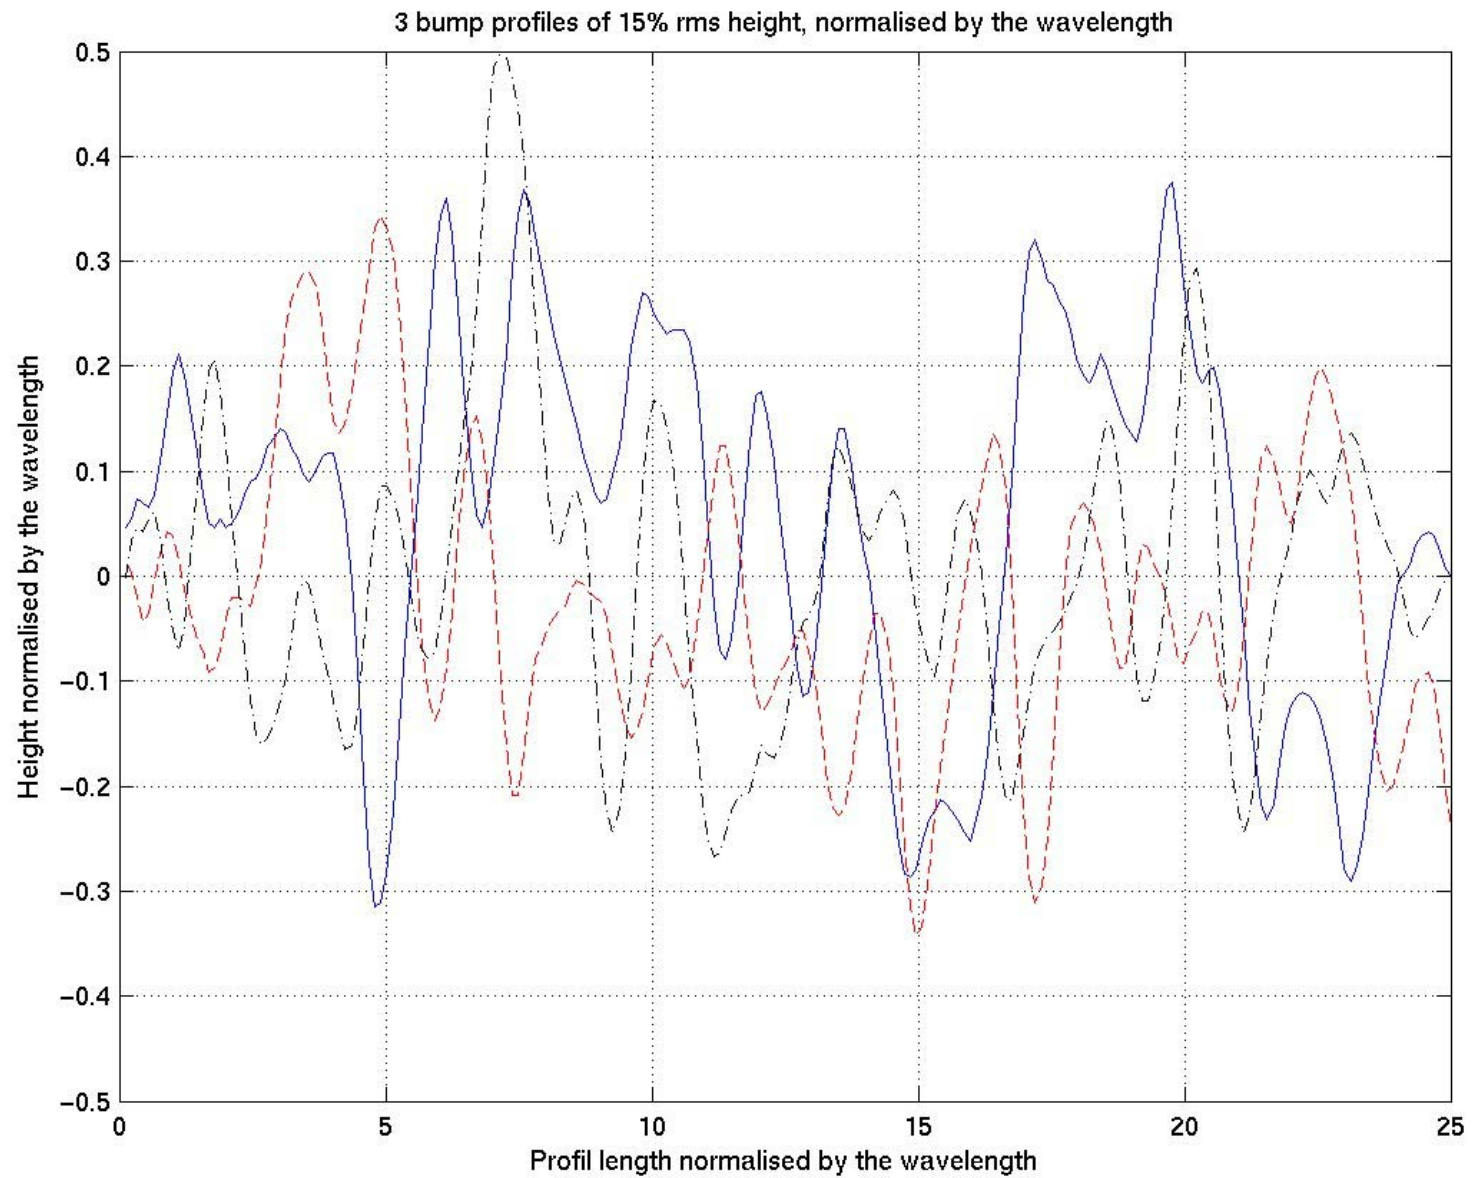

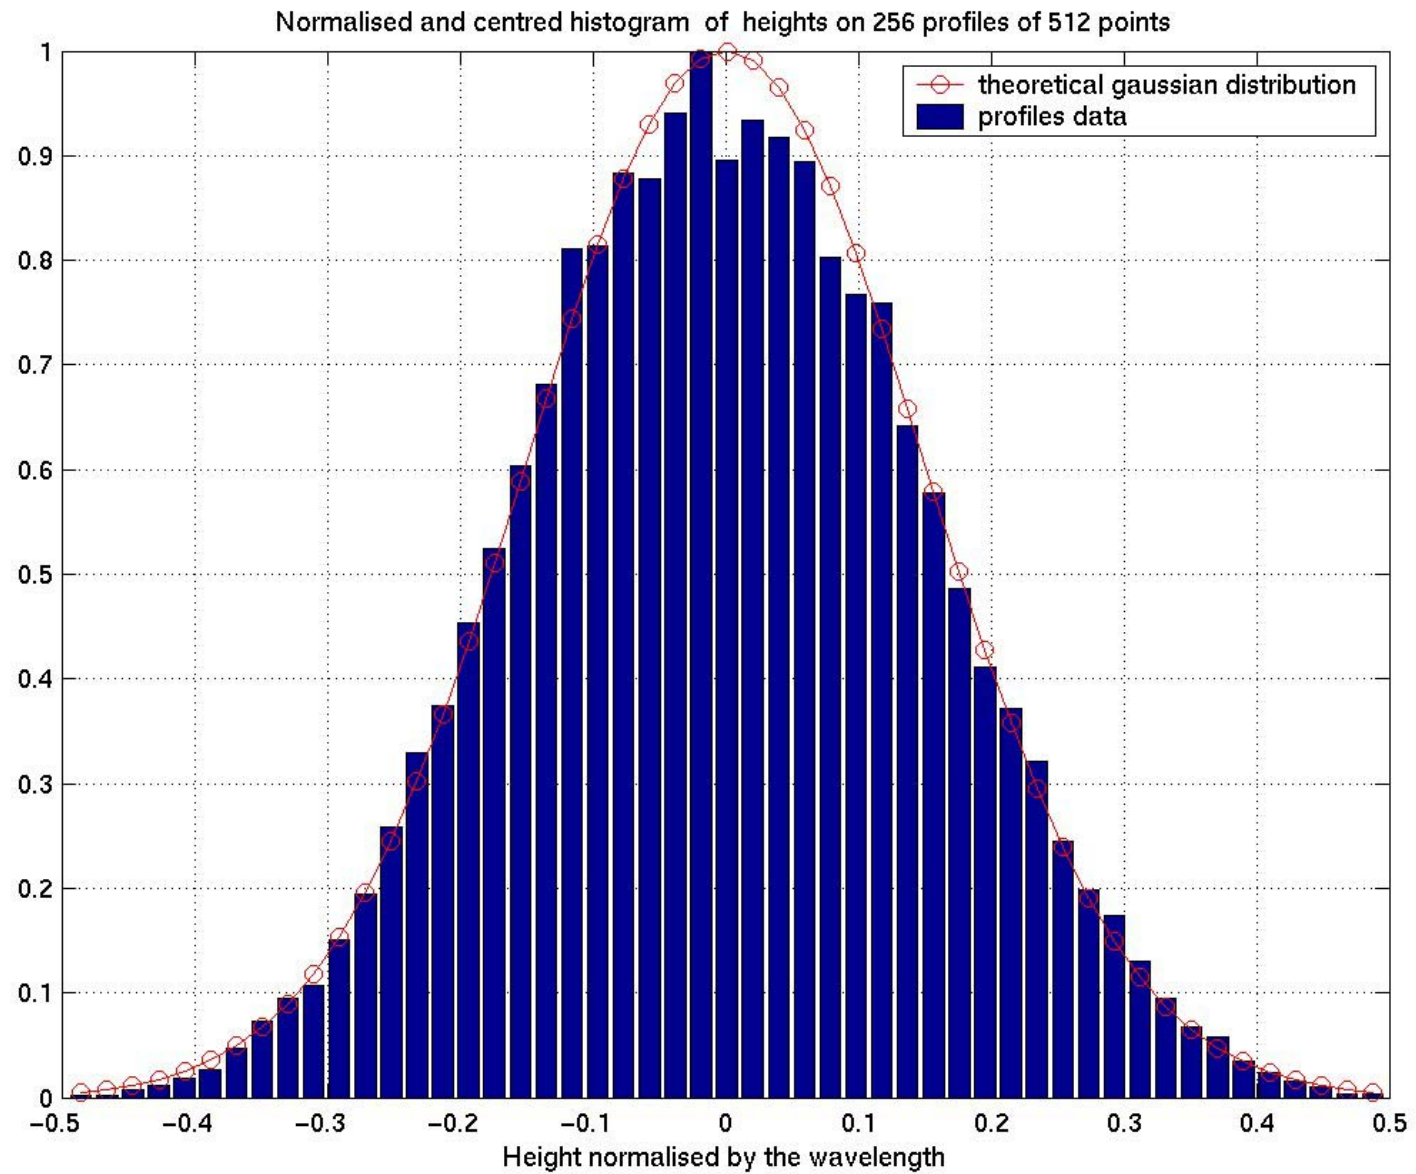


Available data and measurement on ground vehicles :

- ➔ Data pool group SET 069
 - ARL
 - ZSU CAD 600 kfacets and 60 kfacets
 - T72 measurements
 - ZSU 23-4 FGAN ISAR measurements
 - T72 FGAN measurements
- ➔ Specific measurements on rough plates
- ➔ Others ...


First analysis of roughness effect on ground vehicles :

- ➔ Based on previous investigations on:
 - a VAB (Véhicule de l'Avant Blindé) Repair and Recovery Vehicle
 - the use of bump texture in IR applications
- ➔ Specific roughness analysis on canonical objects (plates, dihedral, trihedral, test scene)
- ➔ First applications on the ZSU CAD 60 kfacets


Roughness effect on a plate RCS peak-to-peak value as parameter

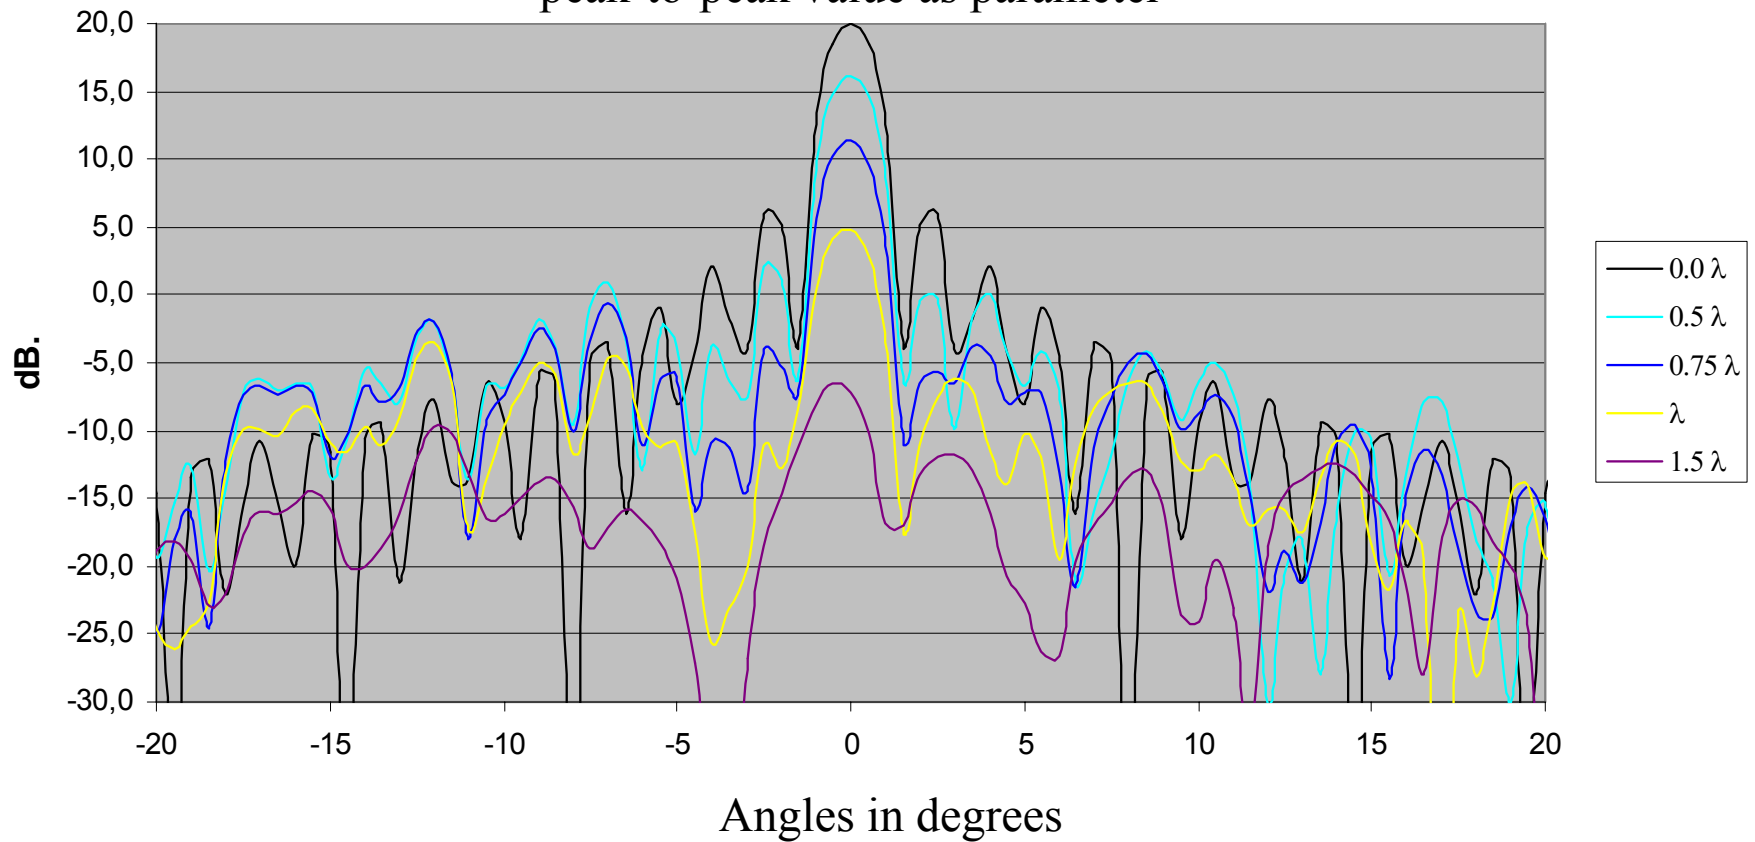


Roughness effect on a dihedral RCS peak-to-peak value as parameter

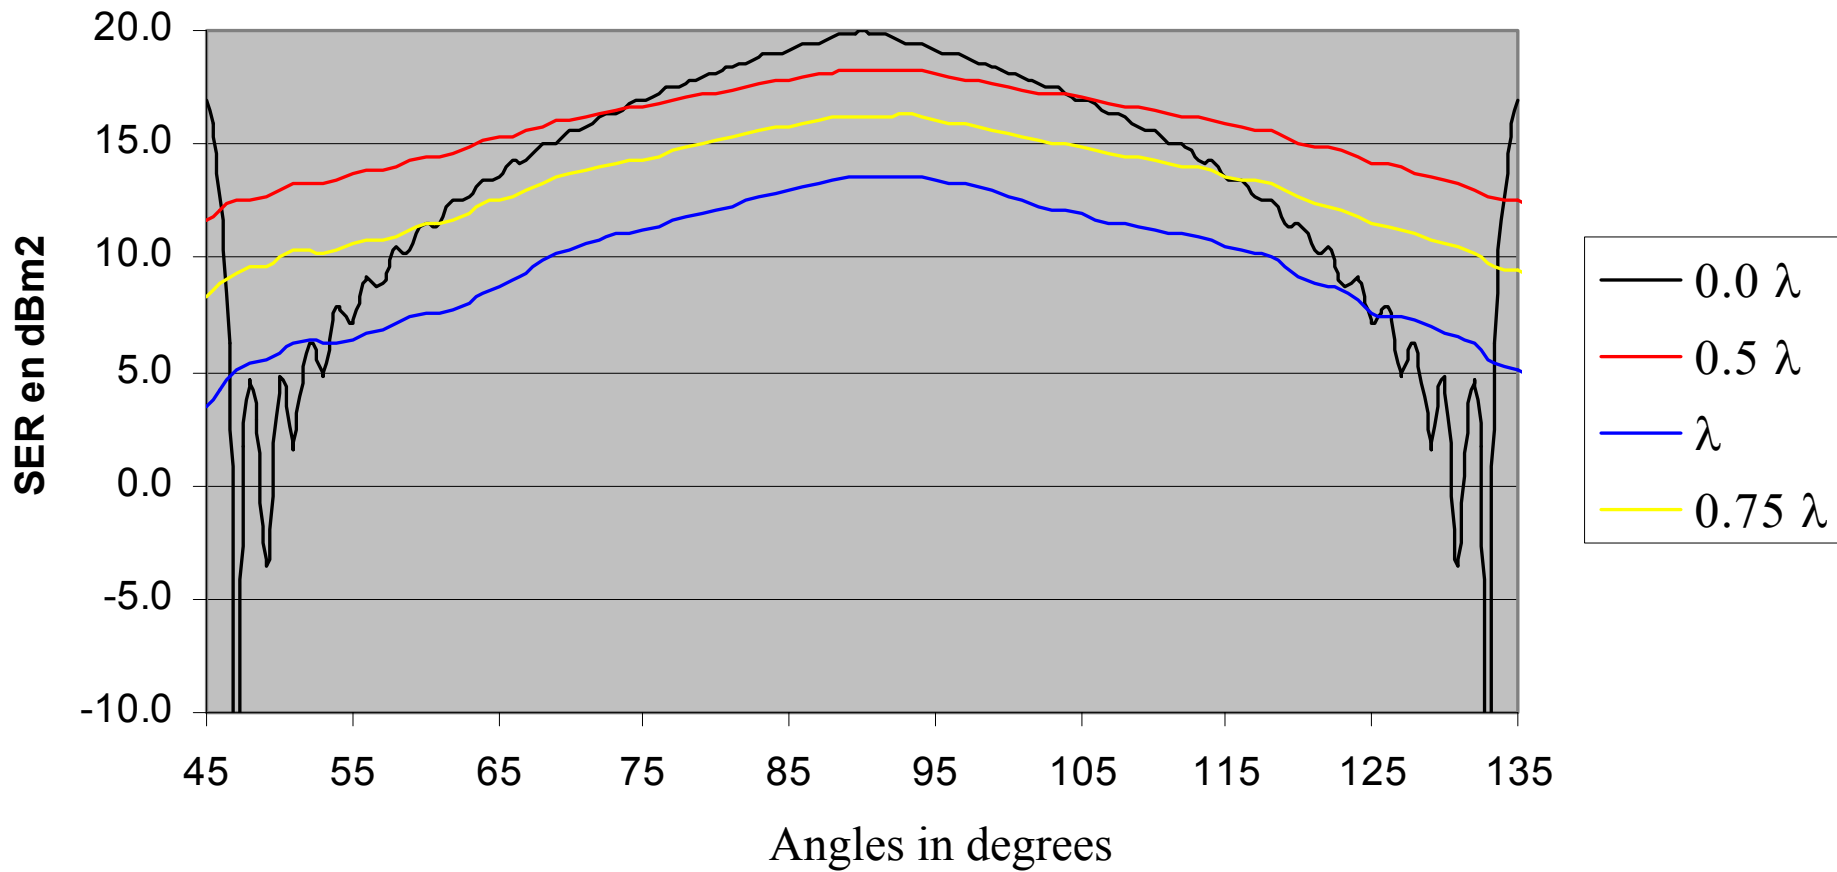


Roughness effect on a trihedral RCS peak-to-peak value as parameter

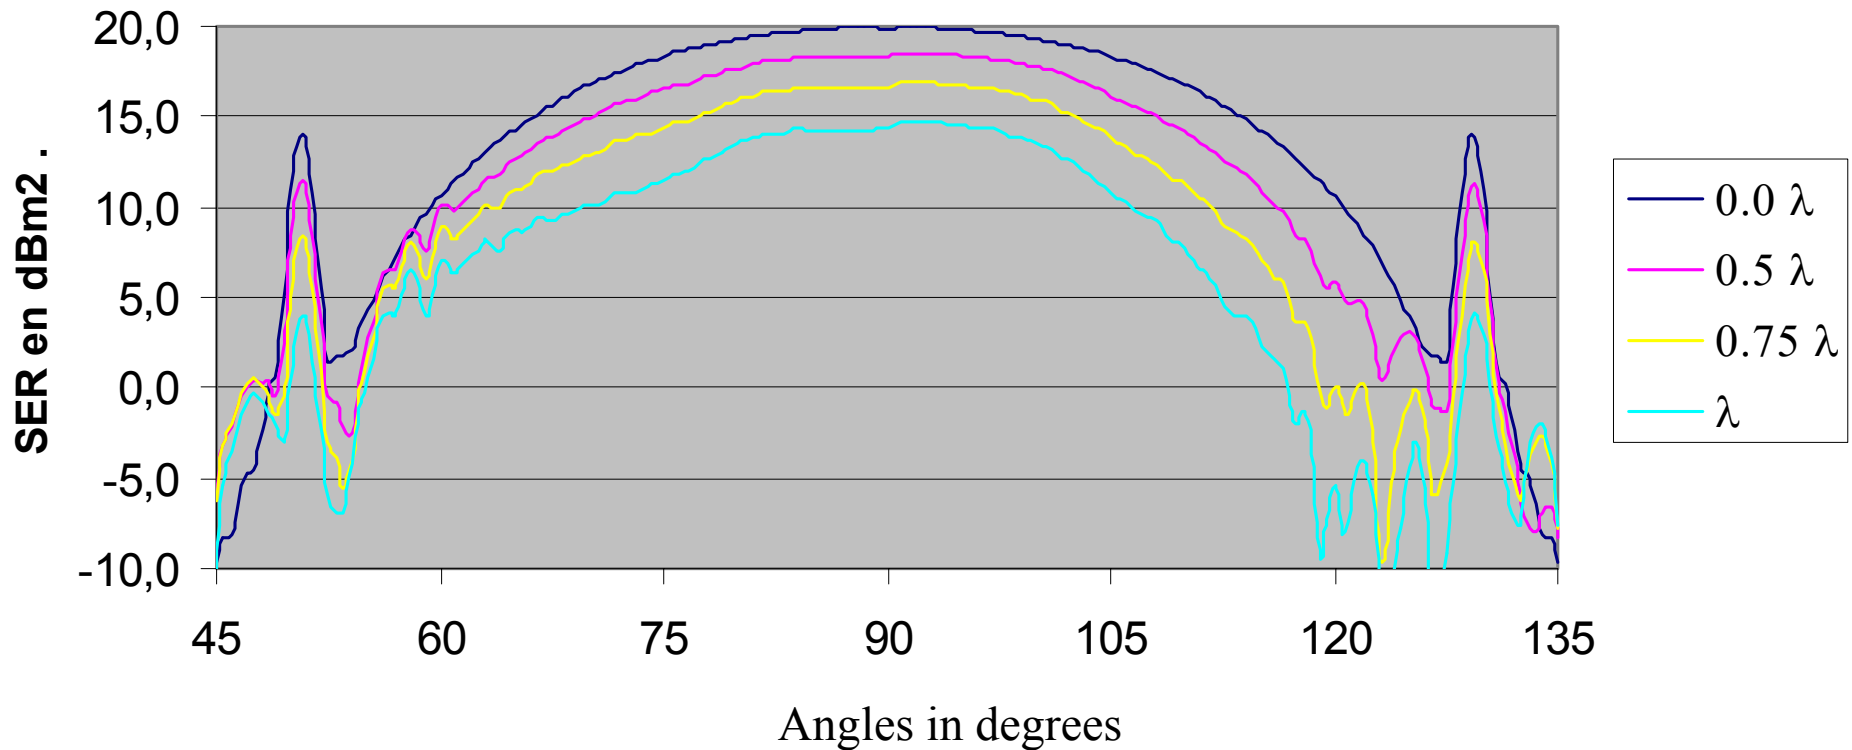


Canonical Target Imaging 35 GHz VV

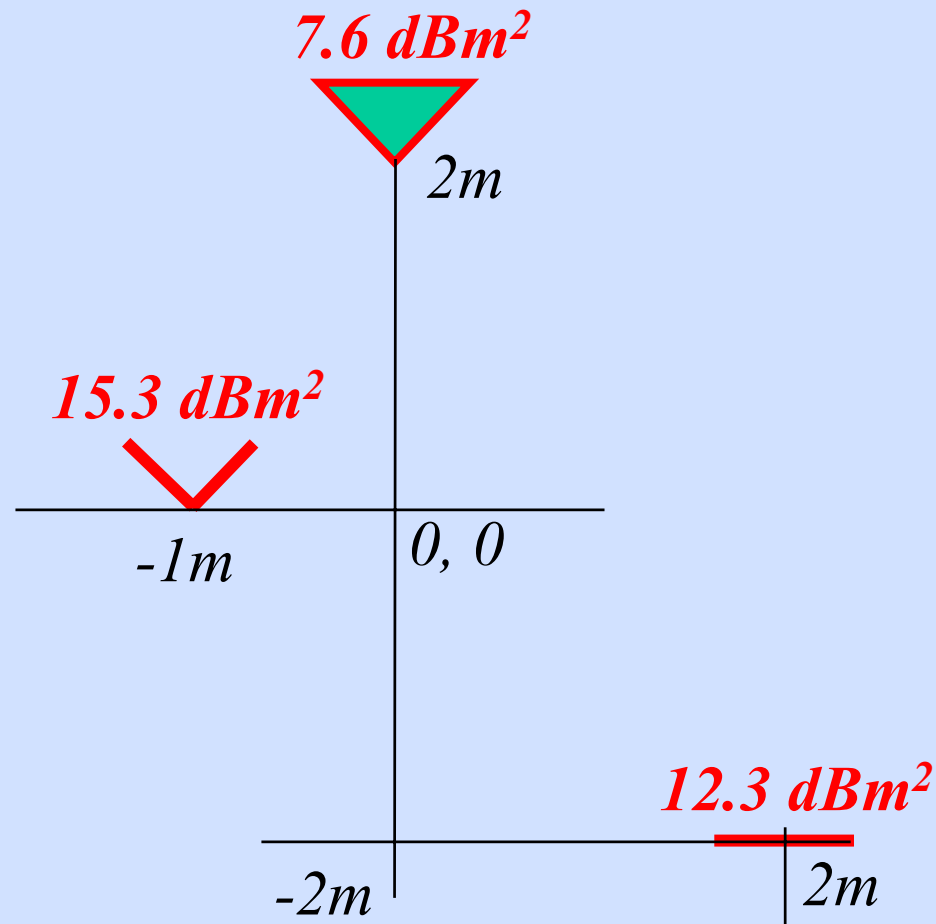


Canonical Target Imaging Set 35 GHz VV Lamda/4

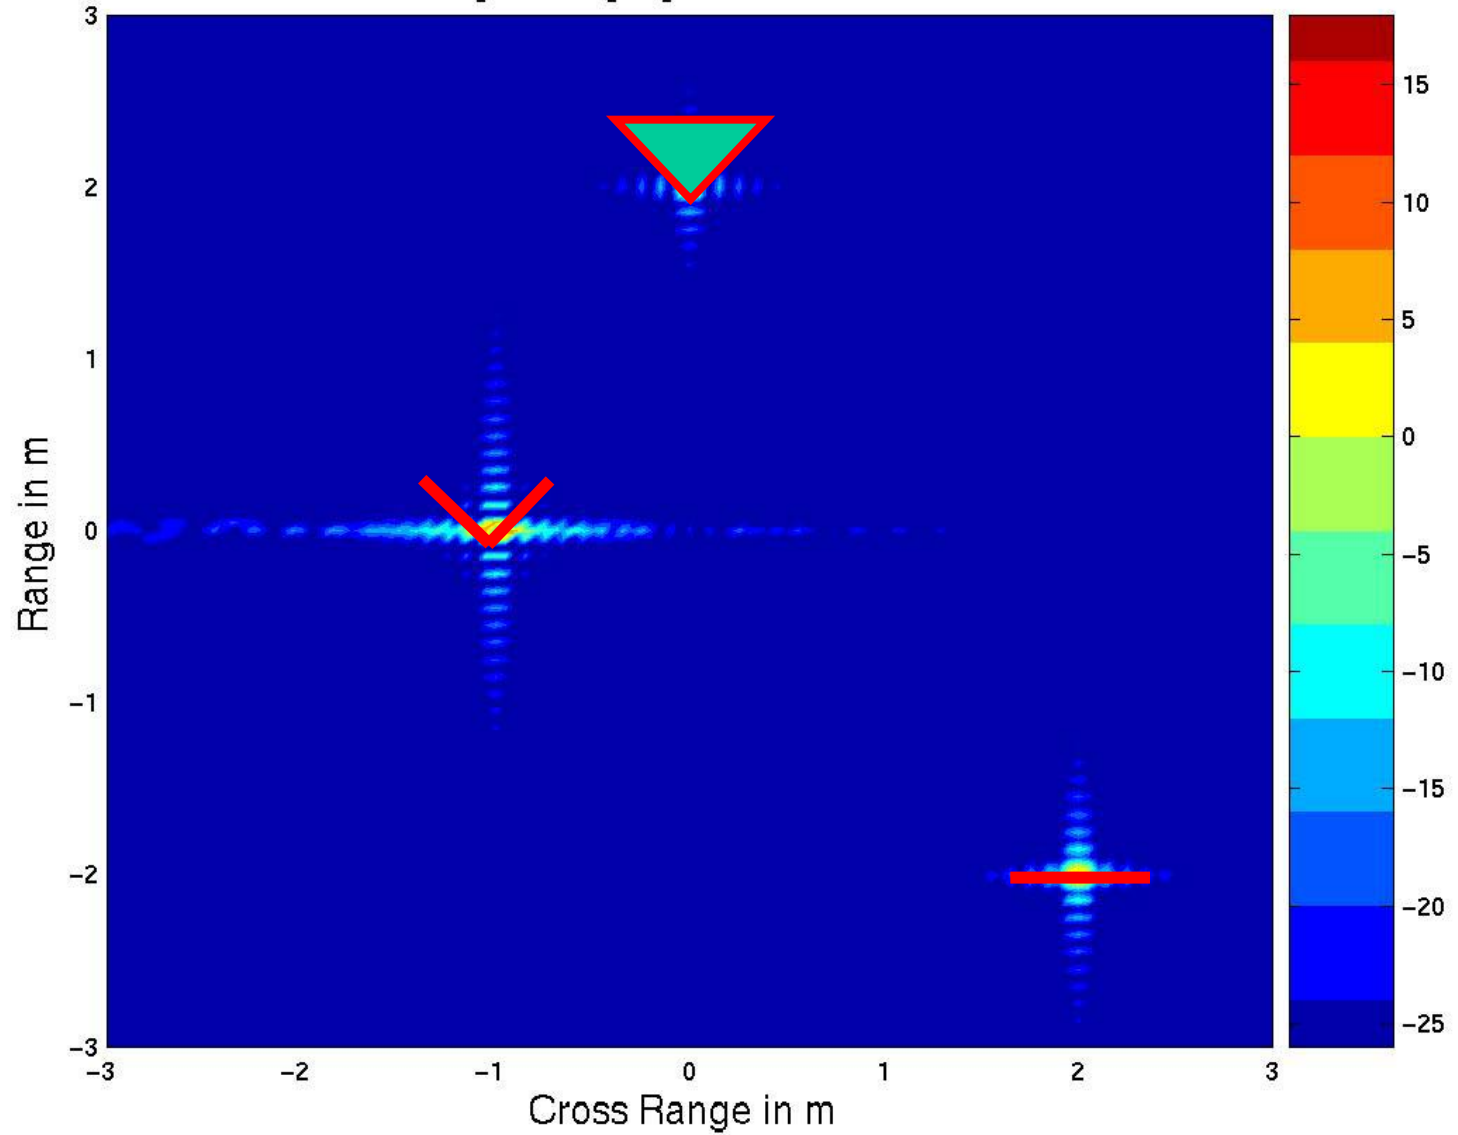

Canonical Target Imaging Set 35 GHz VV $\lambda/4$

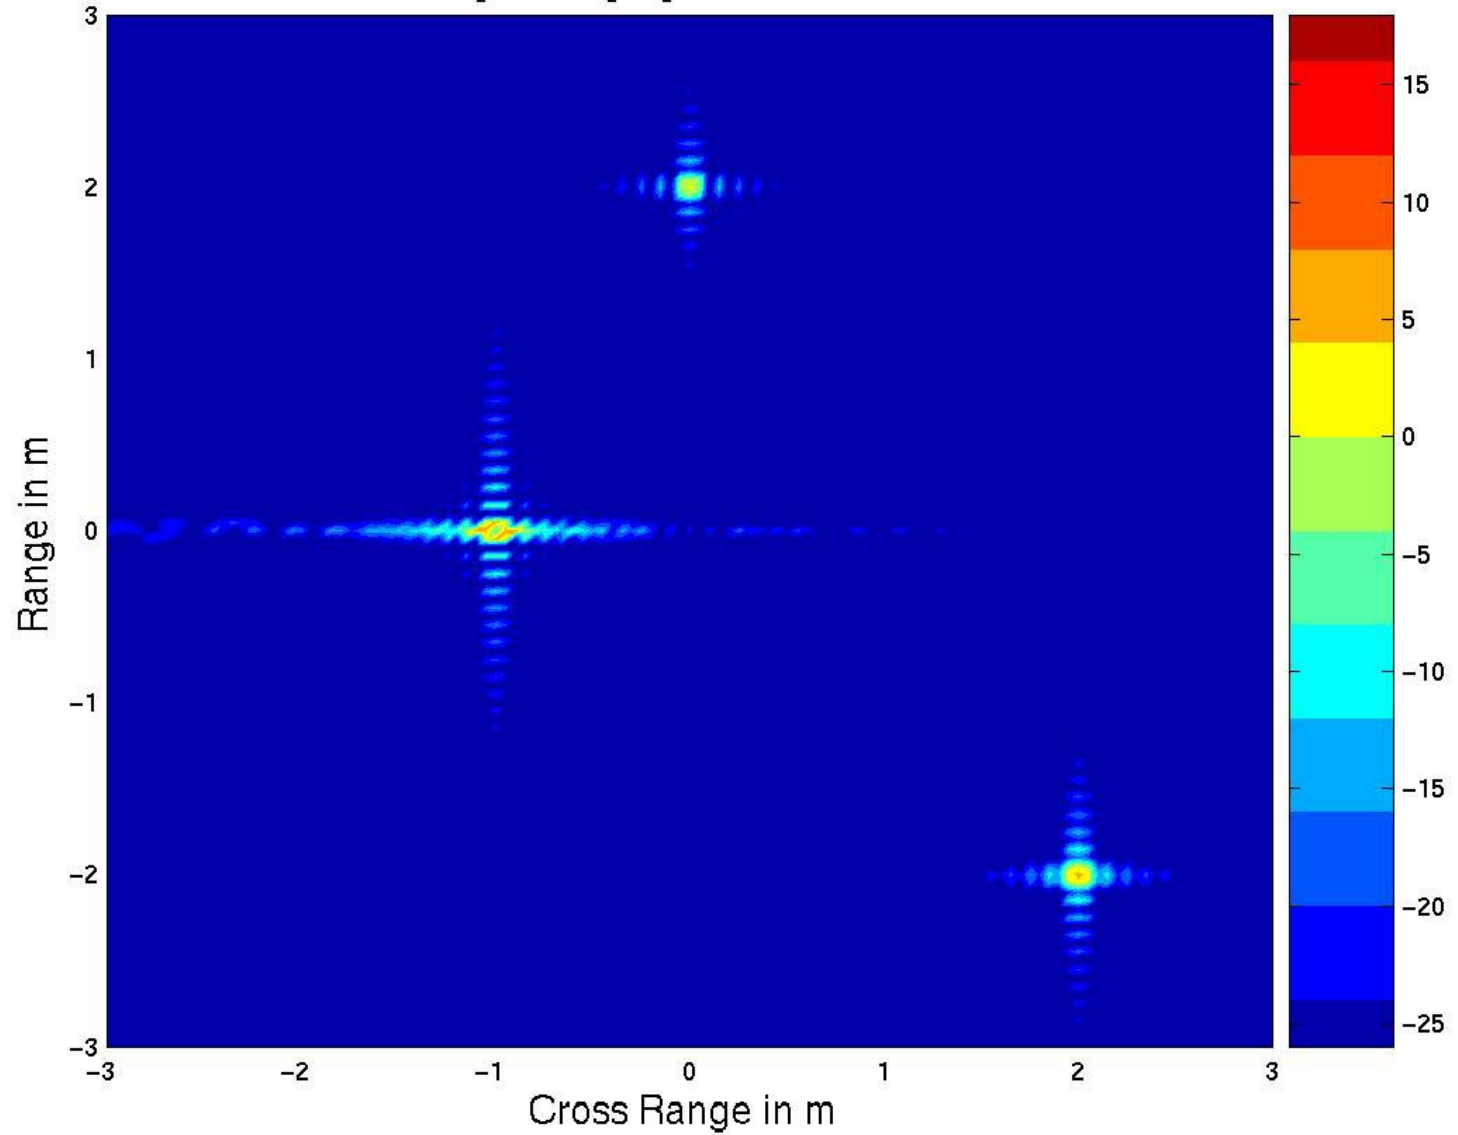

Roughness effect on the canonical set RCS peak-to-peak value as parameter

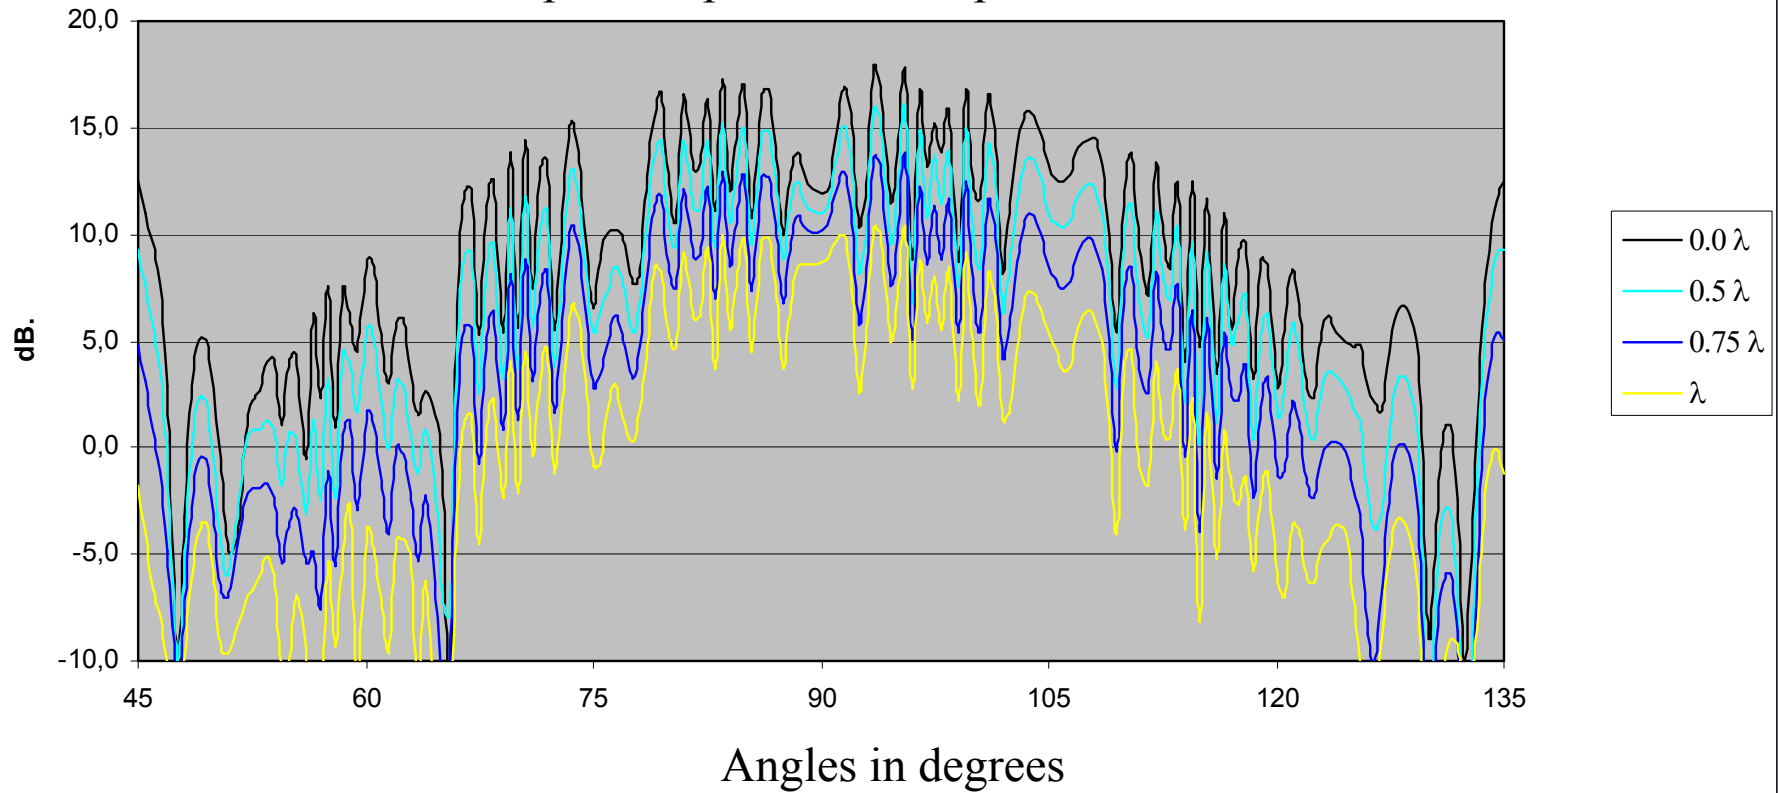


Bump texture effect and modified Fresnel formulations

$(R_{//,\perp} \cdot \exp[-2 \cdot (2\pi\sigma \cos(\theta)/\lambda)^2])$

Roughness effect on a plate RCS
peak-to-peak value as parameter

Attenuation in dB

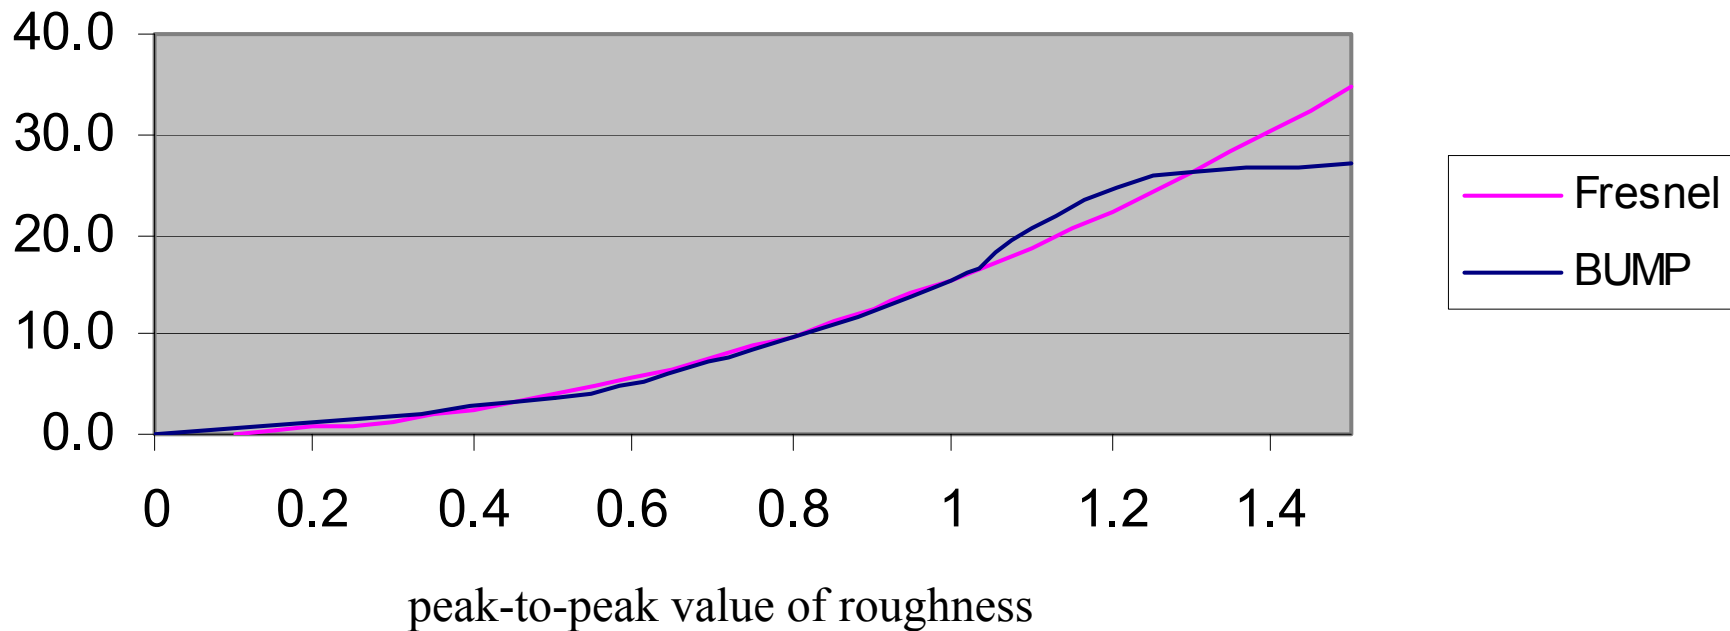


Evaluation tools (metric comparison)



Evaluation and comparison tools worked on:


- ➔ Statistical evaluation of ISAR images
 - peak values,
 - mean value,
 - quadratic mean,
- ➔ Comparison on global RCS (frequency averaged)
- ➔ Measurements references from SET 069 data pool and other available measurements from DECE/CELAR.

ZSU 23-4 600 kfacets

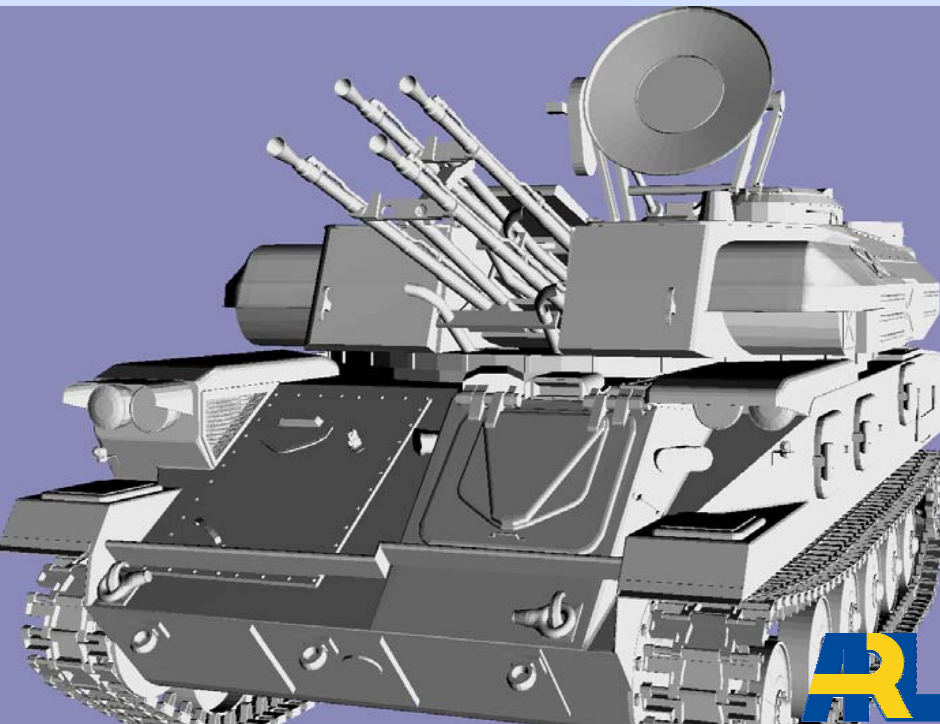


ZSU 23-4 600 and 60 kfacets

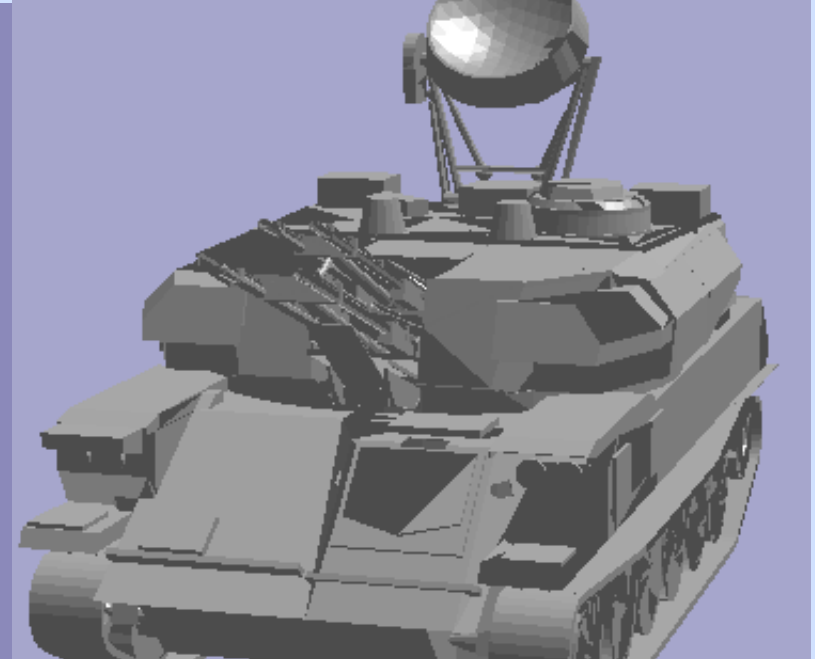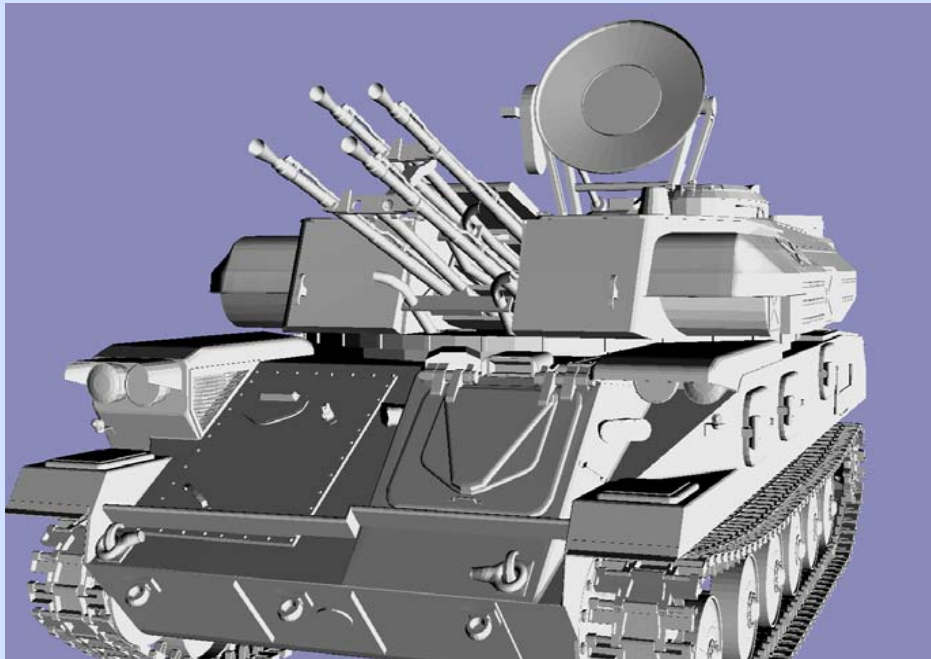

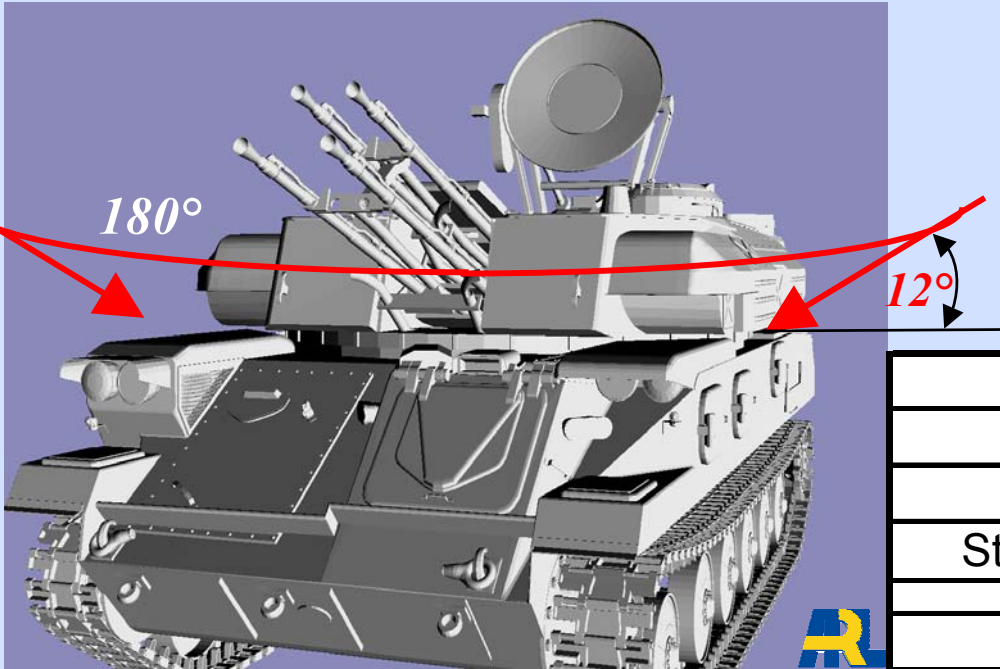


Total azimuth angle	180	°
Step	0.015	°
Bandwidth	1.5176	MHz
Step frequency number	256	
Total angle number	12000	
Total caculation duration		
on PC	17.25	days
	2	mn/by angle
ISAR imaging	2°	
Total ISAR image number	295	


ZSU 23-4 35 GHz WV

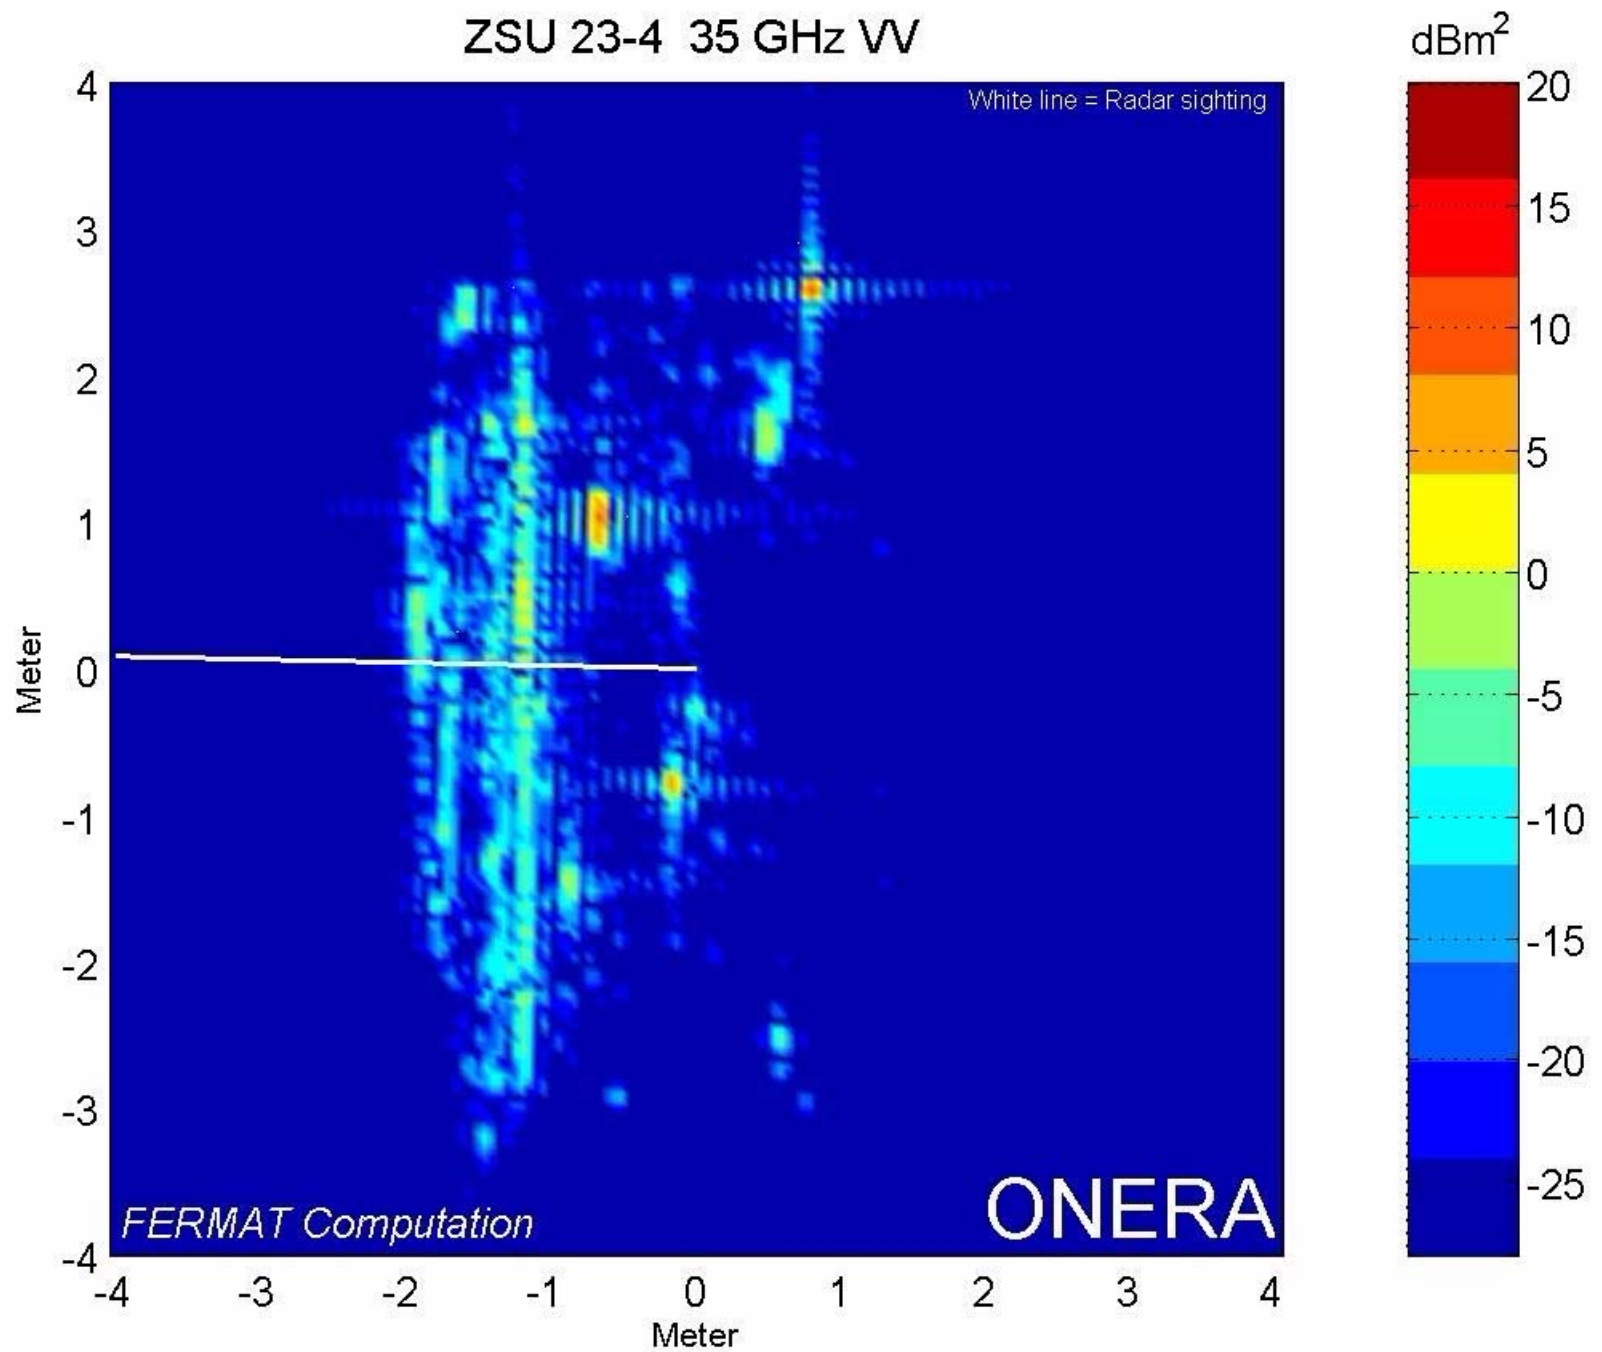


ZSU 23-4 35 GHz HV

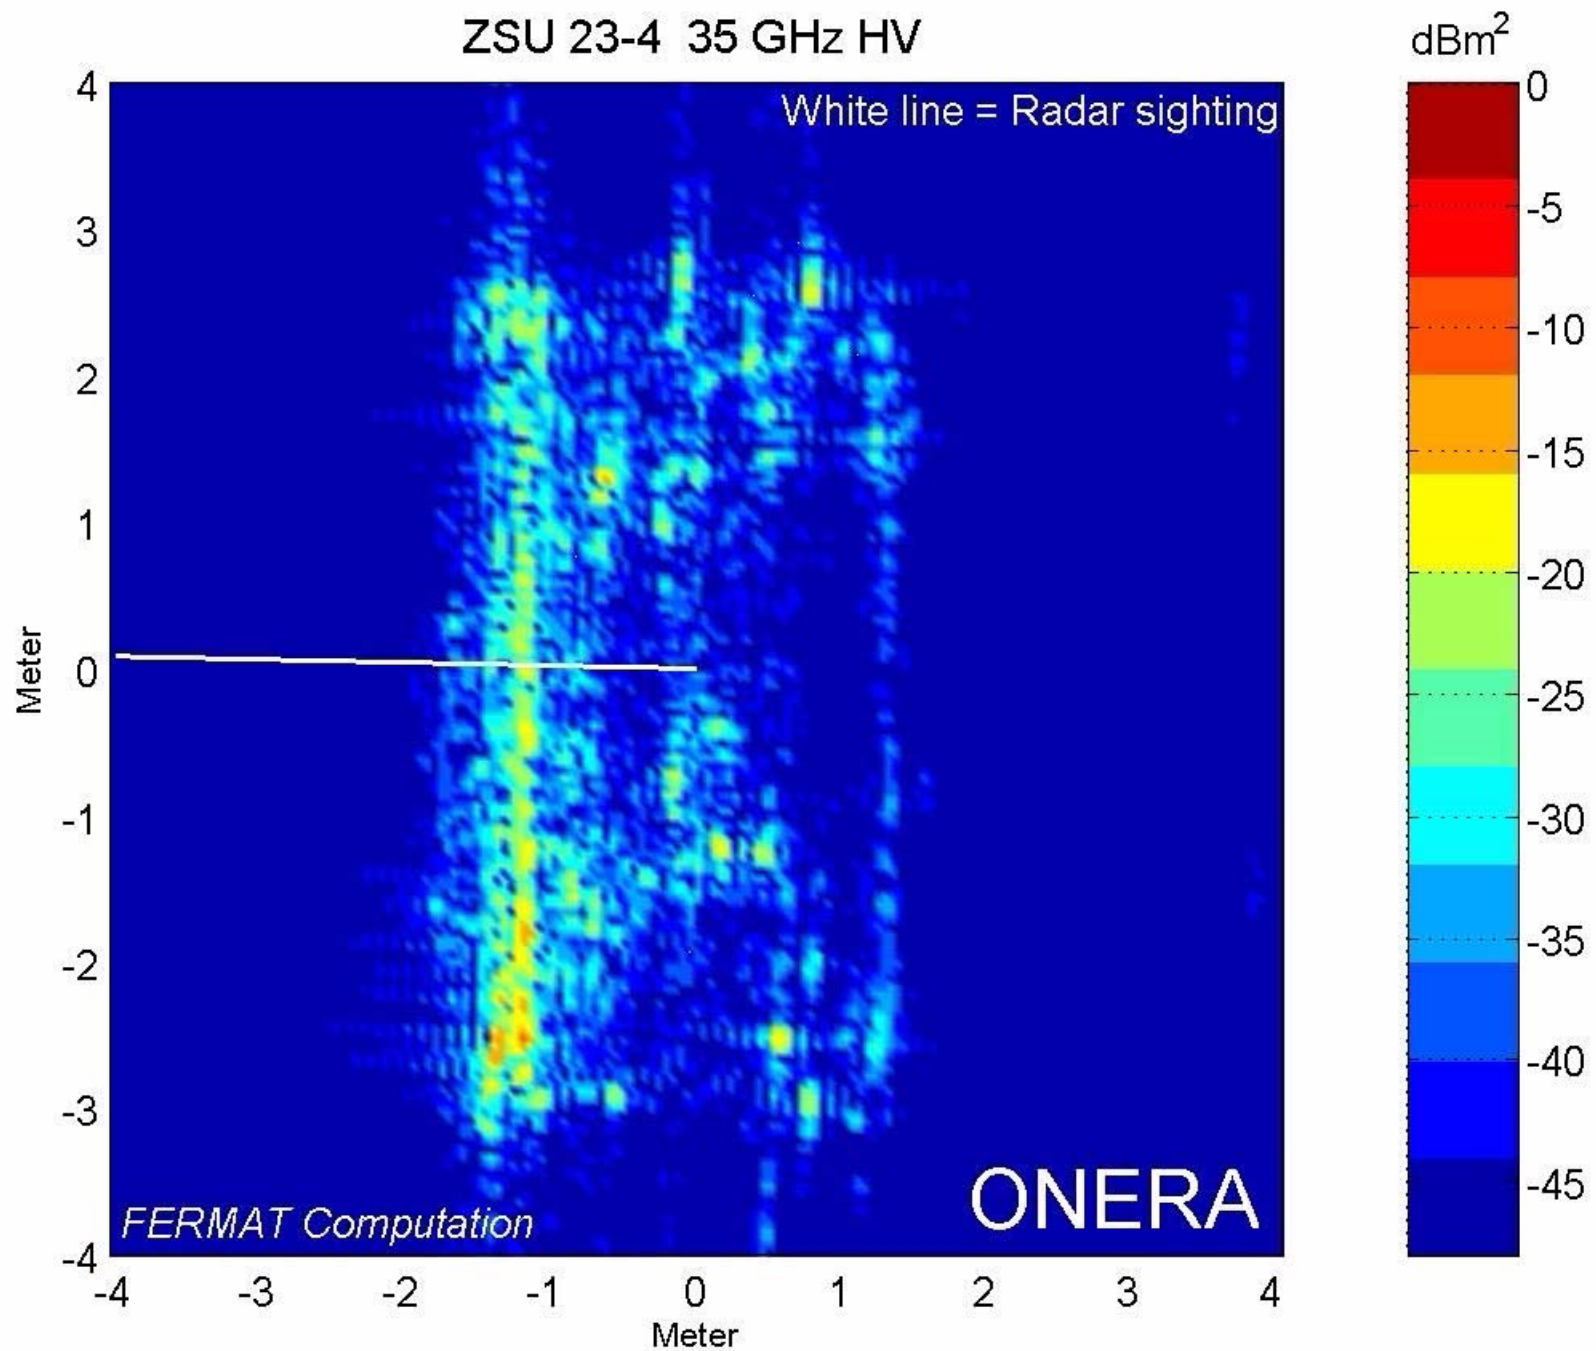


RCS ZSU 23-4 600k / 60k 35 GHz VV (frequency mean)

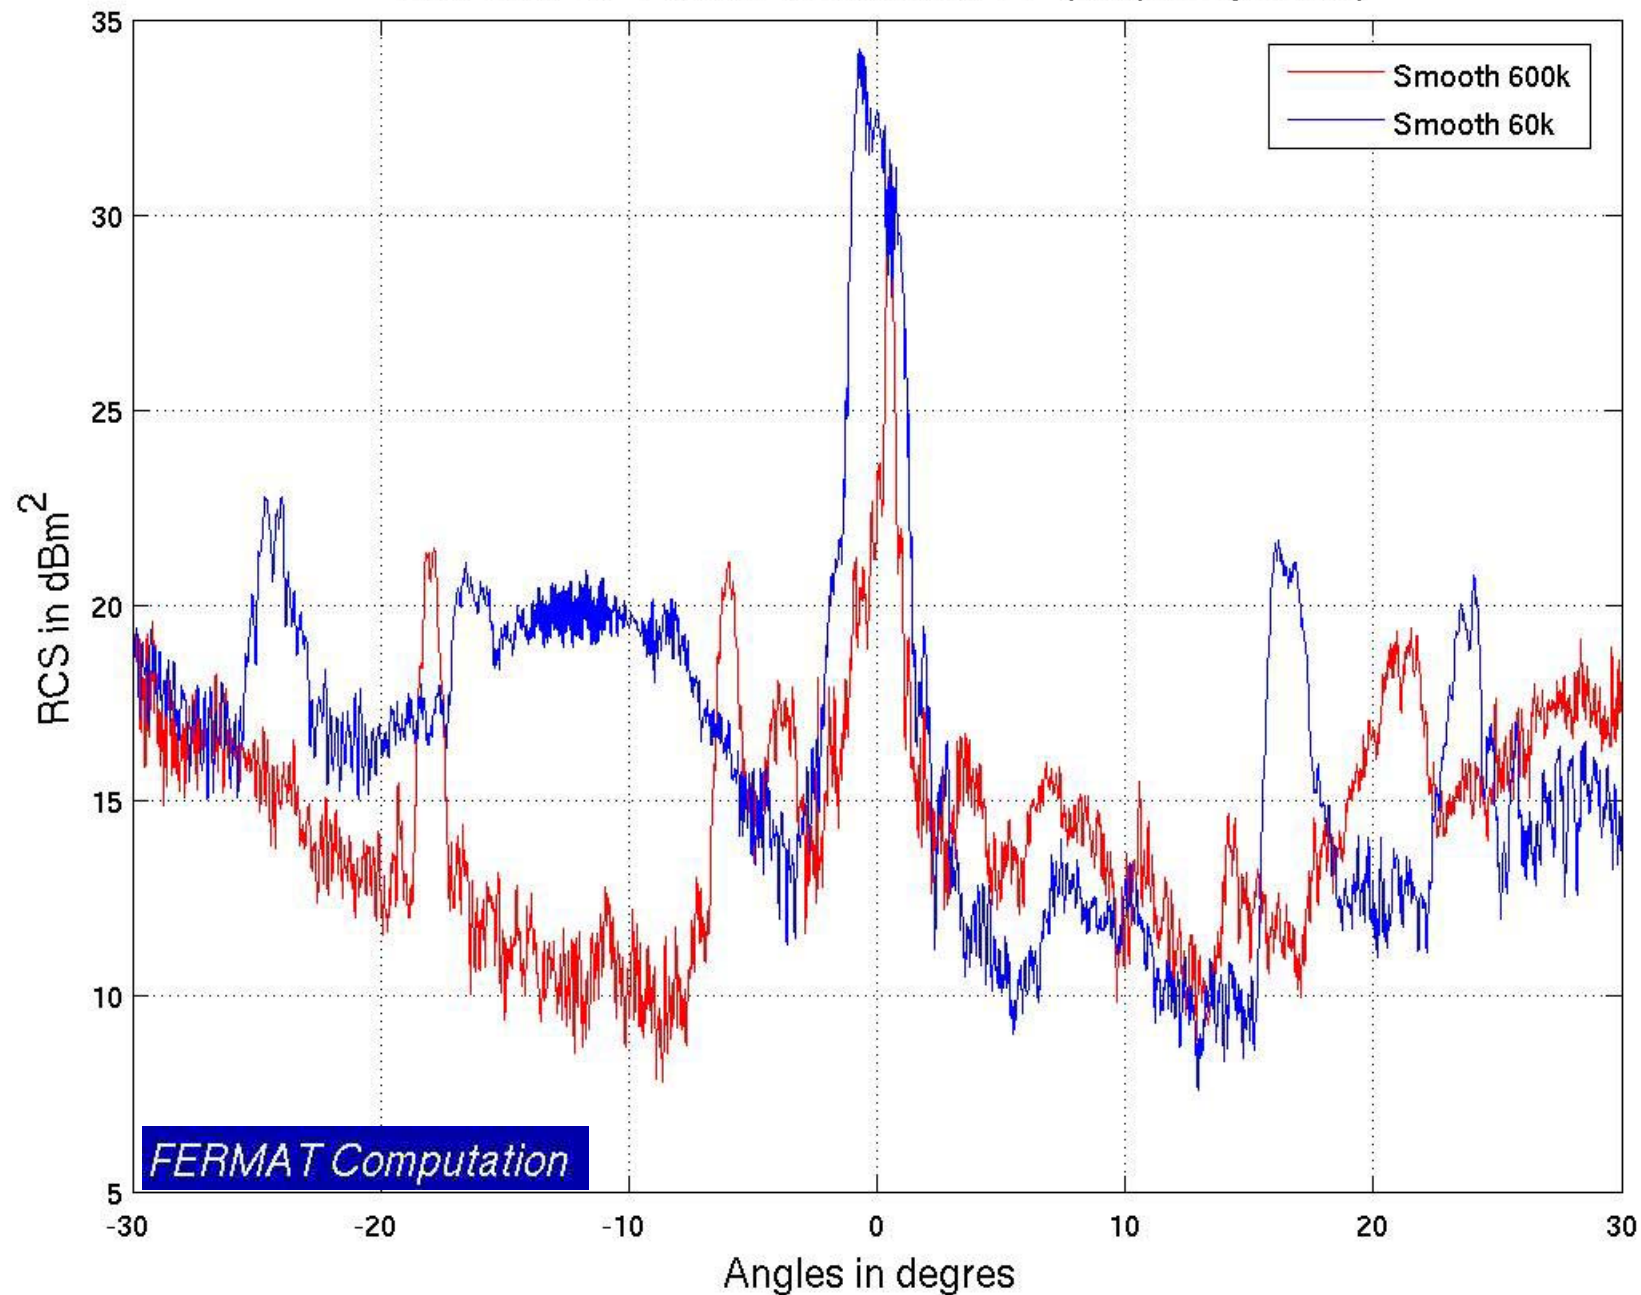


RCS ZSU 23-4 60k 35 GHz VV (frequency mean)

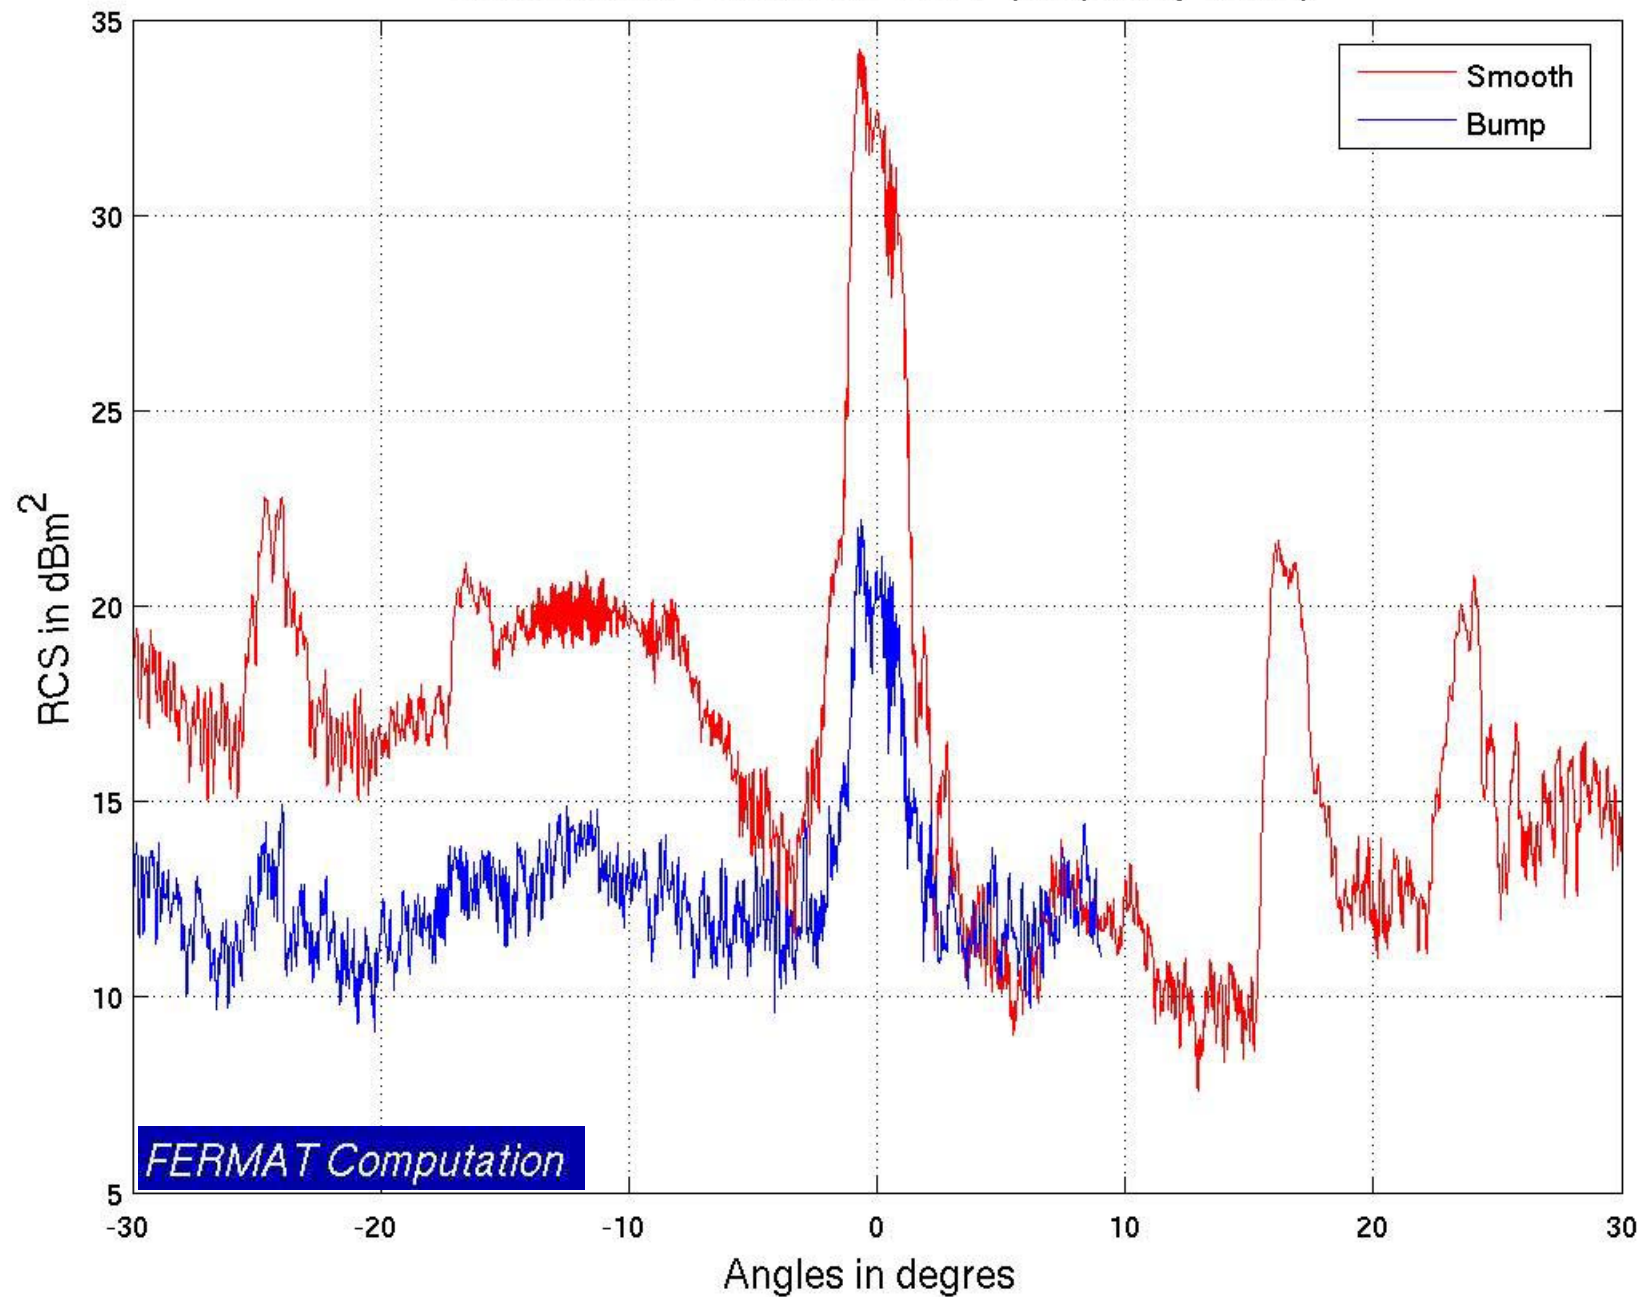

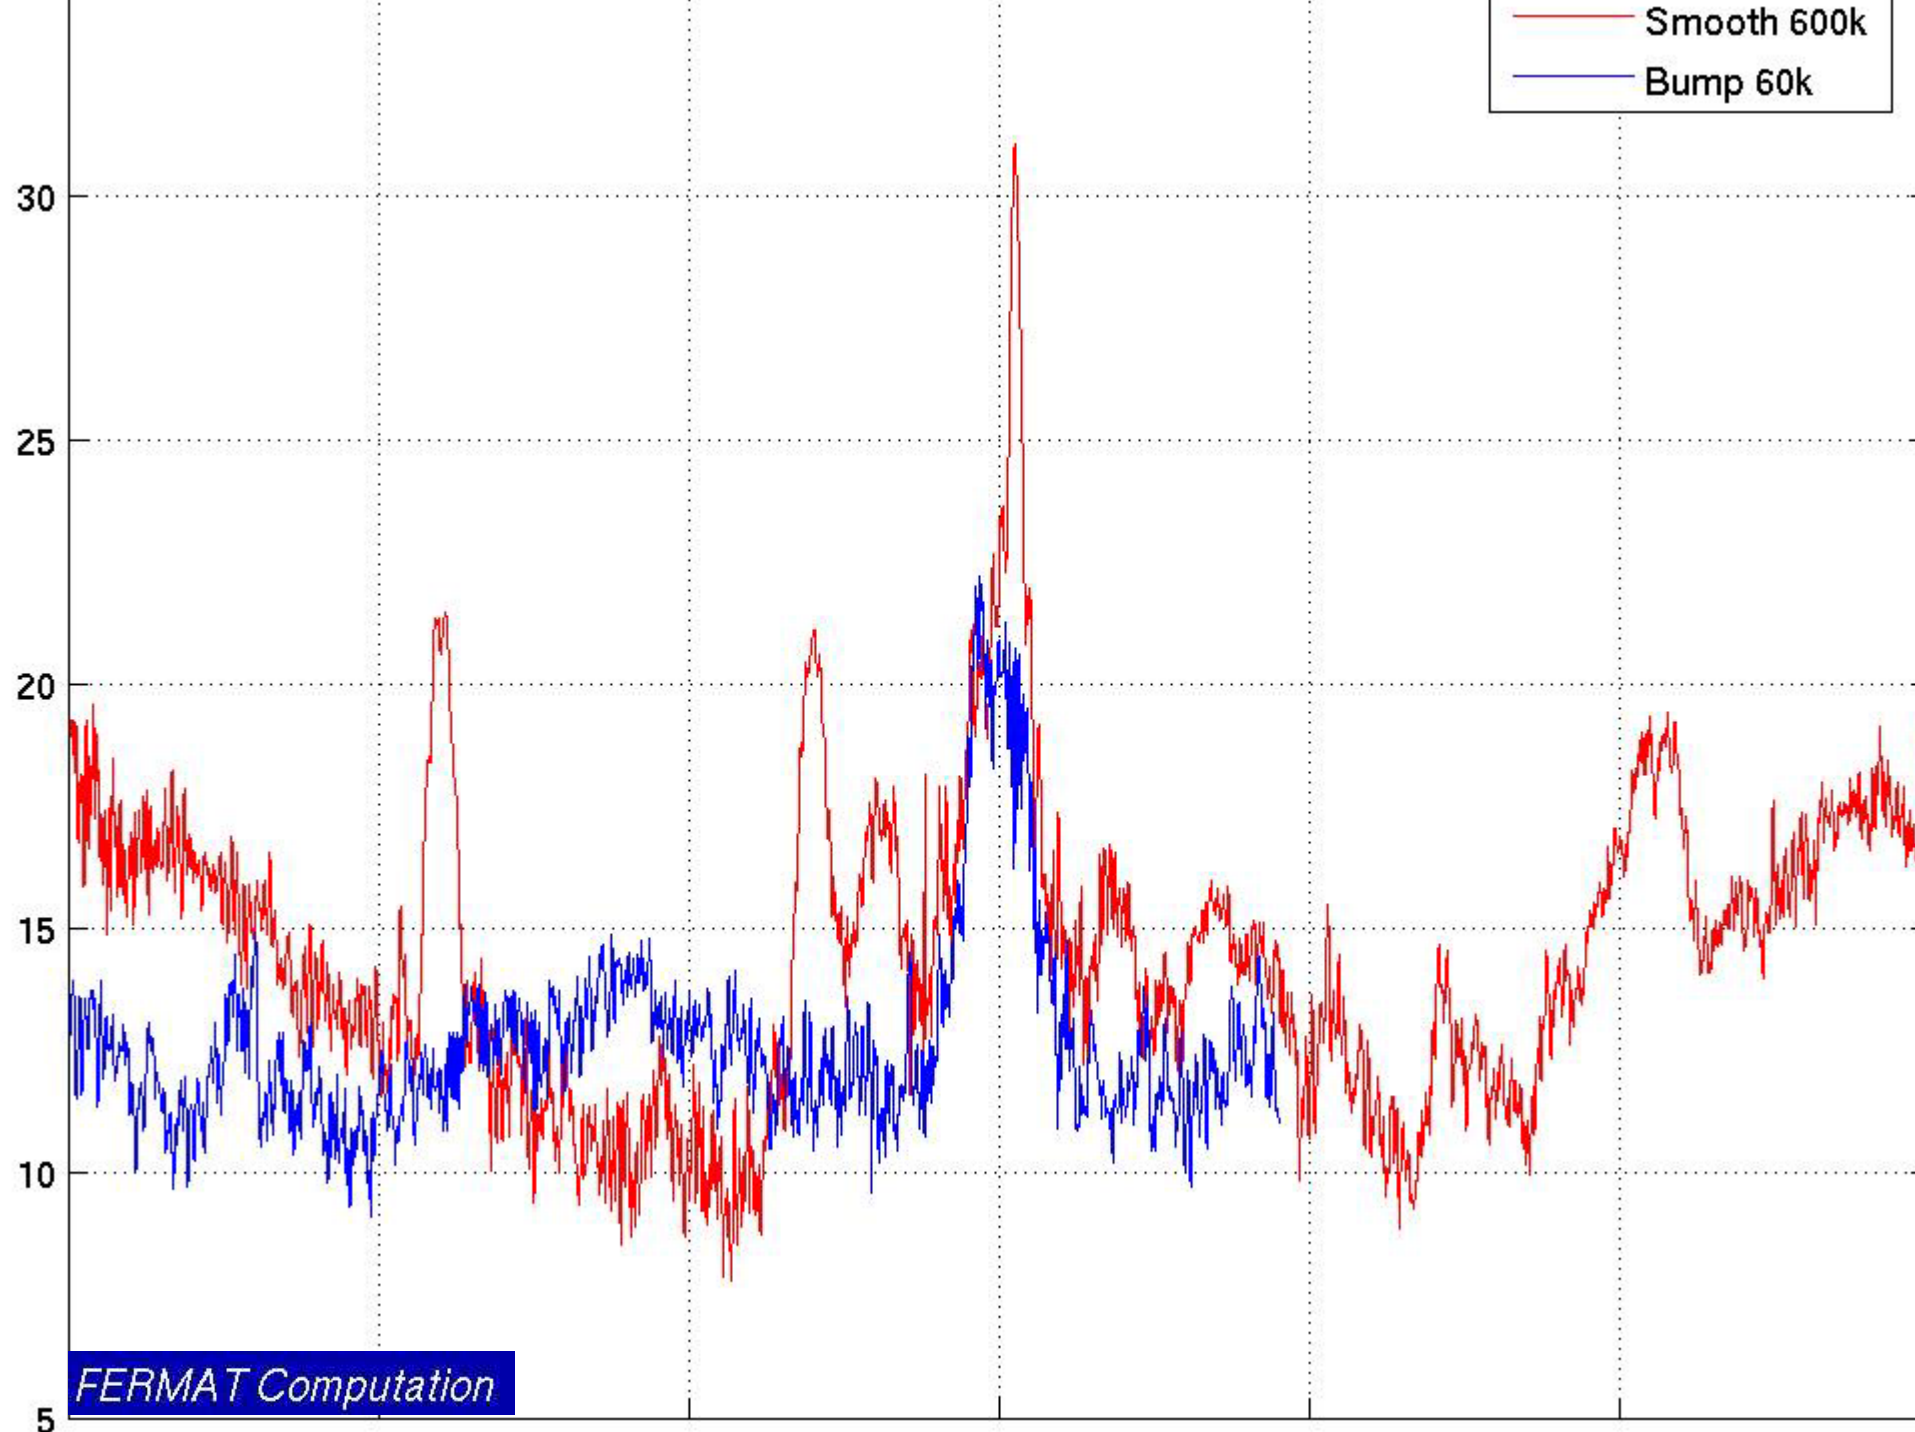


FERMAT Computation

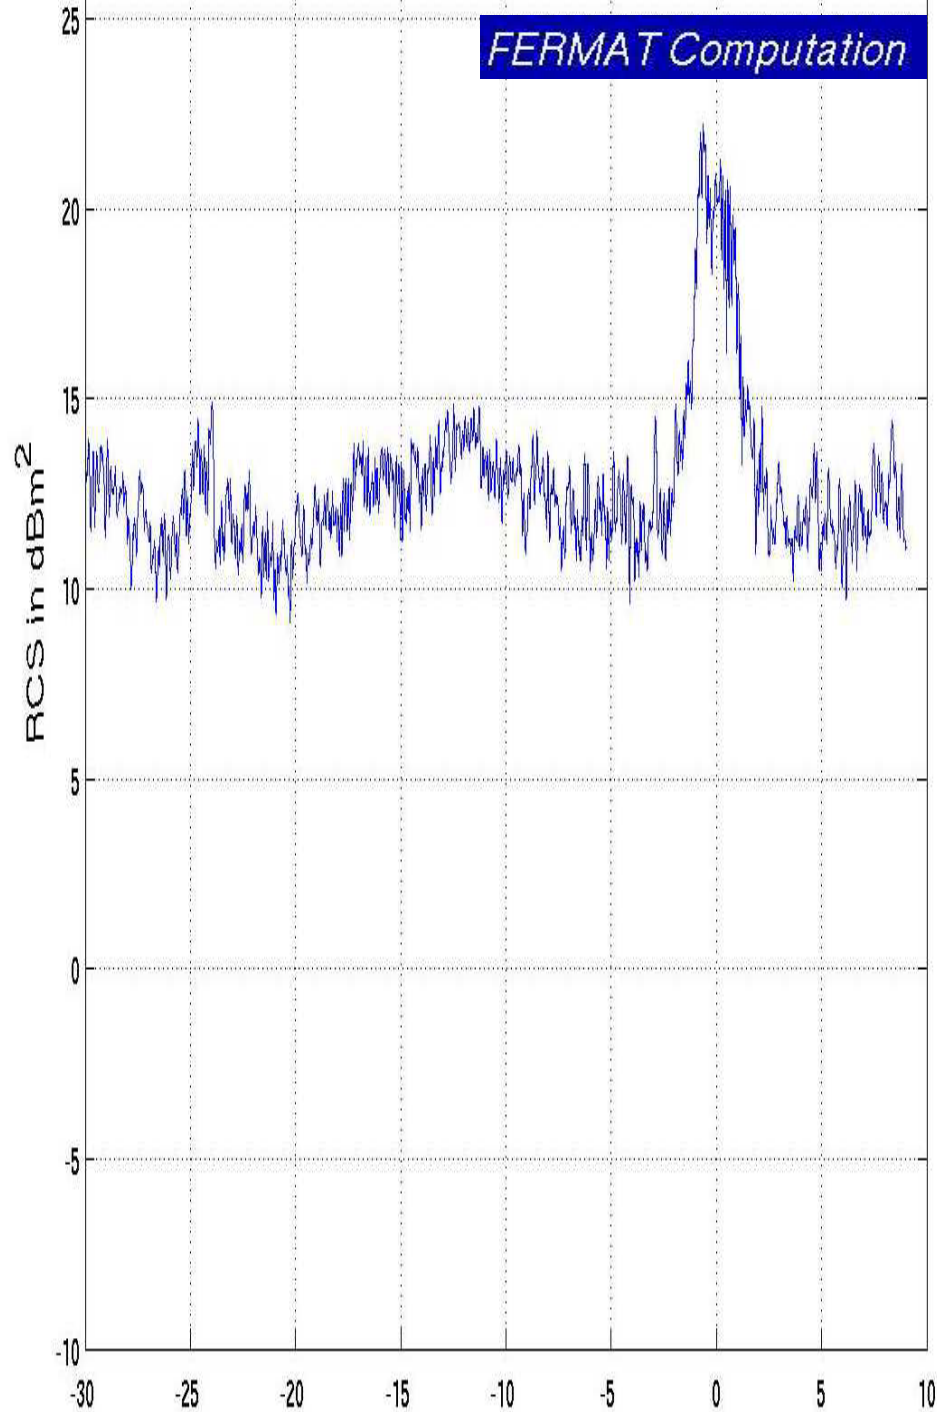


ment


ZSU 23-4 60k Bump2 35 GHz VV 12 degrees

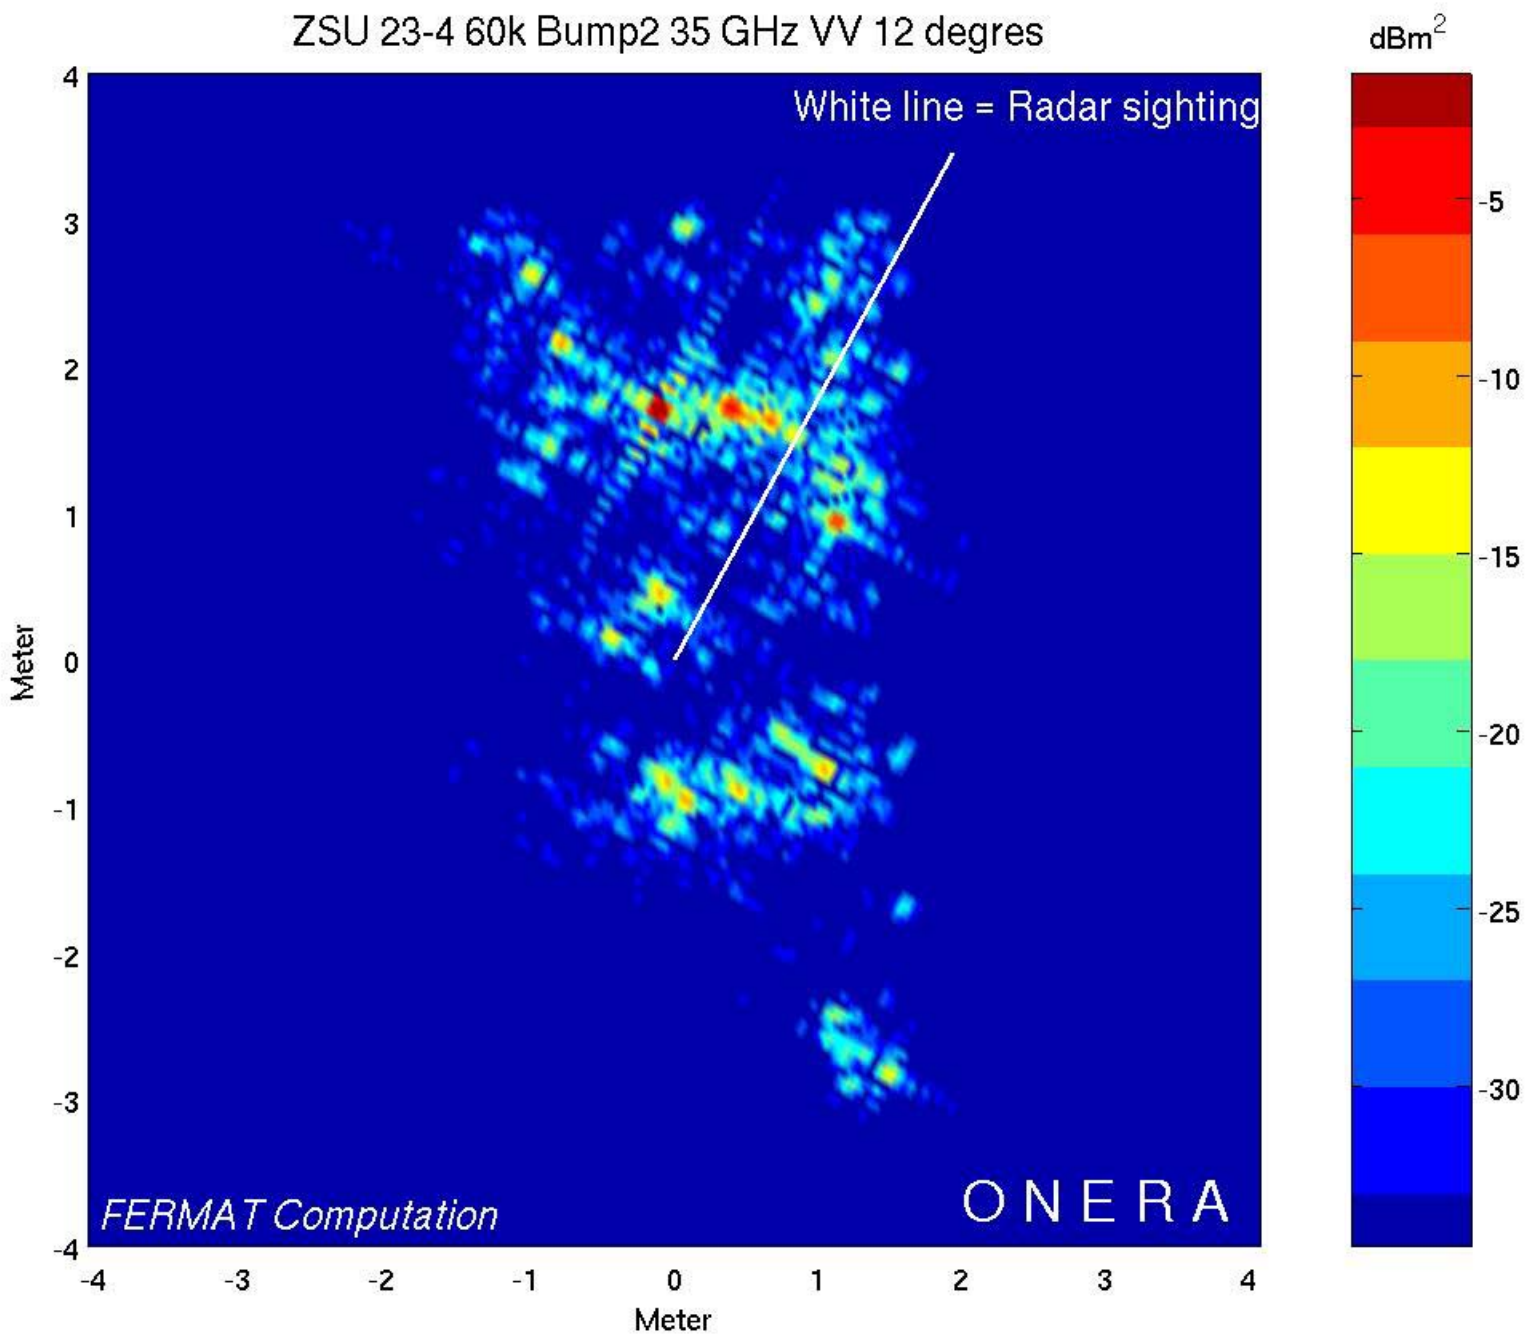

ZSU 23-4 60k Bump2 35 GHz VV 12 degrees

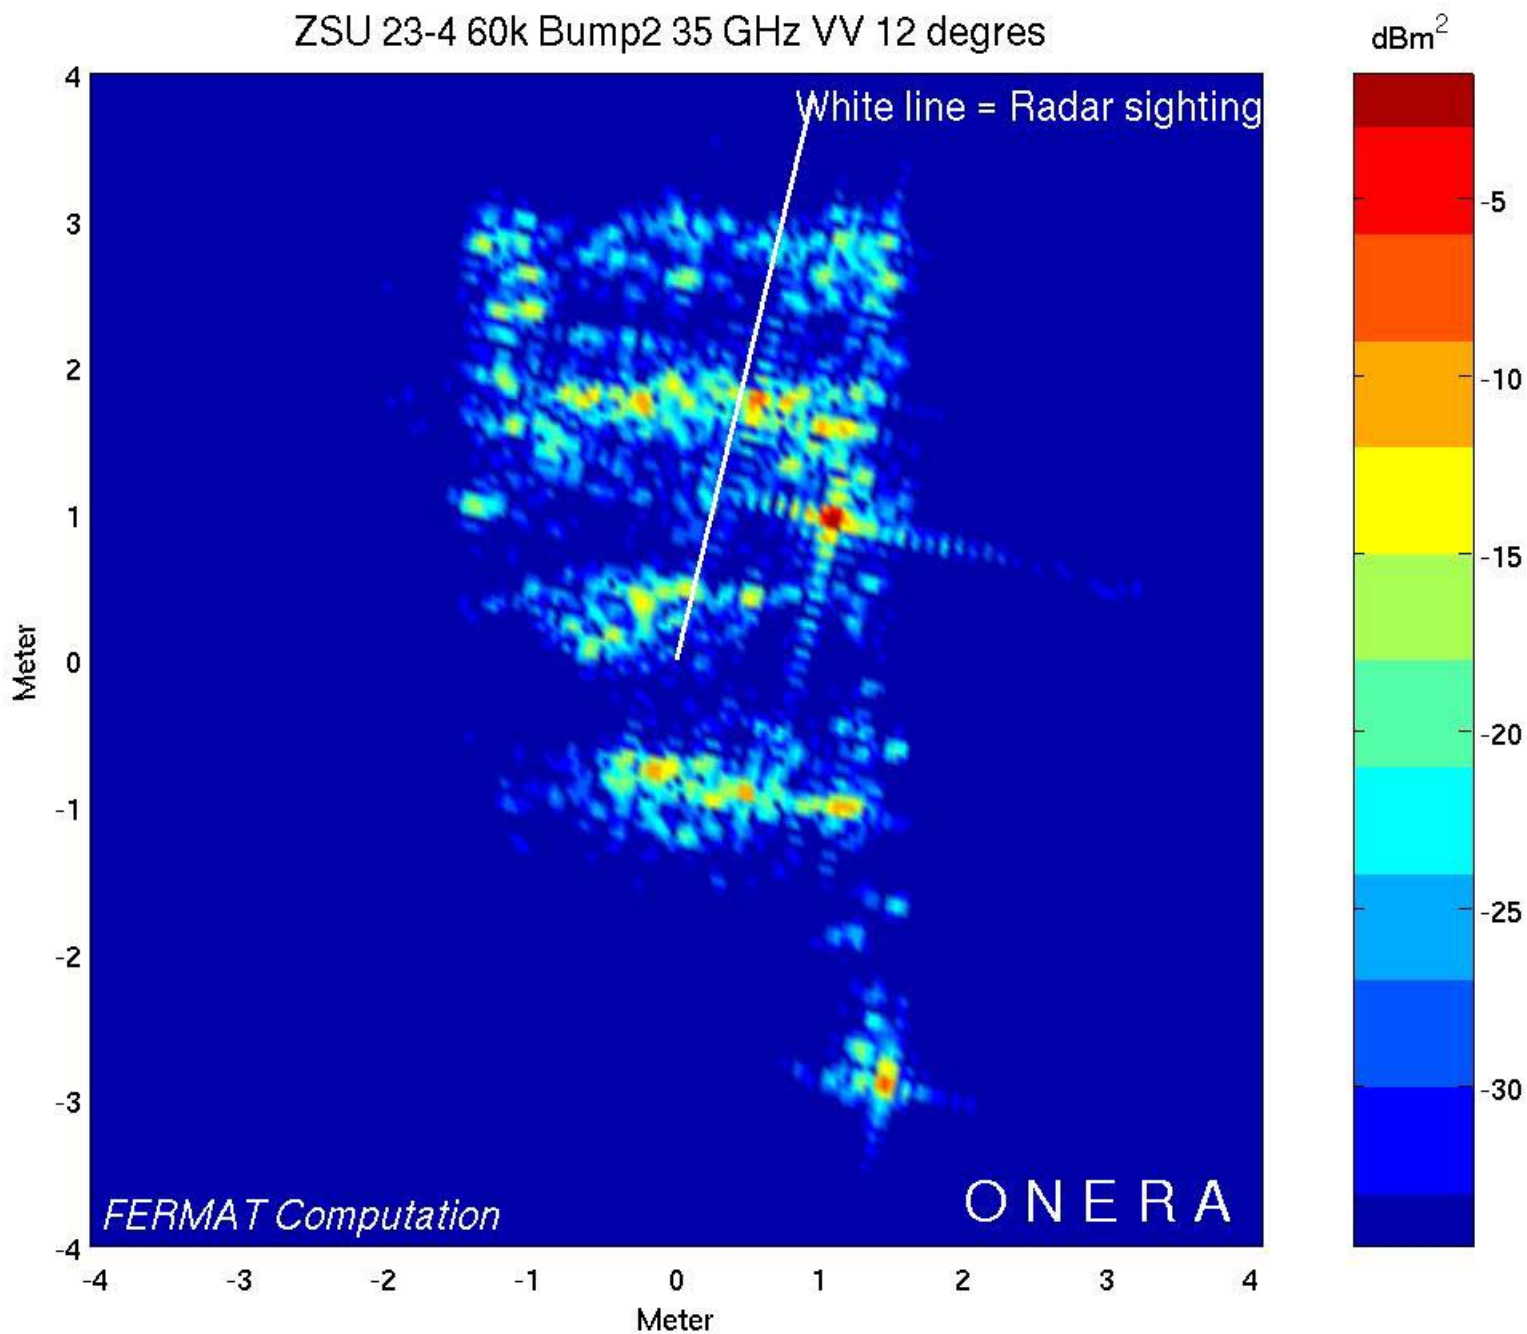

ZSU 23-4 60k Bump2 35 GHz VV 12 degrees

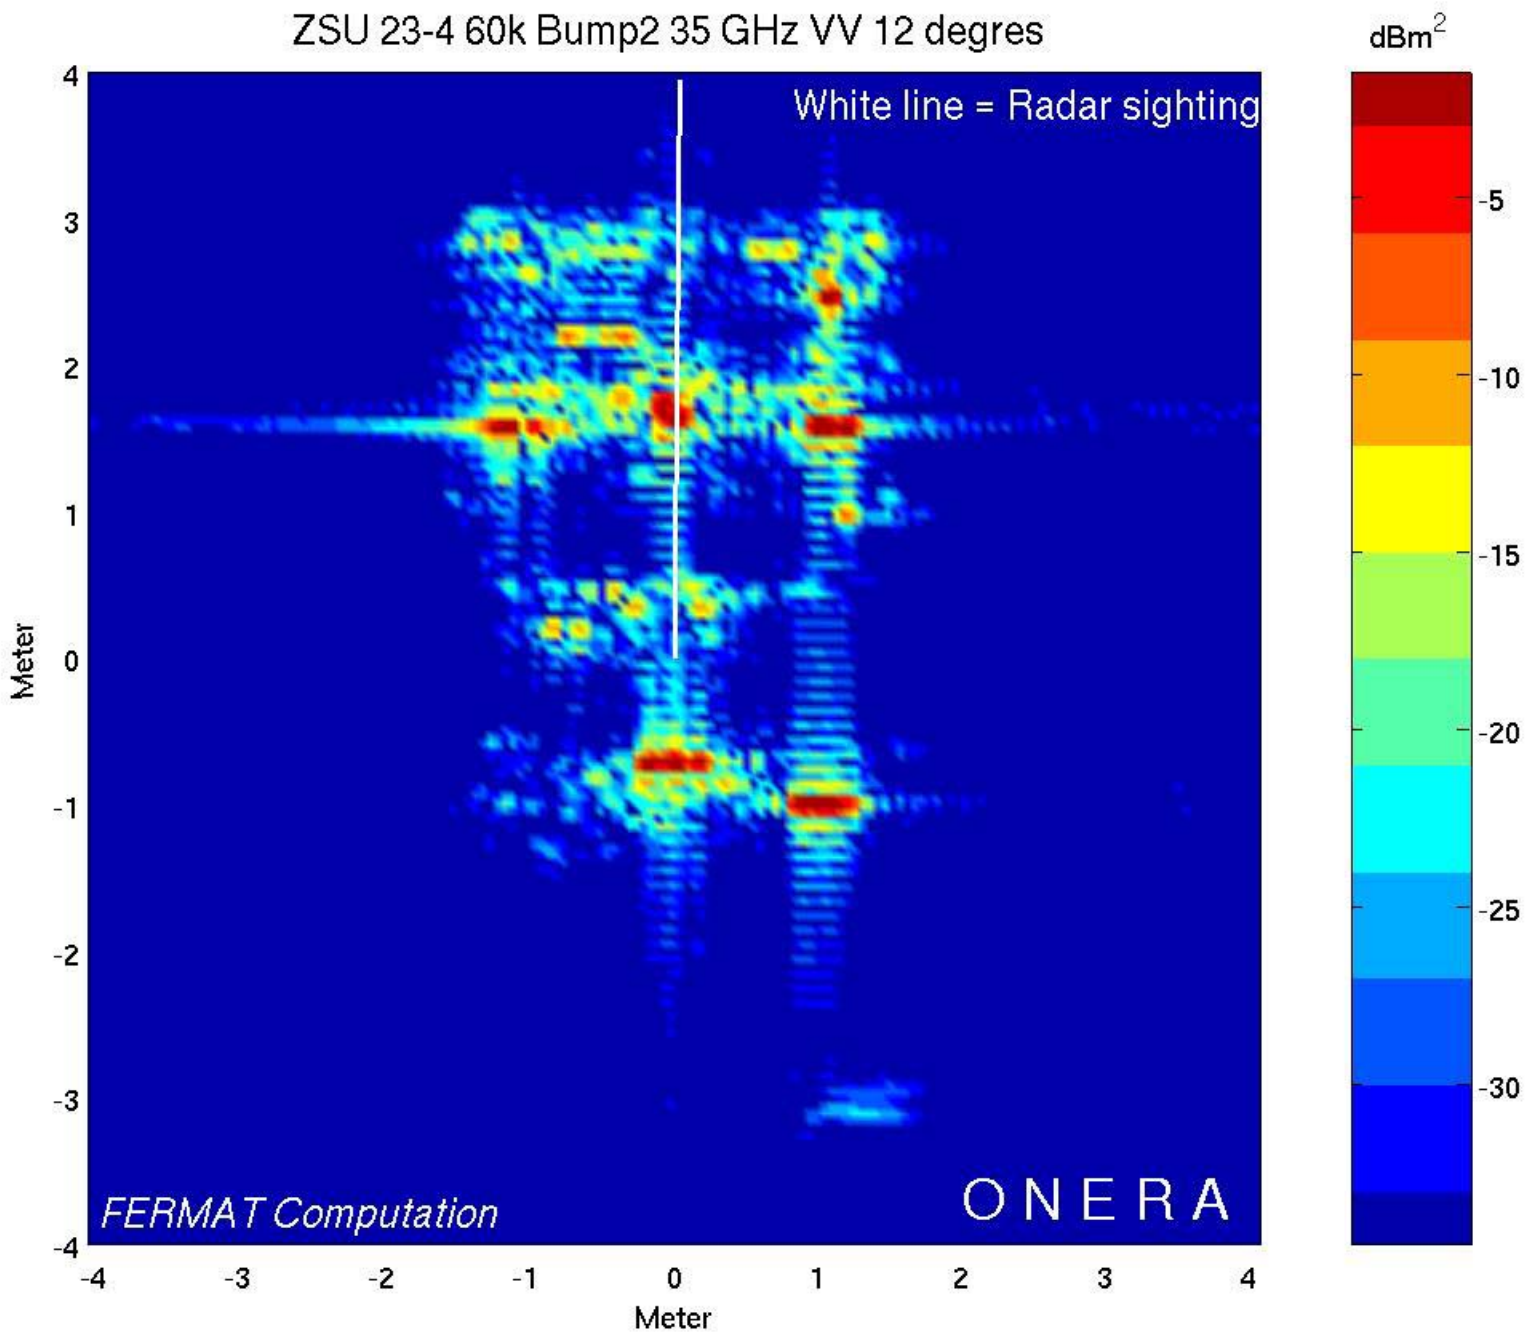

Conclusion on the methodology

→ From the first experiment of modelling of the VAB it appeared that with the principal shortcoming of a RCS calculation in MMW is the too significant value of "specular" compared to a diffuse scattering.

→ Statistical analyses on ISAR images evaluated in terms of:

- peak values,
- mean value,
- quadratic mean,

can allow an adjustment, on a given class of vehicle, of the random part of the scattering process.

Comparison on global RCS (frequency averaged)

→ Measurements references from SET 069 data pool and other available measurements from DCE/CELAR will be