

Nano-SMA fiber Composites Development and Applications

- PI: Kato, H., Hokkaido U, Japan
- Collaborator: Tamagawa, H., Gifu U, Japan (polymer synthesis)
- Technical Effort
 - Smart Structures for Extreme Environmental Conditions
 - Nano Shape Memory Elements
 - Robust, high performance / SMA fiber 1 μ m or lesser (2007)
 - Affinity, light weight, low cost, productivity / SMP fiber 100nm (2007)
- Science
 - Nano-effects in Phase transformation in metal and in polymer

Report Documentation Page		Form Approved OMB No. 0704-0188
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.		
1. REPORT DATE 27 JUL 2007	2. REPORT TYPE FInal	3. DATES COVERED 06-05-2006 to 06-04-2007
4. TITLE AND SUBTITLE Nano-SMA fiber Composites Development and Applications.		5a. CONTRACT NUMBER FA48690610079
		5b. GRANT NUMBER
		5c. PROGRAM ELEMENT NUMBER
6. AUTHOR(S) Hiroyuki Kato		5d. PROJECT NUMBER
		5e. TASK NUMBER
		5f. WORK UNIT NUMBER
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Hokkaido University,N13W8 Kita-ku,Sapporo 060-8628,Japan,JP,060-8628		8. PERFORMING ORGANIZATION REPORT NUMBER N/A
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) AOARD, UNIT 45002, APO, AP, 96337-5002		10. SPONSOR/MONITOR'S ACRONYM(S) AOARD
		11. SPONSOR/MONITOR'S REPORT NUMBER(S) AOARD-064078
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited		
13. SUPPLEMENTARY NOTES		

14. ABSTRACT

We design a set of self-strengthening AMCs with shape memory nanofibers with the aim of inducing compressive stress at different use temperatures; (i) high temperature for leading edge structure panels or those near engine and (ii) low temperatures for composite face sheets of AF cryogenic tanks. To this end, two types of SM nanofibers will be used, shape memory alloy (SMA) and shape memory polymer (SMP). SMA exhibit phase change at transformation temperatures (M_s , M_f , A_s , A_f) while SMP exhibits a similar phase change at T_g . This project is aimed at creating a set of new designs of autonomic multi-functional composites (AMCs) by interacting with researchers in different disciplines, Polymer Chemistry, Materials Science and Engineering, and Mechanical Engineering at the University of Washington (UW) and Hokkaido University (HU). The UW-HU team proposes to design self-strengthening AMCs for use in the composite structures in high and low temperature environments, particularly the face sheet composites of a AF reusable fuel tank. HU team is helped with additional sub-members, Dr. Tamagawa of Gifu University, and Dr. Yamamoto, Tohoku University, where Dr Tamagawa is expert in polymers, thus in charge of design and process of shape memory polymers and Dr Yamamoto is in Metallurgy, thus in charge of nano-shape memory alloy powders which are key starting materials for processing of nano SMA fibers. The key active and sensing material in designing the proposed AMCs is shape memory (SM) nanofibers where SM can be shape memory alloy (SMA) or shape memory polymer (SMP). SMA and SMP nano-fiber will be used for self-strengthening AMCs in high temperature (temperature change), or in low temperature. The key concept in designing self-strengthening AMCs is to induce compressive stress in the matrix material through a shape (or length) change in SM nanofibers upon temperature change. This compressive stress in the matrix is expected to suppress any cracking in the matrix. Use of ferromagnetic SMA FePd nano-fibers is expected to provide additional functionality to the self-strengthening AMC, i.e. (i) self-diagnosis if the composite is inspected by magneto-optic-image scanner and (ii) stealth under radar detection

15. SUBJECT TERMS

Aircraft Structures, Smart Structures

16. SECURITY CLASSIFICATION OF:

a. REPORT
unclassified

b. ABSTRACT
unclassified

c. THIS PAGE
unclassified

17. LIMITATION OF
ABSTRACT

**Same as
Report (SAR)**

18. NUMBER
OF PAGES

12

19a. NAME OF
RESPONSIBLE PERSON

Nano-SMA fiber Composites Development and Applications


Scientific Approach & Accomplishment

Scientific Approach

- Down-sizing bulk SMA by **gas atomization** and **electro-dissolving**
- Synthesis approach for nano size SMP by **electrospinning**


Accomplishment

1. SMA particles produced by **gas atomization** (HU)

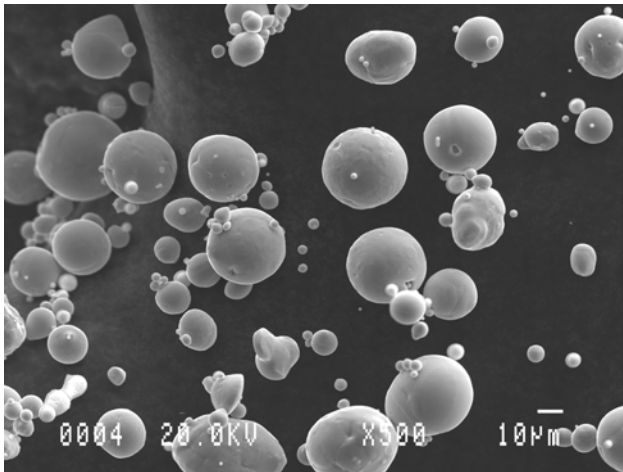

Nickel-Titanium SMA powders

- the finest particles ever

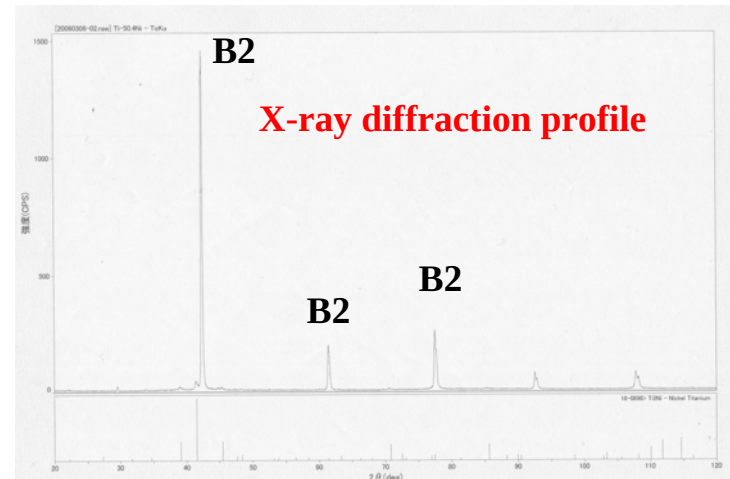


angle


- impurity free
- homogeneous B2 phase

Accomplishment

2. SMA fiber produced by **electro-dissolving** (HU) 2

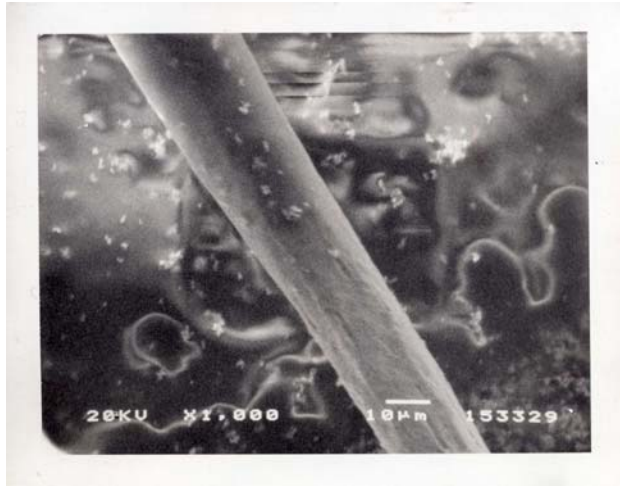

Nickel-Titanium SMA fiber 15μm dia.

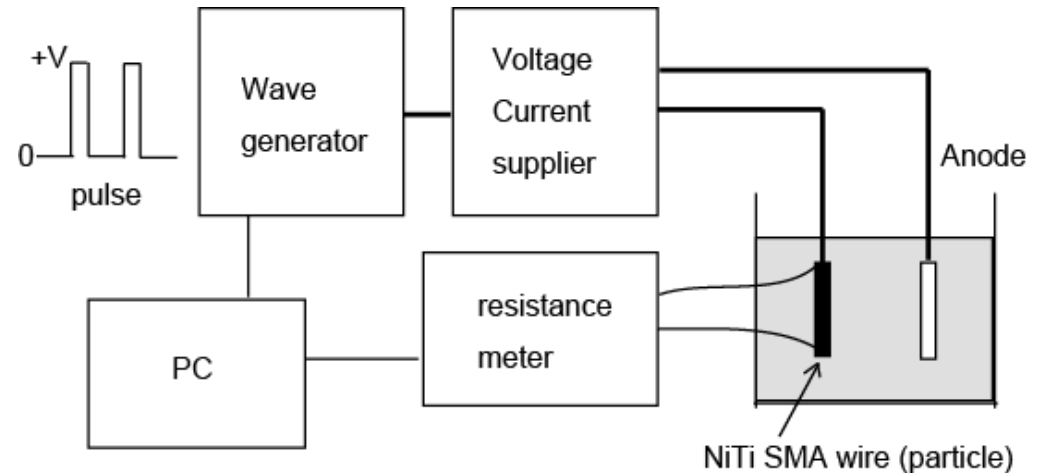


Electro dissolving with pulse current.


- Nickel titanium SMA with the smallest diameter ever,
 - diameters: 15μm (Sep2006), 10μm (Oct), **3μm(Nov)**
 - **Bamboo**-structured fiber (Crystal grain size 8μm)
-
- Present purpose (HU)
 - SMA less than **100nm dia.** affordable for **tensile deformation**
 - SMA reinforced **FRP with low CTE**

3. Synthesis approach for nano size SMP by **electrospinning**

- The synthesis machine has been built (Gifu-U)

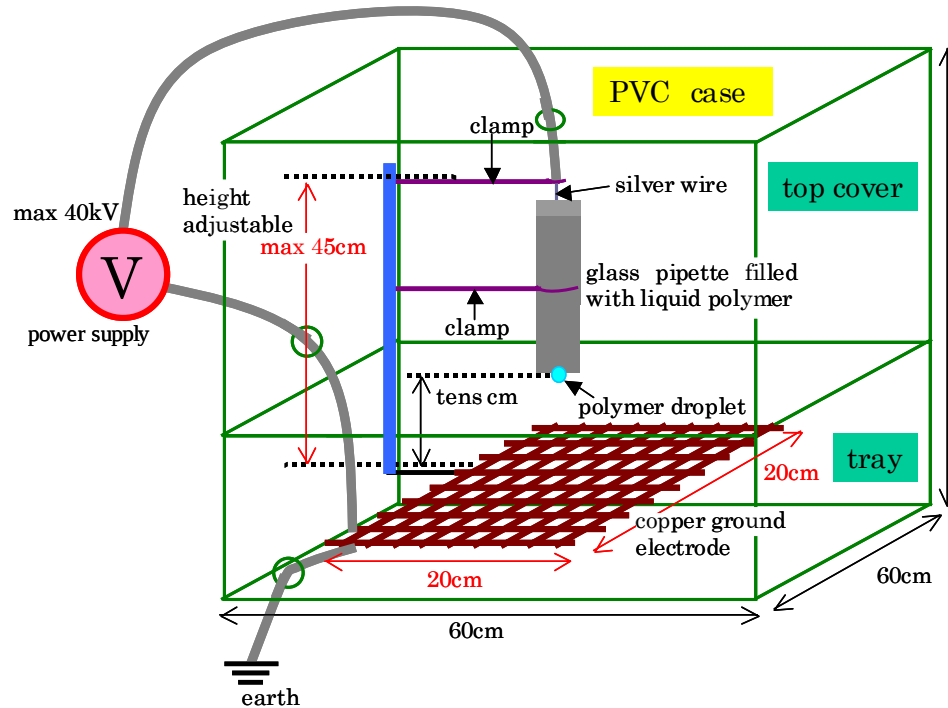

Electrospinning machine

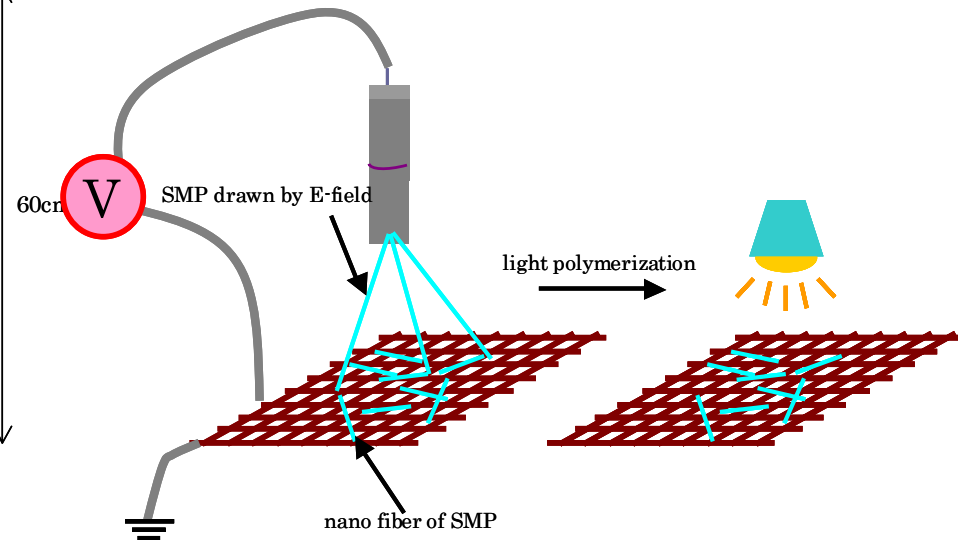


Method of polymerization

- the test run started Nov.29, 2006 (Gifu-U)


problem

The outline of the project

FRP cryo-tank




CTE effect at low temp

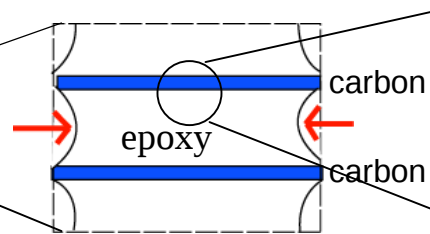

$$\left. \begin{array}{l} \Delta\alpha = 5 \times 10^{-5} / \text{K} \\ \Delta T = 300 \text{K} \\ E = 2 \text{GPa} \end{array} \right\} E\Delta\alpha\Delta T = \mathbf{30MPa}$$


Internal stress state

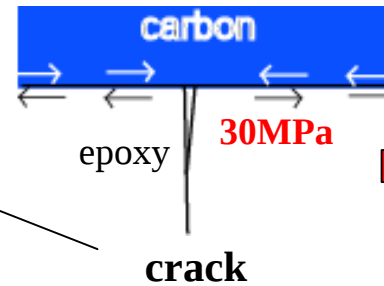


LH2
Leakage
Accident

our strategy

SMA short fiber in matrix



internal stress cancelled out

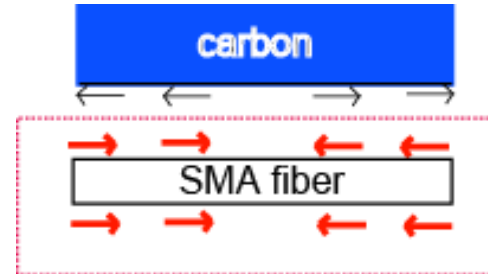

Int stress reduction
plus Fiber
Strengthening effect

state-of-the-art technology

