

Non Destructive Testing of Body Armor Plates for Structural Integrity

Dr. Thomas Meitzler
Survivability Research
March 2007

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 26 MAR 2007		2. REPORT TYPE N/A		3. DATES COVERED -	
4. TITLE AND SUBTITLE Non Destructive Testing of Body Armor Plates for Structural Integrity				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Meitzler Dr.Thomas				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) RDECOM - TARDEC 6501 E 11 Mile Road Warren, MI 48397-5000				8. PERFORMING ORGANIZATION REPORT NUMBER 17018	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S) TACOM TARDEC	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) 17018	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release, distribution unlimited					
13. SUPPLEMENTARY NOTES The original document contains color images.					
14. ABSTRACT					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 5	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Body Armor Plate



Strike face
Component to be tested


The outer plate is the strike plate and is what we are going to test the structural integrity of.

Proof-of-principle method – future field units will be MEM based

Principle: An AC voltage will cause the piezoelectric transducer to vibrate and this vibration when coupled to the material being tested will excite a resonant mode in the plate which can then be measured by another transducer.


Various input voltage signals excite the transducer and are coupled to the plate

Output voltage from the transducer caused by the mechanical oscillation of the plate will be used as the standard for comparison.

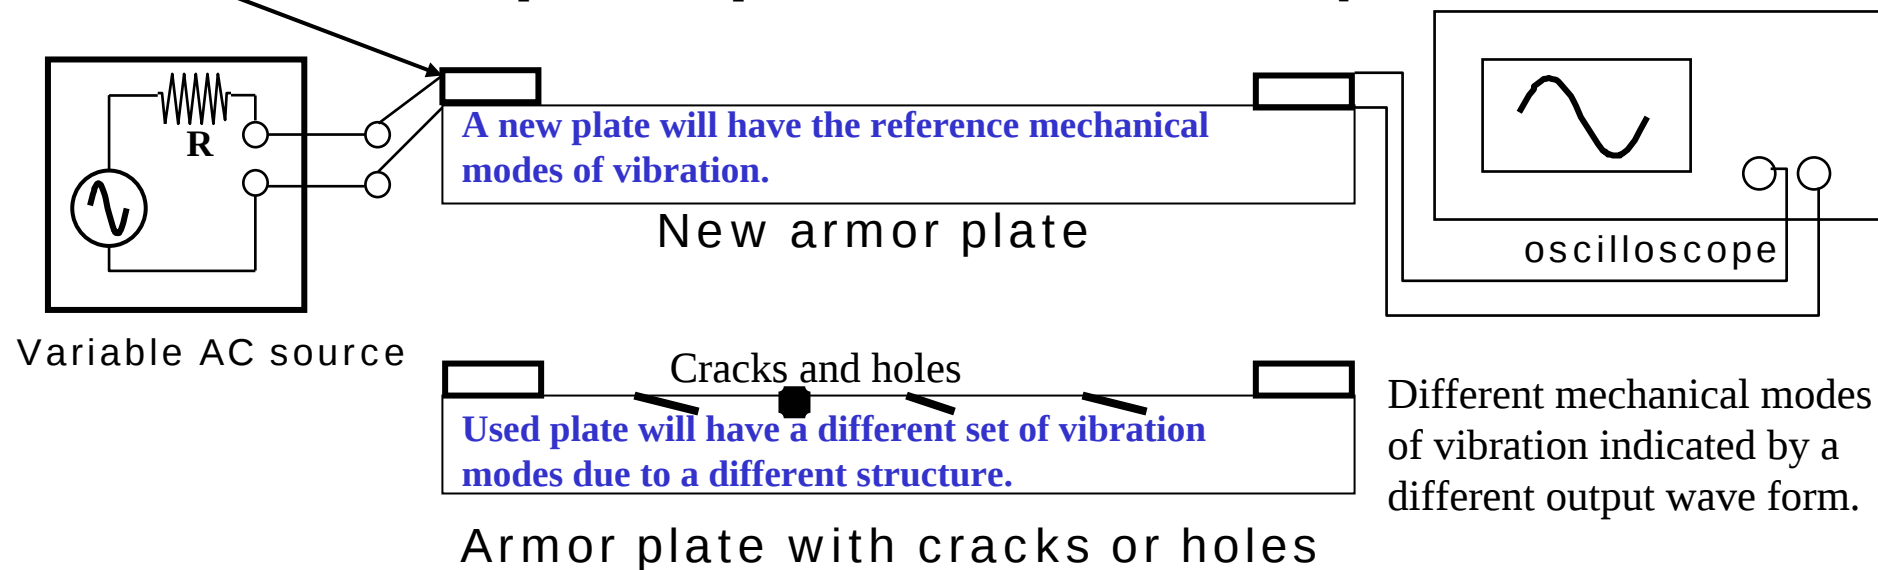

This test configuration will show a profound change of the amplitude of the transmission signal if the plate is cracked.

Damaged and undamaged plate fundamental harmonic

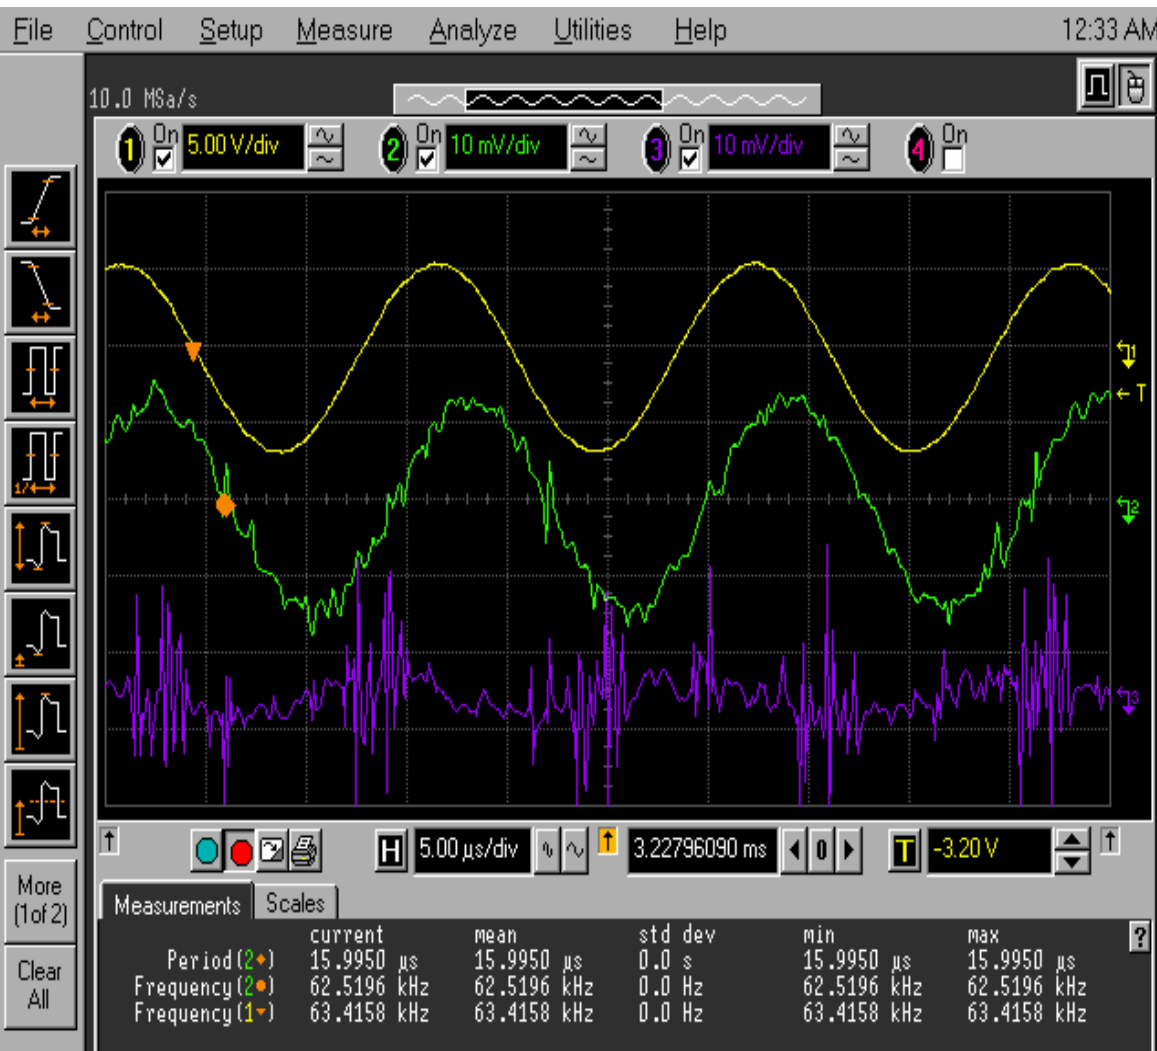

Signal 1 = driving signal of transducer

Signal 2 = resonant vibration
of undamaged plate

Signal 3 = resonant vibration of plate
cracked and with one hole

X-ray images of plates

