

UNCLASSIFIED

E. R. D. E. 16/M/53

Picatinny Arsenal, Dover, N. J.
~~CONFIDENTIAL~~

COPY No. 44

8807



PICATINNY ARSENAL LIBRARY

DOVER, ENGL.

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited

MINISTRY OF SUPPLY

Decl OADR

EXPLOSIVES RESEARCH & DEVELOPMENT ESTABLISHMENT

TECHNICAL MEMORANDUM No. 16/M/53

REVIEWED ON:

2/13/85
Date

Ecs
Signature

Radiographic Examination of a 'Mayfly' Charge

1. THIS INFORMATION IS DISCLOSED FOR OFFICIAL USE
BY THE RECIPIENT GOVERNMENT. DISCLOSURE TO ANY
OTHER GOVERNMENT OR RELEASE TO THE PRESS OR IN
ANY OTHER WAY WOULD BE A BREACH OF THIS
CONDITION.

A. Mendoza

2. THE INFORMATION SHOULD BE SAFEGUARDED UNDER
REGULATIONS TO GIVE THE SAME STANDARD OF
SECURITY AS MAINTAINED BY HER MAJESTY'S
GOVERNMENT IN THE UNITED KINGDOM

3. THE INFORMATION CONTAINED IN THIS DOCUMENT
SHOULD NOT BE CIRCULATED OUTSIDE GOVERNMENT
DEPARTMENTS WITHOUT THE PRIOR PERMISSION OF THE
MINISTRY OF SUPPLY.

4. THE RECIPIENT IS WARNED THAT INFORMATION
CONTAINED IN THIS DOCUMENT MAY BE
PRIVATELY OWNED RIGHTS.

THIS DOCUMENT IS THE PROPERTY OF H.B.M. GOVERNMENT
AND ATTENTION IS CALLED TO THE PENALTIES ATTACHING
TO ANY INFRINGEMENT OF THE OFFICIAL SECRETS ACTS

It is intended for the use of the recipient only, and for communication to such officers under him as
may require to be acquainted with its contents in the course of their duties. The officers exercising this
power of communication are responsible that such information is imparted with due caution and reserve.
Any person other than the authorised holder, upon obtaining possession of this document, by finding or
otherwise, should forward it together with his name and address in a closed envelope to:-
THE SECRETARY, MINISTRY OF SUPPLY, ADELPHI, LONDON, W.C. 2.

Letter postage need not be prepaid, other postage will be refunded. All persons are hereby warned that
the unauthorised retention or destruction of this document is an offence against the Official Secrets Acts.

Waltham Abbey
Essex.

~~CONFIDENTIAL~~

UNCLASSIFIED

March
1954

20071109068

Ince #1
OR-186

393
reg 24458

IN THE



THE

LIBRARY

OF THE

A.R.E.
Publishing Section

OF THE

LIBRARY

OF THE

LIBRARY

OF THE

LIBRARY

UNCLASSIFIED

E.R.D.E.16/M/53

~~CONFIDENTIAL~~

XR. 782/5

MINISTRY OF SUPPLY

EXPLOSIVES RESEARCH AND DEVELOPMENT ESTABLISHMENT

TECHNICAL MEMORANDUM NO. 16/M/53

Radiographic Examination of a 'Mayfly' Charge

by

A. Mendoza

This Memorandum does not contain classified information of overseas origin

Approved:

G. H. S. Young

G.H.S. YOUNG
S.P.R.I.

Approved for
Circulation:

C. H. Johnson

C.H. JOHNSON
C.S., E.R.D.E.

WALTHAM ABBEY,
ESSEX.

UNCLASSIFIED

~~CONFIDENTIAL~~

~~CONFIDENTIAL~~ UNCLASSIFIED

DISTRIBUTION

EXTERNAL

TPA3/TIB (31)

Dr. C.G. Lawson, B.J.S.M.

Solid Propellant Information Agency, Johns Hopkins University, Silver Spring, Maryland, U.S.A.

Allegany Ballistics Laboratory, Hercules Powder Co., Cumberland, Maryland, U.S.A. (Attn. Dr.L.G. Bonner)

Naval Ordnance Laboratory, White Oak, Silver Spring, 19, Maryland, U.S.A.

Naval Ordnance Test Station, China Lake, Inyokern, California, U.S.A.

Naval Powder Factory, Indian Head, Maryland, U.S.A.

Picatinny Arsenal, Dover, New Jersey, U.S.A.,

Wright Air Development Centre, Wright Field, Dayton, Ohio, U.S.A.

through
TPA3/TIB

Director of Research, I.C.I. Ltd. (Nobel Division) Stevenston, Ayrshire.

The Director, I.C.I. Ltd. (Metals Division), Summerfield Research Station, near Kidderminster

through
DMXRD

Ministry of Supply

C.E.A.D. (2)

C.S.A.R. (4, including Dr. Poole)

D.Arm.R.D.

D.I.Arm.

I.Arm.(Air), R.A.E., Farnborough

D.M.X.R.D. (2)

D.R.A.E.

D.O.F.(F)

D.O.F.(X)

A.D.O.F.(X)/D

A.D./X.C.P.

P.D.Eng.E.D.

P.D.G.W.

A.D.G.W.(P)

P.D.S.R.(A)

P.D.S.R.(D)

R.A.E./R.P.D. (Westcott)

Sec. O.B. (2)

S.D.Amm.P.

Sec.S.A.C.

War Office

R.M.C. of S. Shrivenham (2)

Air Ministry

A.D./R.A.F.T.C., Henlow.

Admiralty

A.C.S.I.L.

C.I.N.O.

UNCLASSIFIED

/D.N.O.

UNCLASSIFIED

~~SECRET~~

DISTRIBUTION (Contd.)

Admiralty (Contd.)

D.M.O.
P.S.O., N.O.I.L., Caerwent
Supt. R.N.P.F.

INTERNAL

C.S., E.R.D.E.
S.P.R.I.
S.P.R.II.
S./I.S.R.G.
Mr. W.N. Hewson
Mr. E.G. Lewis
Mr. A. Mendoza
Dr. W.G. Williams
Library
Registry (2)
Information Bureau (2 + stock)

Further copies of this memorandum can be obtained from
Chief Superintendent, Explosives Research and Development
Establishment, Waltham Abbey, Essex.

UNCLASSIFIED

~~SECRET~~

CONFIDENTIAL

CONTENTS

	<u>Page</u>
1. Summary	1
2. Introduction	1
3. Experimental	1
4. Conclusion	2
Figures 1 to 9	

CONFIDENTIAL

Reference: XR 782/5

1. SUMMARY

A radiographic technique has been developed for examining an 8.6-inch diameter, star centred, extruded propellant charge for 'Mayfly'. By suitably orientating the charge, a reasonably uniform optical density can be obtained across the film. Three radiographs taken in directions 120 degrees apart permit a thorough examination of a length of charge.

Ilford Industrial 'C' X-ray film was exposed to 140 kV for 27 mA.minutes, using a front lead screen 0.004 inch thick, and 0.030 inch thick back lead screen.

2. INTRODUCTION

A cordite charge for 'Mayfly', 8.6 inches diameter, star centred, and 120 inches long, was extruded through a 'long-parallel' die fitted to a 10 $\frac{1}{2}$ -inch horizontal press at E.R.D.E., Woolwich.

Investigations have been carried out at E.R.D.E., Waltham Abbey, to determine and apply a radiographic technique for the examination of this charge.

3. EXPERIMENTAL

The cross-section of the charge is shown in Fig.1. A first attempt was made to radiograph the charge set up as in Fig.1, but it was found to be impossible to examine the cross-section satisfactorily in one exposure, as the spread in optical density across the film hindered interpretation. The thickness of propellant along AA is 6 inches, compared with 2.6 inches along BB, so that adequate penetration through AA would over-expose the film under BB, whilst if BB is radiographed satisfactorily AA is not penetrated. Fig.2 is a print from a radiograph exposed with the arrangement of Fig.1, showing the undesirable range of optical density. Additional radiographs were then obtained after rotating the charge through 15 degrees from its position in Fig.1, so that the differences in thickness of propellant to be penetrated were not so great, and interpretation of the radiographs was much facilitated.

Ilford Industrial 'C' X-ray film was used between lead screens, 0.004 inch in front and 0.030 inch behind, with a film focus distance of 36 inches. At 140kV it was found that an exposure time of 27 mA.minutes was adequate.

With the charge in its new position (Fig.3) further films were exposed to investigate detection of flaws in two extreme positions in the charge, with a penetrameter at 'a' or 'b' of Fig.3. This device is designed for use with a quarter-inch of steel and is not ideal for colloidal propellant (E.R.D.E. Technical Memorandum No.15/M/53). Fig.4 is a print from the radiograph obtained with the penetrameter at 'a', and Fig.5 is a print showing the penetrameter at 'b'. The radiographic techniques were identical for these two exposures.

The difference in definition of the penetrameter in Figs. 4 and 5 is marked, and obviously minute faults in the upper half of the charge would not be well defined on the radiograph. Consequently, each section of the charge was radiographed in three positions, along the X, Y and Z lines, Fig.6, turning the charge through 120 degrees after each exposure. The examination of the charge by this method ensured that each part of the cross-section was adjacent to the film in one of the three positions.

/Figs.7, 8 and 9

CONFIDENTIAL

11

CONFIDENTIAL

Figs. 7, 8 and 9 are prints from three radiographs of one section of the charge, exposed in the X, Y and Z orientations. Fig.7, printed from the radiograph exposed in orientation X, shows images of two groups of flaws. Group S shows up sharply, but Group T is not well defined. Fig.8, from the Y orientation, shows both groups of flaws poorly defined, and Fig.9 from the Z orientation, shows Group T well defined and Group S again poorly defined. Hence it is seen that each group of flaws is well defined in one radiograph of the three, and the desirability of radiography in the three orientations is confirmed.


4. CONCLUSION

This work gives reason to believe that, in general, it will be possible to radiograph any charge of reasonable web thickness, and elementary cross section, if a series of orientations can be found such that substantially equal thicknesses of material are presented to the X-ray beam.

S.No. 347.BM.
M.No. 3/54.

CONFIDENTIAL

X FOCUS

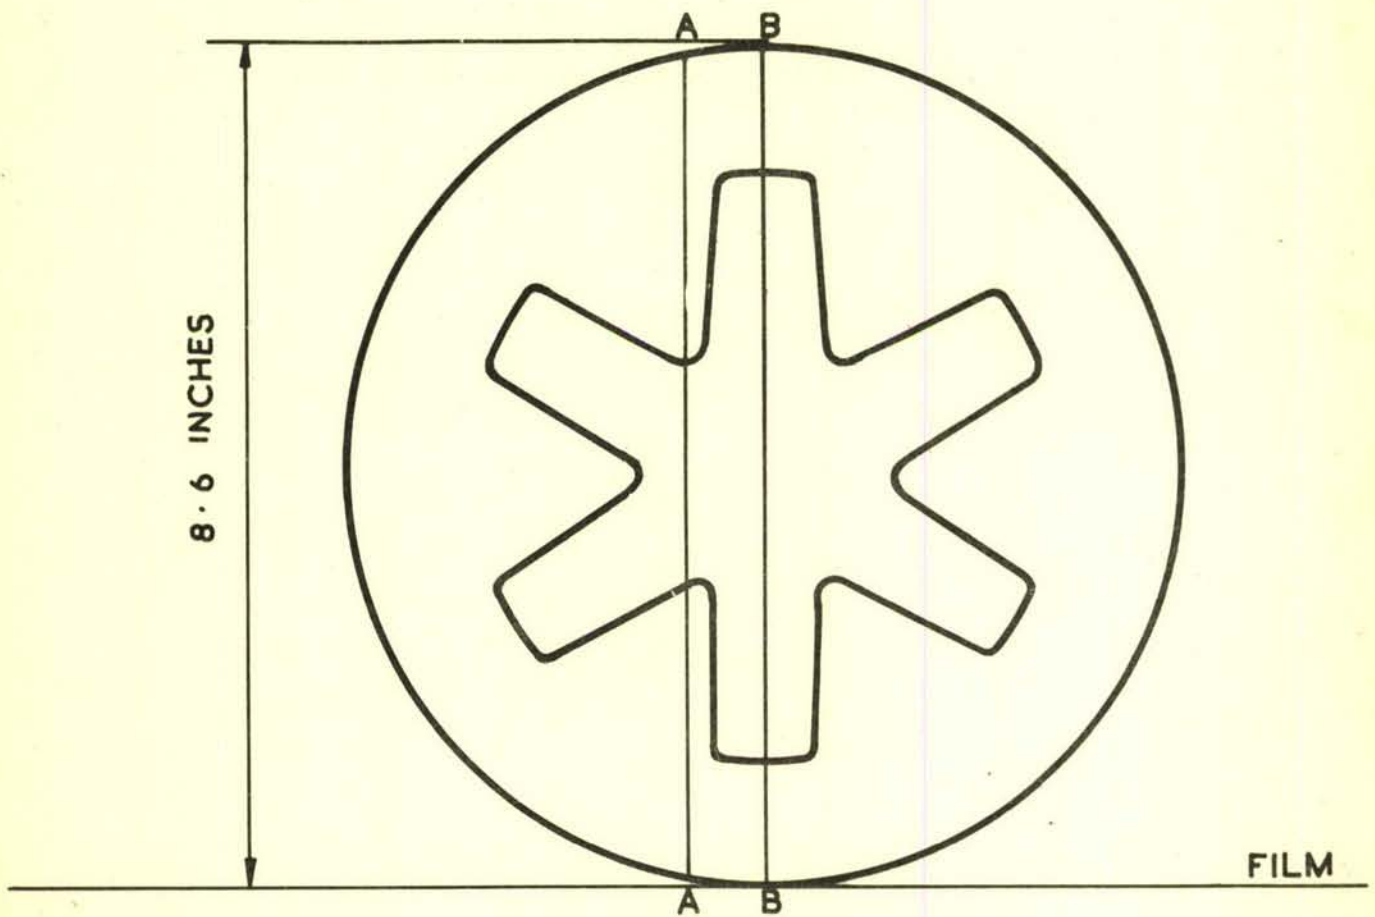

HALF SCALE, FILM - FOCUS DISTANCE IS NOT TO SCALE

FIG. 1.

CONFIDENTIAL

CONFIDENTIAL


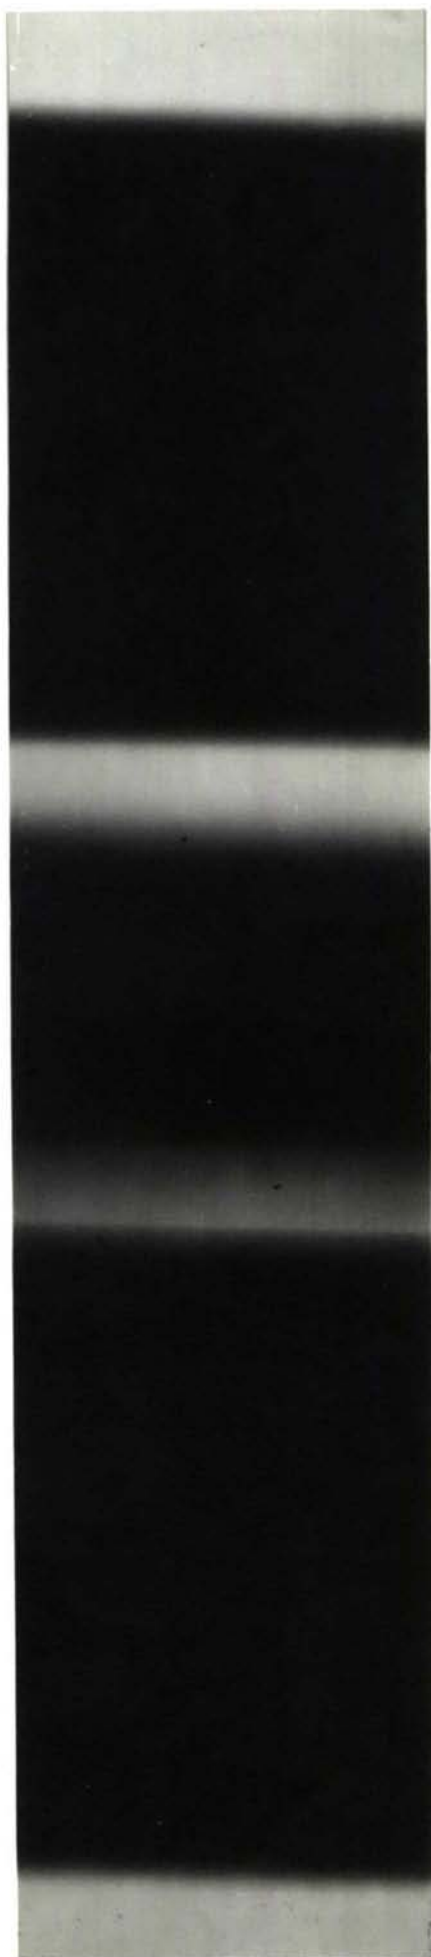


FIG. 2.

CONFIDENTIAL

X FOCUS

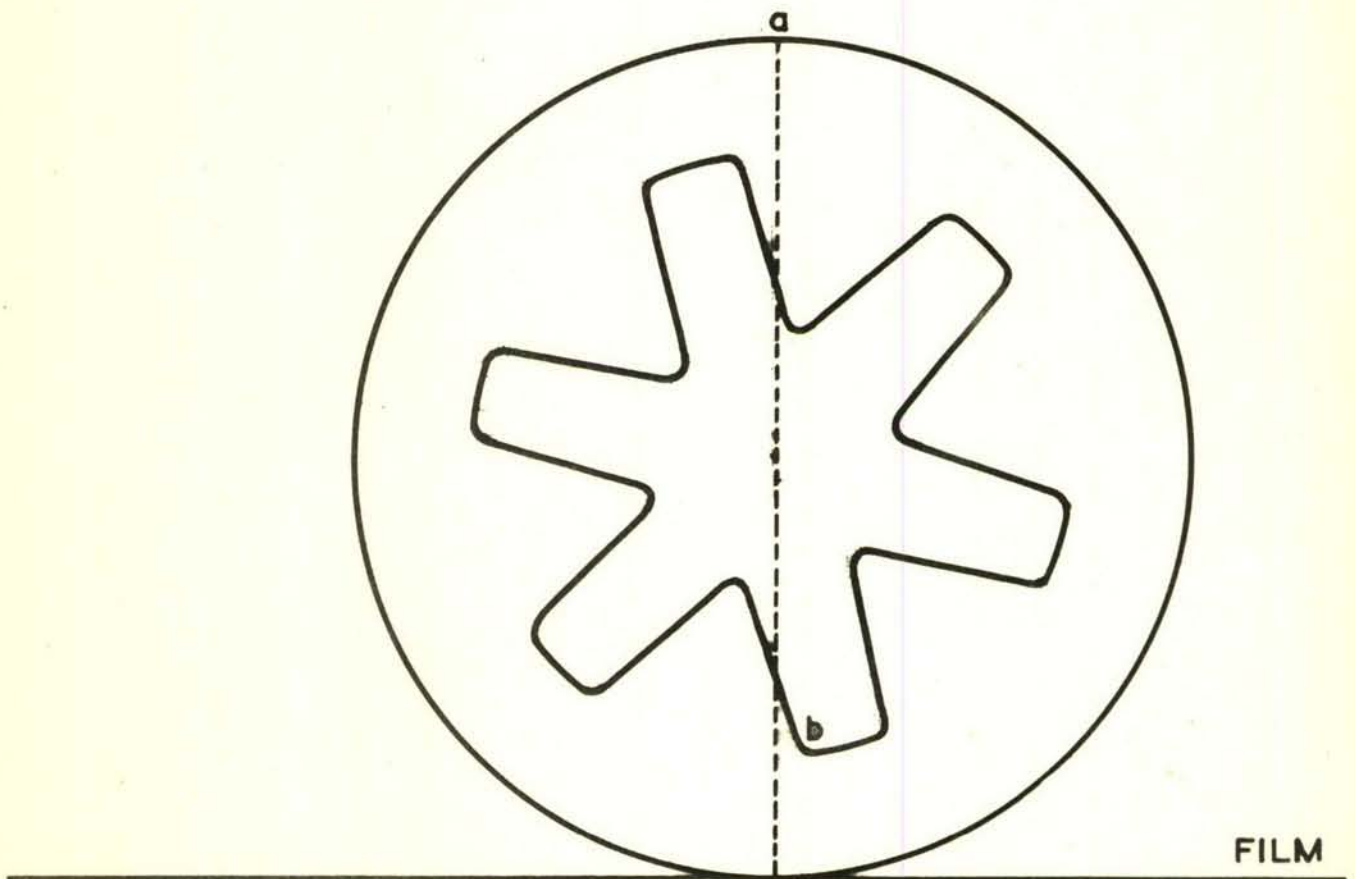

HALF SCALE, FILM - FOCUS DISTANCE IS NOT TO SCALE.

FIG. 3.

CONFIDENTIAL


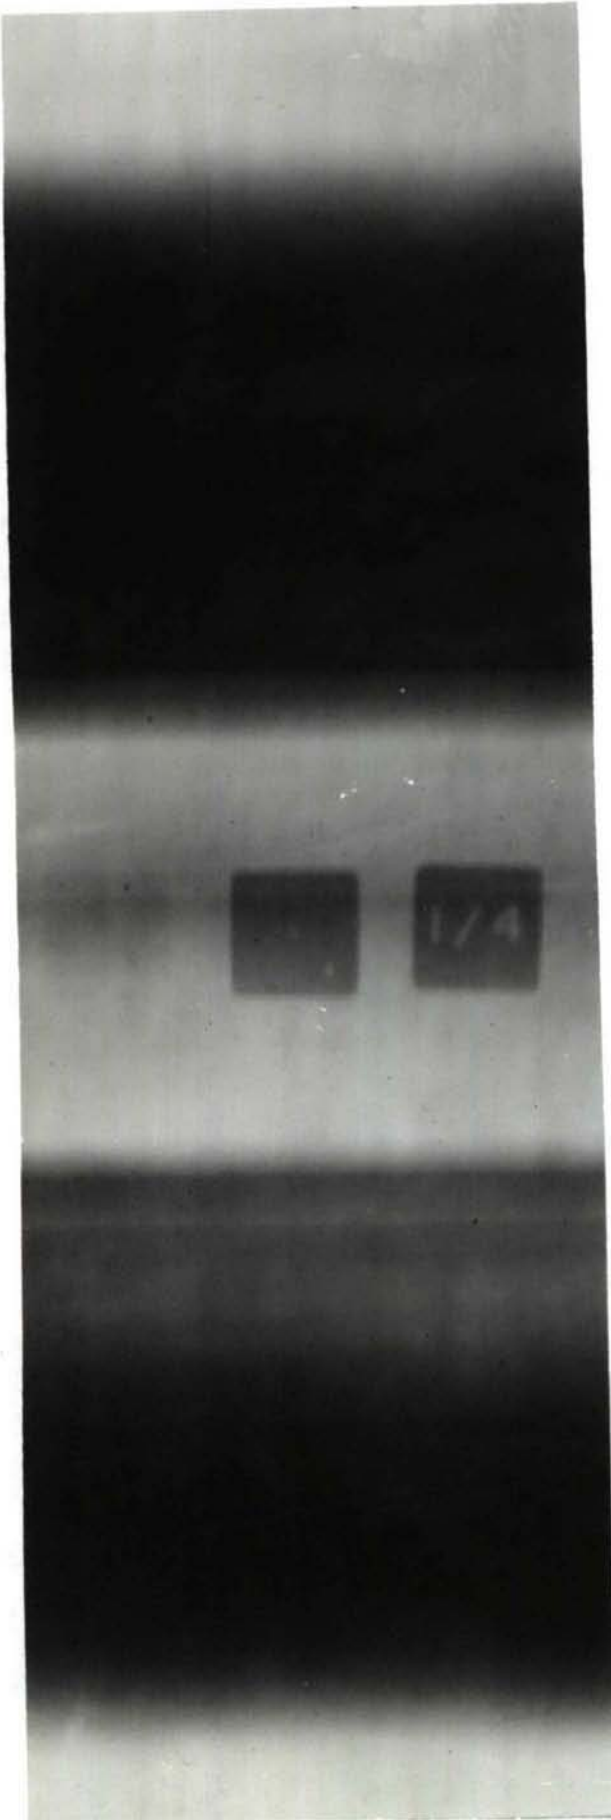


FIG. 4.



FIG. 5.

CONFIDENTIAL

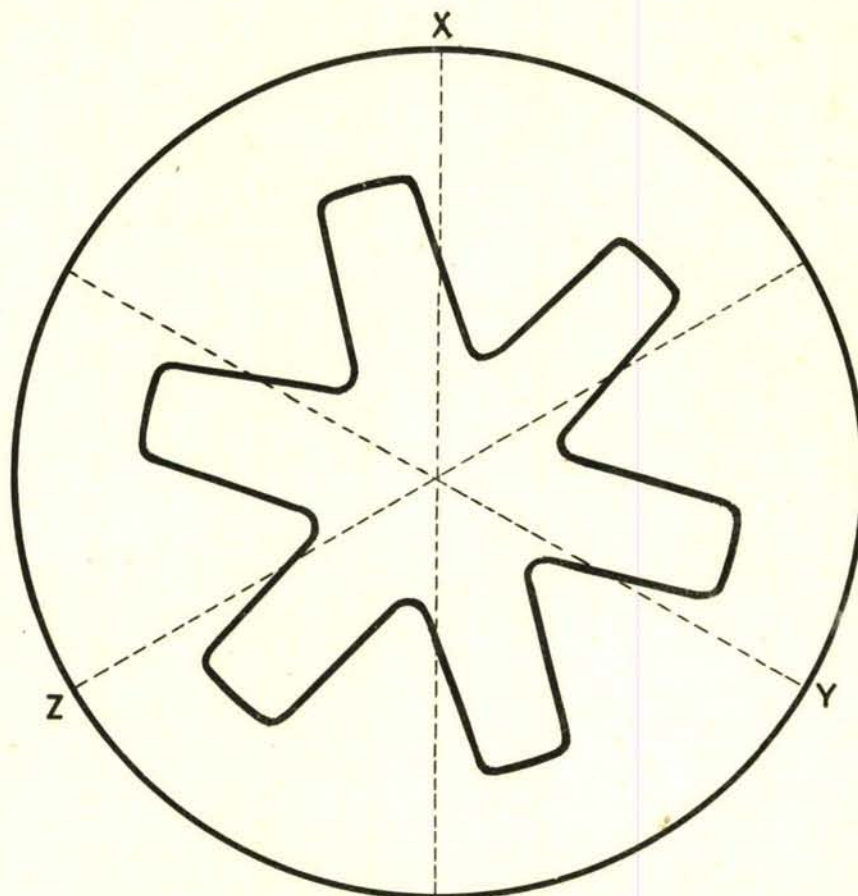

HALF SCALE.

FIG. 6

CONFIDENTIAL

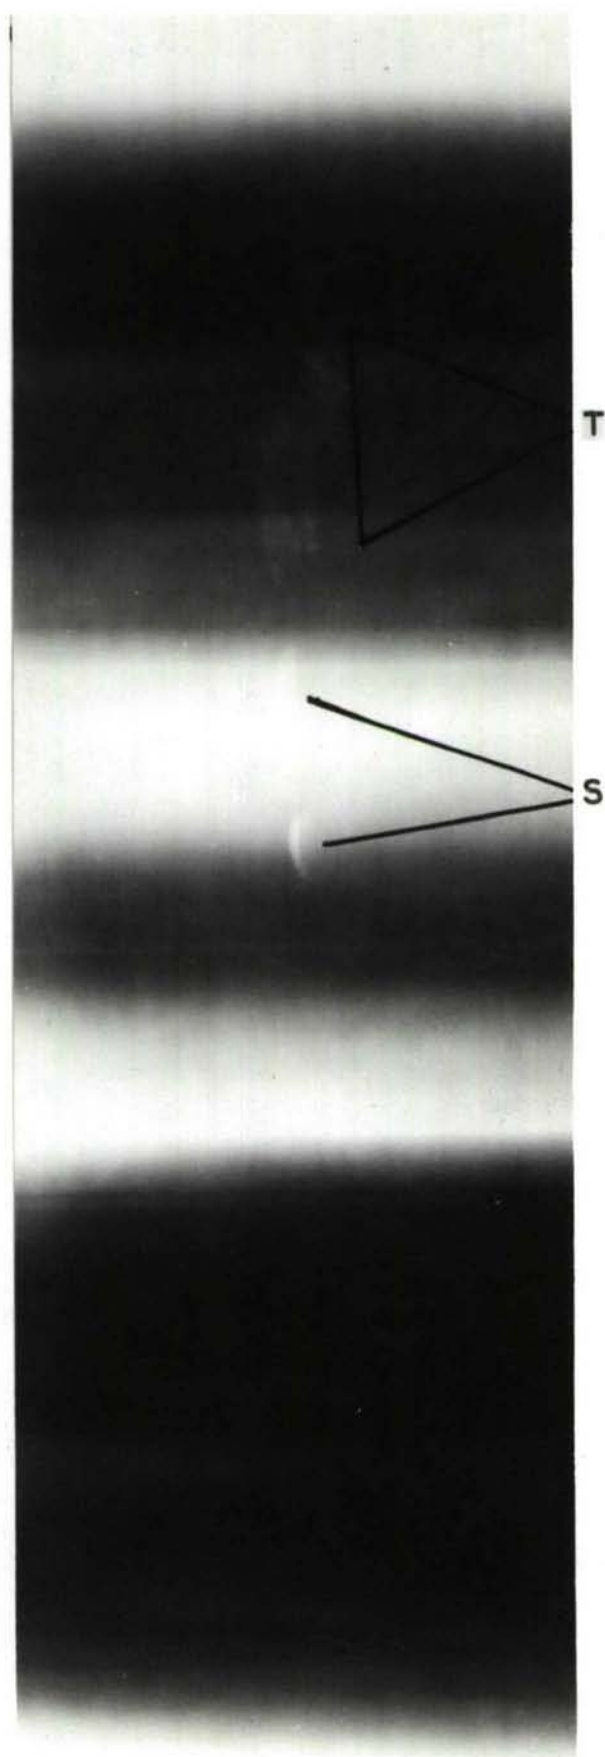


FIG. 7.


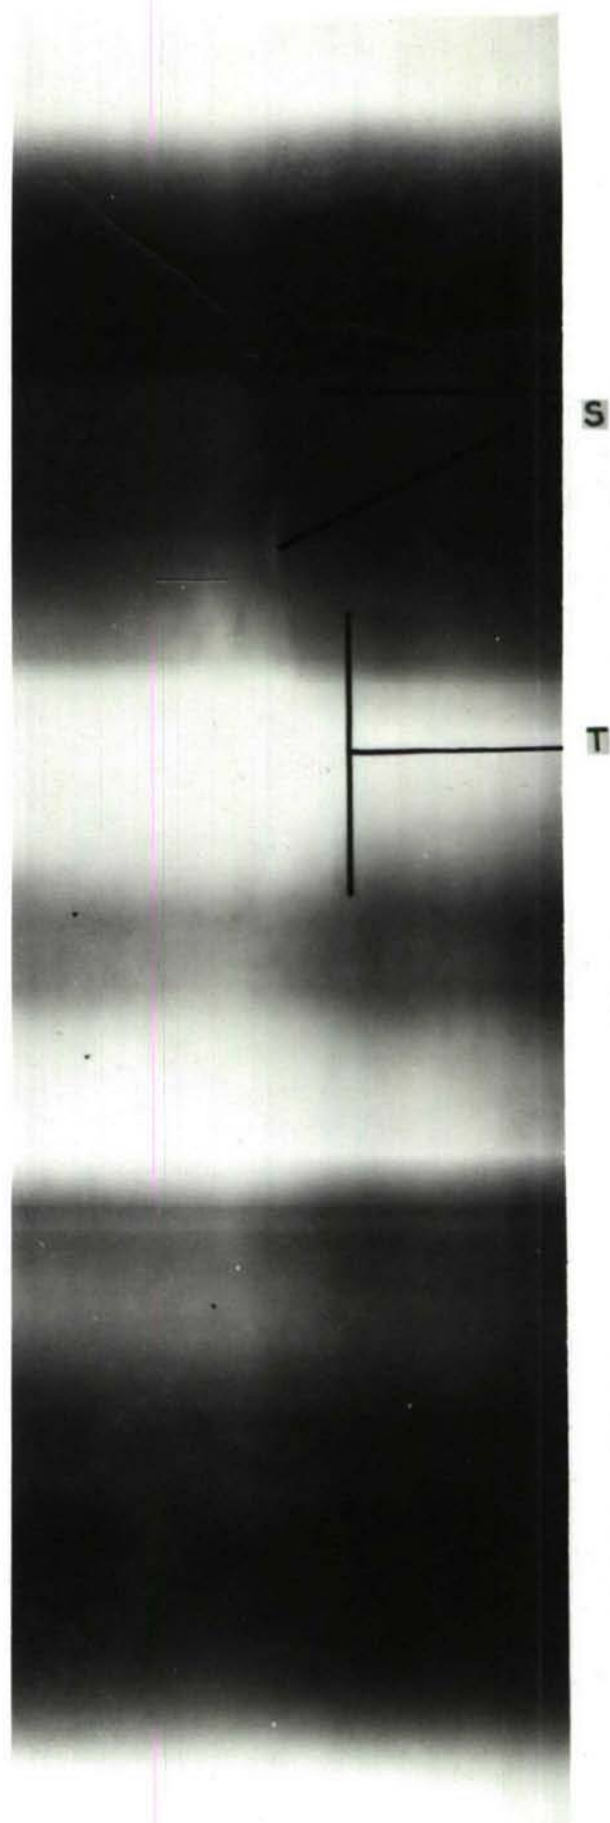


FIG. 8.

~~CONFIDENTIAL~~

UNCLASSIFIED

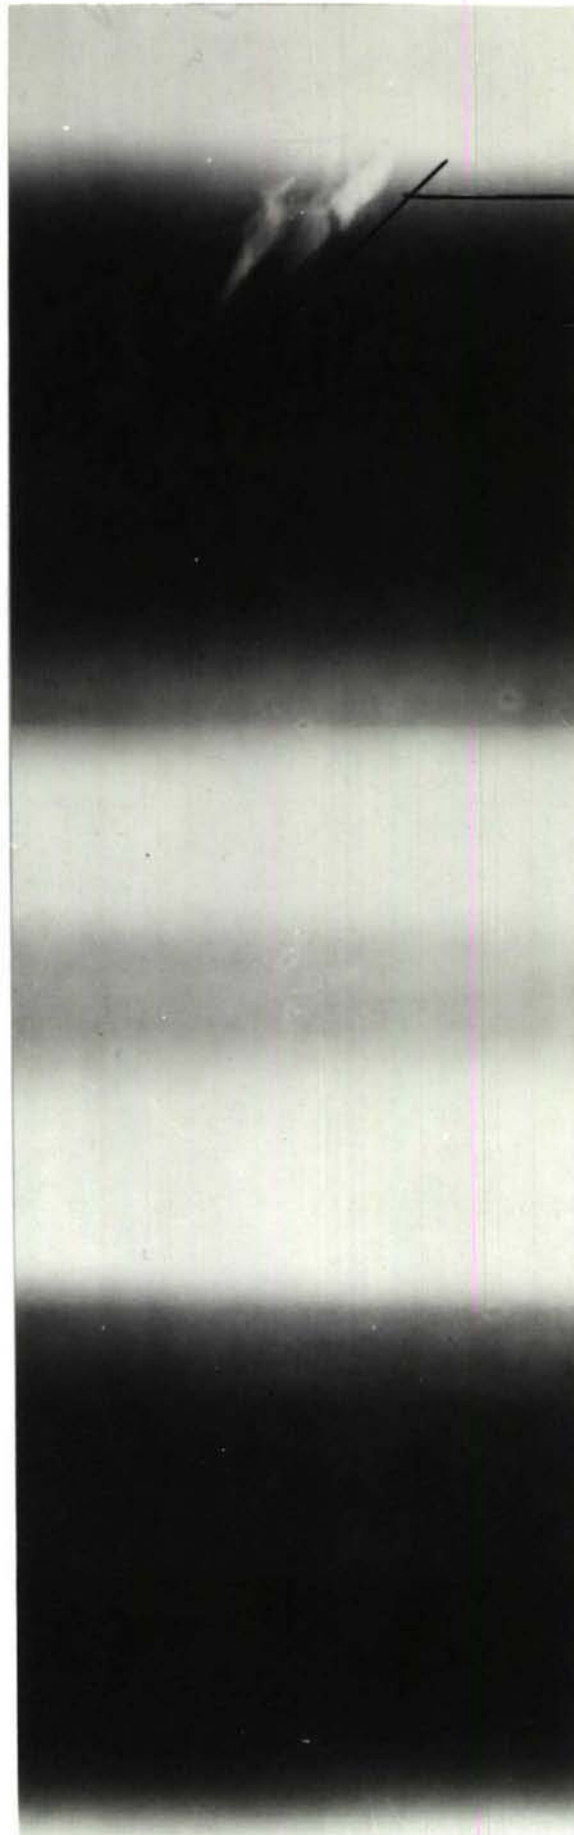

T

S

FIG. 9

CONFIDENTIAL

E.R.D.E. Technical
Memorandum No.16/M/53

Radiographic Examination of a
'Mayfly' Charge.

A. Mendoza

March , 1954.

A radiographic technique has been developed for examining an 8.6-inch diameter, star centred, extruded propellant charge for 'Mayfly'. By suitably orientating the charge, a reasonably uniform optical density can be obtained across the film. Three radiographs taken in directions 120 degrees apart permit a thorough examination of a length of charge.

Ilford Industrial 'C' x-ray film was exposed to 140 kV for 27 mA.minutes, using a front lead screen 0.004 inch thick, and 0.030 inch thick back lead screen.

2 pp.,9 figures,no tables

CONFIDENTIAL

CONFIDENTIAL

E.R.D.E. Technical
Memorandum No. 16/M/53

Radiographic Examination of a
'Mayfly' Charge.

A. Mendoza

March, 1954.

A radiographic technique has been developed for examining an 8.6-inch diameter, star centred, extruded propellant charge for 'Mayfly'. By suitably orientating the charge, a reasonably uniform optical density can be obtained across the film. Three radiographs taken in directions 120 degrees apart permit a thorough examination of a length of charge.

Ilford Industrial 'C' x-ray film was exposed to 140 kV for 27 mA.minutes, using a front lead screen 0.004 inch thick, and 0.030 inch thick back lead screen.

2 pp.,9 figures,no tables

CONFIDENTIAL

DETACHABLE ABSTRACT CARDS

The Abstract Cards detached from this document are located as follows:

8" x 5"

- | | | |
|------------------|-----------------|------------|
| 1. Section | Signature | Date |
| 2. Section | Signature | Date |

5" x 3"

- | | | |
|------------------|-----------------|------------|
| 1. Section | Signature | Date |
| 2. Section | Signature | Date |
| 3. Section | Signature | Date |
| 4. Section | Signature | Date |

~~CONFIDENTIAL~~

UNCLASSIFIED



UNCLASSIFIED

RECEIVED IN LIBRARY

JE 3 '54

~~CONFIDENTIAL~~